

# Antenna Report

FCC ID: A4RGX7AS

12/6/2022


Google LLC

## 1. Test Method

The antenna gains are obtained through measurements in a fully anechoic OTA chamber with a 3D positioner.

Measurements are taken in discrete steps in theta and phi direction, data is being recorded using the spectrum analyzer (active) or network analyzer (passive) for both theta and phi polarizations at each position resulting in a 3D gain pattern. Step size is <30 deg along both axes.

Gain is either derived directly through spatial averaging of VNA S21 measurements (passive measurement) or by the ratio of spatial averaging of 3D EIRP/TRP measurements vs the conducted power (active measurement)

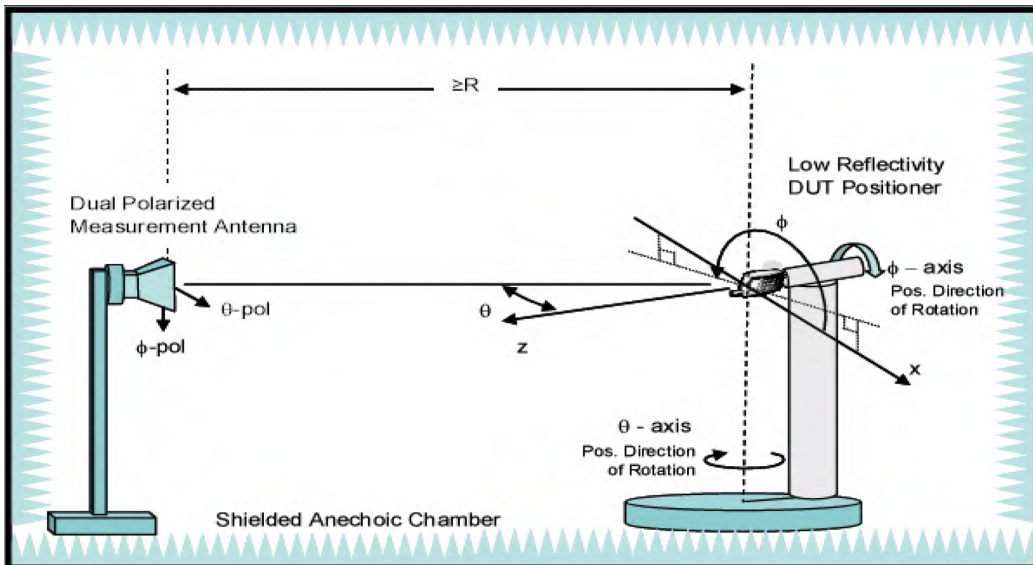

## 2. Test Equipment

Site Description	Chamber Manufacturer	Type
AMS-8500	ETS-Lindgren	Fully anechoic
Software Version	ETS-Lindgren	EMQuest V1.10 Bulid 4671
Site location	No.23, Xinghua Road, Taoyuan District, Taoyuan City 33068, Taiwan	
Test Engineer	Jason Lin / Jason Cheng	
Date	Aug. 2022	

Description	Manufacturer	Moder	Calibration Date	Due Date
Network Analyzer	Agilent	E5071C	Feb. 17, 2022	Feb. 17, 2023
Spectrum Analyzer	Rohde&Schwarz	FSVA3030	May 16, 2022	May 16, 2023

### 3. Test Setup

See separate appendix document for pictures of the test setup in this filing.

### 4. Antenna Information

	Antenna Type
Ant3	IFA
Ant4	IFA

Ant	Band	Frequency Band	Peak Gain(dBi)
Ant4	WiFi/BT 2.4 GHz	2402 MHz	-0.2
		2412 MHz	-0.3
		2437 MHz	-0.4
		2472 MHz	-0.3
		2480 MHz	-0.5
Ant3	WiFi/BT 2.4 GHz	2402 MHz	-1.7
		2412 MHz	-1.5
		2437 MHz	-1.1
		2472 MHz	-0.5
		2480 MHz	-0.4
Ant4	UNII-1	5180 MHz	-1.9
	UNII-2A	5280 MHz	-1.8
	UNII-2C	5500 MHz	-2.1
	UNII-3	5820 MHz	-1.1
	UNII-4	5887 MHz	-1.2
	UNII-5	6175 MHz	-0.9
	UNII-6	6475 MHz	-3.0
	UNII-7	6700 MHz	-3.6
	UNII-8	7000 MHz	-5.0
Ant3	UNII-1	5180 MHz	-1.7
	UNII-2A	5280 MHz	-1.8
	UNII-2C	5500 MHz	-1.8
	UNII-3	5820 MHz	-1.3
	UNII-4	5887 MHz	-0.6

	UNII-5	6175 MHz	-0.9
	UNII-6	6475 MHz	-1.3
	UNII-7	6700 MHz	-1.5
	UNII-8	7000 MHz	-1.2

Note: Antenna gain is measured at Google internal OTA anechoic chamber. The measurement antenna is fixed in position and the EUT is rotated in both the azimuth and the roll direction to achieve three-dimensional measurement. We use the vector network analyzer method for measurement. The signal from the output port of the vector network analyzer is connected by a cable to the measurement antenna and the input port is connected to the DUT. The vector network analyzer system splits the transmission signal from the output port and gets feedback as a reference signal to the input port for comparison with the measured signal to evaluate the antenna gain.

**Measurement Facilities:**

Measurement Chamber: ETS-Lindgren AMS-8500 3D fully anechoic test system

ETS-Lindgren positioner: EMCO-2090


RF Relay Switches: Agilent 3499B

Network Analyzer: Agilent E5071C


**5. Radiation Plots for Max Gain Plane**

**Ant3:**


ANT3 Frequency 2402MHz

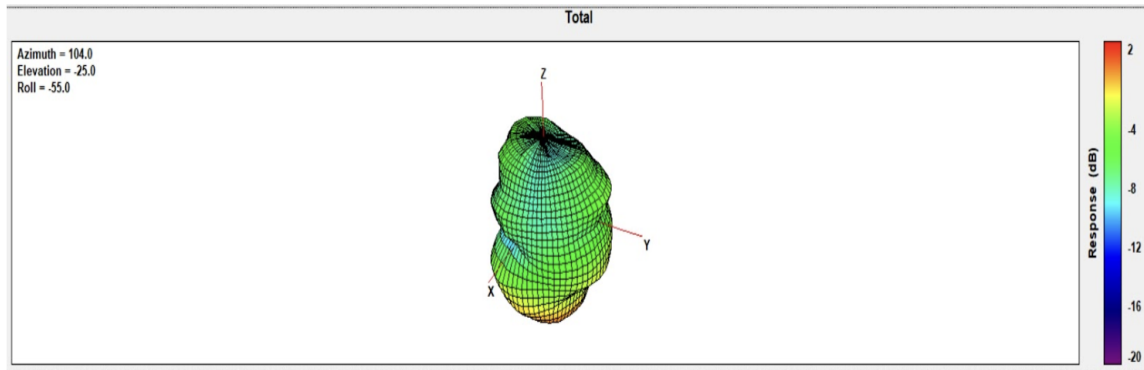


ANT3 Frequency 2412MHz

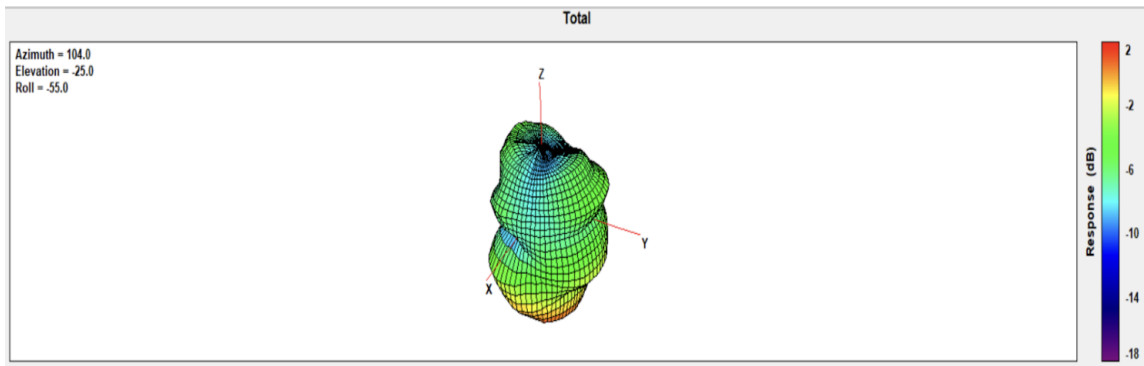


ANT3 Frequency 2437MHz

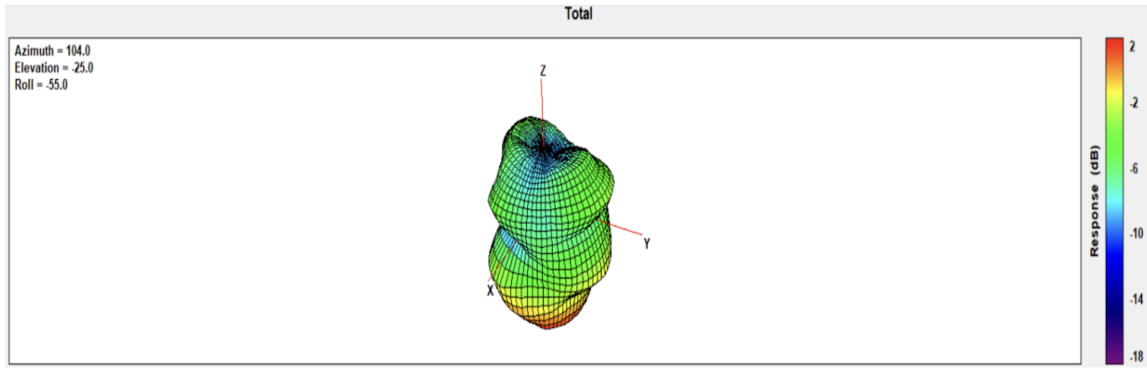


ANT3 Frequency 2472MHz

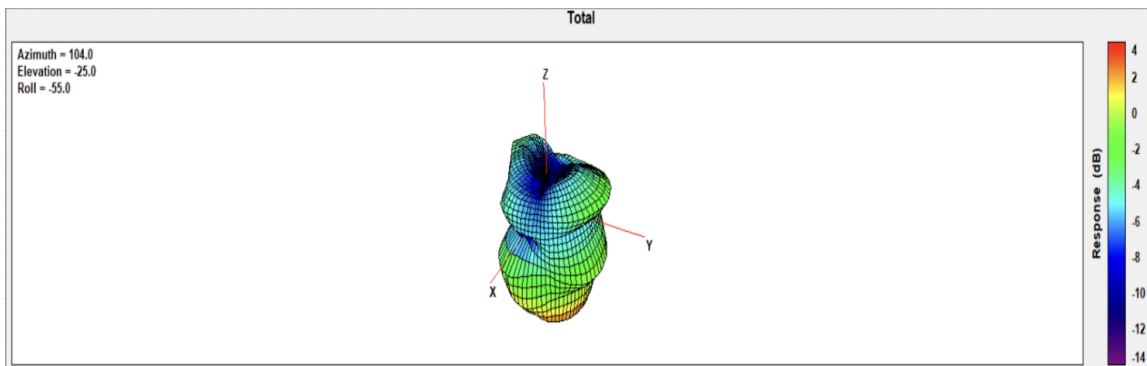


ANT3 Frequency 2480MHz

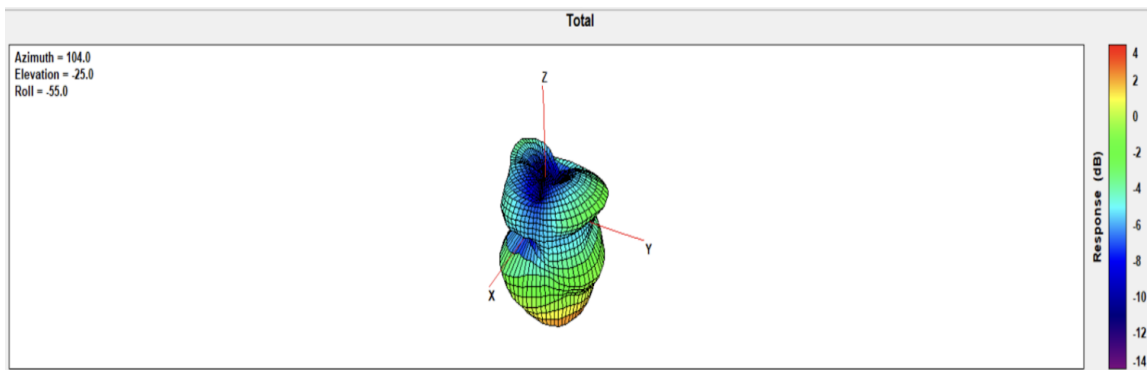


ANT3 Frequency 5180 MHz

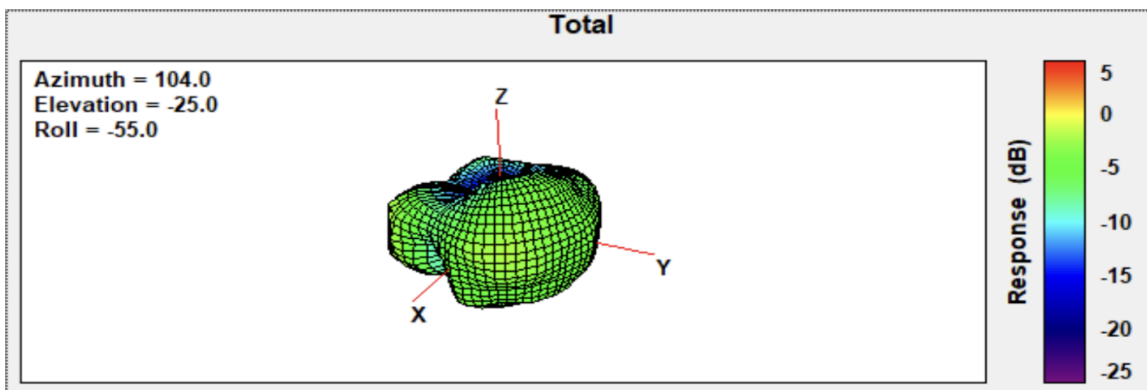


ANT3 Frequency 5280 MHz

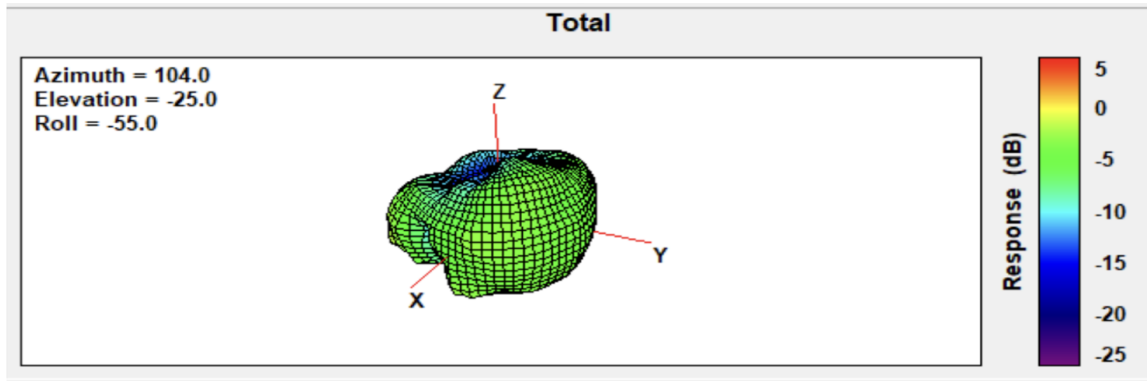


ANT3 Frequency 5500 MHz

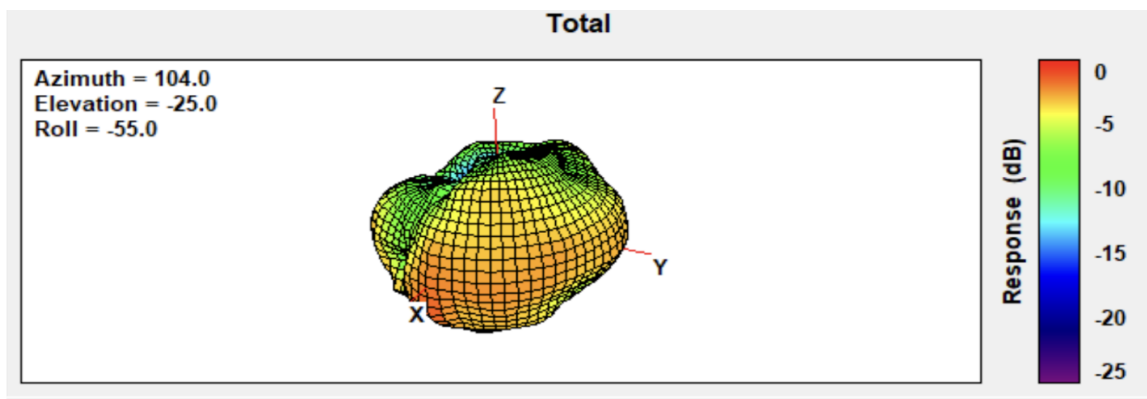


ANT3 Frequency 5820 MHz

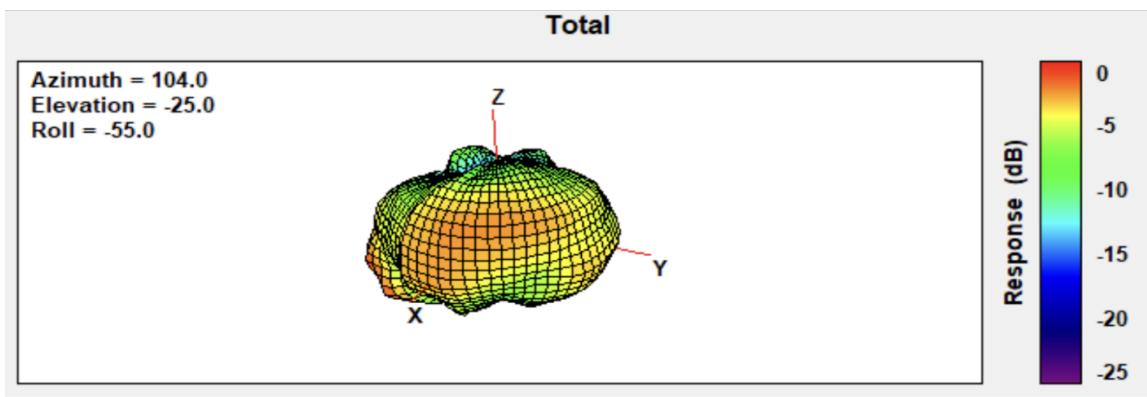


ANT3 Frequency 5887 MHz

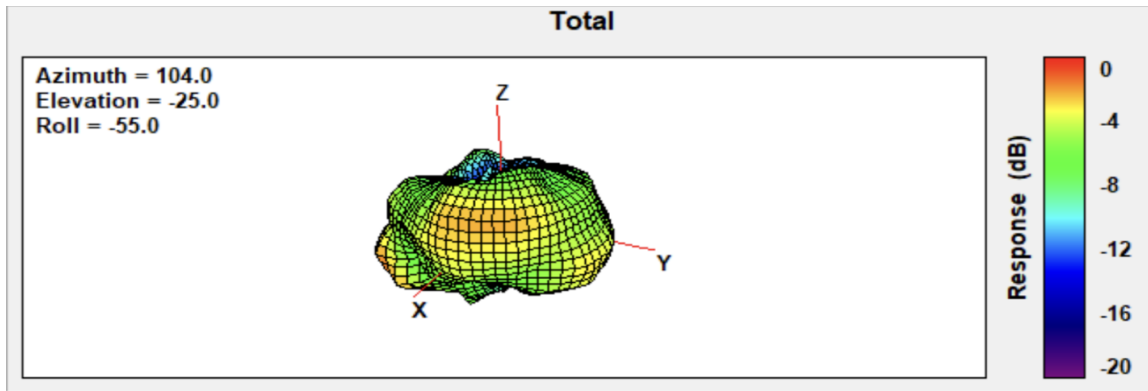


ANT3 Frequency 6175 MHz

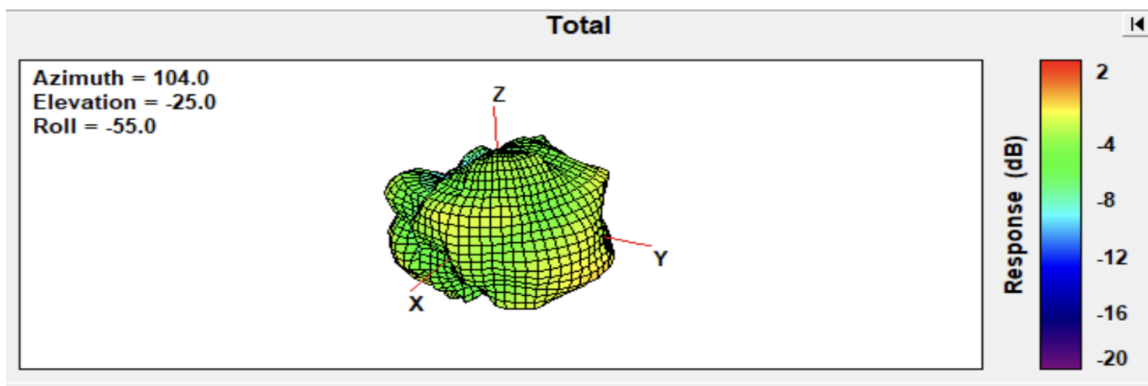


ANT3 Frequency 6475 MHz

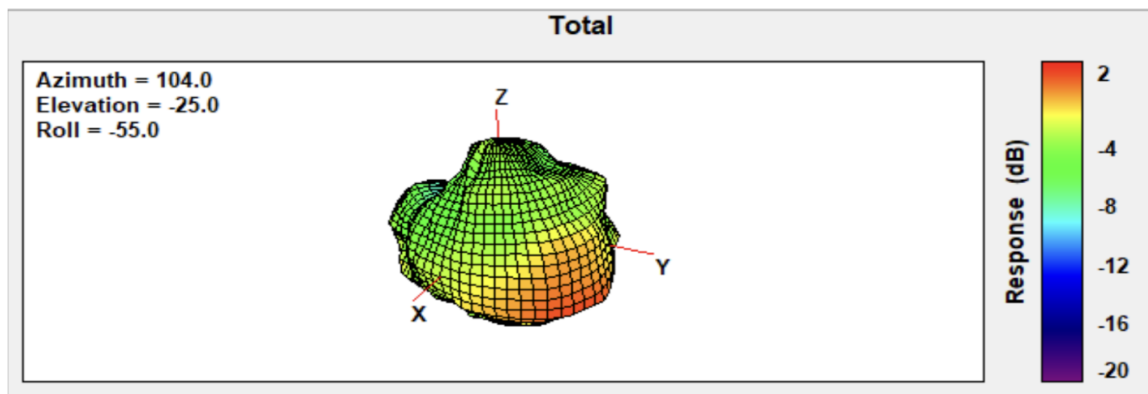

ANT3 Frequency 6700 MHz

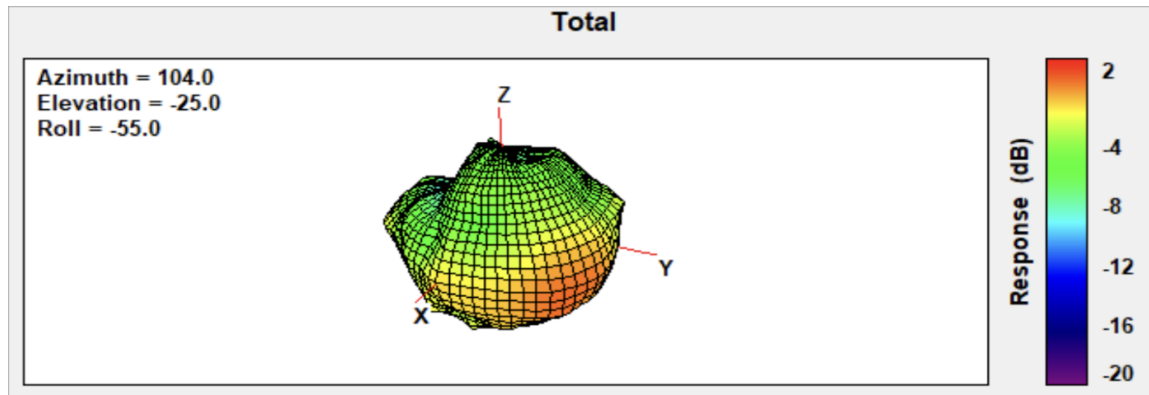


ANT3 Frequency 7000 MHz

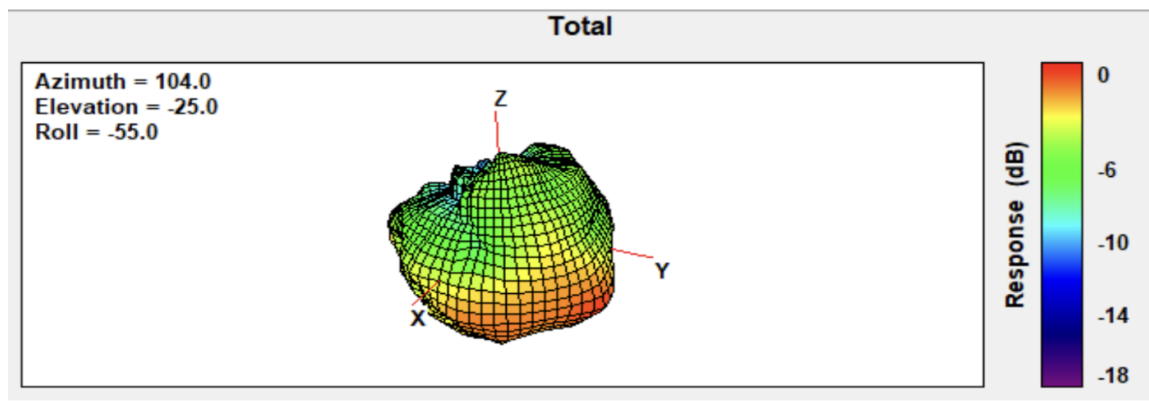




**Ant4:**


ANT4 Frequency 2402MHz

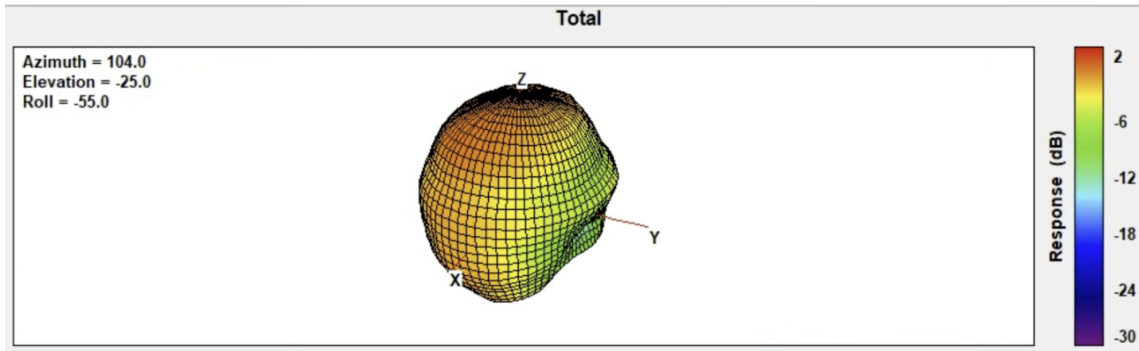


ANT4 Frequency 2412MHz

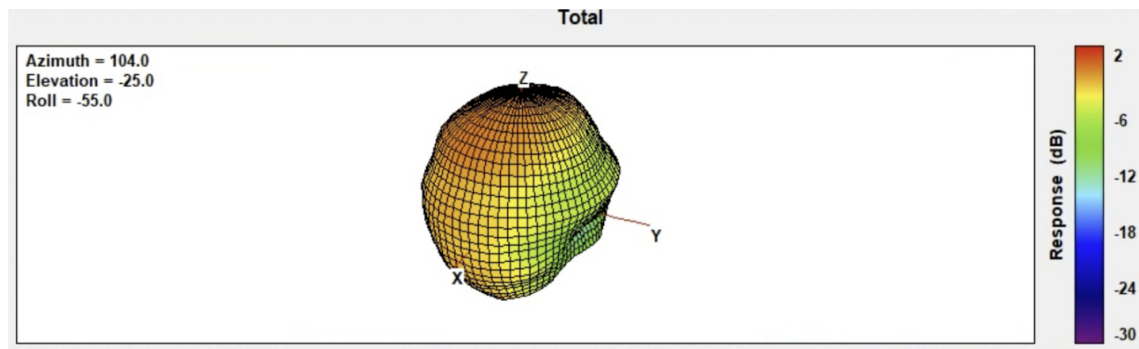


ANT4 Frequency 2437MHz

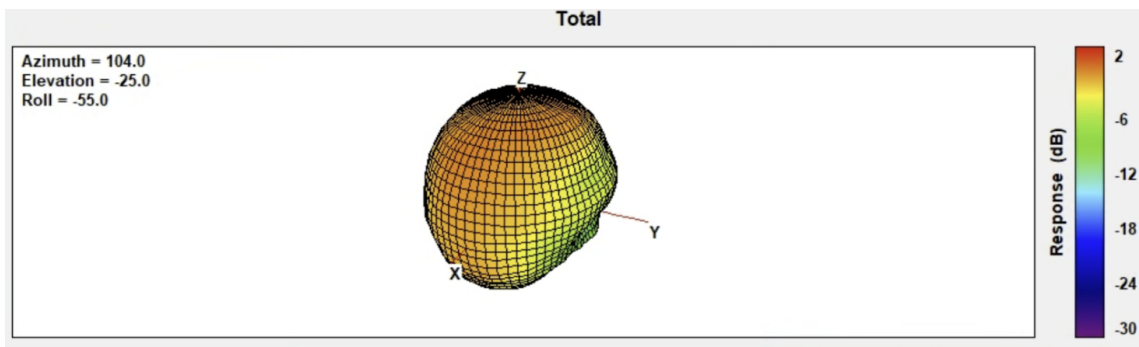


ANT4 Frequency 2472MHz

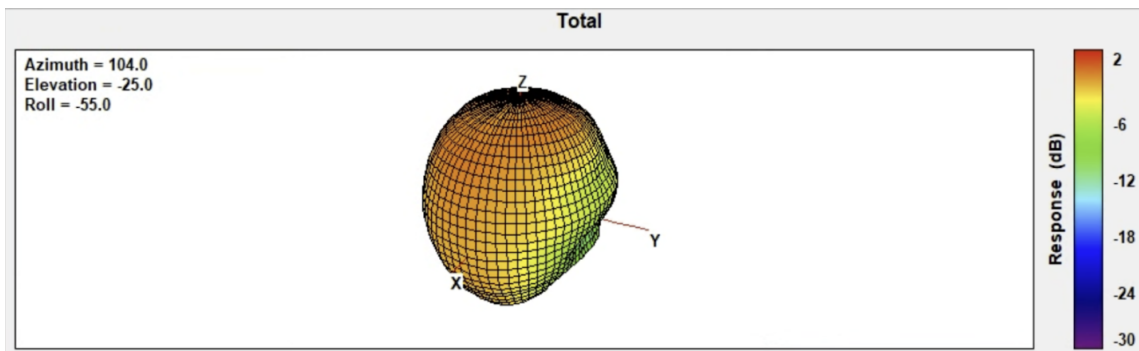


### ANT4 Frequency 2480MHz

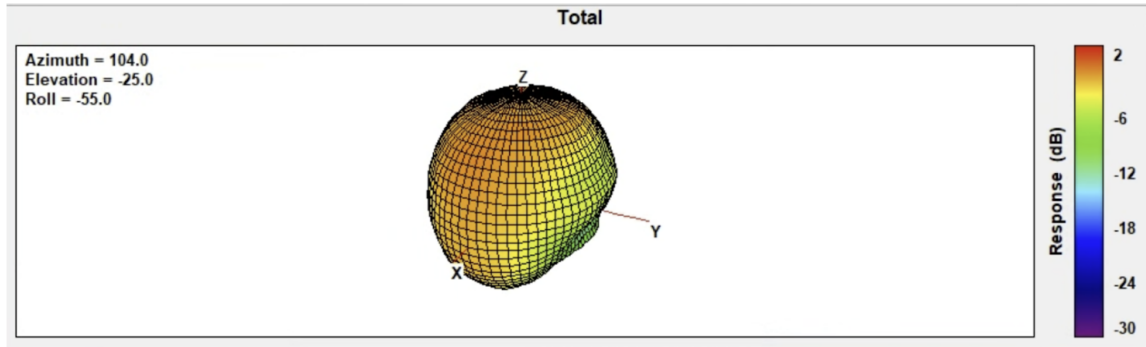


### ANT4 Frequency 5180 MHz

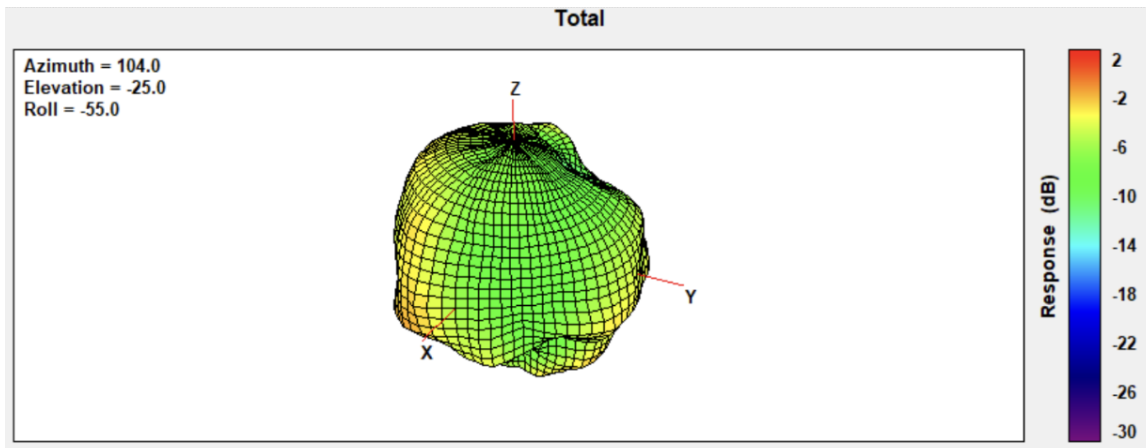

### ANT4 Frequency 5280 MHz

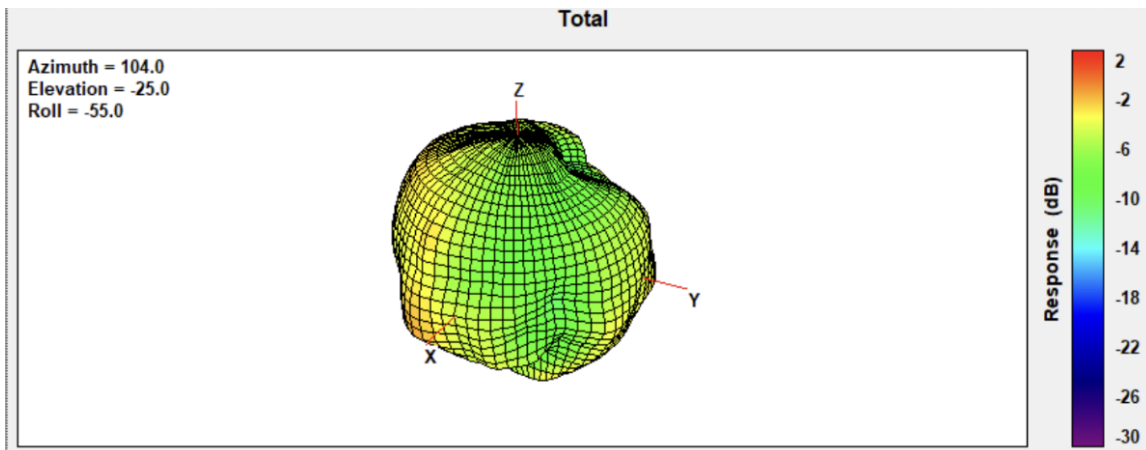

ANT4 Frequency 5500 MHz

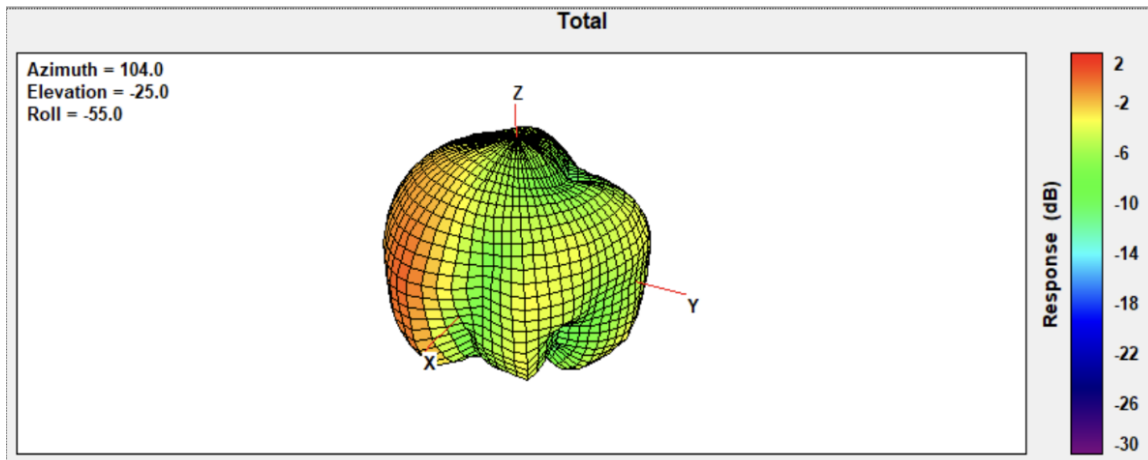

ANT4 Frequency 5820 MHz

