

QUICK START GUIDE

DOORBELL


VIDEO DOORBELL

Content

- In the Box 02
- Product Overview 04
- Basic Parameters 06
- Set Up the Doorbell 07
- Determine the Power Option 11
- Mount the Doorbell 12
- Connect to the Doorbell Chime 21
- Remove the Doorbell 22
- Notice 23

In the Box

After opening the box, please check the following pictures to see if the accessories are complete.

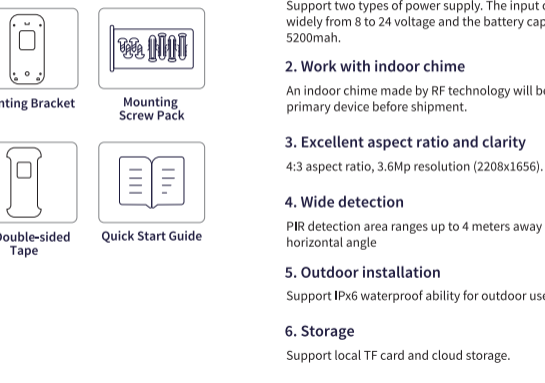


Introduction

- Compatible with battery and AC power**
Support two types of power supply. The input of AC power ranges widely from 8 to 24 voltage and the battery capacity is up to 5200mah.
- Work with indoor chime**
An indoor chime made by RF technology will be paired with the primary device before shipment.
- Excellent aspect ratio and clarity**
4:3 aspect ratio, 3.6Mp resolution (2208x1656).
- Wide detection**
PIR detection area ranges up to 4 meters away and 120° horizontal angle
- Outdoor installation**
Support IPx6 waterproof ability for outdoor use.
- Storage**
Support local TF card and cloud storage.

Product Overview

Appearance

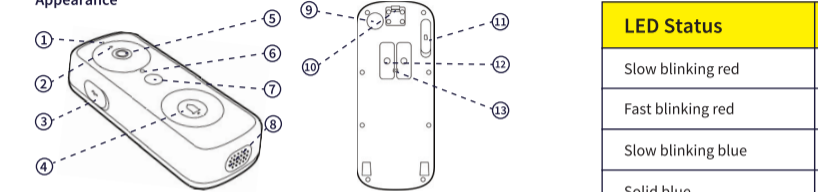

- 1 LED Light
- 2 Ambient Light Sensor
- 3 Power Input
- 4 LED Ring / Doorbell Button
- 5 Camera Lens
- 6 Microphone
- 7 PIR
- 8 Speaker
- 9 Power Button
- 10 Detaching Mechanism
- 11 Micro SD Card Slot
- 12 Power Terminals for Existing Doorbell Wires
- 13 Reset Button

Status LED

LED Status	Description
Slow blinking red	Ready to connect
Fast blinking red	Disconnected from the internet
Slow blinking blue	Connected to the router successfully
Solid blue	The camera has been added successfully and is working normally
Flashing blue and red alternately	A firmware update is in progress

Charging indicators on doorbell button	Description
Slow flashing blue	Battery is charging
Solid blue	Charging completed

Basic Parameters

Active Pixels	2208*1656	Storage	TF Card (Max 256G)
Clarity Resolution	3.6MP	Wi-Fi	Only 2.4GHz Wi-Fi
FOV(D)	154°	Network Security	WPA-PSK /WPA2-PSK
Lens	2.3mm@F2.2	Battery Capacity	5200mAh
IR LED	8m	Item Weight	257g
Audio	MIC /Speaker	Product Dimensions	64(L)*31(W)*157.6(H) mm
PIR	120°, Horizontal	Charging Power	(1)Type-C, DC5V/1A (2)AC 8-24V @500mA
Mounting Type	Door or Wall Mount	Working Temp	-20~+50°C
Charging Temp	0~45°C		

Setting Up The Doorbell


Step 1 Download

Download the Tuya Smart or Smart Life App from the Apple App Store or Google Play, or by scanning the QR code below.



Step 2 Connect it to the App

- Sign up an App account, go to the App homepage, tap Add Device, and select the smart camera(Wi-Fi).

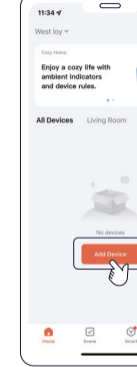

Please follow the prompts of the App to allow relevant permissions, otherwise it will affect the addition and use of the device.




Please choose a 2.4GHz Wi-Fi, the camera does not support the 5GHz Wi-Fi.

2. Press and hold the power button for 3s until the status LED is slow blinking red or heard "Waiting to receive the wireless configuration"



Reset the device
If the SSID of your home Wi-Fi have been changed, you need to reconfigure the network. Please hold the reset button for 5-6 seconds until you heard "reset successfully", then take the prompts to add the device again



3. Please click Next, select a stable network and enter a password. The camera of the device scans the QR code generated by the mobile phone, keeps a distance of 15 to 20cm and does not move until the sound of "Di" is heard, and finally follows the steps on the App to complete the addition.



When adding devices, please make the camera and mobile phone connect to a same Wi-Fi router.

Determine the Power Option

- Option 1 - Battery Powered**
- If your front door does not have existing doorbell wiring, please use the built-in battery.
 - Please fully charge the camera before mounting it.
 - If you choose this option, please jump to "Power the doorbell with battery" on page 12.



Please use the 5V 1.5A power adapter

- Option 2 - Doorbell Wire Powered**
- If your front door has existing and working doorbell wiring, the doorbell will be continuously powered by the wires.
 - If you choose this option, please jump to "Power the Doorbell with existing Doorbell Wires" on page 15.

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

NOTE 2: Any changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.