

TABLE OF CONTENTS LIST

APPLICANT: RADIOSHACK, A DIV. OF TANDY CORP.

FCC ID: AAO1901106

TEST REPORT CONTAINING:

PAGE 1.....TEST PROCEDURE
PAGE 2.....TEST PROCEDURE & CIRCUIT DESCRIPTION
PAGE 3.....RADIATION INTERFERENCE TEST DATA
PAGE 4.....38 dB REJECTION RATIO

EXHIBITS CONTAINING:

EXHIBIT 1.....POWER OF ATTORNEY LETTER
EXHIBIT 2.....STATEMENT PER 15.121(a)
EXHIBIT 3.....BLOCK DIAGRAMS
EXHIBIT 4A-4B.....SCHEMATICS
EXHIBIT 5A-5Z.....INSTRUCTION MANUAL
EXHIBIT 6.....SAMPLE OF FCC ID LABEL AND SKETCH OF
LOCATION
EXHIBIT 7.....RADIATED TEST SETUP PHOTOGRAPH
EXHIBIT 8.....EXTERNAL PHOTO - FRONT SIDE
EXHIBIT 9.....EXTERNAL PHOTO - BACK SIDE
EXHIBIT 10.....INTERNAL PHOTOS - COMPONENT SIDE
EXHIBIT 11.....INTERNAL PHOTOS - COPPER SIDE

APPLICANT: RADIOSHACK, A DIV. OF TANDY CORP.

FCC ID: AAO1901106

REPORT #: T:\CUS\R\RADSHACK\RAD363K9\RAD363K9.RPT

PAGE: TABLE OF CONTENTS LIST

APPLICANT: RADIOSHACK, A DIV. OF TANDY CORP.
FCC ID: AAO1901106

TEST EQUIPMENT LIST

1. Spectrum Analyzer: Hewlett Packard 8566B - Opt 462, w/
preselector 85685A, & Quasi-Peak Adapter HP 85650A, & HP
8449B - OPT H02 Cal. 7/6/99
2. Signal Generator, Hewlett Packard 8640B, cal. 9/23/99
3. Signal Generator, HP 8614A Serial No.2015A07428 cal. 5/27/99
3. Eaton Biconnical Antenna Model 94455-1
20-200 MHz Serial No. 0997 Cal. 10/30/98
4. Electro-Metric Dipole Kit, 20-1000 MHz, Model TDA-30 10/31/98
5. Electro-Metric Horn 1-18 GHz, Model RGA-180, Cal. 4/27/99
6. Electro-Metric Antennas Model TDA-30/1-4, Cal. 10/15/98
7. Electro-Metric Line Impedance Stabilization Network Model
No. EM-7821, Serial No. 101; 100KHz-30MHz 50uH. Cal.11/19/98
8. Electro-Metric Line Impedance Stabilization Network Model
No. EM-7820, Serial No. 2682; 10KHz-30MHz 50uH. Cal. 11/19/98
9. Special low loss cable was used above 1 GHz
10. Tenney Temperature Chamber
11. AC Voltmeter, HP 400FL, Serial No 2213A14499. Cal. 9/21/99
12. Digital Multimeter, Fluke 8010A/12A, Serial No. 4810047.
Cal 9/21/99
13. Digital Multimeter, Fluke 77, Serial No. 43850817. Cal 9/21/99
14. Oscilloscope, Tektronix 2230, Serial No. 300572. Cal 9/23/99

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without
the written approval of TIMCO ENGINEERING, INC.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD
C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a prese-
lector. The bandwidth of the spectrum analyzer was 100 kHz with an
appropriate sweep speed. The analyzer was calibrated in dB above a
microvolt at the output of the antenna. The resolution bandwidth was
100KHz and the video bandwidth was 300KHz. The ambient temperature of
the UUT was 80oC with a humidity of 76%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was estab-
lished by adding the meter reading of the spectrum analyzer (which is
set to read in units of dBuV) to the antenna correction factor sup-
plied by the antenna manufacturer. The antenna correction factors are
stated in terms of dB. The gain of the Preselector was accounted for
in the Spectrum Analyzer Meter Reading.

Example:

Freq (MHz) METER READING + ACF = FS
33 20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

APPLICANT: RADIOSHACK, A DIV. OF TANDY CORP.
FCC ID: AAO1901106
REPORT #: T:\CUS\R\RADSHACK\RAD363K9\RAD363K9.RPT
PAGE #: 1

TEST PROCEDURES CONTINUED

APPLICANT: RADIOSHACK, A DIV. OF TANDY CORP.
FCC ID: AAO1901106

ANSI STANDARD C63.4-1992 10.1.7 MEASUREMENT PROCEDURES: The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSIC63.4-1992 with the EUT 40 cm from the vertical ground wall.

CIRCUIT_DESCRIPTION:

In the receive mode the signal comes in on the receive antenna to the double tuned circuit to the super-regenerative detector Q-3, where the audio is detected. From Q-3 the audio goes to the volume resistor R15 to the input to the three(3) stage audio amplification, Q1, Q4 & Q5. Q5 drives the audio output transformer T3 which is connected to the speaker.

ANTENNA_AND_GROUND_CIRCUITRY


This unit makes use of a external 5 inch antenna. The antenna is inductively coupled. This unit is powered from a 9.0V battery.

No ground connection is provided. The unit relies on the ground tract of the printed circuit board.

APPLICANT: RADIOSHACK, A DIV. OF TANDY CORP.
FCC ID: AAO1901106
REPORT #: T:\CUS\R\RADSHACK\RAD363K9\RAD363K9.RPT
PAGE #: 2

APPLICANT: RADIOSHACK, A DIV. OF TANDY CORP.
 FCC ID: AAO1901106
 NAME OF TEST: 38dB REJECTION RATIO
 RULES PART NUMBER: 15.121(b)
 REQUIREMENTS: 38dB REJECTION RATIO TO SENSITIVITY OF
 OF THE RECEIVER.

TEST SET-UP

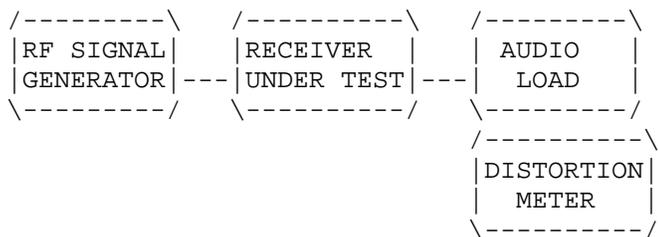

TEST PROCEDURE: The reference sensitivity was measured in accordance with TIA/EIA-603;

- a. Equipment connected as illustrated
- b. A standard signal was applied to the receiver input terminals.
- c. Receiver output audio output was adjusted for rated output.
- d. The RF Signal generator was adjusted to the lowest level to produce a 12dB SINAD without the audio output dropping more than 3dB.
- e. This was done across the different bands to establish a reference level. The reference taken was the highest sensitivity in all of the bands.
- f. The output of the signal generator was then adjusted to a level of 50dB above the reference level.
- g. The receiver was then set to the low end of the 1st band and the signal generator was tuned over to frequency range of 824-849MHz and 869-894MHz in search of a response.
- h. Step g was repeated at the middle, and top on the 1st band then repeated in the same way for all of the other bands.

TEST RESULTS: The UUT meet the 38dB REJECTION RATIO.

PERFORMED BY: S. S. SANDERS

DATE: SEPTEMBER 29, 1999

APPLICANT: RADIOSHACK, A DIV. OF TANDY CORP.
 FCC ID: AAO1901106
 REPORT #: T:\CUS\R\RADSHACK\RAD363K9\RAD363K9.RPT
 PAGE #: 4