



## GENERAL RESEARCH OF ELECTRONICS, INC.

Phone: +813-5439-3611

Fax: +813-5439-3644

SHIBA NO.3 AMEREX BLDG.  
12-17 MITA 3-CHOME, MINATO-KU  
TOKYO 108-0073, JAPAN

September 1, 2003

Federal Communications Commission  
Authorization and Evaluation Division  
Laboratory Division  
7435 Oakland Mills Road  
Colombia, MD 21046

Ref.: Model 20-515, FCC ID: ADV2000515

This is to clarify that the above equipment is incapable of operating (tuning) or readily being altered by the user to operate, within the frequency bands to the Cellular Radiotelephone Service.

The frequencies in question are deleted from the ROM during manufacture, and cannot be restored through any readily available process or component such as: installation of cuts, jumper wires, resistors, diodes, or plug-in IC's; deletion of such items; or reprogramming via access codes or external devices such as a personal computer.

The receiver is incapable of converting digital cellular transmissions to analog voice audio.

### **Assessing the vulnerability of the receiver to possible modification**

The receiver has the possibility of reducing the threshold value to discern transmissions from the Cellular Radiotelephone Service by making modification such as adding jumper wire to the RF band pass filters.

### **Design features that prevent modification of the receiver to receive Cellular Service**


The scanning receiver is designed to prevent any attempt for the user to modify the receiver to receive transmissions from the Cellular Radiotelephone Service by using epoxy to cover the required parts of the RF circuit and band pass filters.

### **Testing method used to determine compliance with the 38 dB rejection ratio**

#### Testing method

The 12 dB SINAD measurement method in the Cellular Radiotelephone Service used for frequencies that the receiver tunes and the signal rejection ratio gained by the measurement.

## Equipment Setup Block Diagram

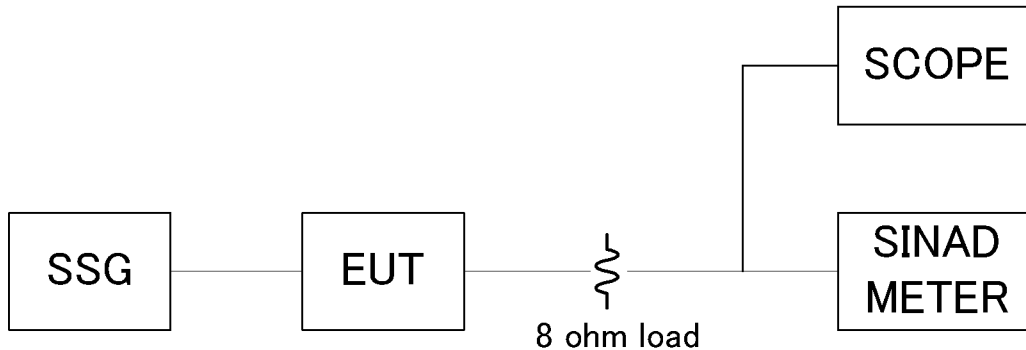

### Measurement method

Tune the receiver to the received frequency and outputs the receiving frequency from SG to obtain its 12 dB SINAD. Then output the interference frequency to obtain its 12 dB SINAD. The signal rejection ratio is the ratio between these two SSG output levels.

The scanning receiver prevents transmissions more than 38 dB from the Cellular Radiotelephone Service from being received for the following reasons:

1. The image frequencies in the frequency range from 28 MHz to 512 MHz are shown as follows:

FR = 28 to 54 MHz, 108 to 174 MHz, 406 to 512 MHz

IMAGE FREQ. = FR + 1<sup>st</sup> IF x 2

1<sup>st</sup> IF = 1<sup>st</sup> Local – FR

1<sup>st</sup> Local = A x 0.075

A = (FR + 380.8)/0.075 (Except 173.420 - 174.000MHz)

A = (FR + 380.7)/0.075 (173.420 – 174.000MHz)

= A.xxx (Cut away decimal)

(28 to 54) + (1<sup>st</sup> IF x 2) = 789.5 to 815.55 MHz ..... IMAGE FREQ.

(132.4125 to 174) + (1<sup>st</sup> IF x 2) = 893.8875 to 935.40 MHz ..... IMAGE FREQ.

$$(406 \text{ to } 512) + (1^{\text{st}} \text{ IF} \times 2) = 1167.5 \text{ to } 1273.6 \text{ MHz} \dots\dots\dots \text{IMAGE FREQ.}$$

These image frequencies are not included within the Cellular Radiotelephone Service Frequency Band except as follows.

$$(108 \text{ to } 132.4875) + (1^{\text{st}} \text{ IF} \times 2) = 869.550 \text{ to } 893.9625 \text{ MHz} \dots\dots\dots \text{IMAGE FREQ.}$$

### Test Results 108 to 132.4875 MHz

Frequency range (MHz)	Cellular frequency range included (MHz)	Received frequency (MHz)	Interference frequency (MHz)	Signal rejection ratio (MHz)	Equation for interference frequency reception (MHz)
108.000 to 132.4875	869.550 to 893.9625	108.000 to 132.4875	869.550 to 893.9625	50 47	FR + (IF x 2) = 869.550 to 893.9625

The above test results indicate that all the signal rejection ratios for the Cellular Radiotelephone Frequency Service Band are higher than 38 dB.

- The image frequencies in the frequency range from 806 to 960 MHz are shown as follows:

$$\text{FR} = 806 \text{ to } 823.9875 \text{ MHz, } 849 \text{ to } 868.9875 \text{ MHz, } 894 \text{ to } 960 \text{ MHz}$$

$$\text{IMAGE FREQ.} = \text{FR} - 1^{\text{st}} \text{ IF} \times 2$$

$$1^{\text{st}} \text{ IF} = \text{FR} - 1^{\text{st}} \text{ Local}$$

$$1^{\text{st}} \text{ Local} = A \times 0.075$$

$$A = (\text{FR} - 380.8)/0.075$$

$$= A.\text{xxx (Cut away decimal)}$$

$$(806 \text{ to } 823.9875) - (1^{\text{st}} \text{ IF} \times 2) = 44.35 \text{ to } 62.3625 \text{ MHz} \dots\dots\dots \text{IMAGE FREQ.}$$

$$(849 \text{ to } 868.9875) - (1^{\text{st}} \text{ IF} \times 2) = 87.3 \text{ to } 107.3625 \text{ MHz} \dots\dots\dots \text{IMAGE FREQ.}$$

$$(894 \text{ to } 960) - (1^{\text{st}} \text{ IF} \times 2) = 132.3 \text{ to } 198.3 \text{ MHz} \dots\dots\dots \text{IMAGE FREQ.}$$

These image frequencies are not included within the Cellular Radiotelephone Service Frequency Band.

### 3. Other rejection results

#### Test Results (1)

Frequency range (MHz)	Cellular frequency range included (MHz)	Received frequency (MHz)	Interference frequency (MHz)	Signal rejection ratio (dB)	Equation for interference frequency reception (MHz)
28.000 to 29.145	845.500 to 848.895	28.000 to 29.145	845.500 to 848.895	57 to 55	1 <sup>st</sup> Lo x 3 – 1 <sup>st</sup> IF = 845.500 to 1 <sup>st</sup> Lo x 3 – 1 <sup>st</sup> IF = 848.895
35.825 to 44.145	869.075 to 893.895	35.825 to 44.145	869.075 to 893.895	50 to 52	1 <sup>st</sup> Lo x 3 – 1 <sup>st</sup> IF = 869.075 to 1 <sup>st</sup> Lo x 3 – 1 <sup>st</sup> IF = 893.895

$$\begin{aligned}
 1^{\text{st}} \text{ IF} &= 1^{\text{st}} \text{ Local} - \text{FR} \\
 1^{\text{st}} \text{ Local} &= A \times 0.075 \\
 A &= (\text{FR} + 380.8) / 0.075 \\
 &= A.\text{xxx} \text{ (Cut away decimal)}
 \end{aligned}$$

#### Test Results (2)

Frequency range (MHz)	Cellular frequency range included (MHz)	Received frequency (MHz)	Interference frequency (MHz)	Signal rejection ratio (dB)	Equation for interference frequency reception (MHz)
849.000 to 868.9875	826.500 to 846.4875	849.000 to 868.9875	826.500 to 846.4875	69 to 71	$\{(FR \times 2) - 2^{\text{nd}} \text{ IF}\} / 2 = 826.500$ to $\{(FR \times 2) - 2^{\text{nd}} \text{ IF}\} / 2 = 846.4875$
894.000 to 916.4875	871.500 to 893.9875	894.000 to 916.4875	871.500 to 893.9875	68 to 68	$\{(FR \times 2) - 2^{\text{nd}} \text{ IF}\} / 2 = 871.500$ to $\{(FR \times 2) - 2^{\text{nd}} \text{ IF}\} / 2 = 893.9875$
894.000 to 916.4875	826.500 to 848.9875	894.000 to 916.4875	826.500 to 848.9875	80 to 78	$\{(FR \times 2) - 2^{\text{nd}} \text{ IF}\} / 2 - 45 = 826.500$ to $\{(FR \times 2) - 2^{\text{nd}} \text{ IF}\} / 2 - 45 = 848.9875$
936.500 to 960.000	869.000 to 892.500	936.500 to 960.000	869.000 to 892.500	78 to 79	$\{(FR \times 2) - 2^{\text{nd}} \text{ IF}\} / 2 - 45 = 869.000$ to $\{(FR \times 2) - 2^{\text{nd}} \text{ IF}\} / 2 - 45 = 892.500$

$$\begin{aligned}
 1^{\text{st}} \text{ IF} &= \text{FR} - 1^{\text{st}} \text{ Local} \\
 1^{\text{st}} \text{ Local} &= A \times 0.075 \\
 A &= (\text{FR} - 380.8) / 0.075 \\
 &= A.\text{xxx} \text{ (Cut away decimal)}
 \end{aligned}$$

The above test results indicate that all the signal rejection ratios for the Cellular Radiotelephone Service Frequency Band are higher than 38 dB.

## LOCAL OSC FREQUENCY CALCULATION

Receiving band (FR step)	Freq. step (kHz)	Receiving freq. FR (MHz)	1 <sup>st</sup> Local PLL 1/VCO 1 or VCO 2 (MHz)	2 <sup>nd</sup> Local PLL 2/VCO 3 (MHz)	3 <sup>rd</sup> Local (MHz)
VHF Low	5.0	28.0000 – 54.0000	$A = (FR + 380.800)/0.075$ $= A.xxx$ (Cut away decimal) $1^{st} \text{ Local} = A \times 0.075$ $1^{st} \text{ IF} = 1^{st} \text{ Local} - FR$	2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
VHF High	12.5	108.0000 – 136.9875		2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
	5.0	137.0000 – 150.7750		2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
	7.5	150.7825 – 150.8125		2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
	7.5	150.8150 – 154.4525		2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
	7.5	154.45625 – 154.47875		2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
	7.5	154.4825 – 154.5050		2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
	5.0	154.5100 – 154.5250		2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
	6.25	154.52750 – 154.54625		2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
	7.5	154.5475 – 154.6075		2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
	5.0	154.6100 – 154.6550		2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
	7.5	154.6575 – 156.2475		2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
	5.0	156.2500 – 157.4750		2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
	7.5	157.4775 – 161.5650		2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
	5.0	161.5700 – 173.2000		2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
	6.25	173.20375 – 173.22250		2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
	6.25	173.22500 – 173.38750		2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
	6.25	173.39000 – 173.41500		2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
	5.0	173.4200 – 174.0000	$A = (FR + 380.700)/0.075$ $= A.xxx$ (Cut away decimal) $1^{st} \text{ Local} = A \times 0.075$ $1^{st} \text{ IF} = 1^{st} \text{ Local} - FR$	2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
UHF Low	6.25	406.0000 – 512.0000	$A = (FR + 380.800)/0.075$ $= A.xxx$ (Cut away decimal) $1^{st} \text{ Local} = A \times 0.075$ $1^{st} \text{ IF} = 1^{st} \text{ Local} - FR$	2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
UHF High	6.25	806.0000 – 823.9875	$A = (FR - 380.800)/0.075$ $= A.xxx$ (Cut away decimal) $1^{st} \text{ Local} = A \times 0.075$ $1^{st} \text{ IF} = FR - 1^{st} \text{ Local}$	2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
	6.25	849.0000 – 868.9875		2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0
	6.25	894.0000 – 960.0000		2 <sup>nd</sup> Local = 1 <sup>st</sup> IF – 45.0	45.0

RF DENOTES Frequency received


IF FREQUENCY      1<sup>st</sup> IF:380.680 – 380.86875 MHz, 2<sup>nd</sup> IF:45.0 MHz , 3<sup>rd</sup> IF:450 kHz

## Label Requirement

The scanning receiver has a label affixed to the product shown on the attached drawing of the model label, which reads as follows:

WARNING: MODIFICATION OF THIS DEVICE TO RECEIVE CELLULAR  
RADIOTELEPHONE SERVICE SIGNALS IS PROHIBITED UNDER FCC RULES AND  
FEDERAL LAW.

Based on the above, we hereby attest that the equipment in question compiles fully with the provisions of §15.121 of FCC Rules.

A handwritten signature in cursive script, appearing to read "M. Ishizuka", is written over a horizontal line.

M. Ishizuka, assistant manager