



BASIC MANUAL

VHF AIR BAND TRANSCEIVERS

IC-A25N

IC-A25C

IC-A25NE

IC-A25CE

Icom Inc.

Thank you for choosing this Icom product. This product is designed and built with Icom's state of the art technology and craftsmanship. With proper care, this product should provide you with years of trouble-free operation.

IMPORTANT

READ ALL INSTRUCTIONS carefully and completely before using the transceiver.


SAVE THIS INSTRUCTION MANUAL — This instruction manual contains important operating instructions for the IC-A25N, IC-A25C, IC-A25NE, and IC-A25CE.

EXPLICIT DEFINITIONS

WORD	DEFINITION
⚠ DANGER!	Personal death, serious injury or an explosion may occur.
⚠ WARNING!	Personal injury, fire hazard or electric shock may occur.
CAUTION	Equipment damage may occur.
NOTE	If disregarded, inconvenience only. No risk of personal injury, fire or electric shock.

SUPPLIED ACCESSORIES

Antenna




Belt clip



Handstrap




Battery case




Battery pack



Headset adapter



Wall charger*



Battery charger



* Different type may be supplied

PRECAUTIONS

⚠ **DANGER! NEVER** short the terminals of the battery pack. Shorting may occur if the terminals touch metal objects such as a key, so be careful when placing the battery packs (or the transceiver) in bags, and so on. Carry them so that shorting cannot occur with metal objects. Shorting may damage not only the battery pack, but also the transceiver.

⚠ **DANGER NEVER** use or charge Icom battery packs with non-Icom transceivers or non-Icom chargers. Only Icom battery packs are tested and approved for use with Icom transceivers or charged with Icom chargers. Using third-party or counterfeit battery packs or chargers may cause smoke, fire, or cause the battery to burst.

⚠ **WARNING! NEVER** hold the transceiver so that the antenna is very close to, or touching exposed parts of the body, especially the face or eyes, while transmitting. The transceiver will perform best if the microphone is 5 to 10 cm (2 to 4 inches) away from the lips and the transceiver is vertical.

⚠ **WARNING! NEVER** operate the transceiver with a headset or other audio accessories at high volume levels. The continuous high volume operation may cause a ringing in your ears. If you experience the ringing, reduce the volume level or discontinue use.

⚠ **WARNING! NEVER** operate the transceiver near unshielded electrical blasting caps or in an explosive atmosphere.

CAUTION: DO NOT use harsh solvents such as benzene or alcohol when cleaning. This could damage the equipment surfaces. If the surface becomes dusty or dirty, wipe it clean with a soft, dry cloth.

CAUTION: DO NOT place or leave the transceiver in excessively dusty environments. This could damage the transceiver.

CAUTION: DO NOT expose the transceiver to heavy rain, and never immerse it in the water. The transceiver meets IP57 requirements for dust-protection and splash resistance. However, once the transceiver has been dropped, dust protection and splash resistance cannot be guaranteed due to the fact that the transceiver may be cracked, or the waterproof seal damaged, and so on.

DO NOT place or leave the transceiver in direct sunlight or in areas with temperatures below $-XX^{\circ}\text{C}$ ($-X^{\circ}\text{F}$) or above $+XX^{\circ}\text{C}$ ($+XXX^{\circ}\text{F}$).

Keep the transceiver in a secure place to prevent use by unauthorized persons.

FCC caution: Changes or modifications to this transceiver, not expressly approved by Icom Inc., could void your authority to operate this transceiver under FCC regulations. (USA only)

CAUTION: In Canada, use of 8.33 kHz Channel Spacing of this radio is strictly prohibited and shall not be used.

Icom, Icom Inc. and Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand, and/or other countries.

The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Icom inc. is under license. All other products or brands are registered trademarks or trademarks of their respective holders.

PRÉCAUTIONS

⚠ **AVERTISSEMENT! NE JAMAIS** court-circuiter les bornes du bloc-batterie. Un court-circuit peut se produire si les bornes touchent des objets métalliques, tels que des clés, faites donc attention lorsque vous rangez des blocs-batteries (ou l'émetteur-récepteur) dans des sacs, etc. Transportez-les de telle sorte que des courts-circuits ne peuvent se produire avec des objets métalliques. Car cela peut endommager le bloc-batterie ainsi que l'émetteur-récepteur.

Utilisez et chargez uniquement les packs batterie Icom spécifiés avec les terminaux Icom ou les chargeurs Icom. Seuls les packs batterie Icom sont testés et homologués pour une utilisation avec les terminaux Icom ou être chargés avec les chargeurs Icom. L'utilisation de packs batterie ou de chargeurs tiers ou de contrefaçon peut être à l'origine de fumées, d'incendie ou faire éclater la batterie.

⚠ **AVERTISSEMENT! NE JAMAIS** tenir le terminal de communication avec l'antenne placée à proximité immédiate ou en contact avec des parties du corps exposées, en particulier le visage ou les yeux, lors des transmissions. Les performances de la radio sont optimales quand le microphone est tenu entre 5 et 10 cm de la bouche de l'utilisateur et quand l'appareil est vertical.

⚠ **AVERTISSEMENT! NE JAMAIS** utiliser l'émetteur-récepteur avec un casque ou tout autre accessoire audio à un niveau sonore élevé. L'utilisation continue à un niveau sonore élevé peut provoquer un bourdonnement dans vos oreilles.

NE PAS utiliser l'émetteur-récepteur à proximité de détonateurs électriques non blindés ou dans une atmosphère explosive.

NE PAS utiliser de dissolvants agressifs tels que du Benzène ou de l'alcool lors du nettoyage, car ils endommageraient les surfaces de l'émetteur-récepteur. Si l'émetteur-récepteur est poussiéreux ou sale, nettoyez-le avec un tissu doux et sec.

NE PAS placer l'émetteur-récepteur dans des environnements excessivement poussiéreux. Cela pourrait endommager l'émetteur-récepteur.

CONSERVEZ l'émetteur-récepteur à l'abri des fortes pluies et ne le plongez jamais dans l'eau. Cet émetteur-récepteur répond aux exigences de la norme IP57 en matière de protection contre la poussière et de résistance aux éclaboussures. Cependant, en cas de chute de l'émetteur-récepteur, la protection contre la poussière et la résistance aux éclaboussures ne peuvent plus être garanties, car le boîtier risque d'être fissuré ou le joint d'étanchéité endommagé, etc.

NE PAS placer ou laisser l'émetteur-récepteur en plein soleil ou dans un environnement soumis à des températures inférieures à –XX °C ou supérieures à +XX °C.

Placez l'émetteur-récepteur dans un lieu sûr pour éviter toute utilisation par des personnes non autorisées.

MISE EN GARDE: Utilisation de 8,33 kHz Espacement des canaux de cette radio est strictement interdite et ne doit pas être utilisé au Canada.


TABLE OF CONTENTS

IMPORTANT	i	Pairing with a headset	i
EXPLICIT DEFINITIONS	i	7	
SUPPLIED ACCESSORIES	i	Connecting a paired headset	7
PRECAUTIONS	ii	7	
PRÉCAUTIONS	iii	Setting AF Output	8
SAFETY TRAINING INFORMATION	iv	8	
INFORMATION EN MATIÈRE DE SÉCURITÉ	v	Disconnecting a headset	8
1 PANEL DESCRIPTION	1–2	Unpairing a headset	8
Front panel	1	FCC information	15
Function display	2	INDEX	16
2 BASIC OPERATION	3–5		
Turning ON the transceiver	3		
Receiving and transmitting	4		
Adjusting the squelch	5		
3 Bluetooth® OPERATION	6–8		
Operating Bluetooth®	6		
Electromagnetic Interference	6		

1

PANEL DESCRIPTION

■ Front, top and side panels

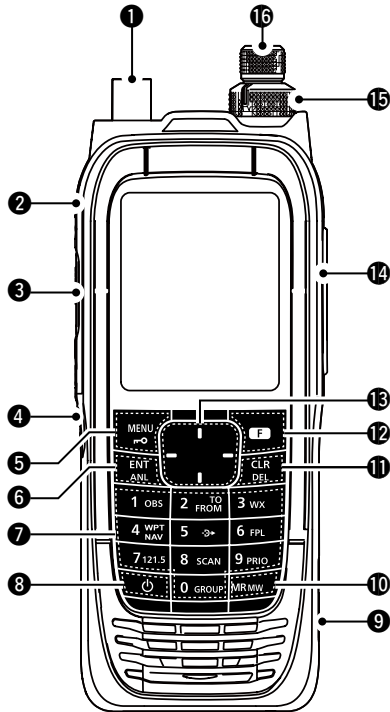

① ANTENNA CONNECTOR

Connect the supplied antenna.

② BACKLIGHT KEY [LIGHT]

Push to adjust the backlight level.

③ PTT SWITCH [PTT]

Hold down to transmit, release to receive.

④ SQUELCH ADJUSTMENT KEYS [SQL▲]/[SQL▼]

Push to adjust the squelch.

⑤ MENU/LOCK KEY [MENU/↵]

- Push to enter or exit the Menu screen.
- Push [FUNC], and then push [MENU/↵] to lock the keypad.

⑥ ENTER/AUTOMATIC NOISE LIMITER KEY [ENT/ANL]

- Push to set the entered data.
- Push [FUNC], and then push [MENU/↵] to lock the keypad.

⑦ TEN KEYS

- Enter the specified digit for setting the frequency, selecting the Memory channel, and so on.
- Push [FUNC], and then push these keys to use functions listed below.

OMNI BEARING SELECTOR [1/OBS]

(For only the IC-A25N and IC-A25NE)

Enter the Omni Bearing Selector (OBS) mode.

TO/FROM SELECTOR KEY [2/TO FROM]

(For only the IC-A25N and IC-A25NE)

- Push to change the “TO/FROM” indicator.
- Push to set the direction to or from the VOR to the Omni Bearing Selector, for using the Automatic Bearing Set System (ABSS).

WHETHER CHANNEL KEY [3/WX]

(For only the USA versions)

Push to enter the whether channel selection mode.

WAYPOINT KEY [4/WPT NAV]

(For only the IC-A25N and IC-A25NE)

Push to display the Waypoint Navigation screen.*

*Only when the waypoint or the flight plan is selected.

DIRECT-TO KEY [5/→]

(For only the IC-A25N and IC-A25NE)

Push to display the “Direct-To WPT” screen, for entering the waypoint.

FLIGHT PLAN KEY [6/FPL]

(For only the IC-A25N and IC-A25NE)

Push to display the current flight plan.

*Only when the flight plan is selected.

FLIGHT PLAN KEY [6/FPL]

(For only the IC-A25N and IC-A25NE)

Push to display the current flight plan.

EMERGENCY KEY [7/121.5]

Push to select the emergency frequency.

SCAN KEY [8/SCAN]

Push to start or stop the scan.

PRIORITY CHANNEL KEY [9/PRIO]

Push to turn the Priority watch function ON or OFF.

GROUP KEY [0/GROUP]

Push to enter the “Group List,” for changing the group.

8 POWER KEY [⏻]

Hold down for 1 second to turn ON or OFF the transceiver.

9 DC POWER JACK

Connect the power adapter or the optional cable to charge the battery pack, or to use the transceiver by external power.

10 MEMORY WRITE KEY [9/MW]

- Push to enter the Memory channel selection mode.
- Push [FUNC], and then push [9/MW] to enter the “Memory Write” screen, for entering the selected frequency to the memory.

11 CLEAR/DELETE KEY [CLR/DEL]

- Push to cancel the entered data, or selected item.
- While selecting the Memory channel or Recall channel, Push [FUNC], and then push [CLR/DEL] to delete the selected channel.

12 FUNCTION KEY [F]

Push to display the “F,” icon for 3 seconds, and then push other keys to use its secondary function.

13 LEFT/RIGHT/UP/DOWN KEYS

- Push to display, and select the Recall channels.
- Push to select the menu items, menu settings, and so on.

14 HEADSET JACK

Connects the third party headset through the supplied Headset adapter.

15 VOLUME CONTROL KNOB


Adjusts the audio output level.

16 TUNING DIAL

Rotate to select the frequency, Memory channel, menu items, and so on.


1 PANEL DESCRIPTION

■ Function display (COM mode)

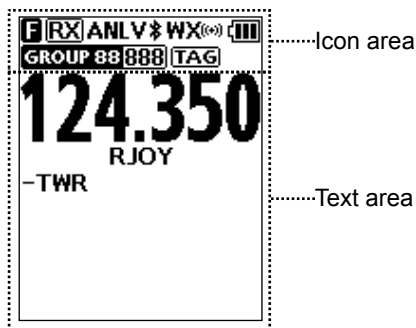

◇ Icon area

Indicators

BATTERY INDICATOR 
Displays the battery status.

Icons

FUNCTION ICON

Displayed for 3 seconds when you push [F], to use secondary functions assigned for other keys.

RX/TX ICON

Displayed while receiving or transmitting.

AUTOMATIC NOISE LIMITER ICON ANL

Displayed when the Automatic Noise Limiter function is ON.

VOX ICON

Displayed when the VOX function is ON.

Bluetooth® ICON

Displayed when the Bluetooth device is connected.

WX ICON (For only the USA versions)

- Displayed when the whether alert function is ON.
- Blinks when the whether alert is received.

GROUP/MEMORY INDICATOR

Displays the selected group and channel in the Memory mode.

TAG ICON

Displayed when the tagged channel is selected.

◇ Text area

- Displays the selected frequency, channel type, channel name, priority channel, and so on.

■ Battery caution

Misuse of Li-ion batteries may result in the following hazards: smoke, fire, or the battery may rupture. Misuse can also cause damage to the battery or degradation of battery performance.

⚠ **DANGER! NEVER** solder the battery terminals, or NEVER modify the battery pack. This may cause heat generation, and the battery may burst, emit smoke or catch fire.

⚠ **DANGER! NEVER** place or leave battery packs in areas with temperatures above +60°C (+140°F). High temperature buildup in the battery cells, such as could occur near fires or stoves, inside a sun-heated vehicle, or in direct sunlight for long periods of time may cause the battery cells to rupture or catch fire. Excessive temperatures may also degrade the battery pack's performance or shorten the battery cell's life.

⚠ **DANGER! NEVER** strike or otherwise impact the battery pack. Do not use the battery pack if it has been severely impacted or dropped, or if the pack has been subjected to heavy pressure. Battery pack damage may not be visible on the outside of the case. Even if the surface of the battery does not show cracks or any other damage, the cells inside the battery may rupture or catch fire.

⚠ **DANGER! NEVER** expose the battery pack to rain, snow, seawater, or any other liquids. Do not charge or use a wet pack. If the pack gets wet, be sure to wipe it dry before using.

⚠ **DANGER! NEVER** place or leave battery packs near fire. Fire or heat may cause them to rupture or explode. Dispose of used battery packs in accordance with local regulations.

⚠ **DANGER! NEVER** let fluid from inside the battery get in your eyes. This can cause blindness. Rinse your eyes with clean water, without rubbing them, and immediately go to a doctor.

⚠ **WARNING! NEVER** put the battery pack in a microwave oven, high-pressure container, or in an induction heating cooker. This could cause a fire, overheating, or cause the battery cells to rupture.

⚠ **WARNING! NEVER** use the battery pack if it emits an abnormal odor, heats up, or is discolored or deformed. If any of these conditions occur, contact your Icom dealer or distributor.

⚠ **WARNING! NEVER** let fluid from inside the battery cells come in contact with your body. If it does, immediately wash with clean water.

CAUTION: DO NOT use the battery pack out of the specified temperature range for the transceiver (−30°C ~ +60°C (−22°F ~ +140°F)) and the battery itself (−20°C ~ +60°C (−4°F ~ +140°F)). Using the battery out of its specified temperature range will reduce its performance and battery cell's life. Please note that the specified temperature range of the battery may exceed that of the transceiver. In such cases, the transceiver may not work properly because it is out of its operating temperature range.

2 BATTERY CHARGING

■ Battery caution (continued)

CAUTION: Shorter battery life could occur if the battery is left fully charged, completely discharged, or in an excessive temperature environment (above +50°C (+122°F)) for an extended period of time. If the battery pack must be left unused for a long time, it must be detached from the transceiver after discharging. You may use the battery pack until the remaining capacity is about half, then keep it safely in a cool and dry place at the following temperature range:

- 20°C ~ +50°C (-4°F ~ +122°F) (within a month)
- 20°C ~ +40°C (-4°F ~ +104°F) (within three months)
- 20°C ~ +20°C (-4°F ~ +68°F) (within a year)

BE SURE to replace the battery pack with a new one approximately five years after manufacturing, even if it still holds a charge. The inside battery material will become weak after a period of time, even with little use. The estimated number of times you can charge the battery is between 300 and 500. Even when the battery appears to be fully charged, the operating time of the transceiver may become short when:

- Approximately 5 years have passed since the battery was manufactured.
- The battery has been repeatedly charged.

■ Charging caution

⚠ **DANGER! NEVER** charge the battery pack in areas with extremely high temperatures, such as near fires or stoves, inside a sun-heated vehicle, or in direct sunlight. In such environments, the safety/protection circuit in the battery will activate, causing the battery to stop charging.

⚠ **WARNING! NEVER** charge the transceiver during a lightning storm. It may result in an electric shock, cause a fire or damage the transceiver. Always disconnect the power adapter before a storm.

⚠ **WARNING! NEVER** charge or leave the battery in the battery charger beyond the specified time for charging. If the battery is not completely charged by the specified time, stop charging and remove the battery from the battery charger. Continuing to charge the battery beyond the specified time limit may cause a fire, overheating, or the battery may rupture.

⚠ **WARNING! NEVER** insert the transceiver (battery attached to the transceiver) into the charger if it is wet or soiled. This could corrode the battery charger terminals or damage the charger. The charger is not waterproof.


CAUTION: NEVER charge the battery outside of the specified temperature range: BC-214 and BC-219N (+16°C ~ +40°C (+60.8°F ~ +104°F)). Otherwise, the charging time will be longer, but the battery will not reach a full charge. While charging, at a point after the temperature goes out of the specified range, the charging will automatically stop.

■ Battery charger

You can charge supplied Li-ion battery pack using the supplied BC-224 and BC-123S.

● **Charging time: approximately XX hours.**

① You can also use the CP-20 cigarette lighter cable, instead of the BC-123S.

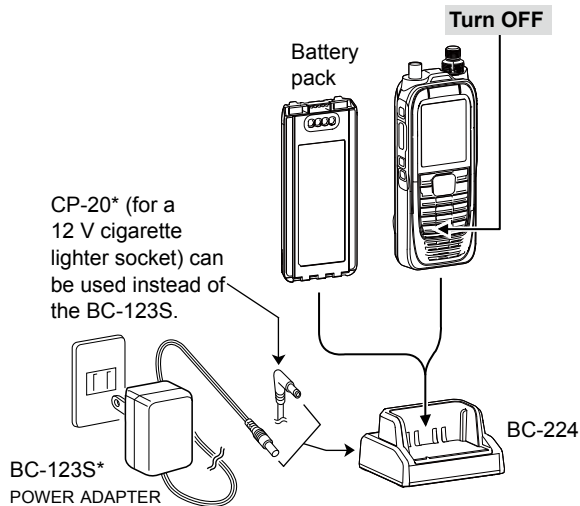

* A different type may be supplied, or may not be supplied, depending on the transceiver version.

■ Battery case

When using a supplied battery case, install 6 × AA (LR6) size Alkaline batteries, as shown below.

2

CAUTION:

- Use batteries with same label, type, and capacity. Do not mix new and old batteries together.
- Keep battery contacts clean. It's a good idea to clean battery terminals once a week.

■ Receiving and transmitting

◇ Setting the frequency

Setting the frequency in the VFO mode

1. Push [F], and then rotate dial to set the MHz digit.
2. Rotate dial to set the kHz digit.
 - ① If the transceiver is in the Memory mode, Push [F], and then [MR/MW] to enter the VFO mode.

Setting the frequency in the Memory mode

1. Push [MR/MW] to enter the Memory mode.
 - The selected group and channel is displayed.

Example: **GROUP 01 001**


2. Rotate dial to select the channel.
 - ① Push [F], and then push [0/GROUP] to enter the "Group List" screen, to select the group.



◇ Receiving


When receiving a signal, "RX" is displayed and audio is heard.

- ① Rotate volume control knob to adjust the audio output level.



◇ Adjusting the squelch

- Push [SQL▲] or [SQL▼] to adjust the squelch if necessary
 - The adjustment screen is displayed while adjusting.




◇ Using the Automatic Noise Limiter function

The function reduces noise components while receiving, such as those caused by the engine ignition systems.

- Push to turn the function ON or OFF.
 - "ANL" is displayed

◇ Transmitting


1. Hold down [PTT], and then speak at your normal voice level.
 - "TX" is displayed



■ Setting the 121.5 MHz emergency frequency

In case of emergency, you can immediately set the 121.5 MHz emergency frequency.

- Push [F], and then push [7/121.5] to set the emergency frequency.



INFORMATION

■ VFO channel ID list

- Channel spacing: 8.33 kHz

Operating Frequency (MHz)	Channel spacing (kHz)	Channel ID (Displayed Frequency)
118.0000	8.33	118.005
118.0083	8.33	118.010
118.0167	8.33	118.015
118.0250	8.33	118.030
118.0333	8.33	118.035
118.0417	8.33	118.040
118.0500	8.33	118.055
118.0583	8.33	118.060
118.0667	8.33	118.065
118.0750	8.33	118.080
118.0833	8.33	118.085
118.0917	8.33	118.090
118.1000	8.33	118.105

- Channel spacing: 25 kHz (Actual frequency is displayed.)

Operating Frequency (MHz)	Channel spacing (kHz)	Channel ID (Displayed Frequency)
118.0000	25	118.000
118.0250	25	118.025
118.0500	25	118.050
118.0750	25	118.075
118.1000	25	118.100

These tables show just the display example between 118.0000 MHz and 118.1000 MHz. Not all frequencies in the band are shown.

CAUTION: In Canada, use of 8.33 kHz Channel Spacing of this radio is strictly prohibited and shall not be used.

■ About CE



Versions of the IC-A25NE and IC-A25CE which have the “CE” symbol on the product, comply with the essential requirements of the Radio Equipment Directive, 2014/53/

EU, and the restriction of the use of certain hazardous substances in electrical and electronic equipment Directive, 2011/65/EU.

■ About declaration of conformity

Hereby, Icom Inc. declares that the radio equipment type IC-A25NE and IC-A25CE are in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <http://www.icom.co.jp/world/support/>

■ Disposal



The crossed-out wheeled-bin symbol on your product, literature, or packaging reminds you that in the European Union, all electrical and electronic products, batteries, and accumulators

(rechargeable batteries) must be taken to designated collection locations at the end of their working life. Do not dispose of these products as unsorted municipal waste. Dispose of them according to the laws in your area.

■ Country code list

• ISO 3166-1

	Country	Codes		Country	Codes
1	Austria	AT	18	Liechtenstein	LI
2	Belgium	BE	19	Lithuania	LT
3	Bulgaria	BG	20	Luxembourg	LU
4	Croatia	HR	21	Malta	MT
5	Czech Republic	CZ	22	Netherlands	NL
6	Cyprus	CY	23	Norway	NO
7	Denmark	DK	24	Poland	PL
8	Estonia	EE	25	Portugal	PT
9	Finland	FI	26	Romania	RO
10	France	FR	27	Slovakia	SK
11	Germany	DE	28	Slovenia	SI
12	Greece	GR	29	Spain	ES
13	Hungary	HU	30	Sweden	SE
14	Iceland	IS	31	Switzerland	CH
15	Ireland	IE	32	Turkey	TR
16	Italy	IT	33	United Kingdom	GB
17	Latvia	LV			

■ Firmware version identification

You can identify your transceiver's firmware version in the "Version" menu.

MENU > Others > **Version**

Version	
CPU	1.00 Beta
BT UNIT	1.11
GPS UNIT	11613

■ FCC information

• FOR CLASS A UNINTENTIONAL RADIATORS:

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

• POUR LES RAYONNEMENTS NON INTENTIONNELS DE CLASSE A:

Cet équipement a été testé et reconnu conforme aux limites fixées pour un appareil numérique de classe A, conformément au point 15 de la réglementation FCC. Ces limites sont définies de façon à fournir une protection raisonnable contre le brouillage préjudiciable lorsque cet appareil est utilisé dans un environnement commercial. Cet équipement génère, utilise et peut émettre un rayonnement de fréquence radio. S'il n'a pas été installé conformément aux instructions, il peut par ailleurs créer des interférences perturbant les communications radio.

L'utilisation de cet appareil dans une zone résidentielle peut provoquer un brouillage préjudiciable, auquel cas l'utilisateur sera tenu de corriger la situation à ses frais.

■ Safety training information



Your Icom radio generates RF electromagnetic energy while transmitting. This radio is designed for and classified as for “Occupational Use Only.” This means it must be used only during the course of employment by individuals aware of the hazards, and the ways to minimize such hazards. This radio is NOT intended for use by the “General Population” in an uncontrolled environment. This radio has been tested and complies with the FCC and IC RF exposure limits for “Occupational Use Only”. In addition, your Icom radio complies with the following Standards and Guidelines with regard to RF energy and electromagnetic energy levels and evaluation of such levels for exposure to humans:

- FCC KDB Publication 447498 D03, Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields.
- American National Standards Institute (C95.1-1992), IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.
- American National Standards Institute (C95.3-1992), IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields— RF and Microwave.
- The accessories listed on page i are authorized for use with this product. Use of accessories other than those specified may result in RF exposure levels exceeding the FCC requirements for wireless RF exposure.
- Health Canada Safety Code 6 - Limits of Human Exposure to Electromagnetic Energy in the Frequency Range from 3 kHz to 300 GHz.



To ensure that your exposure to RF electromagnetic energy is within the FCC allowable limits for occupational use, always adhere to the following guidelines:

- **DO NOT** operate the radio without a proper antenna attached, as this may damage the radio and may also cause you to exceed FCC RF exposure limits. A proper antenna is the antenna supplied with this radio by the manufacturer or an antenna specifically authorized by the manufacturer for use with this radio.
- **DO NOT** transmit for more than 50% of the total radio use time (“50% duty cycle”). Transmitting more than 50% of the time can cause FCC RF exposure compliance requirements to be exceeded. The radio is transmitting when “TX” is displayed on the function display. You can cause the radio to transmit by pushing the [PTT] switch.
- **ALWAYS keep** the antenna at least 2.5 cm (1 inch) away from the body when transmitting and only use the Icom belt-clips which are listed in this instruction manual when attaching the radio to your belt, or other place, to ensure FCC and IC RF exposure compliance requirements are not exceeded.

The information listed above provides the user with the information needed to make him or her aware of RF exposure, and what to do to assure that this radio operates within the FCC RF exposure limits of this radio.

Electromagnetic Interference/Compatibility

During transmissions, your Icom radio generates RF energy that can possibly cause interference with other devices or systems. To avoid such interference, turn off the radio in areas where signs are posted to do so. DO NOT operate the transmitter in areas that are sensitive to electromagnetic radiation such as hospitals and blasting sites.

Occupational/Controlled Use

The radio transmitter is used in situations in which persons are exposed as consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure.

■ Infomation en matière de sécurité



AVERTISSEMENT

Votre radio Icom produit une énergie électromagnétique de radiofréquences (RF), en mode de transmission. Cette radio est conçue pour un «usage professionnel seulement» et classée comme tel, ce qui signifie qu'elle doit être utilisée uniquement dans le cadre d'un travail par des personnes

conscientes des dangers et des mesures visant à minimiser ces dangers.

Elle N'EST PAS conçue pour un «utilisation grand public », dans un environnement non contrôlé. Cet appareil a été évalué et jugé conforme, aux limites d'exposition aux RF de la FCC et d'IC, pour une «utilisation grand public». En outre, votre radio Icom satisfait les normes et directives qui suivent en matière de niveaux d'énergie et d'énergie électromagnétique de RF et d'évaluation de tels niveaux en ce qui concerne l'exposition humaine:

- Publication 447498 D03 de la FCC KDB, «Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields».
- Norme de l'American National Standards Institute (ANSI): IEEE C95.1-1992 sur les niveaux de sécurité compatibles avec l'exposition humaine aux champs électromagnétiques de radiofréquences (3 kHz à 300 GHz).
- Norme de l'ANSI: IEEE C95.3-1992 sur la méthode d'évaluation recommandée du champ magnétique potentiellement dangereux des radiofréquences et des micro-ondes.
- Les accessoires illustrés dans "Options" de la feuille d'instructions sont approuvés pour une utilisation avec ce produit. L'utilisation d'accessoires autres que ceux précisés peut entraîner des niveaux d'exposition aux RF supérieures aux limites établies par la FCC et d'IC en matière d'exposition aux RF sans fil.
- Le Code de sécurité 6 de Santé Canada - Les limites d'exposition humaine à l'énergie électromagnétique dans la gamme de fréquences de 3 kHz à 300 GHz.



MISE EN GARDE

Afin de vous assurer que votre exposition à une énergie électromagnétique de RF se situe dans les limites permises par la FCC pour une utilisation grand public, veuillez en tout temps respecter les directives suivantes :

- **NE PAS** faire fonctionner la radio sans qu'une antenne appropriée y soit fixée, car ceci risque d'endommager la radio et causer une exposition supérieure aux limites établies par la FCC. L'antenne appropriée est celle qui est fournie avec cette radio par le fabricant ou une antenne spécialement autorisée par le fabricant pour être utilisée avec cette radio.
- **NE PAS** émettre pendant plus de 50% du temps total d'utilisation de l'appareil («50% du facteur d'utilisation»). Émettre pendant plus de 50% du temps total d'utilisation peut causer une exposition aux RF supérieure aux limites établies par la FCC. La radio est en train d'émettre lorsque le témoin du "TX" s'affiche sur l'écran ACL. La radio émettra si vous appuyez sur le bouton du microphone.
- **TOUJOURS** tenir l'antenne éloignée d'au moins 2,5 cm de votre corps au moment d'émettre et utiliser uniquement l'attache pour ceinture Icom illustrée à la p. 32, lorsque vous attachez la radio à votre ceinture, ou à autre chose, de façon à vous assurer de ne pas provoquer une exposition aux RF supérieure aux limites fixées par la FCC. Pour offrir à vos interlocuteurs la meilleure qualité de transmission possible, tenez l'antenne à au moins 5 cm de votre bouche et légèrement de côté.

Les renseignements ci-dessus fournissent à l'utilisateur toute l'information nécessaire sur l'exposition aux RF et sur ce qu'il faut faire pour assurer que cette radio fonctionne en respectant les limites d'exposition aux RF établies par la FCC.

Interférence électromagnétique et compatibilité

En mode de transmission, votre radio Icom produit de l'énergie de RF qui peut provoquer des interférences avec d'autres appareils ou systèmes. Pour éviter de telles interférences, mettez la radio hors tension dans les secteurs où une signalisation l'exige. **NE PAS** faire fonctionner l'émetteur dans des secteurs sensibles au rayonnement électromagnétique tels que les hôpitaux, les aéronefs et les sites de dynamitage.

Usage professionnel/contrôlé

Ce radio émetteur est utilisé dans des cas où des personnes sont exposées en raison de leur travail, pourvu qu'elles soient conscientes du risque d'exposition et qu'elles puissent exercer un contrôle sur cette exposition.

AF Output	A	7	Precautions.....	ii
Basic operation.....	B	3	Receiving.....	R
Bluetooth® operation.....		6	Safety training information.....	S
Disposal.....	D	13	Specifications	iv
Electromagnetic Interference.....	E	6	Squelch.....	11
FCC information	F	15	Transmitting	T
Firmware version identification.....		13	Turning ON the transceiver	4
Front panel		1	VFO channel ID list.....	V
Function display.....		2		14
Headset	H			
Connecting a paired headset.....		7		
Disconnecting from a headset		8		
Pairing with a headset		7		
Unpairing a headset.....		8		
Important	I	i		
Menu item list	M	9		
Menu mode.....		9		
Options	O	12		
Panel Description	P	1		

Count on us!

< Intended Country of Use >

- AT BE CY CZ DK EE
 FI FR DE GR HU IE
 IT LV LT LU MT NL
 PL PT SK SI ES SE
 GB IS LI NO CH BG
 RO TR HR

A-7388?-1EX
Printed in Japan
© 2017 Icom Inc.

Icom Inc.

1-1-32 Kamiminami, Hirano-ku, Osaka 547-0003, Japan