

Gilat North America
Application for Special Temporary Authority
Reference to Existing Call Sign: WH2XSY
Reference to Existing File Number: 0133-EX-PL-2015

Gilat North America, (“GNA”), pursuant to Section 5.61 of the Commission’s rules, 47 C.F.R. § 5.61, seeks Special Temporary Authorization (STA) for ground testing of two (2) earth stations to test and demonstrate the functionality of its authorized SR-71 Ku-band mobile satellite terminal. GNA wishes to test at two locations , Fort Hunt, MD and Blackstone, VA, these two sites will use Intelsat satellite IS-29e at 50° West longitude, This testing would use the same SR-71 antenna previously authorized by the Commission previously in above reference filing, using the same configuration and technical specifications, but on a new static platform and different satellite. Specifically, GNA seeks STA to test the SR-71 terminal for use to demonstrate the SR-71 in static test table environment. The requirement for the scope of these proposed tests is to begin on April 20, 2016 and operate through to June 1, 2016. The testing will be performed for a few hours each week between Gilat, Intelsat General Corporation and Textron/AAI. An expedited response is request as the setup is ready to transmit. As described herein, grant of such authority would strongly serve the public interest.

I. BACKGROUND

The SR-71 antenna, was developed in connection with a Department of Defense/Logistics Innovation Agency (“DOD/LIA”) contract to evaluate and satisfy U.S. government satellite-based mobile communications needs. Building on GNA’s proven antenna technology for mobile applications, the SR-71 is a light, single-panel Ku-band array antenna

designed with a low profile, small footprint, and full-motion tracking system that provides broadband data access in the land mobile context.

On May 14, 2015 the Federal Communications Commission (“FCC”) granted GNA a 2 year experimental license (Call Sign WH2XSE), until May 1, 2017, to operate up to five (5) SR-71 terminals in the 14.0-14.5 GHz and 11.7-12.2 GHz Ku-band and communicate with the SES-2 at 87° W.L.¹

II. DESCRIPTION OF PROPOSED EXPERIMENTAL STA OPERATIONS

GNA seeks to conduct static testing at Textron Systems in Hunt Valley, MD (39.47°N, 76.64°W) and the National Guard Airfield in Blackstone, VA (37.07° N, 77.96° W) subject to protection of U.S. Government radio astronomy and space research operations. GNA recognizes and accepts that any experimental STA will be conditioned upon coordination with and/or protection of these co-frequency operations.

The general objectives of the testing to be carried out under this experimental STA include: (i) demonstrating via table-testing the two-way data service from an ESAA system capable of in-flight unmanned aeronautical platform; and (ii) validating the predicted performance of the system.

A. Testing

GNA seeks authorization to conduct this testing under the instant request for experimental Special Temporary Authority. Initial testing will involve test table testing of the SR-71 on a single platform. No flights are necessary for the testing at these two sites.

¹ See ELS File No. 0133-EX-PL-2015, Call Sign WH2XSE.

The SR-71 will be operating at the Hunt Valley and Blackstone, which are outside the exclusion zones for radio astronomy sites (during observations) and NASA TDRSS sites, and in accordance with applicable coordination agreements and FCC rules.

The following performance objectives will be examined in connection with the testing:

- o reliability of data link;
- o two-way data link performance and coverage;
- o video link performance and coverage; and
- o network management and operation.

This testing will be very limited in duration, depending on US Government requirements. In all cases, the terminals will operate in controlled test conditions under close supervision of GNA's network control personnel at all times.

III. TECHNICAL INFORMATION

Attached hereto as Appendix A is a copy of the Narrative Statement and supporting technical information. Appendix B includes the Radiation Hazard Study, respectively. The SR-71 antenna to be tested will include the 40 Watt BUC, with a maximum EIRP of 3820 Watts and ERP of 2328 Watts, emission designator of 23M9G1D, and a BPSK modulated signal in the 14.0-14.5 GHz transmit band.

VI. PROTECTION OF OTHER USERS IN THE 14.0–14.5 GHZ BAND

Protection of Fixed-Satellite Service. GNA's terminals operate in such a manner that the off-axis EIRP levels are no greater than the levels produced by routinely licensed ESAA earth stations under part §25.227. To the extent that any adjacent satellite operator experiences unacceptable interference from GNA's experimental STA operations, GNA will cease terminal transmissions immediately.²

² See 47 C.F.R. § 5.111(a)(2).

Protection of Potential NGSO FSS Systems. GNA acknowledges that non-geostationary orbit (“NGSO”) systems are also permitted to operate in the Ku-band. However, no such systems are currently authorized or plan to operate within the period contemplated for the proposed experimental STA operations.

Protection of Terrestrial Radio Services. GNA has examined current spectrum use in the 14.0-14.5 GHz band and has determined that there are no active FCC-licensed terrestrial services in this band in North America with which its proposed operations could conflict.

Protection of the Radio Astronomy Service. For purposes of this experimental STA application, GNA terminals will not operate within the vicinity of Radio Astronomy sites and during observation periods.

Protection of Space Research Service. GNA recognizes the use of the frequency band from 14.0-14.05 GHz and the possible use of the band from 14.05-14.2 GHz allocated to the National Aeronautics and Space Administration (“NASA”) Tracking and Data Relay Satellite System (“TDRSS”) for space research conducted at White Sands, New Mexico and Blossom Point, Maryland. For purposes of this experimental STA application, GNA will not operate within the vicinity of these earth stations.

VII. SUPERVISION AND CONTROL

For purposes of these experiments, the SR-71 terminals will be operated under GNA’s supervision and control. The technical point of contact information for the planned experimental STA operation is:

Steve Jacklin
Mobile: 571 296-4292
Email: steve.jacklin@gilatna.com

This contact will have access to all network functions, and will have the ability and authority to cease all transmissions from the terminals wherever they are located.

VIII. CONCLUSION

Grant of this experimental STA will allow GNA to further develop and demonstrate the SR-71 terminal and confirm the operational characteristics of the terminal in the UAS context. These experiments are critical to the national security interest of the United States, by supporting US military operations, training and other applications. There is ample precedent for granting this experimental STA and it is clearly in the public interest to do so.

Appendix A

Gilat North America

Narrative Statement

Experimental STA License Application Narrative Statement

I. Introduction

On April 1, 2012, GNA was granted a special temporary authorization (Call Sign WF9XOP) for these operations, which expired on October 1, 2012. Given the ongoing operational requirements, GNA seeks an STA subject to the same terms and conditions included in its prior authority. Grant of the experimental STA would strongly serve the public interest by enhancing satcom-on-the-move service and equipment options for the U.S. Government.

II. Antenna

The SR-71 antenna technology builds upon GNA's proven antenna technology for mobile applications. The major enhancement is in the antenna panel which is capable of simultaneous Ku-band transmission and reception within the 14.0-14.5 GHz and 11.7- 12.7 GHz bands, respectively. The antenna allows tracking in three axes, azimuth, elevation and polarization.

The antenna consists of a single 6 inch-by-6 inch panel array which is mounted on a rotatable platform. The platform rotates in azimuth to orient the panel towards the satellite. The panel also tilts to set the elevation angle. Finally, the antenna has a polarization control mechanism which sets the correct polarization angle for both transmit and receive.

A drawing of the antenna panel and the antenna assembly is shown in Figures 1 and 2 respectively.

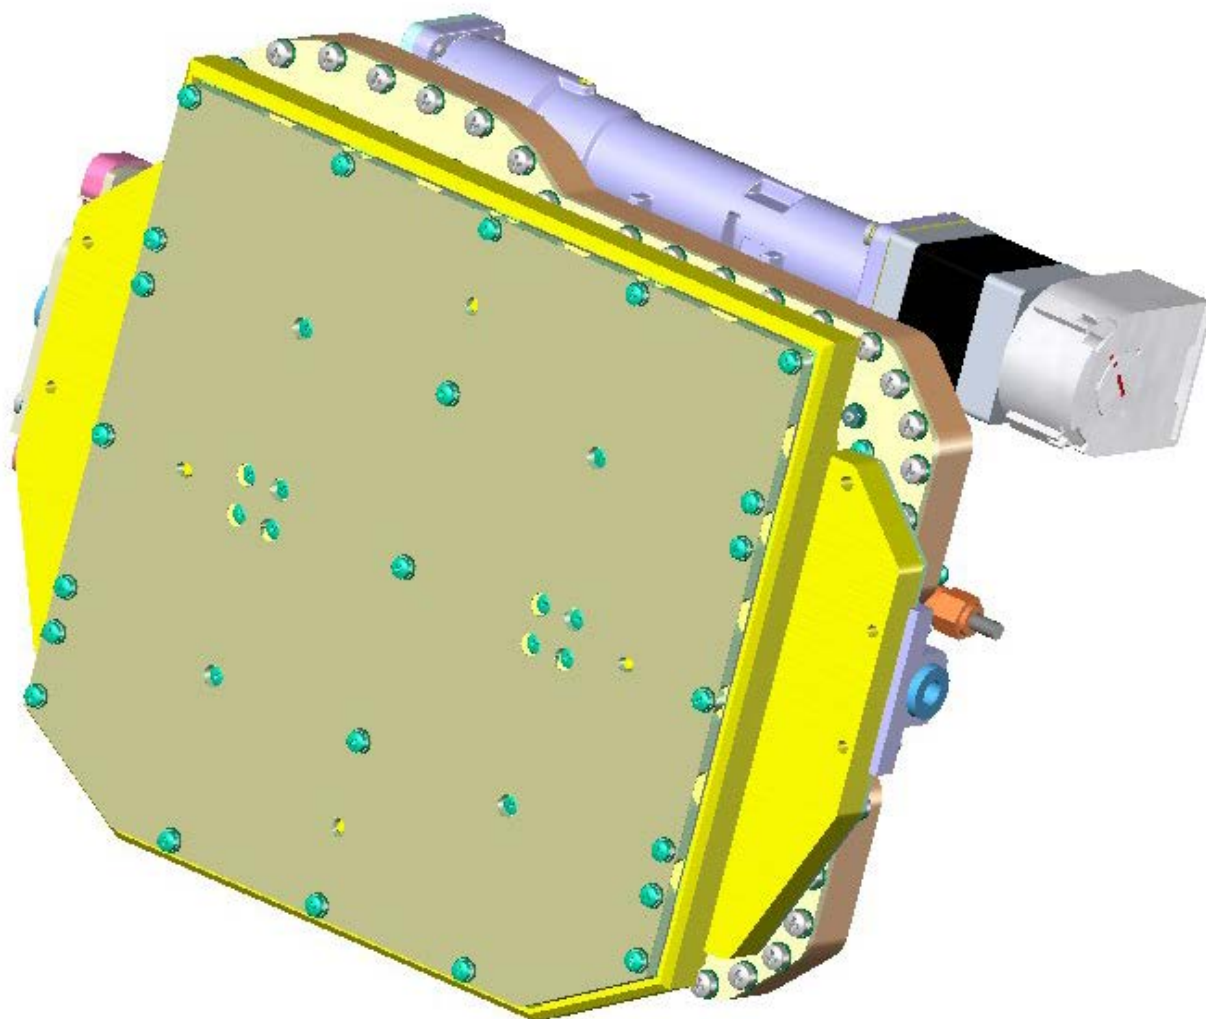


Figure 1
SR-71 Panel Array


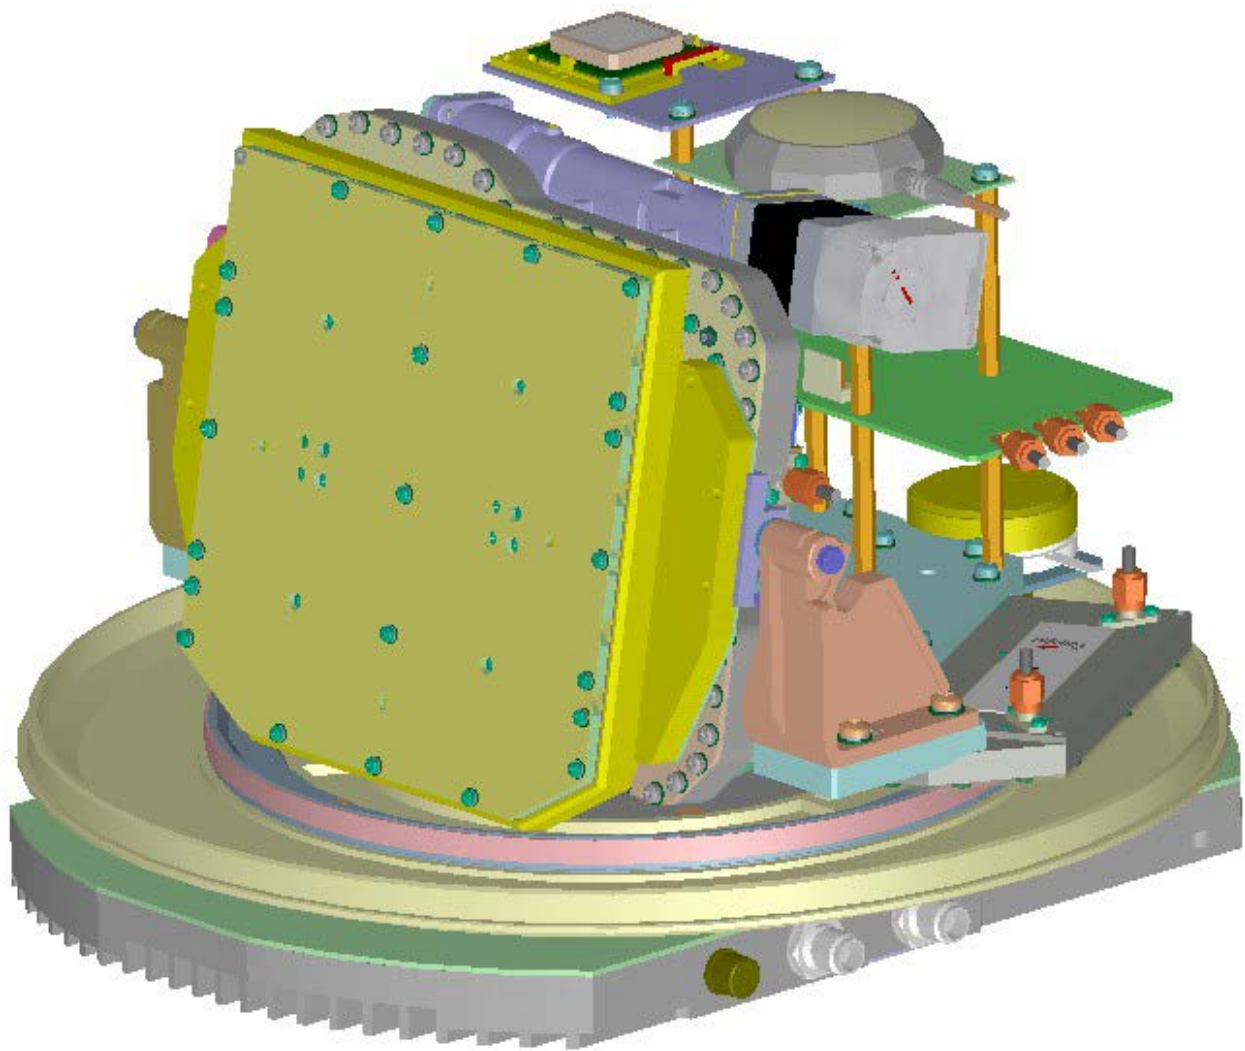


Figure 2
SR-71 Antenna

III. Antenna Operation

As with all GNA antennas, the SR71 has active control of the azimuth, elevation and polarization angles to maintain precise pointing towards the target satellite. The antenna scans mechanically in both azimuth and elevation. For satellite acquisition and reacquisition, the proven principles implemented in existing GNA antennas will be applied. A simplified block diagram of the major components in the tracking and acquisition system is shown in Figure 3.

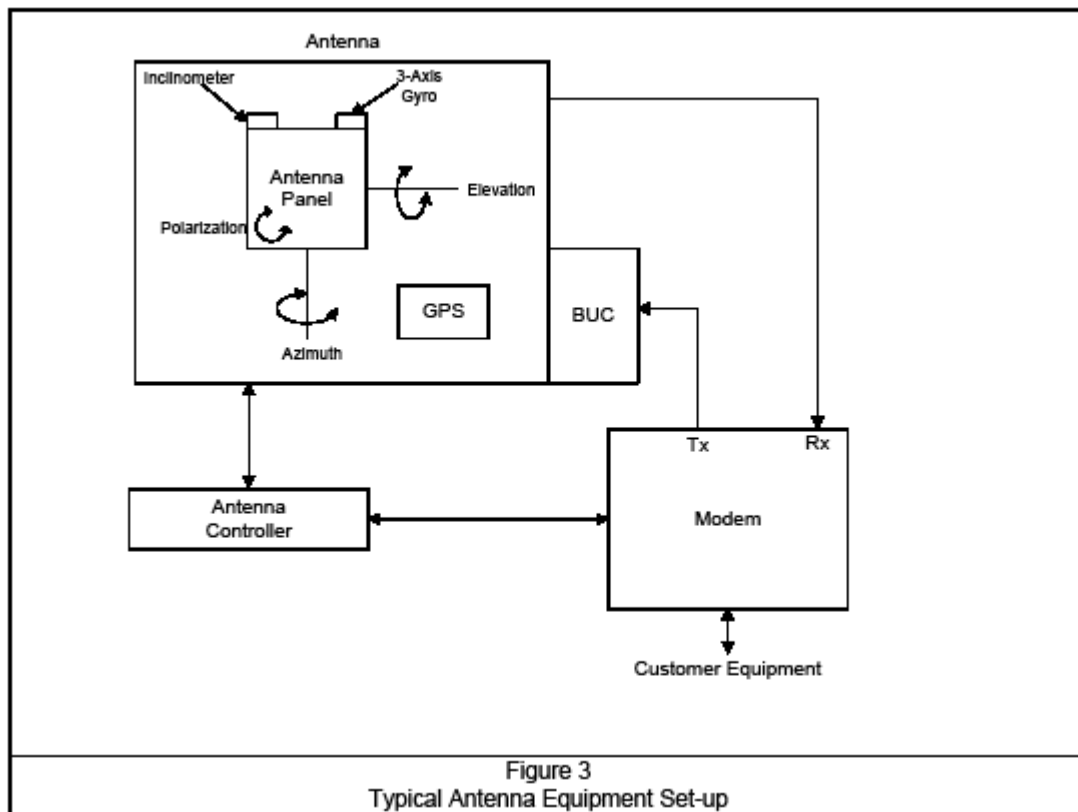

During operation, the antenna uses a built-in GPS receiver to determine its position on the earth. It then uses the geographical position and the longitudinal position of the satellite to determine the appropriate elevation angle. Once the elevation angle is set, the antenna rotates in azimuth. During the scanning process the antenna receives Eb/No information from the modem to verify that the target satellite has been acquired.

Once the satellite is acquired, the antenna dithers in both azimuth and elevation by $\pm 2.0^\circ$ to maintain peaking on the satellite and the transmission is enabled. The antenna also has internal 3-axis gyroscopes and 2-axis inclinometers to help with the tracking while the antenna is in motion. The antenna will use the information from the gyros to determine when the pointing

offset has reached 2.0° and will initiate transmit muting when this occurs within 100 milliseconds.

Since the UAS will only be operating at the Fort Hunter-Liggett CA or the Yuma Proving Grounds site which are well over 125 km away from any radio astronomy sites, or National Aeronautics and Space Administration (“NASA”) Tracking and Data Relay Satellite System (“TDRSS”) for space research conducted at White Sands, New Mexico and Blossom Point, Maryland no coordination is required with either the NSF or with NASA

GNA acknowledges that non-geostationary orbit (“NGSO”) systems are permitted to operate in the Ku-band. However, no such systems are currently authorized or planned to operate within the period contemplated for the proposed experimental STA operations. To the extent such systems are ultimately deployed, GNA will coordinate with NGSO FSS licensees to protect their systems from harmful interference.

IV. Antenna Patterns

The transmit gain pattern shown in Figures 4 and 5 exceeds the Commission’s routine licensing guidelines, but by limiting the input power spectral density to - 25.2dBW/4kHz the off axis EIRP density remains under the Section 25.227(a)(1)(i) off-axis power spectral density (“PSD”) mask even with a 2.0 degree scanning offset in the GSO plane as shown in Figure 6. *See* 47 C.F.R. § 25.227(b)(1)(iv)(A). Thus, at all times transmissions from the SR71 antenna are compliant with the Commission’s two-degree spacing levels.

The maximum level of off-pointing is set to 2.0° in the plane of the GSO arc after which the transmissions are commanded to turn off within 100 milliseconds. *See* 47 C.F.R. § 25.227(b)(1)(iv)(B). In addition, reduced input power into the antenna ensures compliance with off-axis EIRP levels associated with two-degree spacing and the coordinated parameters of the serving satellite. GNA has performed detailed analysis and has confirmed that the adjacent satellite interference levels produced under the worst case operating conditions with a -25.2 dBW/4kHz at the input flange would be no worse than a Section 25.209 compliant antenna with -14dBW/4kHz at its input flange.

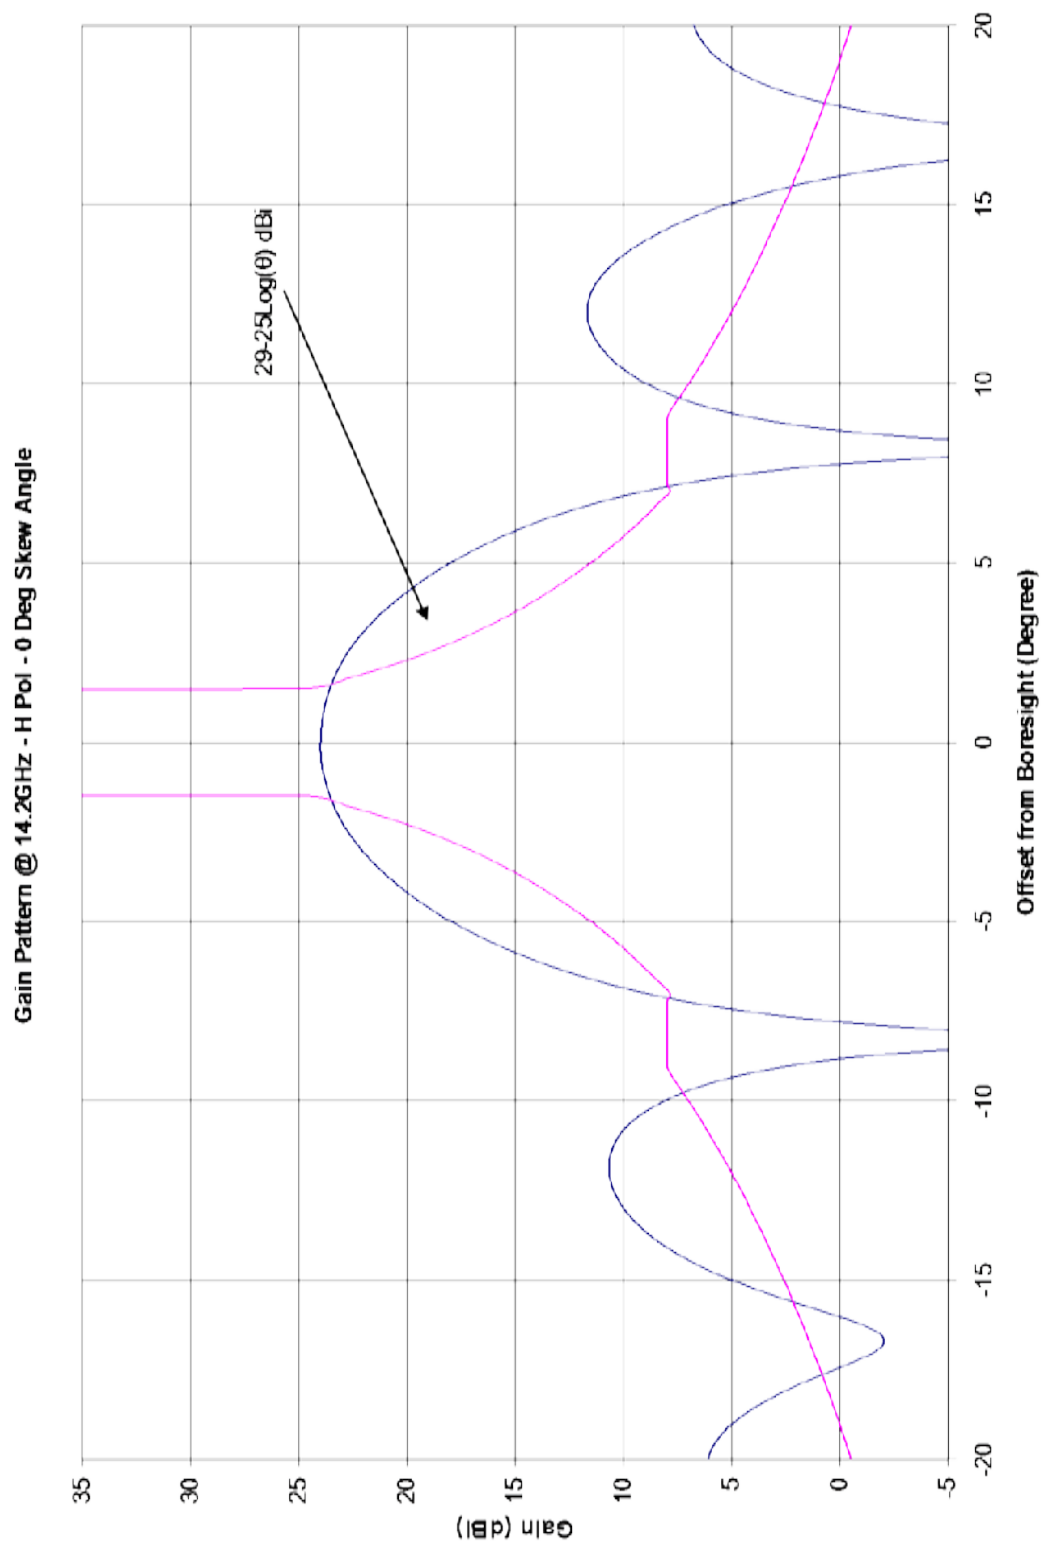


Figure 4 - SR-71 Gain Pattern

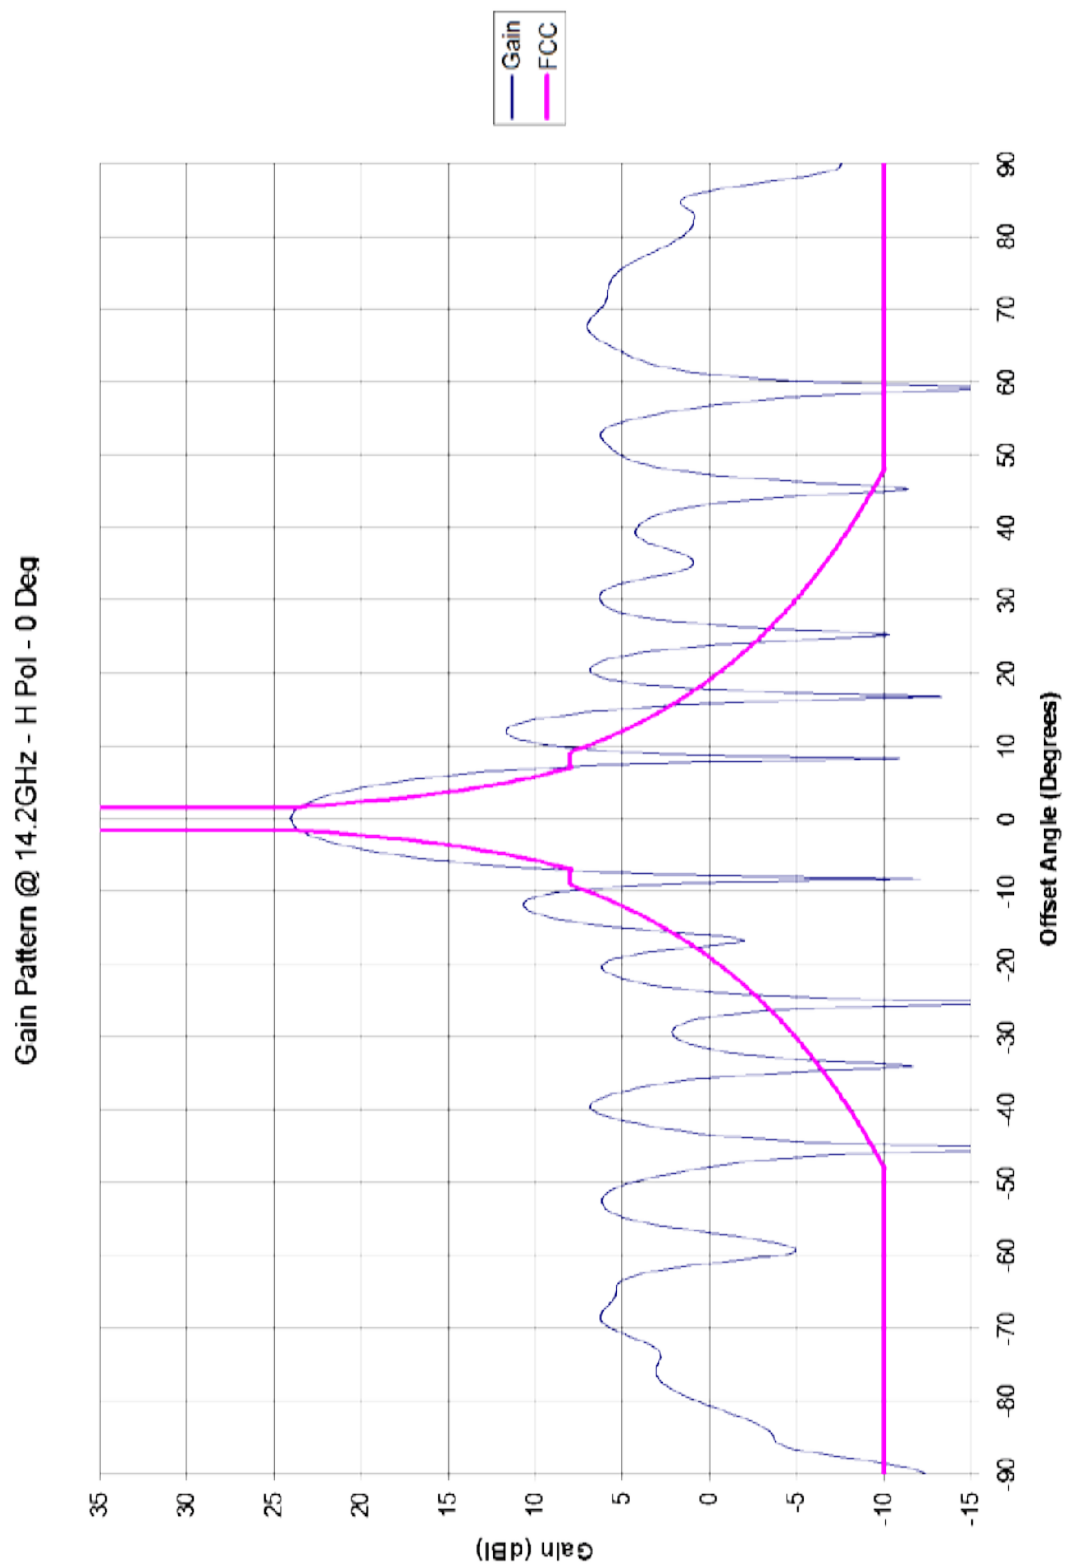


Figure 5 - Wide Gain Pattern

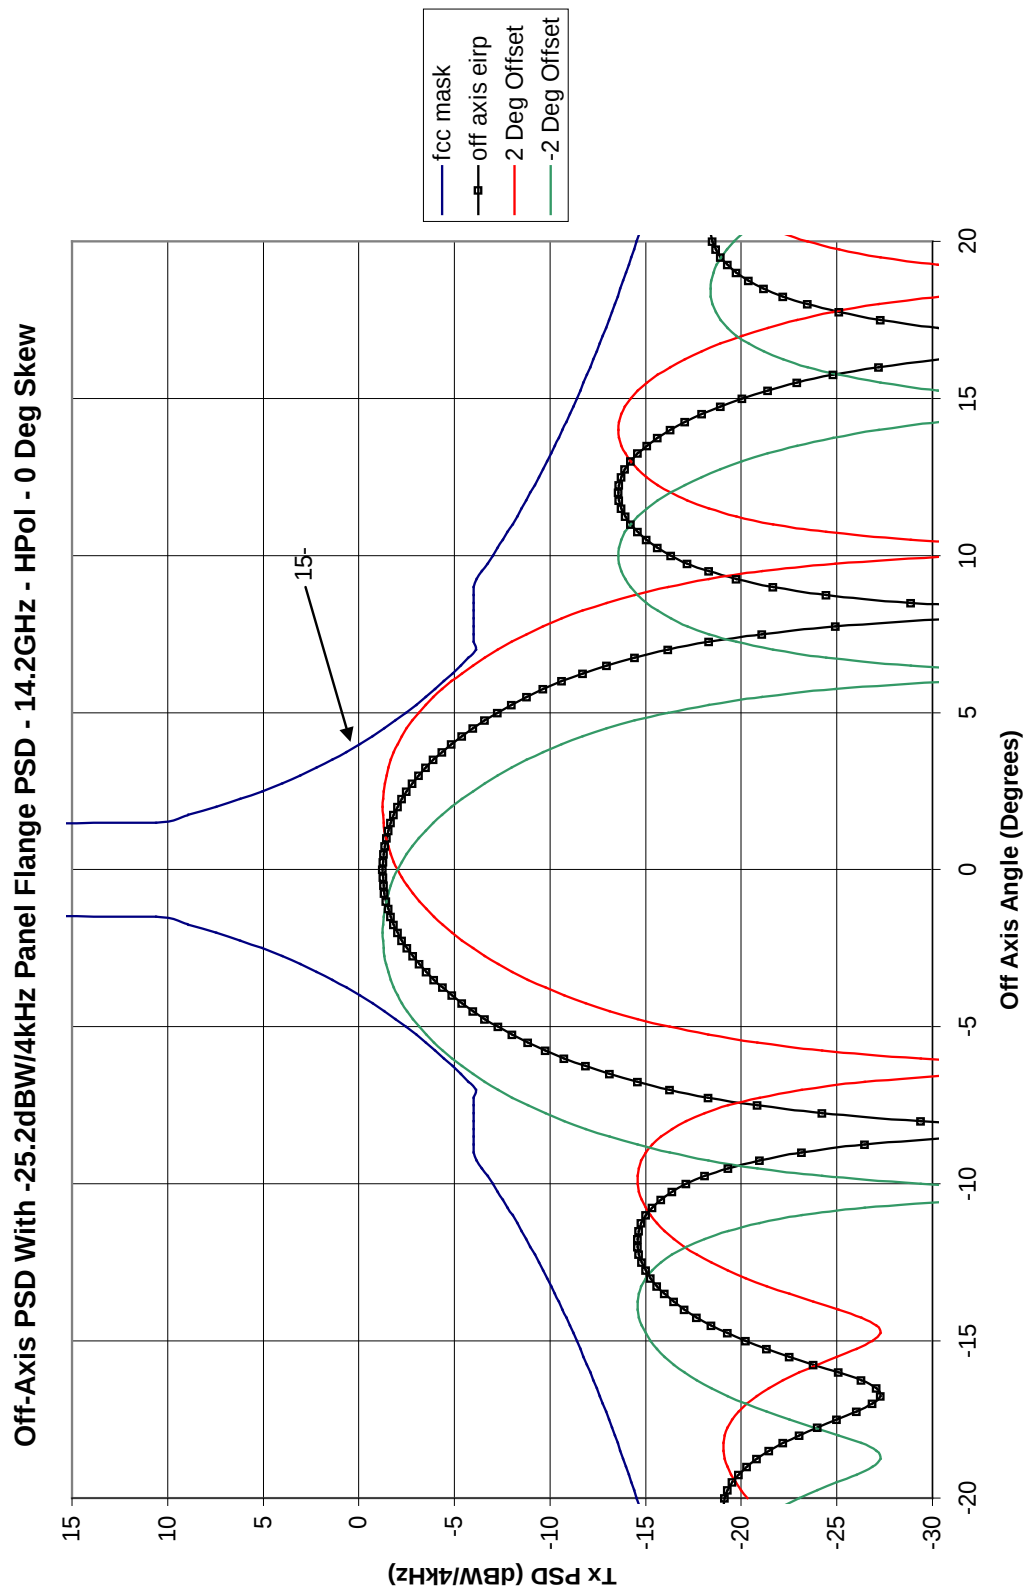


Figure 6 - Off-Axis PSD

Appendix B

Appendix C

SR-71 Radiation Hazard Study

Radiation Hazard Analysis

SR-71

This analysis predicts the radiation levels around a proposed earth station complex, comprised of a single panel type antenna. This report is developed in accordance with the prediction methods contained in OET Bulletin No. 65, Evaluating Compliance with FCC Guidelines for Human Exposure to Radio Frequency Electromagnetic Fields, Edition 97-01, pp 26-30. The maximum level of non-ionizing radiation to which employees may be exposed is limited to a power density level of 5 milliwatts per square centimeter (5 mW/cm²) averaged over any 6 minute period in a controlled environment and the maximum level of non-ionizing radiation to which the general public is exposed is limited to a power density level of 1 milliwatt per square centimeter (1 mW/cm²) averaged over any 30 minute period in a uncontrolled environment. Note that the worse-case radiation hazards exist along the beam axis. Under normal circumstances, it is highly unlikely that the antenna axis will be aligned with any occupied area since that would represent a blockage to the desired signals, thus rendering the link unusable.

EARTH STATION TECHNICAL PARAMETER TABLE

Antenna Aperture Size	0.152m x 0.152m
Antenna Effective Diameter	0.172 meters
Antenna Surface Area	0.023 sq. meters
Antenna Isotropic Gain	24.0 dBi
Number of Identical Adjacent Antennas	1
Nominal Antenna Efficiency (ϵ)	38%
Nominal Frequency	14.25 GHz
Nominal Wavelength (λ)	0.0211 meters
Maximum Transmit Power / Carrier	40.0 Watts
Number of Carriers	1
Total Transmit Power	40.0 Watts
W/G Loss from Transmitter to Feed	3 dB
Total Feed Input Power	20.05 Watts
Radome Losses	1.2 dB
Effective RF Power at radome	15.21 Watts
Near Field Limit	$R_{nf} = D^2/4\lambda = 0.35$ meters
Far Field Limit	$R_{ff} = 0.6 D^2/\lambda = 0.84$ meters
Transition Region	R_{nf} to $R_{ff} = 0.35$ meters to 0.84 meters

In the following sections, the power density in the above regions, as well as other critically important areas will be calculated and evaluated. The calculations are done in the order discussed in OET Bulletin 65.

1.0 At the Antenna Surface

The power density at the reflector surface can be calculated from the expression:

$$PD_{as} = 4P/A = \mathbf{347.126 \text{ mW/cm}^2} \quad (1)$$

Where: P = total power at feed, milliwatts

A = Total area of reflector, sq. cm

In the normal range of transmit powers for satellite antennas, the power densities at or around the reflector surface is expected to exceed safe levels. This area will not be accessible to the general public.

This antenna will incorporate a radome which has 1.2 dB of loss. The worst case power density at the surface of the radome is shown below:

$$PD_{\text{radome}} = 4P_{\text{rad}}/A = \mathbf{263.32 \text{ mW/cm}^2} \quad (2)$$

Where: P_{rad} = total power at feed less radome losses, milliwatts

A = Total area of reflector, sq. cm (this would represent worst case)

Operators and technicians should receive training specifying this area as a high exposure area. Procedures must be established that will assure that all transmitters are rerouted or turned off before access by maintenance personnel to this area is possible.

2.0 On-Axis Near Field Region

The geometrical limits of the radiated power in the near field approximate a cylindrical volume with a diameter equal to that of the antenna. In the near field, the power density is neither uniform nor does its value vary uniformly with distance from the antenna. For the purpose of considering radiation hazard it is assumed that the on-axis flux density is at its maximum value throughout the length of this region. The length of this region, i.e., the distance from the antenna to the end of the near field, is computed as R_{nf} above.

The maximum power density in the near field is given by:

$$PD_{\text{nf}} = (16\epsilon P)/(\pi D^2) = \mathbf{100.062 \text{ mW/cm}^2} \quad (3)$$

from 0 to 0.35 meters

Evaluation

Uncontrolled Environment: **Does Not Meet Controlled Limits**

Controlled Environment: **Does Not Meet Uncontrolled Limits**

3.0 On-Axis Transition Region

The transition region is located between the near and far field regions. As stated in Bulletin 65, the power density begins to vary inversely with distance in the transition region. The maximum power density in the transition region will not exceed that calculated for the near field region, and the transition region begins at that value. The maximum value for a given distance within the transition region may be computed for the point of interest according to:

$$PD_{\text{tr}} = (PD_{\text{nf}})(R_{\text{nf}})/R = \text{dependent on } R \quad (4)$$

where: PD_{nf} = near field power density

R_{nf} = near field distance

R = distance to point of interest

$$PD_{\text{tr}} = \mathbf{100.062 \text{ mW/cm}^2}$$

For: $0.35 < R < 0.84$ meters

We use Eq (4) to determine the safe on-axis distances required for the two occupancy conditions:

Evaluation

Uncontrolled Environment Safe Operating Distance, (meters), R_{safeu} :	35
Controlled Environment Safe Operating Distance, (meters), R_{safec} :	7

4.0 On-Axis Far-Field Region

The on-axis power density in the far field region (PD_{ff}) varies inversely with the square of the distance as follows:

$$PD_{\text{ff}} = PG/(4\pi R^2) \text{ and is dependent on } R^2, (5)$$

where: P = total power at feed

G = Numeric Antenna gain in the direction of interest relative to isotropic radiator

R = distance to the point of interest

For: $R > R_{\text{ff}} = 0.84$ meters

$$PD_{\text{ff}} = 42.864 \text{ mW/cm}^2 \text{ at } R_{\text{ff}}$$

We use Eq (5) to determine the safe on-axis distances required for the two occupancy conditions:

Evaluation

Uncontrolled Environment Safe Operating Distance,(meters), R_{safeu} :	See Section 3
Controlled Environment Safe Operating Distance,(meters), R_{safec} :	See Section 3

5.0 Off-Axis Levels at the Far Field Limit and Beyond

In the far field region, the power is distributed in a pattern of maxima and minima (sidelobes) as a function of the off-axis angle between the antenna center line and the point of interest. Off-axis power density in the far field can be estimated using the antenna radiation patterns prescribed for the antenna in use. Usually this will correspond to the antenna gain pattern envelope defined by the FCC or the ITU, which takes the form of:

$$G_{\text{off}} = 32 - 25\log(\Theta)$$

for Θ from 1 to 48 degrees; -10 dBi from 48 to 180 degrees

(Applicable for commonly used satellite transmit antennas)

Considering that satellite antenna beams are aimed skyward, power density in the far field will usually not be a problem except at low look angles. In these cases, the off axis gain reduction may be used to further reduce the power density levels.

For example: At two (2) degrees off axis At the far-field limit, we can calculate the power density as:

$$G_{\text{off}} = 32 - 25\log(2) = 32 - 7.52 \text{ dBi} = 280.2 \text{ numeric}$$

$$PD_{2 \text{ deg off-axis}} = PD_{\text{ff}} \times 280.2/G = 48.2442 \text{ mW/cm}^2 (6)$$

6.0 Off-Axis power density in the Near Field and Transitional Regions

According to Bulletin 65, off-axis calculations in the near field may be performed as follows: assuming that the point of interest is at least one antenna diameter removed from the center of the main beam, the power density at that point is at least a factor of 100 (20 dB) less than the value calculated for the equivalent on-axis power density in the main beam. Therefore, for regions at least D meters away from the center line of the dish, whether behind, below, or in front under of the antenna's main beam, the power density exposure is at least 20 dB below the main beam level as follows:

$$PD_{nf(off-axis)} = PD_{nf} / 100 = \mathbf{1.00} \text{ mW/cm}^2 \text{ at D off axis (7)}$$

See Section 7 for the calculation of the distance vs. elevation angle required to achieve this rule for a given object height.

7.0 Evaluation of Safe Occupancy Area in Front of Antenna

The distance (S) from a vertical axis passing through the dish center to a safe off axis location in front of the antenna can be determined based on the dish diameter rule (Item 6.0). Assuming a flat terrain in front of the antenna, the relationship is:

$$S = (D / \sin \alpha) + (2h - D - 2) / (2 \tan \alpha) \quad (8)$$

Where: α = minimum elevation angle of antenna

D = dish diameter in meters

h = maximum height of object to be cleared, meters

For distances equal or greater than determined by equation (8), the radiation hazard will be below safe levels for all but the most powerful stations (> 4 kilowatts RF at the feed).

For	D =	0.172 meters
	h =	2.0 meters, delta between antenna and object >1 m
Then:	α	S
	10	0.5 meters
	15	0.3 meters
	20	0.3 meters
	25	0.2 meters
	30	0.2 meters

8.0 Summary of Results

The earth station site will be protected from uncontrolled access by virtue of the fact that it will be mounted on the roof of a vehicle. There will also be proper emission warning signs placed and all operating personnel will be aware of the human exposure levels at and around the earth station. The applicant agrees to abide by the conditions specified in Condition 18 provided below:

(18) – GNA shall take all reasonable and customary measures to ensure that the SR-71 does not create potential for harmful non-ionizing radiation to persons who may be in the vicinity of the SR-71 when it is in operation. At a minimum, permanent warning label(s) shall be affixed to the SR-71 warning of the radiation hazard and including a diagram showing the regions around the SR-71 where the radiation levels could exceed 1.0mW/cm². The operator of the SR-71 shall be responsible for assuring that individuals do not stray into the region around the SR-71 where there is a potential for exceeding the maximum permissible exposure limits required by Section 1.1310 of the Commission's rules 47 C.F.R § 1.1310. This shall be accomplished by means of signs, caution tape, verbal warnings, and placement of the SR-71 so as to minimize access to the hazardous region and/or any other appropriate means

The table below summarizes all of the above calculations.

Summary of All RadHaz Parameters		GNA SR-71		
Parameter	Abbr.	Value	Units	Formula
Dish #		SR-71		
Antenna Diameter (effective aperture)	Df	0.172	meters	
Antenna Centerline	h	2.0	meters	
Antenna Surface Area	Sa	0.023	meters ²	$(\pi * D^2) / 4$
Antenna Ground Elevation	GE	0.0	meters	
Frequency of Operation	f	14.25	GHz	
Wavelength	λ	0.0211	meters	c / f
HPA Output Power	P _{HPA}	40.00	watts	
HPA to Antenna Loss	L _{Lx}	3.00	dB	does not include radome
Transmit Power at Flange	P	13.02	dBW	$10 * \log(P_{HPA}) - L_{Lx}$
		20.05	watts	
Effective transmit Power at radome	Pr	15.21	watts	0.5 dB of radome loss
Antenna Gain	G _{es}	24.0	dB	
		248.9	n/a	
PI	π	3.1415927	n/a	
Antenna Aperture Efficiency	eff	38%	n/a	$G_{es} / (PI * Df / \lambda)^2$
1. Reflector Surface Region Calculations				
Antenna Surface Power Density	PDas	3471.26	W/m ²	$(16 * P) / (\pi * D^2)$
		347.126	mW/cm ²	Reflector is protected by radome
Power at Radome Surface	PDrs	2633.22	W/m ²	$(16 * P) / (\pi * D^2)$
		263.322	mW/cm ²	
2. On-Axis Near Field Calculations				
Extent of Near Field	Rnf	0.35	meters	$D^2 / (4 * \lambda)$
		1.15	feet	
Near Field Power Density	PDnf	1000.62	W/m ²	$(16 * eff * P) / (\pi * D^2)$
		100.062	mW/cm ²	
3. On-Axis Transition Region Calculations				
Extent of Transition Region (min)	Rtr	0.35	meters	$D^2 / (4 * \lambda)$
Extent of Transition Region (min)		1.15	feet	
Extent of Transition Region (max)	Rtr	0.84	meters	$(0.6 * D^2) / \lambda$
Extent of Transition Region (max)		2.75	feet	
Worst Case Transition Region Power Density	PDtr	1000.62	W/m ²	$(16 * eff * P) / (\pi * D^2)$
		100.062	mW/cm ²	
Uncontrolled Environment Safe Operating Distance	RsU	35.0	m	$= (PDnf) * (Rnf) / RsU$
Controlled Environment Safe Operating Distance	Rsc	7.0	m	$= (PDnf) * (Rnf) / Rsc$
4. On-Axis Far Field Calculations				
Distance to the Far Field Region	Rff	0.8	meters	$(0.6 * D^2) / \lambda$
		2.75	feet	
On-Axis Power Density in the Far Field	PDff	428.64	W/m ²	$(G_{es} * P) / (4 * \pi * R^2)$
		42.864	mW/cm ²	
5. Off-Axis Levels at the Far Field Limit and Beyond				
Goa/Ges at example angle θ 2 degree		1.126		$Goa = 32 - 25 * \log(\theta)$
PD ₂ deg off-axis	Pdoa	482.442	W/m ²	$(G_{es} * P) / (4 * \pi * R^2) * (Goa/Ges)$
PD ₂ deg off-axis		48.2442	mW/cm ²	
6. Off-axis Power Density in the Near Field and Transitional Regions Calculations				
Power density 1/100 of Wn for one diameter removed	Pdnfoa	10.0062	W/m ²	$((16 * eff * P) / (\pi * D^2)) / 100$
		1.00062	mW/cm ²	
7. Region Between Antenna and Ground Calculations				
Reflector Surface Power Density	Pdag	658.31	W/m ²	$(4 * P) / (\pi * D^2)$
		65.831	mW/cm ²	
8. Safe Distances from Earth Station				$S = (D / \sin \alpha) + (2h - D - 2) / (2 \tan \alpha)$
α = minimum elevation angle of antenna		10	deg	
h = maximum height of object to be cleared, meters		3	m	
elevation angle		10	0.5	m
		15	0.3	m
		20	0.3	m
		25	0.2	m
		30	0.2	m
Note: Maximum FCC power density limits for 6 GHz is 1 mW/cm ² for general population/uncontrolled exposure as FCC OE&T Bulletin No. 65, Edition 97-01 August 1997, Appendix A page 67.per				