

FORM-4		REFERENCE DIAGRAM NO.				PAGE			
MODEL		UNIT		BLOCK		ISSUE DATE		ISSUED	
UT607ZH						2005/10/6		-	
TITLE		ADJUST POINT		SUB TITLE				REF DIAGRAM	

B101

PD-897 RF PCB TOP VIEW

The diagram shows the top view of the RF PCB. It includes the following components and their labels:

- L112 BPF**: A circular component with a square outline.
- TP103 (BPF)**: A small circular component.
- L111 BPF**: A circular component with a square outline.
- L110 DISC**: A circular component with a square outline.
- TP101 (DISC)**: A small circular component.
- RT421 FREQ**: A trapezoidal component.
- RT422 DEV**: A trapezoidal component.

TX ADJ LEVEL


L110	DISCRI RX AF ADJUST	-
L111	RX BPF ADJUST	-
L112	RX BPF ADJUST	-
RT421	PLL REF ADJUST	TX FREQ ADJ 156.7MHz @14CH
RT422	MIC DEVIATION LEVEL ADJUST	4.5KHz DEV @0.1V MIC IN

REVISION	REV. CODE	△	△	△	△	△	△	△	△	△	△	△	△	△
	DATE													
	LOT # / RN #													
	REVISED BY													
	CHECKED BY													

FORM-4		REFERENCE DIAGRAM NO.				PAGE			
MODEL		UNIT		BLOCK		ISSUE DATE		ISSUED	
UT607ZH						2005/10/6		-	
TITLE	ADJUST POINT			SUB TITLE				REF DIAGRAM	

B501

PD-898 LOGIC PCB BOTTOM VIEW

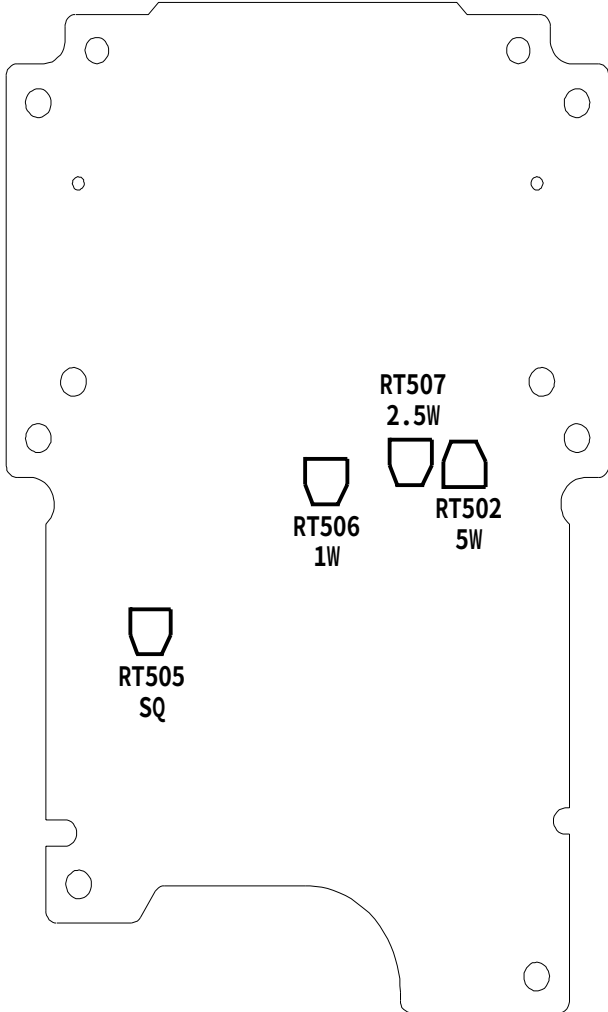

TX ADJ LEVEL

RT502	TX HI-POWER ADJUST	TX POWER : 5W ADJ @14CH
RT507	TX MID-POWER ADJUST	TX POWER : 2.5W ADJ @14CH
RT506	TX LO-POWER ADJUST	TX POWER : 1W ADJ @14CH
RT505	RX SQ ADJUST	-

REVISION	REV. CODE	△	△	△	△	△	△	△	△	△	△	△	△	△
	DATE													
	LOT # / RN #													
	REVISED BY													
	CHECKED BY													