

FCC Part 15, Subpart C (Intentional Radiator)


Product Name: ThinkPad A30 Series
(2652-1xx/2xx/3xx/4xx/6xx)

FCC ID: ANOVNCBDC80211B

June 22, 2001

EMC Staff Engineer

Toshiya Murota

Signature: 

IBM Japan, Ltd.
EMC Engineering
LAB-S59

1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242-8502, Japan
Phone: +81-46-215-6574
Fax: +81-46-273-7420
E-Mail: murota@jp.ibm.com

EMC Engineering Manager / NVLAP signatory

Akihisa Sakurai


Signature: 

IBM Japan, Ltd.
EMC Engineering
LAB-S59

1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242-8502, Japan
Phone: +81-46-215-2613
Fax: +81-46-273-7420
E-Mail: akihisa@jp.ibm.com

Portable Product Manager

Tetsuo Shiroshita

Signature: 

IBM Japan, Ltd.
Portable Products
LAB-R16

1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242-8502, Japan
Phone: +81-46-215-2243

Portable Systems Director

Arimasa Naitoh

Signature: 

IBM Japan, Ltd.
Portable Systems
LAB-R11

1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242-8502, Japan
Phone: +81-46-215-6110

FCC Part 15, Subpart C (Intentional Radiator)

Product Name: ThinkPad A30 Series
(2652-1xx/2xx/3xx/4xx/6xx)

FCC ID: ANOVNCBDC80211B

June 22, 2001

EMC Staff Engineer

Toshiya Murota

Signature: _____

IBM Japan, Ltd.
EMC Engineering
LAB-S59
1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242-8502, Japan
Phone: +81-46-215-6574
Fax: +81-46-273-7420
E-Mail: murota@jp.ibm.com

EMC Engineering Manager / NVLAP signatory

Akihisa Sakurai

Signature: _____

IBM Japan, Ltd.
EMC Engineering
LAB-S59
1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242-8502, Japan
Phone: +81-46-215-2613
Fax: +81-46-273-7420
E-Mail: akihisa@jp.ibm.com

Portable Product Manager

Tetsuo Shiroshita

Signature: _____

IBM Japan, Ltd.
Portable Products
LAB-R16
1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242-8502, Japan
Phone: +81-46-215-2243

Portable Systems Director

Arimasa Naitoh

Signature: _____

IBM Japan, Ltd.
Portable Systems
LAB-R11
1623-14, Shimotsuruma,
Yamato-shi Kanagawa-ken 242-8502, Japan
Phone: +81-46-215-6110

**MEASUREMENT/TECHNICAL REPORT – Part 15 Subpart C
(Intentional Radiator)**

**ThinkPad A30 Series
(2652-1xx/2xx/3xx/4xx/6xx)**

FCC ID : ANOVNCBDC80211B

June 22, 2001

This report concerns: (check one)

Original Grant

Class I change

Class II change

Equipment type: Wireless LAN / Bluetooth device in Computer (computer, printer, modem, etc.)

This report shall not be reproduced except in full, without the written permission of this test lab.

The measurement results contained in this report relate only to the item which was tested.

Measurement procedure used is ANSI C63.4-1992 unless otherwise specified.

Other test procedure: _____

The FCC has issued provisional acceptance of this test laboratory for Declaration of Conformity testing per letter dated 1997.

APPLICANT ANTI-DRUG ABUSE CERTIFICATION:

By checking yes, the applicant certifies that, in the case of an individual applicant, he or she is not subject to a denial of federal benefits, that includes FCC benefits, pursuant to Section 5301 of the Anti-Drug Abuse of 1988, 21 U.S.C. 853(a), or, in the case of a non-individual applicant (e.g. corporation, partnership or other unincorporated association), no party to the application is subject to a denial of federal benefits, that includes FCC benefits, pursuant to that section. For the definition of a "party" for these purposes, see 47 CFR 1.2002(b).

or No

"Report shall not be reproduced except in full, without the written approval of the laboratory" "the report must not be used by the client to claim product endorsement by NVLAP or any agency of the US government"

Prepared by: Toshiya Murota

IBM Japan Corporation, Yamato EMC Engineering

LAB-S59, 1623-14, Shimotsuruma, Yamato-shi Kanagawa-ken 242-8502, Japan

Tel: +81-46-215-6574 Fax: +81-46-273-7420

Operational Description

1. Objective

This is a Certification Compliance Report for FCC Part 15, Subpart C (Intentional Radiator).

- The applying equipment : ThinkPad A30 Series
- FCC ID : ANOVNCBDC80211B

2. Product Description

The applying equipment is a standard fullsize laptop computer integrating IEEE 802.11b Wireless LAN and Bluetooth functions inside.

- The Wireless LAN feature consists of an OEM card (Actiontec Electronics Inc., IEEE802.11b Wireless LAN Mini-PCI card) and IBM original integrated antennas (Inverted F-figure type antenna x 2).
- The Bluetooth feature consists of an OEM card (TDK Systems Europe Ltd., Bluetooth standard card) and IBM original integrated antenna (Inverted F-figure type antenna x 1).

The specification of the applying equipment is as follows :

Table 1 : Specification of PC main body

Model Identification		ThinkPad A30 Series				
Product number (Order code)		2652-6xx	2652-4xx	2652-3xx	2652-2xx	2652-1xx
PC Functions	Max. size	329mm(13.0 ") (W) : 272mm(10.7 ") (D) : 40mm(1.57 ") (H)				
	Max.Weight	7.7 lbs				
	Hard disk	2.5" 48 GB	2.5" 30GB		2.5" 20GB	
	Memory	128MB			64MB	
	Bay Device	DVD / CD-RW combo	8 x DVD-ROM		24 x CD-ROM	
	Power	AC adapter, Battery (Li-Ion)				
	Ports & Slots	Serial, Parallel, Device Bay, , CRT, Headphone, Microphone, Line In, TV-In (2652-6xx model only), TV-Out (S & Composite) USBx2, 4M IR, IEEE1394, Port Replicator,, Docking Station Ethernet, Modem, PCMCIA slot (type-2 x 1or type-3 x 1)				
	CPU	Intel® Mobile Tualatin® 1200MHz	Intel® Mobile Tualatin® 1130MHz	Intel® Mobile Cuppermine-T® 1000MHz	Intel® Mobile Cuppermine-T® 933MHz	
	LCD	15" TFT UXGA	15" TFT XGA	15" TFT SXGA+	15" TFT XGA	14" TFT XGA
	Keyboard	US English, French, Spanish, UK English, Japanese, Chinese, Korean, Thailand				
Pre installed Software	Windows 98SE / Windows 2000 / Windows XP					



Table 2 : Specification of IEEE802.11b Wireless-LAN feature

Carrier Frequencies	2412MHz – 2462MHz			
Occupied BW at 20dB below (Band-edge)	2403.61MHz – 2470.57MHz			
Channels	Total 11 channels (default setting ch. # : 1, 6, 11)			
Channel BW at 20dB below	Max. 17.08MHz / ch			
Channel spacing	5 MHz			
Conducted emission Power	15.7 dBm			
Antenna gain	1.35 dBi			
Antenna type	Inverted F-figure type antenna Tx/Rx switching antenna : IBM P/N: 27L0654 Rx antenna : IBM P/N: 27L0653			
Antenna cable type and length	Tx/Rx switching antenna : coax 760mm Rx antenna : coax 1010mm			
Bit rate	1 Mbit/sec	2 Mbit/sec	5.5 Mbit/sec	11 Mbit/sec
Chip/symbol rate	11	11	8	8
Bit/symbol rate	1 (DBPSK)	2 (DQPSK)	4 (CCK)	8 (CCK)
Chip/bit rate	11	5.5	2	1

Table 3 : Specification of Bluetooth feature

Carrier Frequencies	2402MHz – 2480MHz			
Occupied BW at 20dB below (Band-edge)	2401.59MHz – 2480.45MHz			
Channels	Total 79 channels (Inquiry / Paging mode : 32 channels)			
Channel BW at 20dB below	Max. 0.89MHz / ch			
Channel spacing	1 MHz			
Conducted emission Power	2.4 dBm			
Antenna gain	0.28 dBi			
Antenna type	Inverted F-figure type antenna IBM P/N: 27L0648			
Antenna cable type and length	coax 360mm			

3. Mounting structure of Wireless features

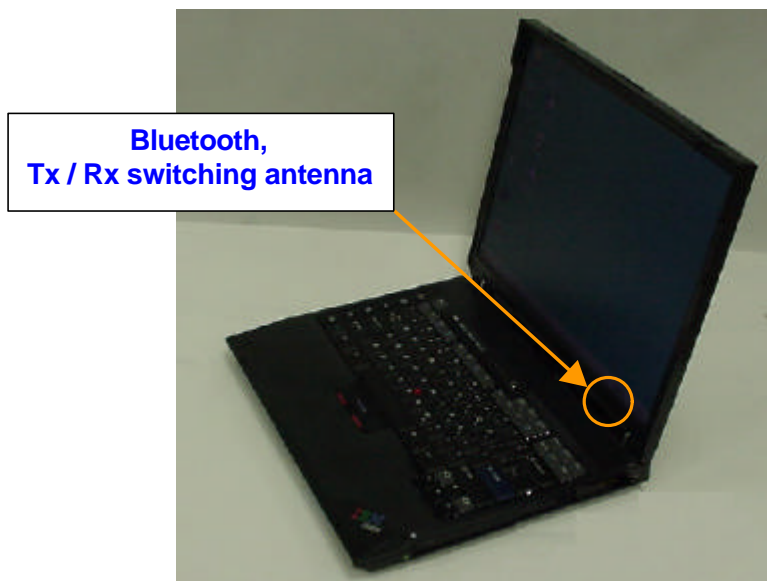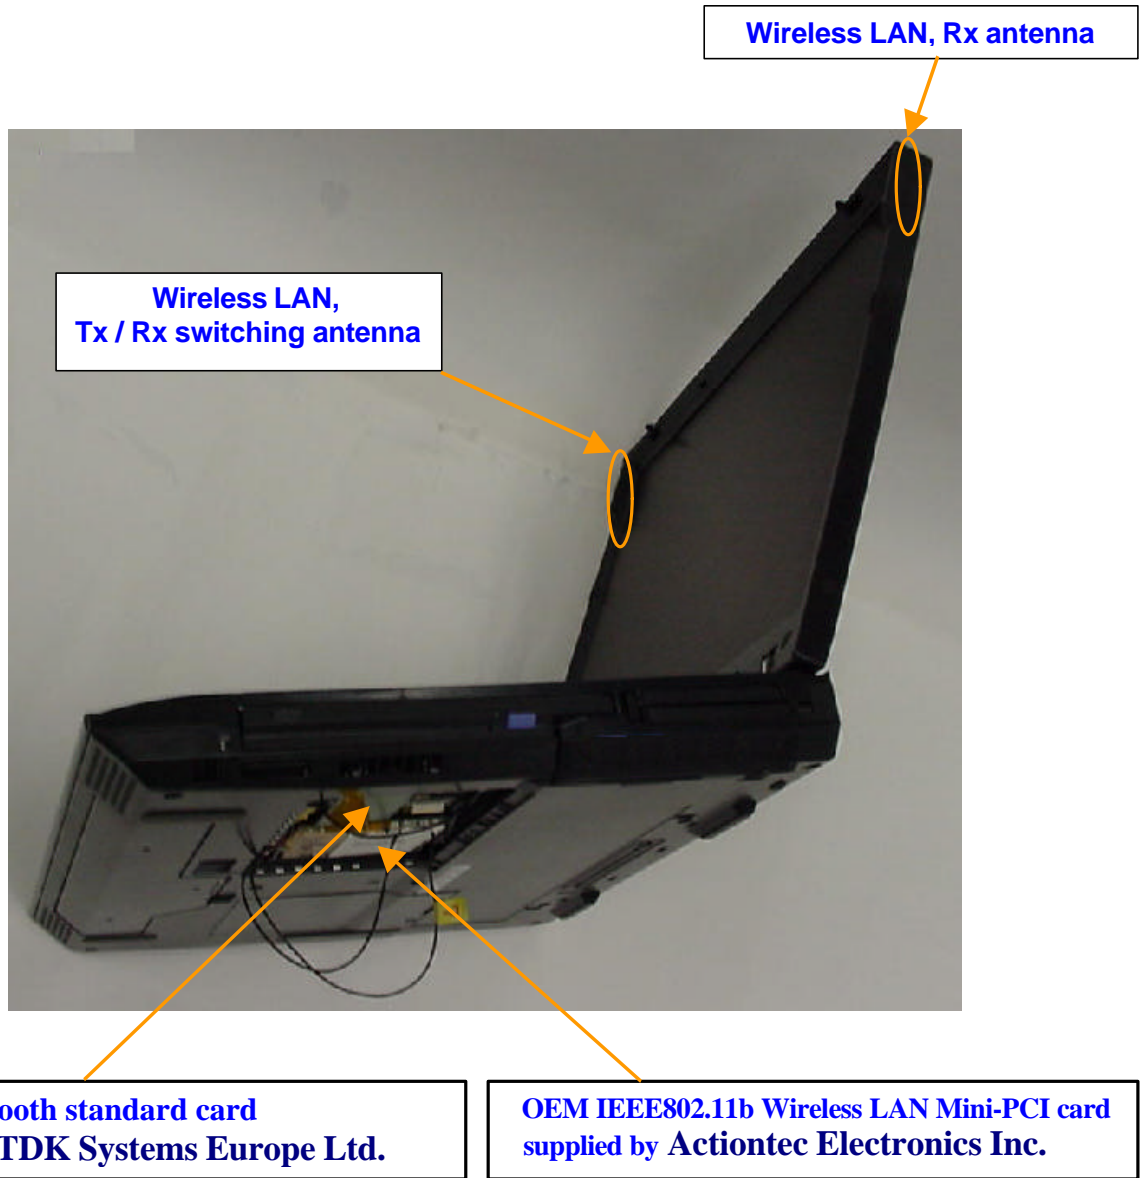

4. Related Submittal(s)/Grant(s)/Notes

- The device without wireless features is classified as a digital device under Part 15 Subpart B and subject to DoC.

5. Circuitry description of the Wireless LAN PC card

Reference: Basic Operation Principle of 802MIP

by Actiontec Electronics, Inc. 4/2001

The Wireless LAN portion of 802MIP combo card is a 2.4GHz ISM Band DSSS Radio. It is designed to operate using IEEE 802.11b WLAN Standard for use in wireless networking systems. The Radio consists of 4 major ICs, which are ISL3685, HFA3783, ISL3984, ISL3874, and few support ICs. It operates at maximum transmit rate 11Mb/s, back off rates 5.5, 2 and 1 Mb/s. The modulation schemes include CCK (Complementary Code Keying), DQPSK and DBPSK depending on what transmit bit rate it operates at. The radio card interfaces to PC through a MiniPCI bus.

Transmitter path

The Ethernet data comes through the MiniPCI interface, the Host I/O interface to the MAC section of ISL3874. The signal then flows into the data router where it is converted from Ethernet to 802.11b protocol. After the signal is converted, a radio preamble and header is added to it and passed to the I/O of BBP (Base Band Processor) section of ISL3874 via PHY I/O, RADIO I/O. There is also support circuitry, such as outboard SRAM and flash ROM, which contains the firmware controlling the radio.

In TX modulator of BBP section, differential phase shift keying modulation schemes DBPSK, DQPSK and CCK, with data scrambling capability, are fulfilled to provide a variety of data rates--DBPSK for 1 Mb/s, DQPSK for 2 Mb/s and CCK for 5.5 and 11Mb/s. The signal, which now is two separate quadrature components I and Q, then flows to the quad IF chip HFA3783 through D/A converters.

At TX side of BBP, there is also TX ALC (Automatic Level Control) circuitry, which is part of the TX ALC loop. The loop keeps TX output power to be consistent so that prevent the power spectrum from regrowth.

HFA3783 is now the dual up conversion mixers (dual down conversion mixers for RX). The signal upconverts to an IF frequency of 374 MHz and passes into a variable gain amplifier, which is also a part of the ALC loop. Next, it passes through the switched TX/RX shared SAW filter into ISL3685 and then upconverts again to a RF frequency from 2.412~2.462 GHz, depending on the channel selection. The signal flows through a pre-amplifier, two band pass filters, which block all the unwanted emissions such as image components, harmonics and spurious stuff, into ISL3984 power amplifier. The output of the power amplifier is then fed through another band pass filter that is about 85 MHz bandwidth to one of the antennas.

Receiver path

The receive signal traveling through the air is received by the dual diversity antennas. The circuits will switch to the antenna which provides better RSSI (Received Signal Strength Indication). The RF signal then feeds into an 85 MHz band pass filter, which blocks all the unwanted components such as image frequency. The signal again is amplified using the LNA within ISL3685 and mixed down to the IF frequency of 374 MHz. The PLL and synthesizer select the channel frequency using Low Side Injection. The mixer outputs are then fed through the IF SAW filter that provides image rejection into HFA3783, which is now a quad down converter. HFA3783 also provides RSSI to BBP of ISL3874. There is a two stage analog AGC (Automatic Gain Control) circuit which adjusts the gain to compensate the signal strength differences. The output of the twin AGC's provides a constant level signal to the I and Q down converters, which convert the IF to both I and Q signals to BBP. A second frequency synthesizer, which uses ISL3183 as its VCO, feeds the I and Q mixers with a same frequency signal that is phase shifted by 90°.

The I and Q signals that are fed into BBP of ISL3874 are converted into digital signals via a dual A/D converters then flow through the digital AGC control circuit followed by the digital demodulator. The correlation codes that BBP generates properly detect the transmitted complimentary codes. In here the automatic antenna selection is also done by taking RSSI as the reference. The output of the digital demodulator is sent into an I/O interface of MAC section. The digital codes then flow into the PHY I/O interface and into the MAC protocol engine. The MAC of ISL3874 converts the signal protocol from 802.11b to Ethernet and finally passes that data through the HOST I/O interface to the PC.

6. Circuitry description of the Bluetooth card

Reference: Bluetooth Daughter Board hardware specifications

by TDK Systems Europe Ltd. 3/2001

Refer to circuit drawings in “Schematic Diagrams of IBM Bluetooth Daughter Card”.

The first page shows the main assembly layout of the card.

Sheet 1 of 3 refers to the bluetooth core (control circuit).

Sheet 2 of 3 refers to the RF section.

Sheet 3 of 3 contains no actual circuit information, only the interconnection between vias on the PCB.

Most of the functionality of the circuitry is contained within the CSR Bluecore chip. The PCB contains, in addition to the Bluecore chip, a flash memory (U2), a low noise RF amplifier,(U6) antenna switching (U5), and a linear power supply regulator (U3).

The antenna socket is routed by U5 RF changeover switch to either the input of the low noise RF amplifier U6, or the output of the PA stage, U4. Bluetooth IC U1 delivers the RF send signal via a Multilayer Balun, B1, to U4. Antenna switching is controlled from the Bluecore chip U1.

U4 provides extra power gain to compensate for the fall off in RF output from the U1 at elevated temperatures.

The Bluecore chip contains RF receiver and transmitter circuitry, 10K of 16 bit words of RAM, organized into circular buffers for temporary storage of incoming and outgoing data, a memory manager, DSP as part of the radio block, and internal 16 bit microcontroller. The flash memory U2 serves to hold settings and program code for the Bluecore chip U1.

The Bluecore chip can interface to a USB port, and optionally to an RS232 interface. In this design the USB port only is used.

A separate power supply regulator is used (U3), because it can provide a higher current capability than the regulator within the Bluecore chip, which would need an external pass transistor and extra components. This is a low-dropout regulator providing a nominal 3.0V internal supply.

The Bluecore-01 contains a USB controller and is directly connected via a 40 way Hirose DF12-40DS-0.5V to a mating 40W compatible connector on the motherboard. All functions of the Bluecore IC are controlled via the USB bus from the motherboard. The Bluecore control is also via the USB bus, including firmware upgrades.

An alternative control / programming interface for the Bluecore IC is via it's SPI interface, accessible by fitting the optional connector JP1. This is a contingency measure which will also allow the flash device to be programmed before the USB port is configured.