

ALIGNMENT PROCEDURES

Model No : FRS 80C

Destination : MUSICAL ELECTRONICS LIMITED


Frequency Range : 462.5625 ~ 467.7125 MHz

Oct - 10 - 2000

PCB Alignment Point

Location of Adjustment in PCB

《 FRS-80C 》

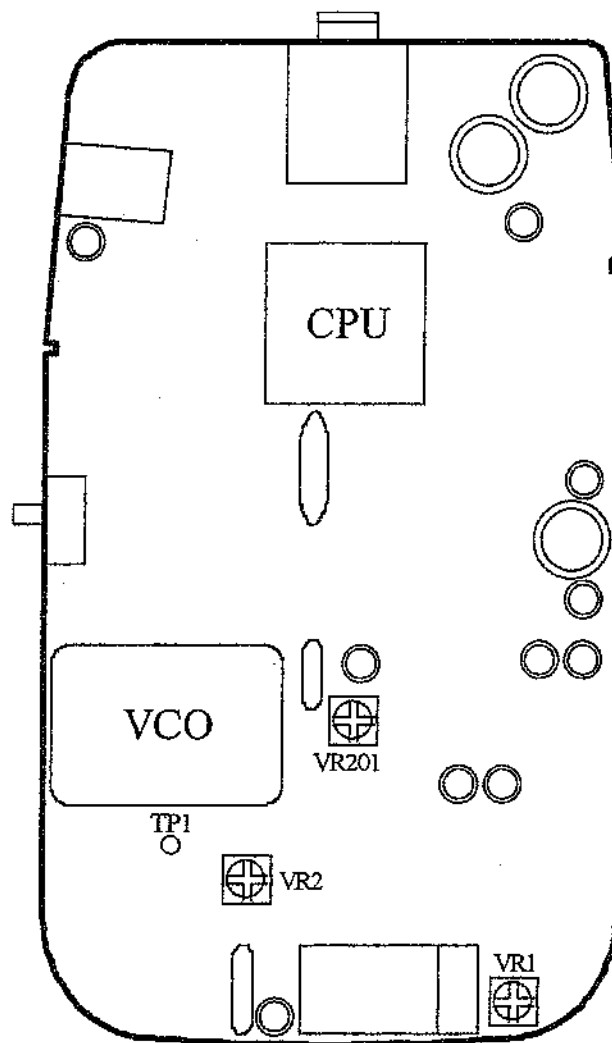

FRS-80C

Alignment Conditions

Standard Conditions :

Power Supply Voltage	6.0 V DC
Audio Output	75 mW
Audio Load	8 ohm
Standard modulation	± 1.5 KHz at 1 KHz AF
Transmission Load	50 ohm
Reception Adjustment Frequency	See below
Transmission Adjustment Frequency	See below

Transmission / Reception Adjustment Frequencies

Channel	Frequency
1 CH	462.5625 MHz
7 CH	462.7125 MHz
14 CH	467.7125 MHz

« PLL Alignment »

Conditions :

1. Frequency		CH-1, CH-14
2. Squelch		Open
3. Volume		Min
4. Power Supply		6.0 V DC

Procedures

[FRS VCO]

- 1) Set a reception Frequency to CH-1.
- 2) Connect a Digital Voltmeter with T.P1, and Confirm that a Voltage Should be a Range of 0.4 V ~ 1.0 V.
- 3) Set a Reception Frequency to CH-14 and Switch to Transmit Mode.
- 4) Confirm That a Voltage Should be Within a Range of 2.0 ~ 3.0 V.

« Transmission Alignment »

Conditions :

1. Dummy Load	50 ohm
2. Frequency	CH-1, CH-14.
2. Squelch	Open
3. Volume	Min
4. Power Supply	6.0 V DC

Procedures

A) RF output Power Alignment

- 1) Set Supply Voltage to 6.0 V.
- 2) Adjust a Frequency to CH-1 and Switch to Transmit Mode.
- 3) Confirm That the ERP obtained at CH-1 and CH-14 must be 0.18W.

B) TX Frequency Alignment

- 1) Set a Frequency to CH-7, and Switch to Transmit Mode.
- 2) Adjust VR2 so that a Frequency Counter Reading Should be Within 462.7125 MHz ± 100 Hz.

C) Deviation Alignment

- 1) Set a Frequency to CH-7, and Switch to Transmit Mode.
- 2) Input 1 KHz, From AG (Audio Generator), 100 mV (Open Voltage) to the EXT-MIC Terminal, and Adjust VR201 so that Deviation is ± 2.3 KHz.
- 3) Lower the AG output, and Adjust the Deviation to 1.5 KHz. In that case, Confirm That AG output Voltage is Within a range of 10 ~ 30 mV (Open Voltage).

« Receiver Alignment »

Conditions :

- | | | |
|-----------------|-------|----------|
| 1. Frequency | | CH-7. |
| 2. Squelch | | Open |
| 3. Power Supply | | 6.0 V DC |

Procedures

A) RX Sensitivity Alignment

- 1) Set a Frequency to CH-7.
- 2) Confirm that 12 dB Sinad is -9 dB approx.
- 3) Confirm that a 12 dB Sinad of the Frequency at CH-1 and CH-14 Must be below -7 dB.

B) Squelch Sensitivity Alignment

- 1) Set a Frequency to CH-7.
- 2) Set a Signal Generator Output Level -13.0 dB μ V e.m.f.
- 3) Adjust the VR1 so that Audio Signal Close Point.