



1TX Antenna 5 MODE


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5775	35.730	0.5
High	5795	35.080	0.5
142	5710	3.200	0.5

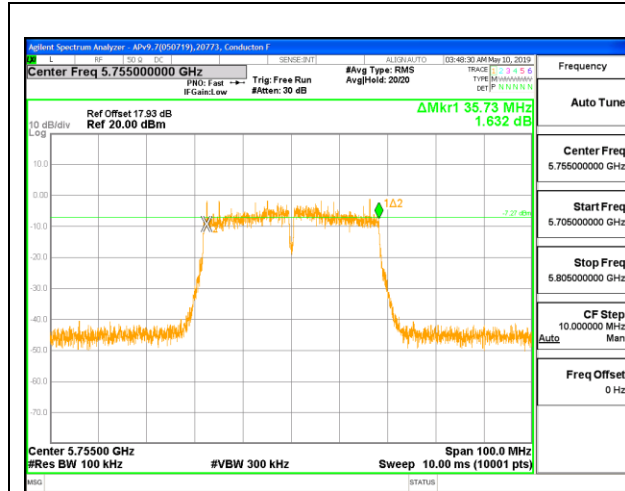

LOW CHANNEL

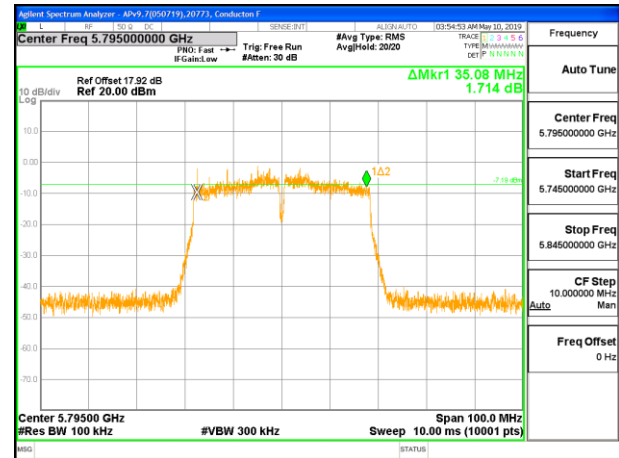





HIGH CHANNEL

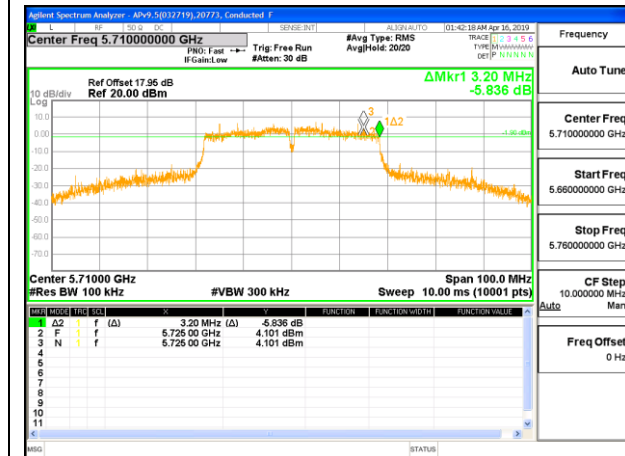


CHANNEL 142

2TX Antenna 6 + Antenna 5 CDD MODE

Channel	Frequency (MHz)	6 dB BW ANT 6 (MHz)	6 dB BW ANT 5 (MHz)	Minimum Limit (MHz)
Low	5755	34.640	36.310	0.5
High	5795	35.450	35.690	0.5
142	5710	2.600	3.160	0.5

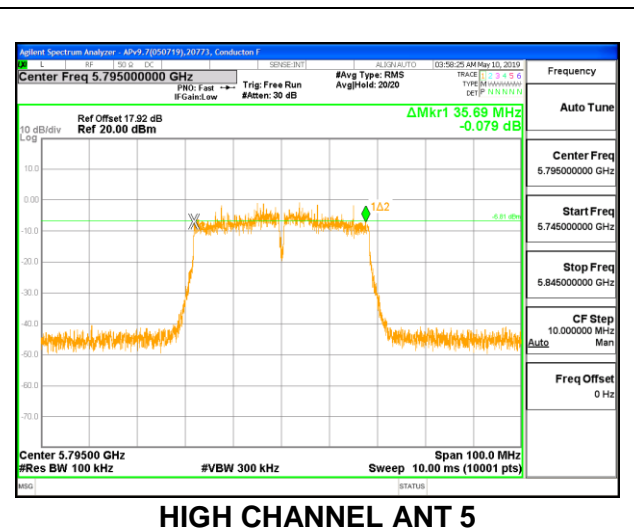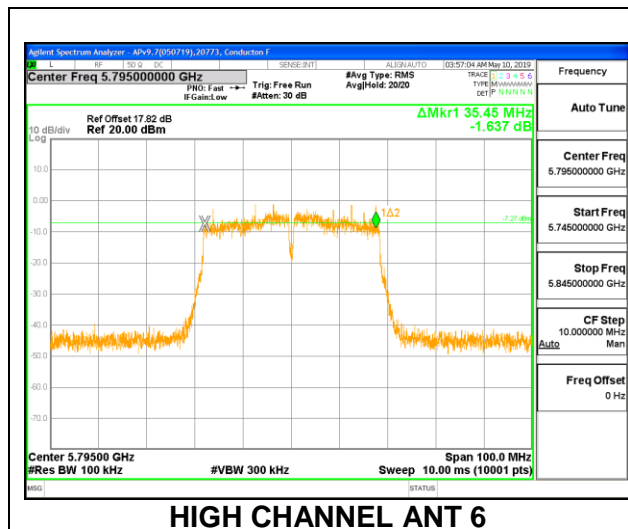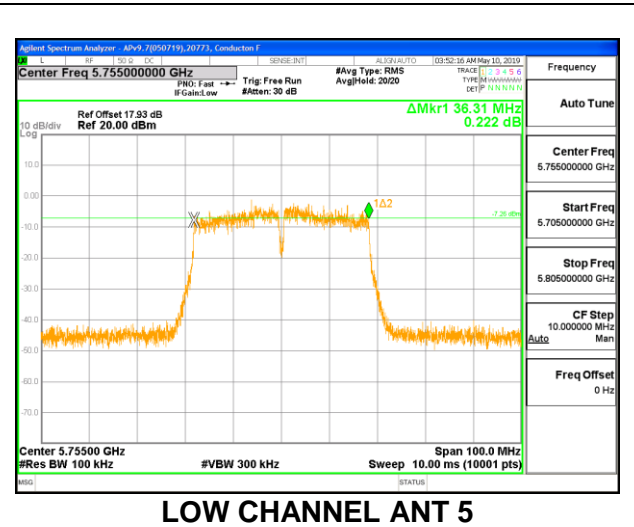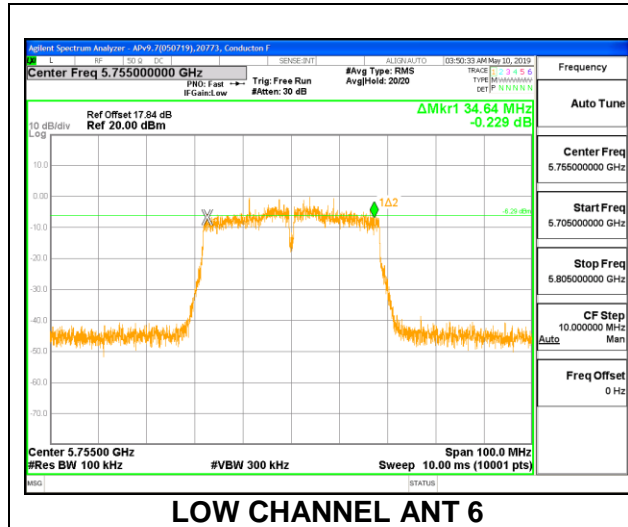


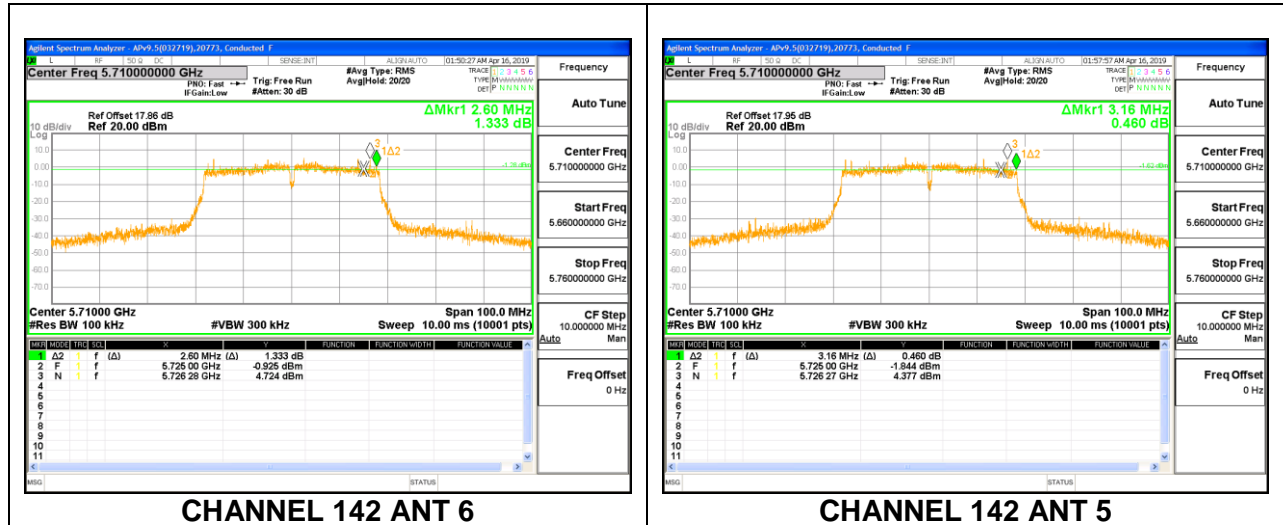


8.4.3. 802.11ac VHT80 MODE IN THE 5.8 GHz BAND

1TX Antenna 6 MODE

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Mid	5775	76.120	0.5
138	5690	2.880	0.5

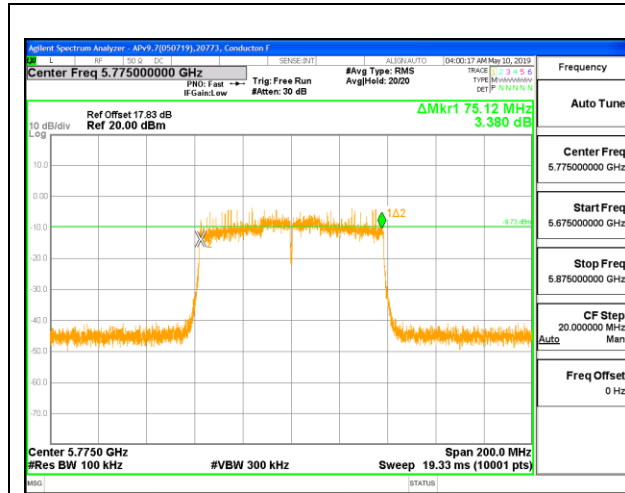


MID CHANNEL

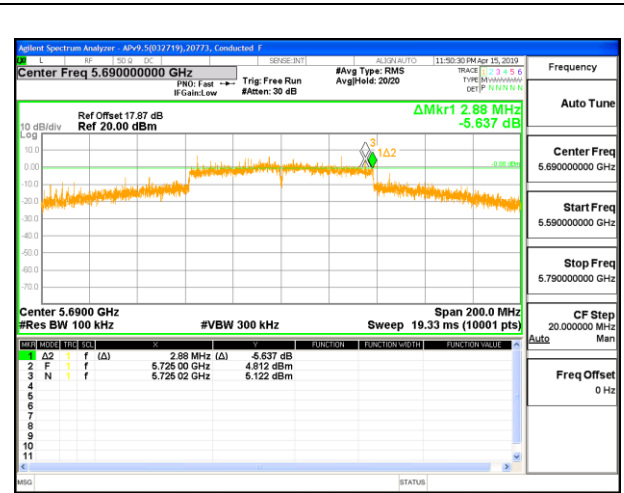


CHANNEL 138

1TX Antenna 5 MODE

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Mid	5775	75.140	0.5
138	5690	2.600	0.5

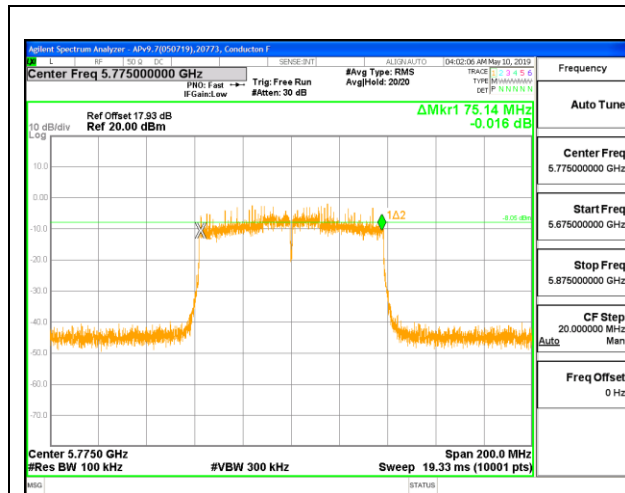





MID CHANNEL

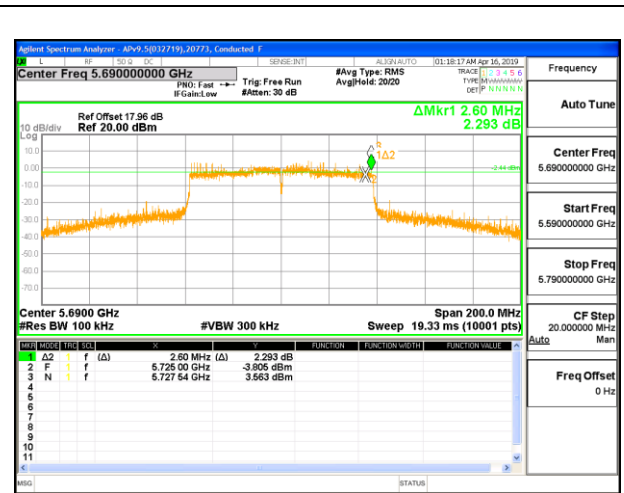

CHANNEL 138

2TX Antenna 6 + Antenna 5 CDD MODE





Channel	Frequency (MHz)	6 dB BW ANT 6 (MHz)	6 dB BW ANT 5 (MHz)	Minimum Limit (MHz)
Mid	5775	75.140	75.260	0.5
138	5690	3.220	3.180	0.5

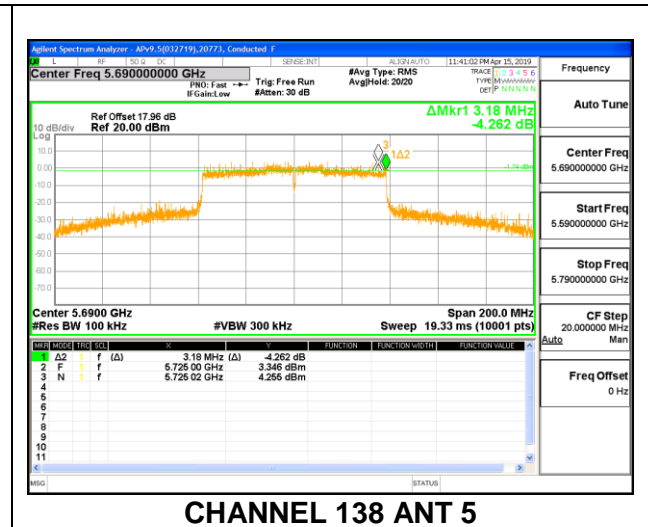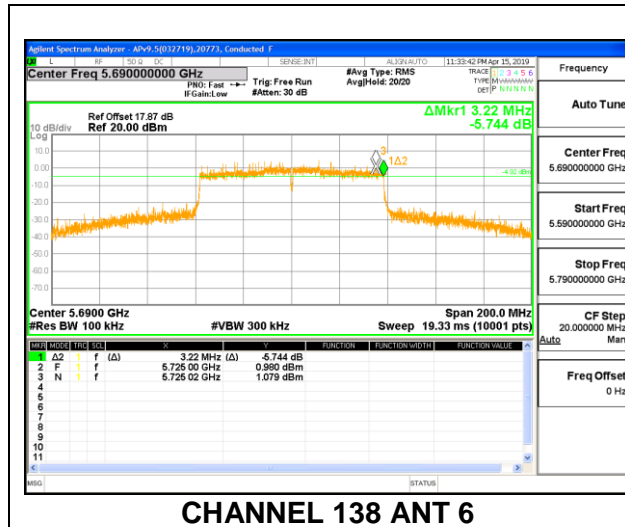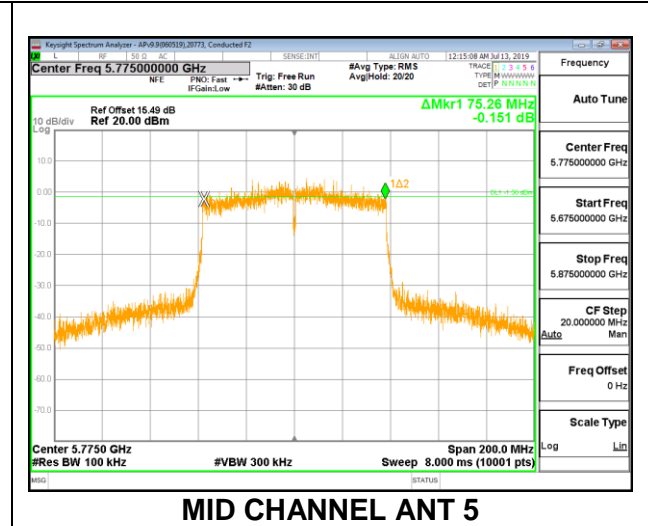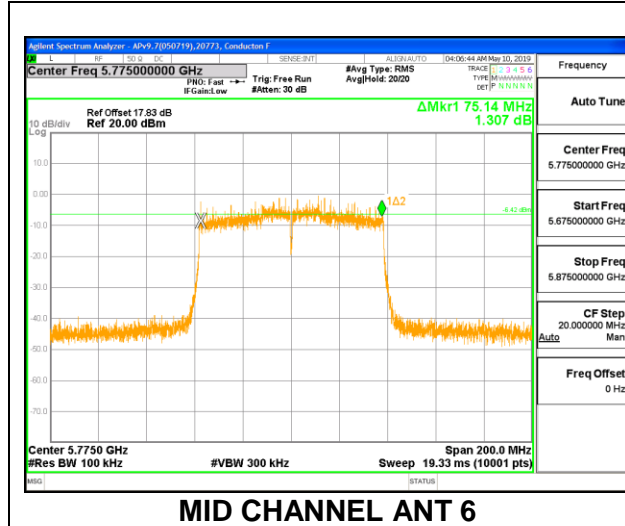

8.4.4. 802.11ax HE20 MODE IN THE 5.8 GHz BAND


1TX Antenna 6 MODE – 242 Tones, RU Index 61

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	18.730	0.5
Mid	5785	18.460	0.5
High	5825	18.565	0.5
144	5720	4.445	0.5

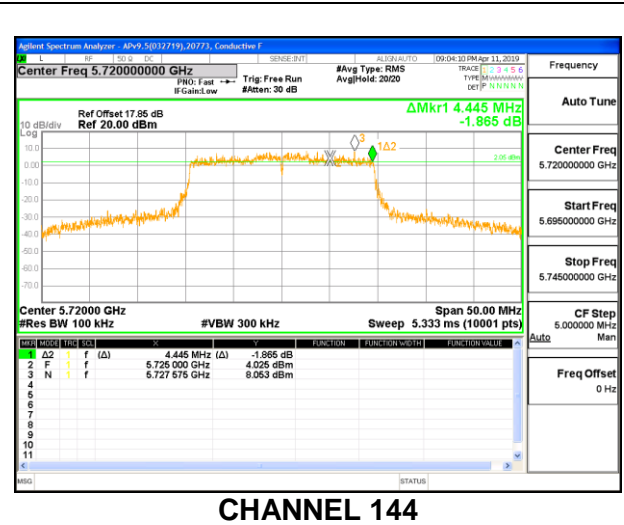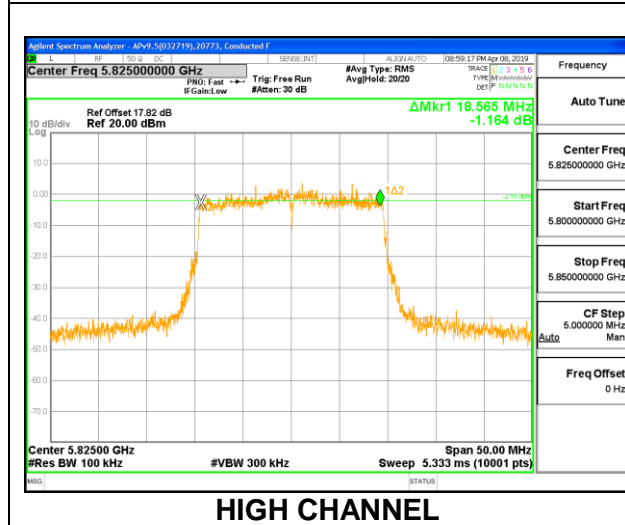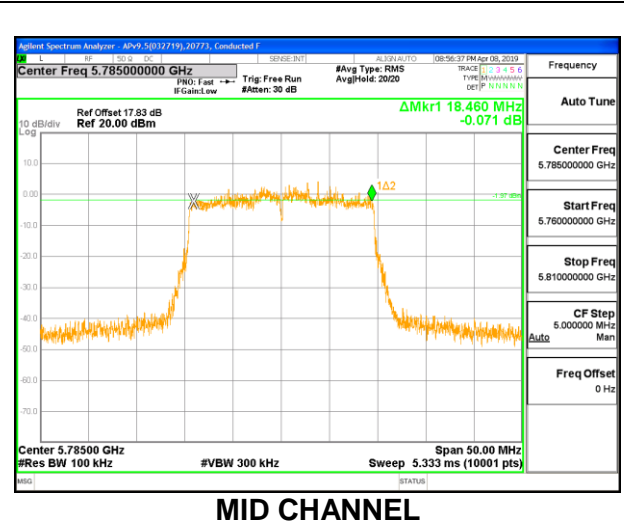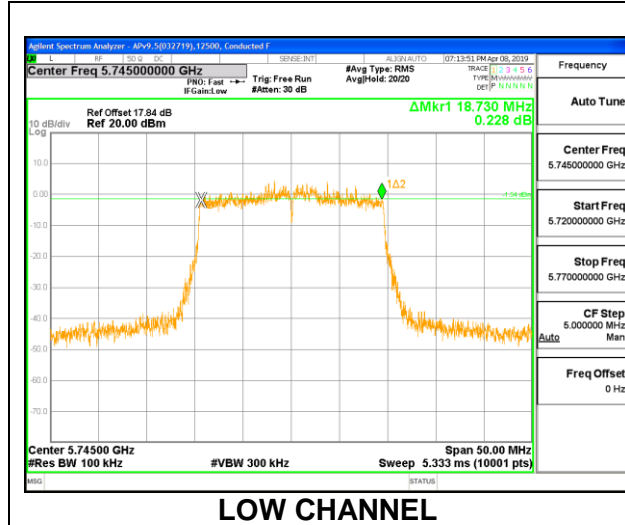


1TX Antenna 6 MODE – 26 Tones, RU Index 0


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	2.070	0.5
Mid	5785	1.970	0.5
High	5825	2.035	0.5

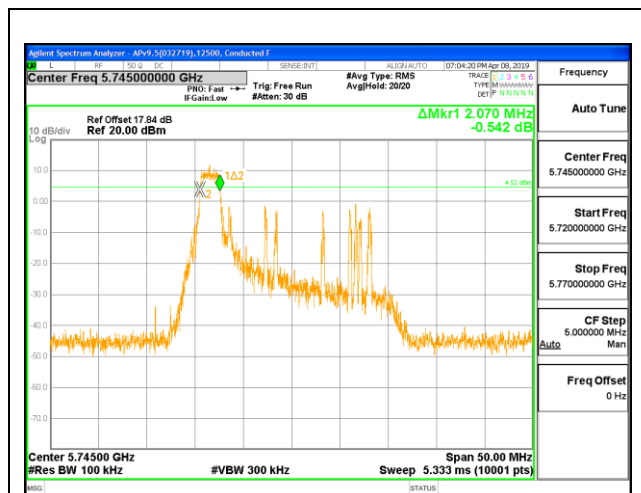

LOW CHANNEL

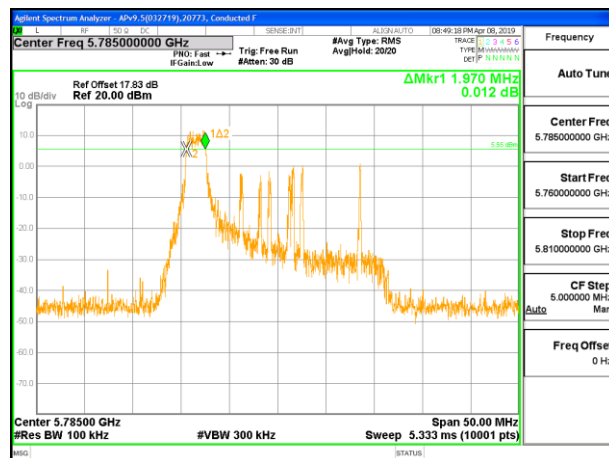

MID CHANNEL

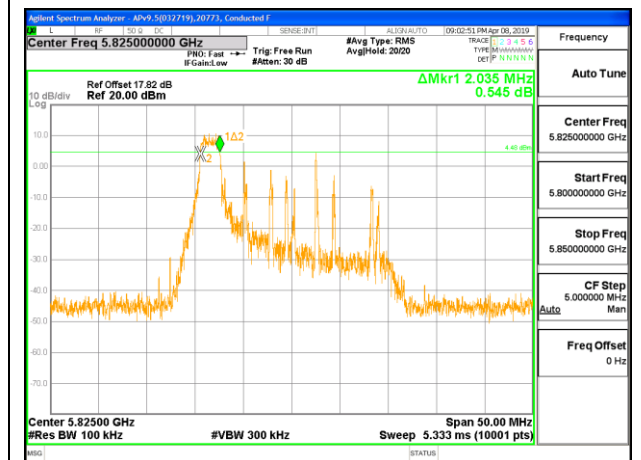


HIGH CHANNEL

See note on section 8.4


CHANNEL 144

1TX Antenna 6 MODE – 26 Tones, RU Index 4


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	2.620	0.5
Mid	5785	2.550	0.5
High	5825	2.590	0.5

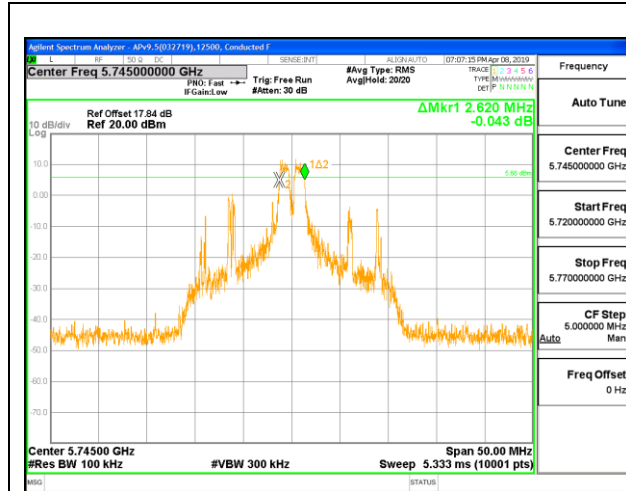

LOW CHANNEL

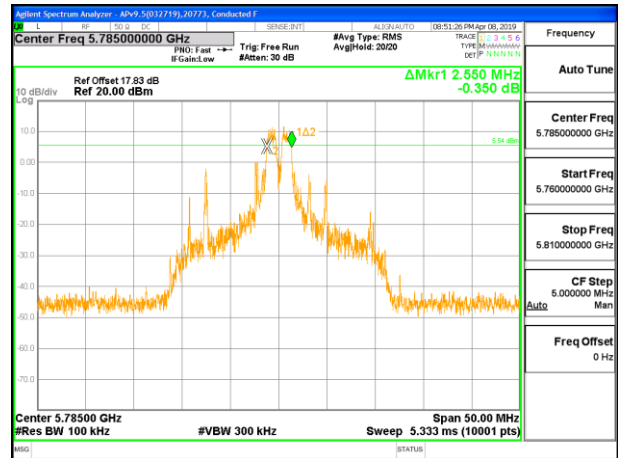

MID CHANNEL

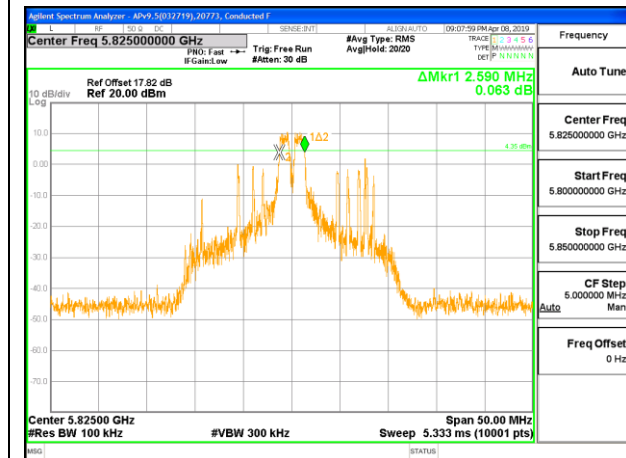





HIGH CHANNEL

See note on section 8.4

CHANNEL 144


1TX Antenna 6 MODE – 26 Tones, RU Index 8

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	2.035	0.5
Mid	5785	2.090	0.5
High	5825	2.025	0.5
144	5720	2.081	0.5

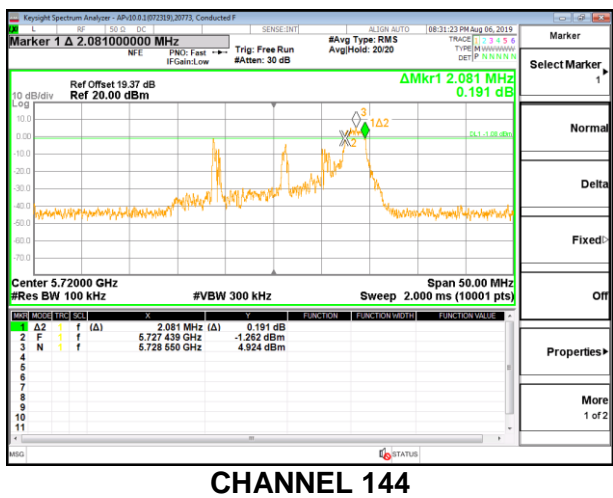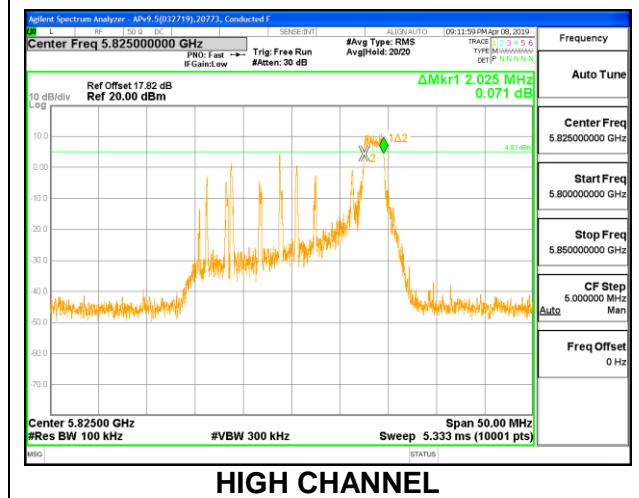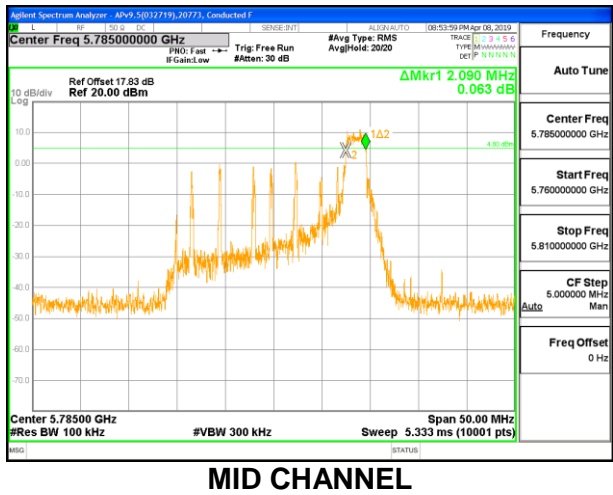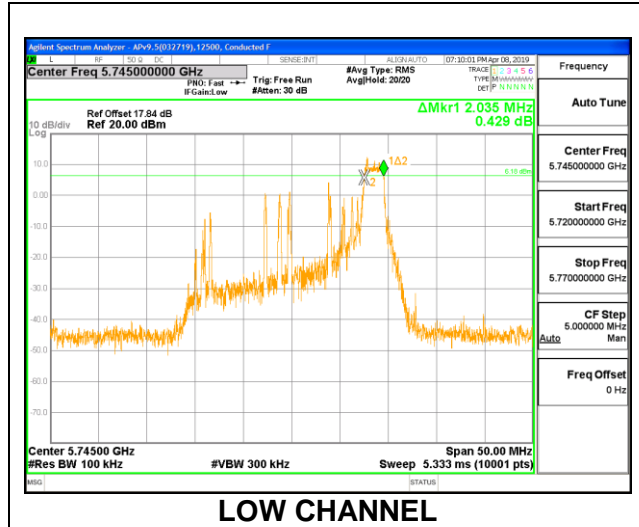


1TX Antenna 5 MODE – 242 Tones, RU Index 61

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	18.955	0.5
Mid	5785	18.900	0.5
High	5825	18.805	0.5
144	5720	4.505	0.5

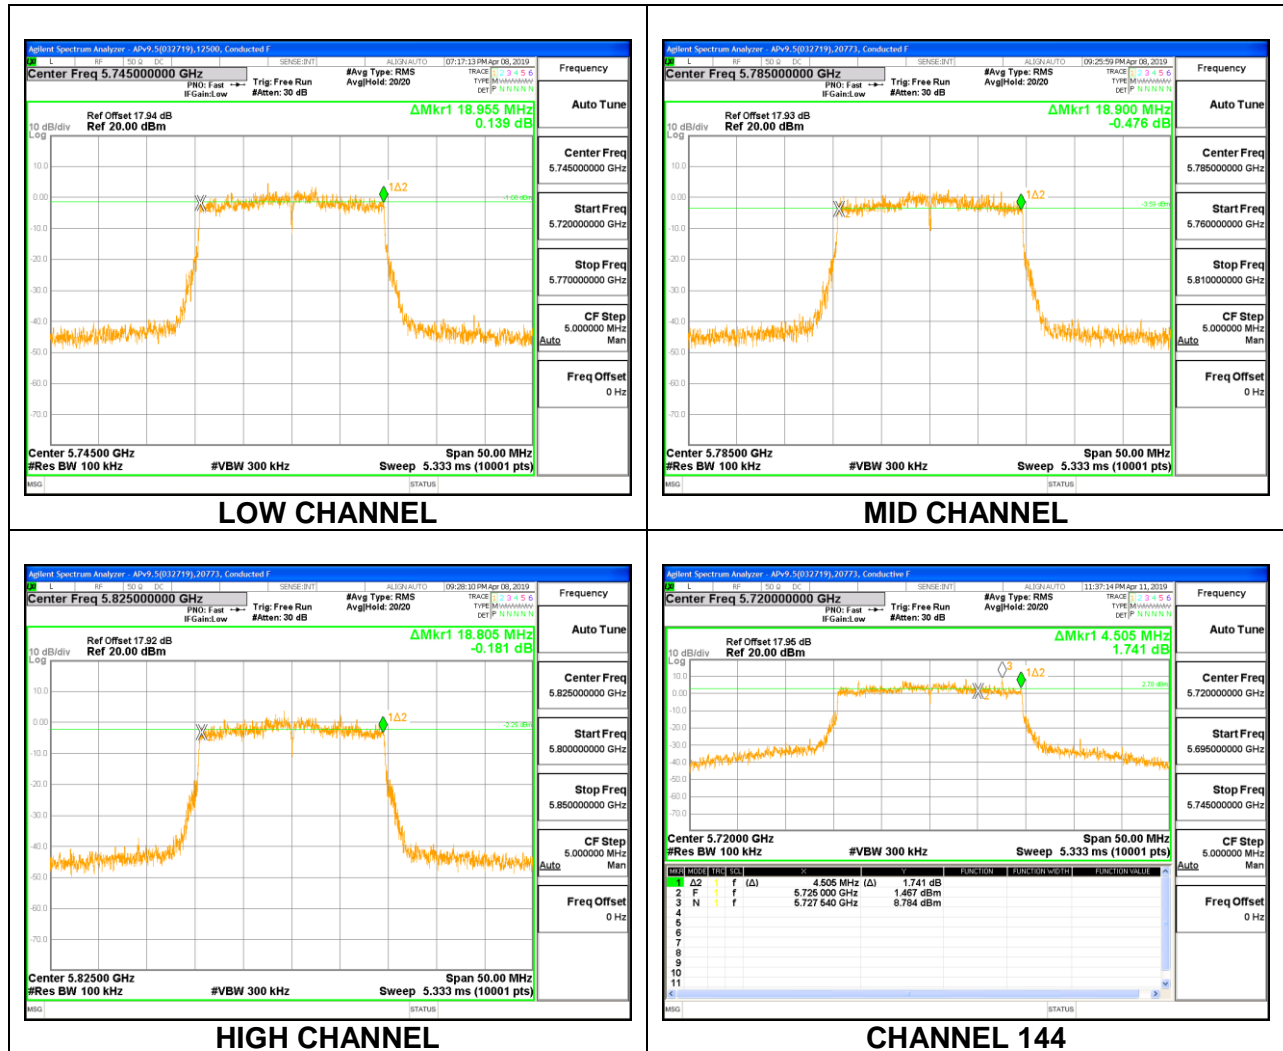


1TX Antenna 5 MODE – 26 Tones, RU Index 0


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	2.095	0.5
Mid	5785	2.035	0.5
High	5825	2.030	0.5

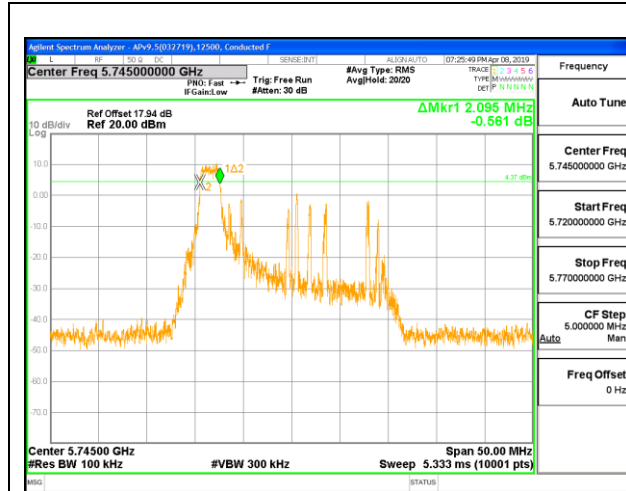

LOW CHANNEL

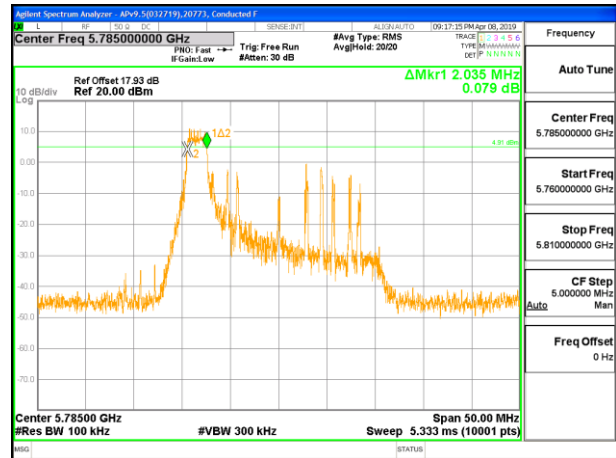

MID CHANNEL

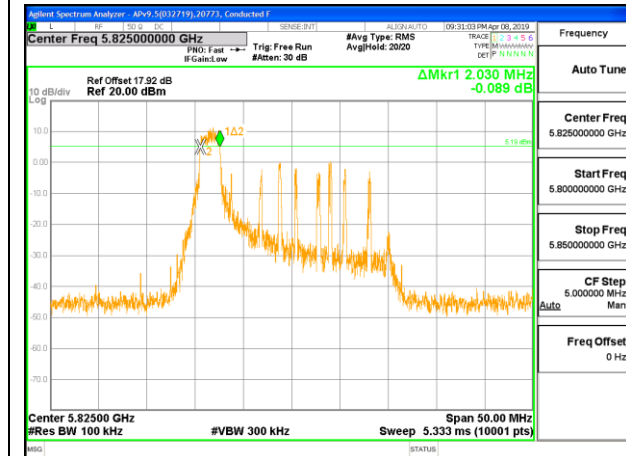


HIGH CHANNEL

See note on section 8.4


CHANNEL 144

1TX Antenna 5 MODE – 26 Tones, RU Index 4


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	2.545	0.5
Mid	5785	2.550	0.5
High	5825	2.555	0.5

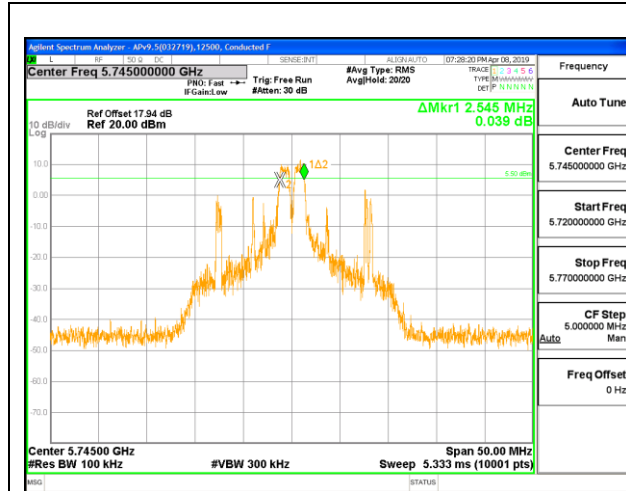

LOW CHANNEL

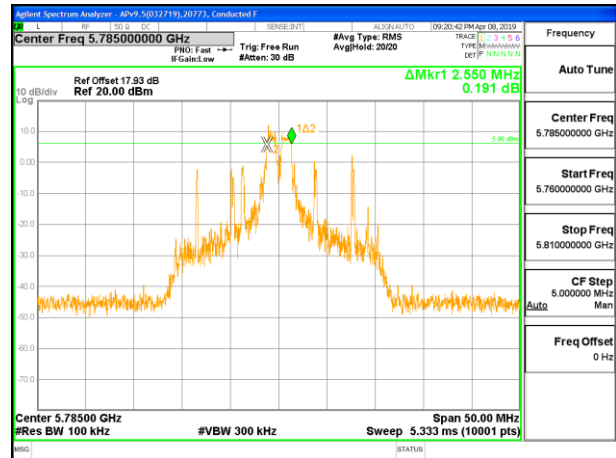

MID CHANNEL

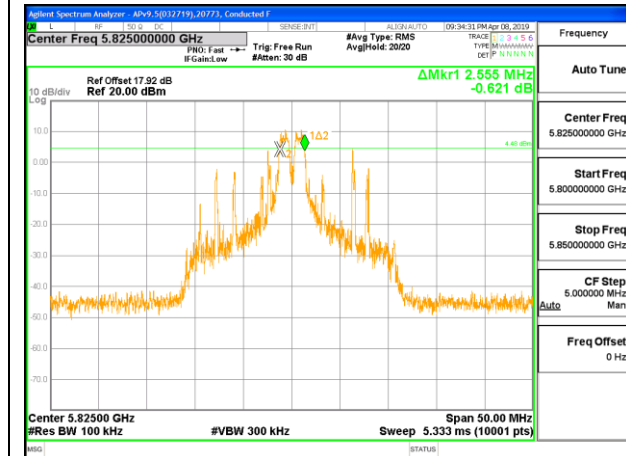


HIGH CHANNEL

See note on section 8.4


CHANNEL 144

1TX Antenna 5 MODE – 26 Tones, RU Index 8


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5745	1.970	0.5
Mid	5785	2.060	0.5
High	5825	2.080	0.5
144	5720	2.115	0.5

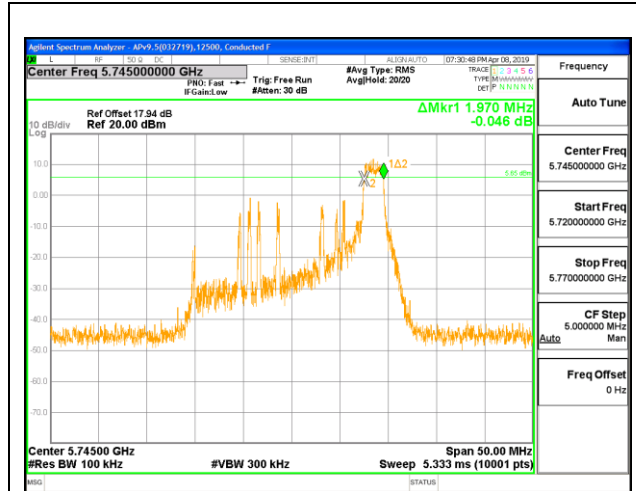


LOW CHANNEL

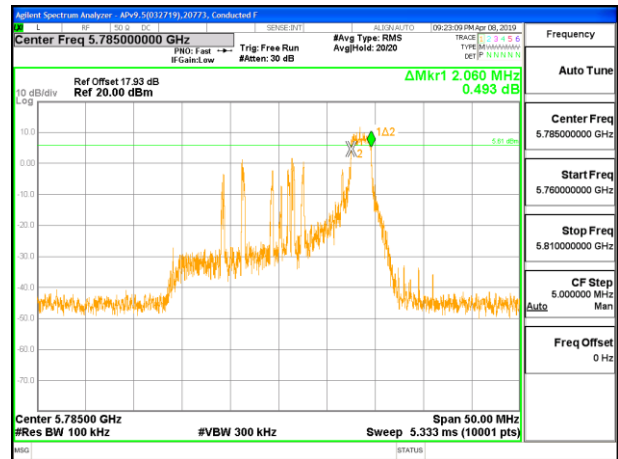

MID CHANNEL

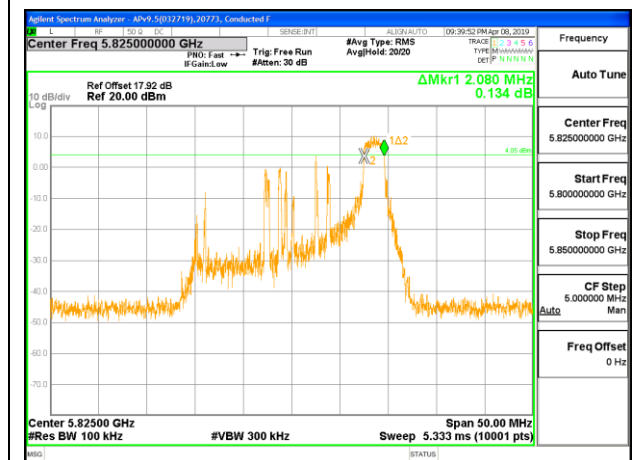





HIGH CHANNEL




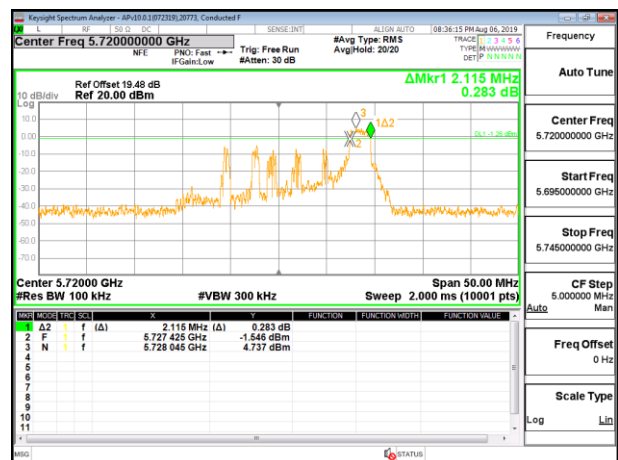


CHANNEL 144

2TX Antenna 6 + Antenna 5 OFDMA MODE – 242 Tones, RU Index 61





Channel	Frequency (MHz)	6 dB BW ANT 6 (MHz)	6 dB BW ANT 5 (MHz)	Minimum Limit (MHz)
Low	5745	18.570	18.370	0.5
Mid	5785	18.670	18.635	0.5
High	5825	18.760	17.745	0.5
144	5720	4.505	3.545	0.5

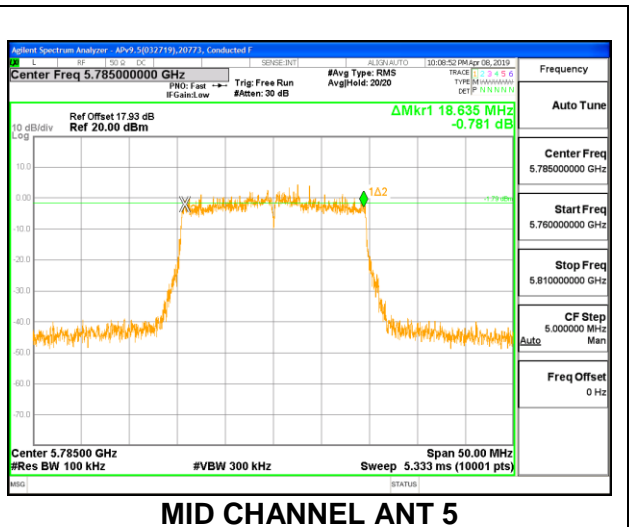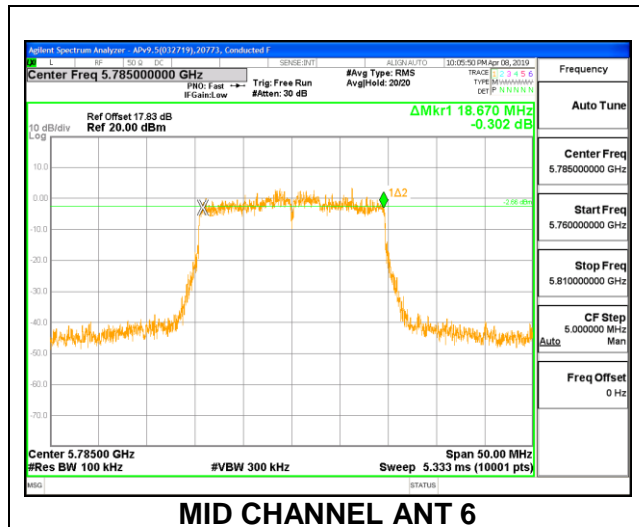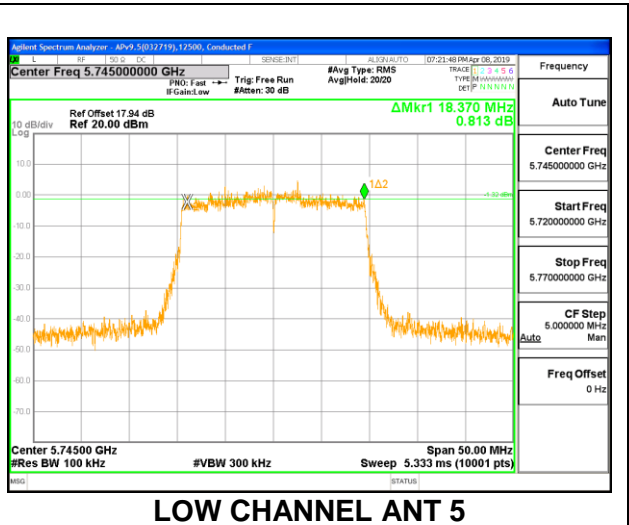
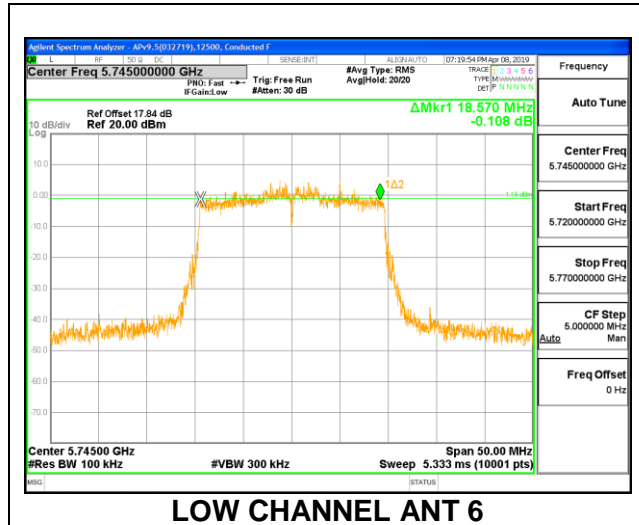


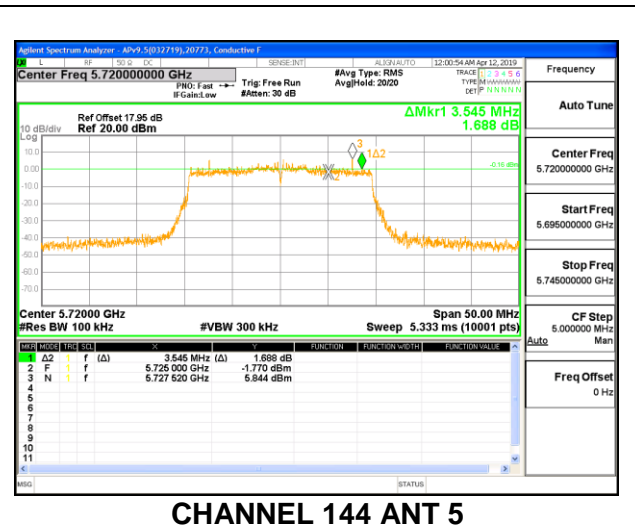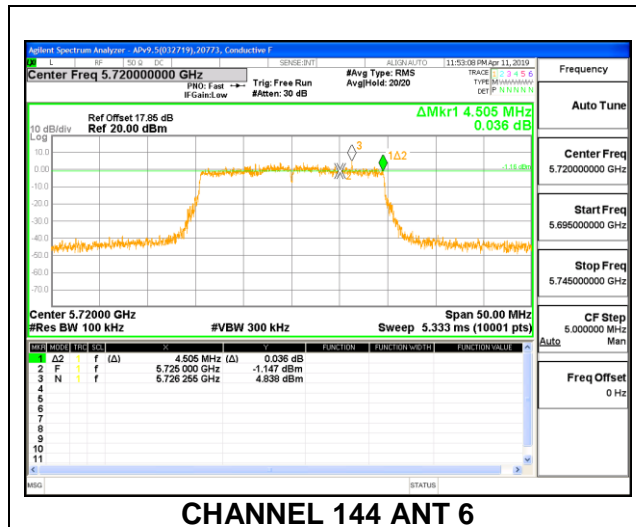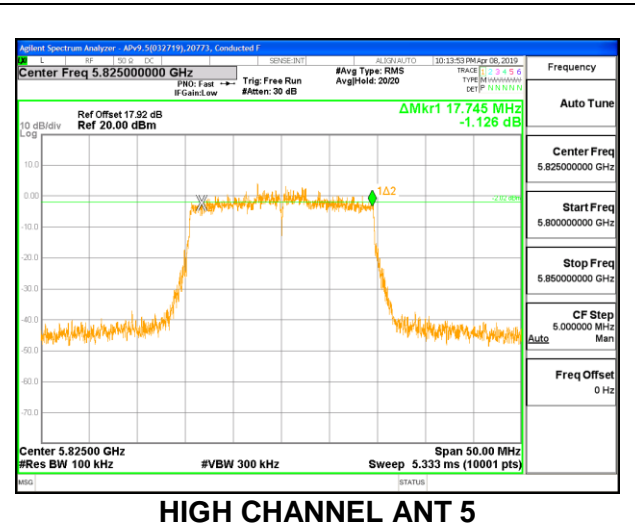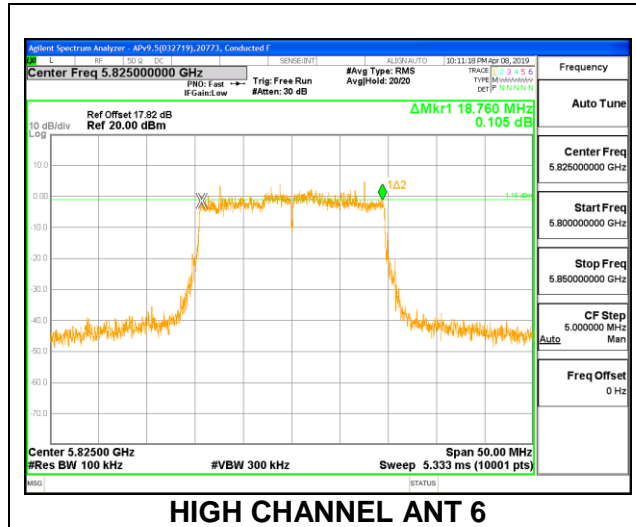

2TX Antenna 6 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 0

Channel	Frequency (MHz)	6 dB BW ANT 6 (MHz)	6 dB BW ANT 5 (MHz)	Minimum Limit (MHz)
Low	5745	1.980	2.000	0.5
Mid	5785	1.985	1.995	0.5
High	5825	2.090	1.980	0.5

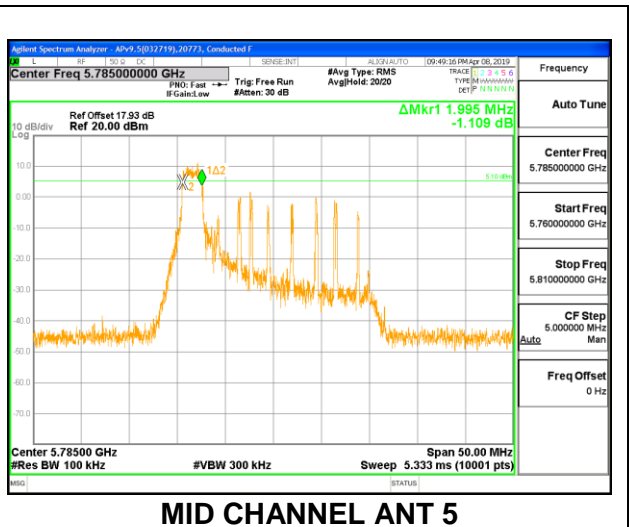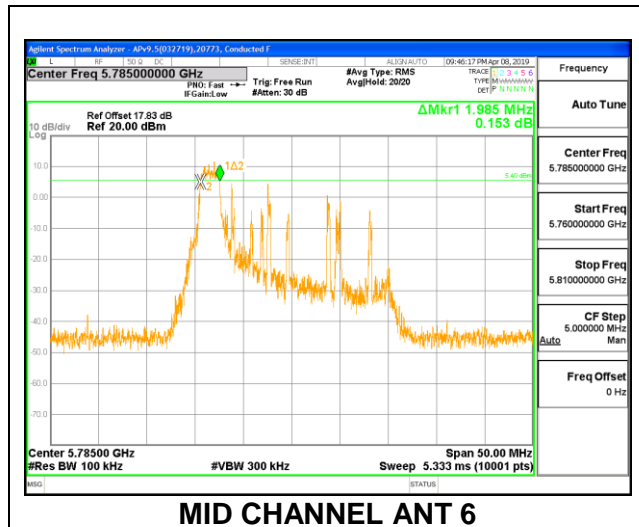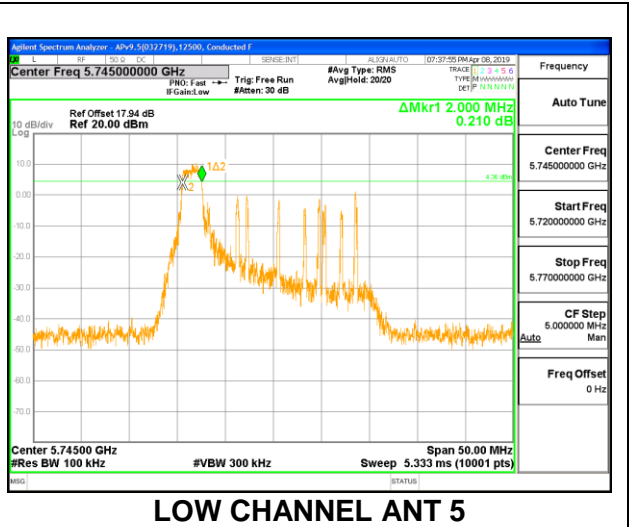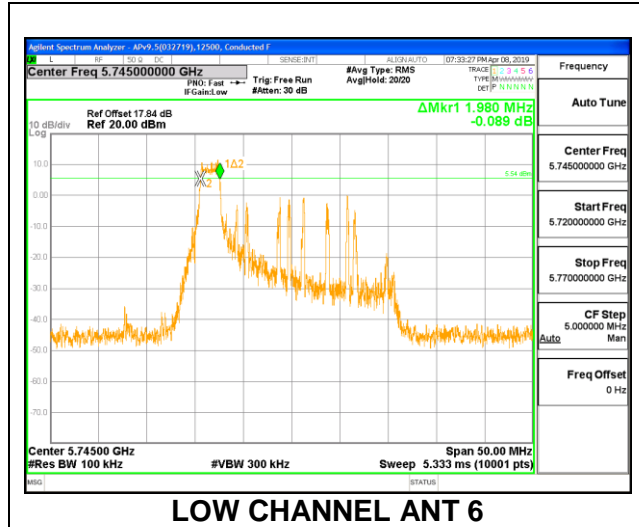



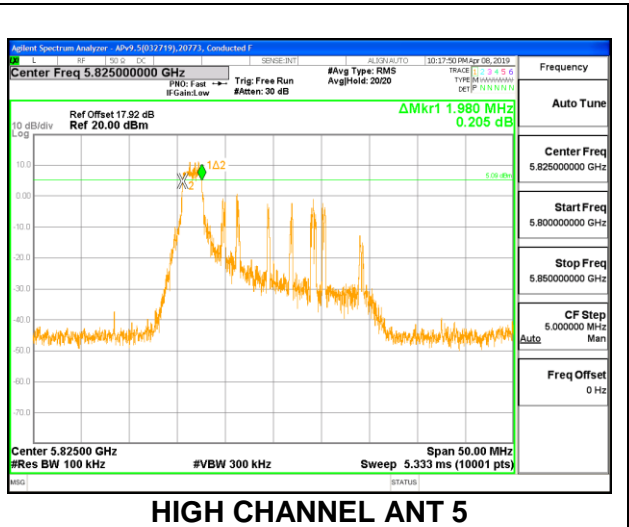
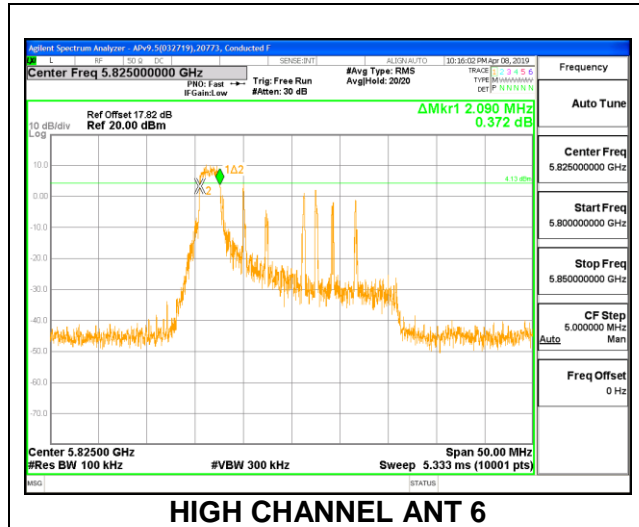




See note on section 8.4
CHANNEL 144 ANT 6

See note on section 8.4
CHANNEL 144 ANT 5

2TX Antenna 6 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 4

Channel	Frequency (MHz)	6 dB BW ANT 6 (MHz)	6 dB BW ANT 5 (MHz)	Minimum Limit (MHz)
Low	5745	2.600	2.575	0.5
Mid	5785	2.570	2.530	0.5
High	5825	2.545	2.585	0.5

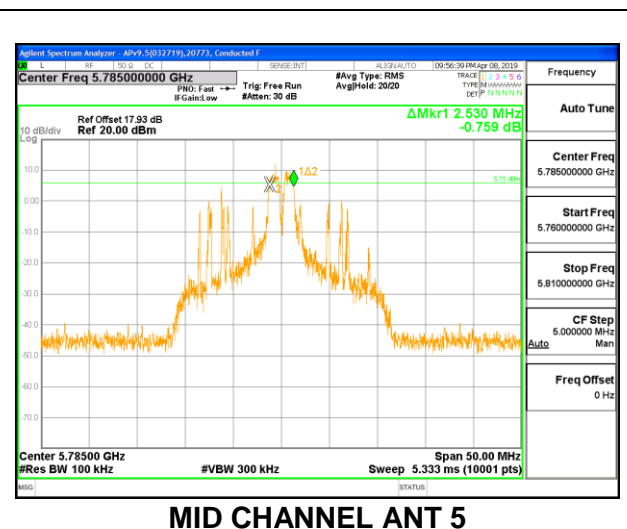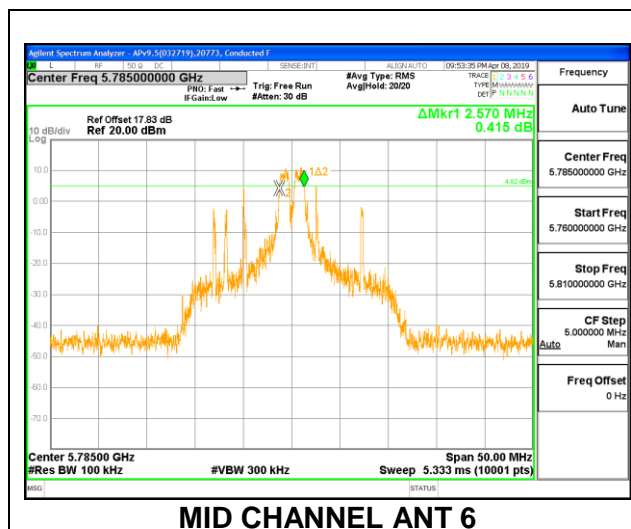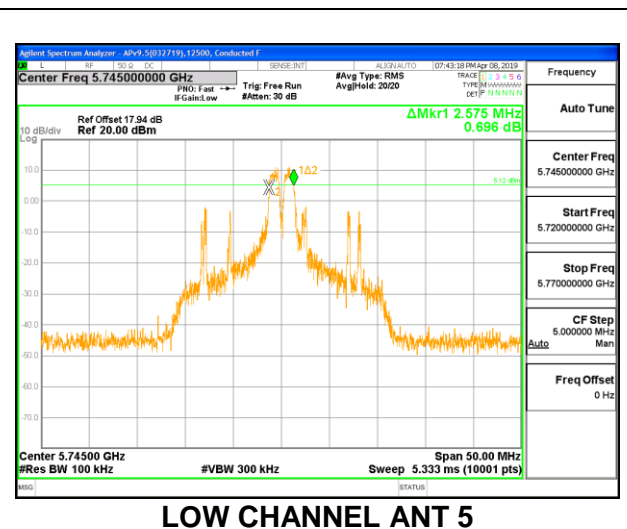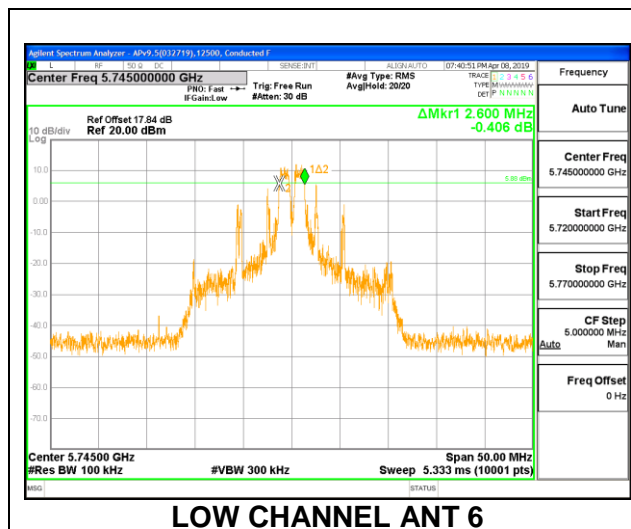



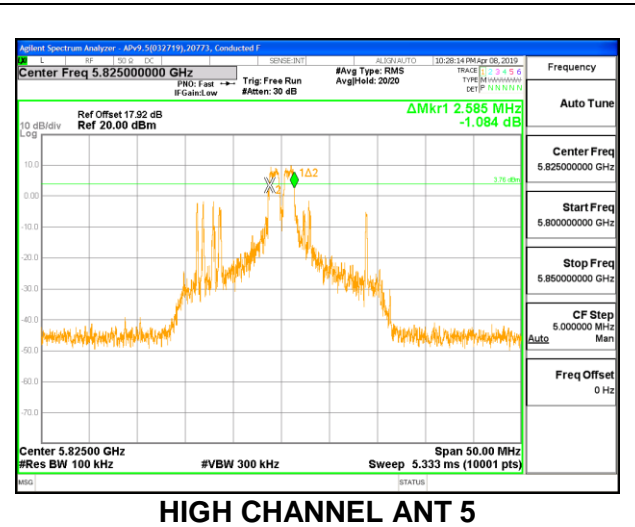
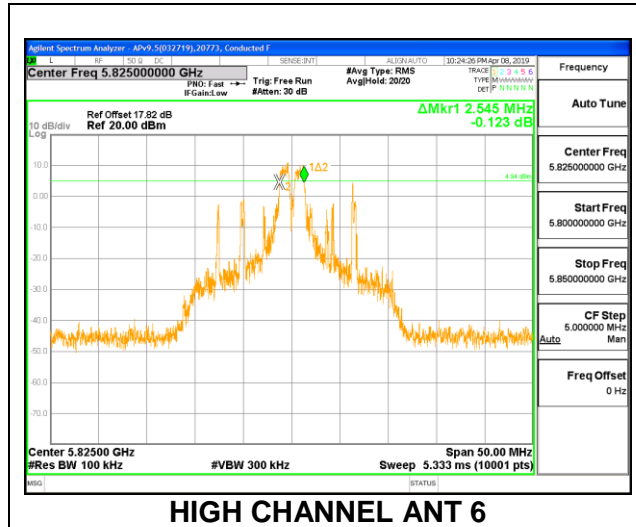






See note on section 8.4
CHANNEL 144 ANT 6

See note on section 8.4
CHANNEL 144 ANT 5

2TX Antenna 6 + Antenna 5 OFDMA MODE – 26 Tones, RU Index 8

Channel	Frequency (MHz)	6 dB BW ANT 6 (MHz)	6 dB BW ANT 5 (MHz)	Minimum Limit (MHz)
Low	5745	2.050	2.020	0.5
Mid	5785	1.965	2.020	0.5
High	5825	2.035	2.005	0.5
144	5720	2.000	2.025	0.5

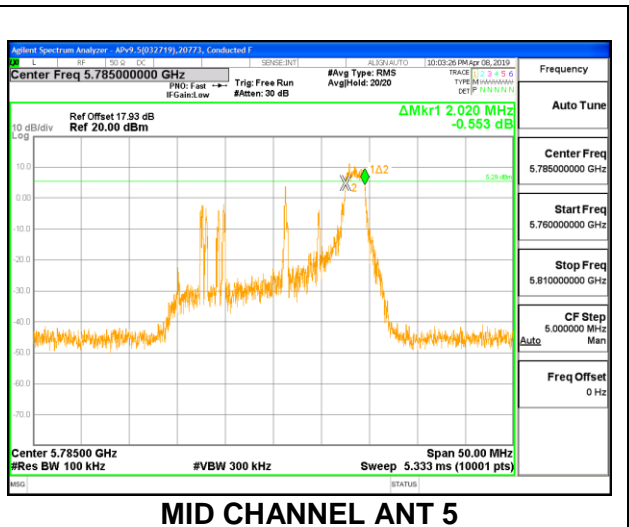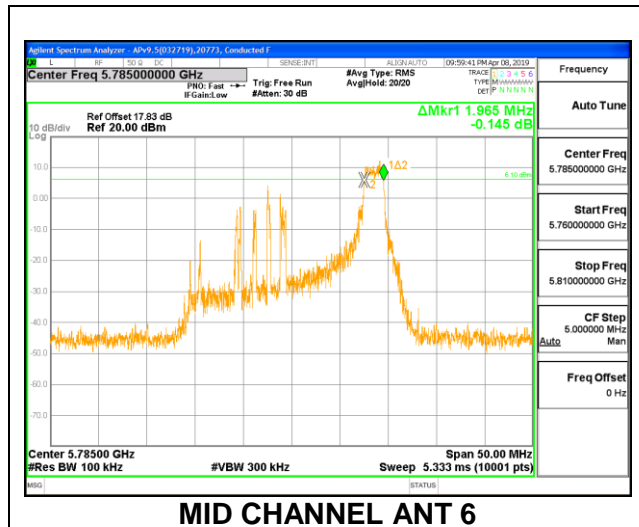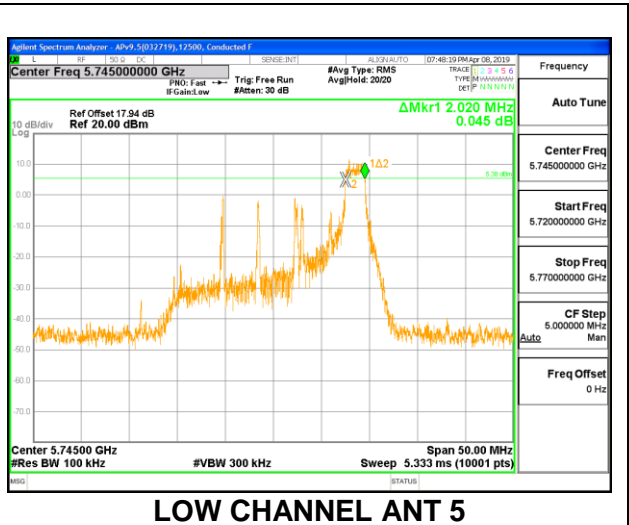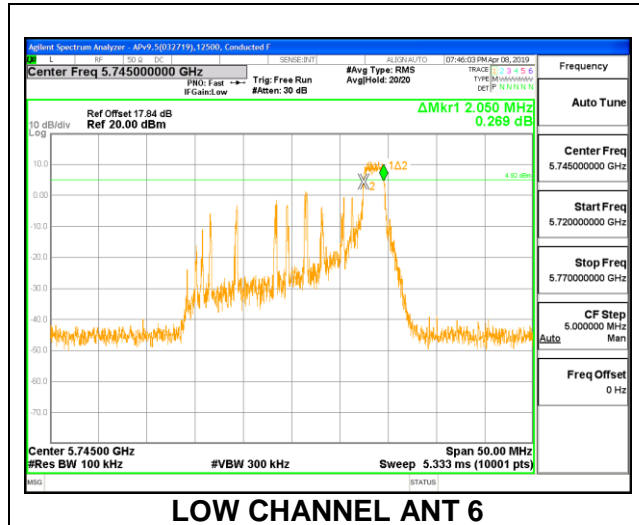


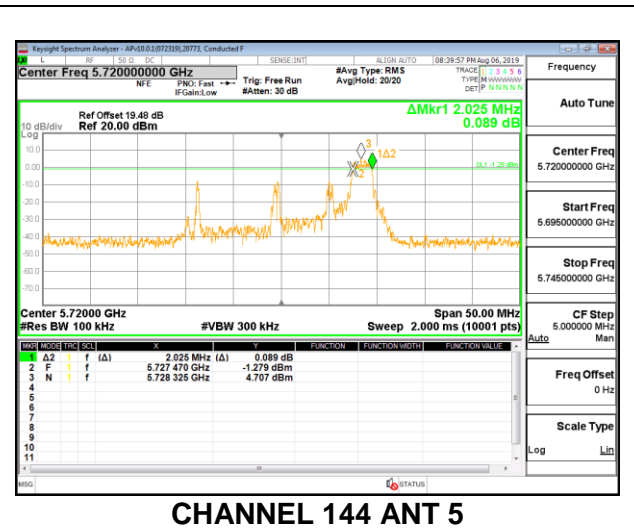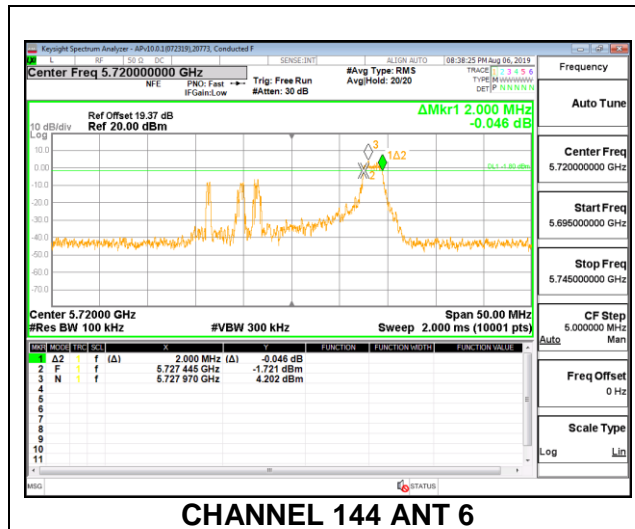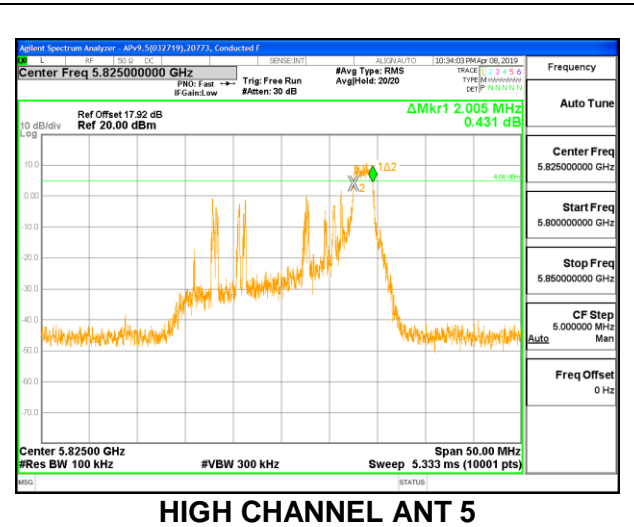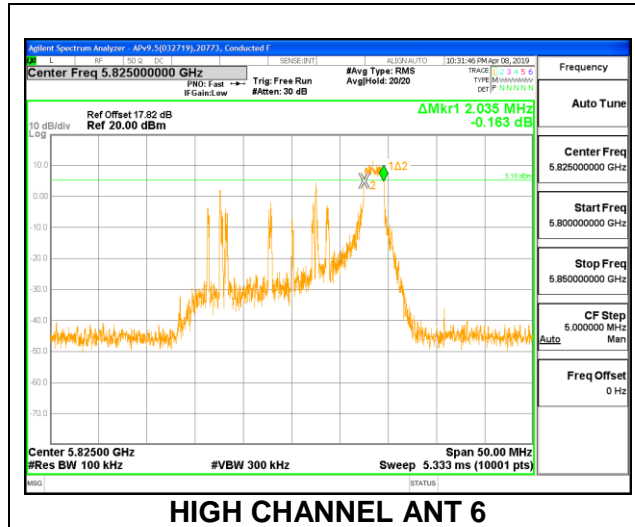


8.4.5. 802.11ax HE40 MODE IN THE 5.8 GHz BAND

1TX Antenna 6 MODE – 484 Tones, RU Index 65


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5755	37.000	0.5
High	5795	37.930	0.5
142	5710	4.130	0.5

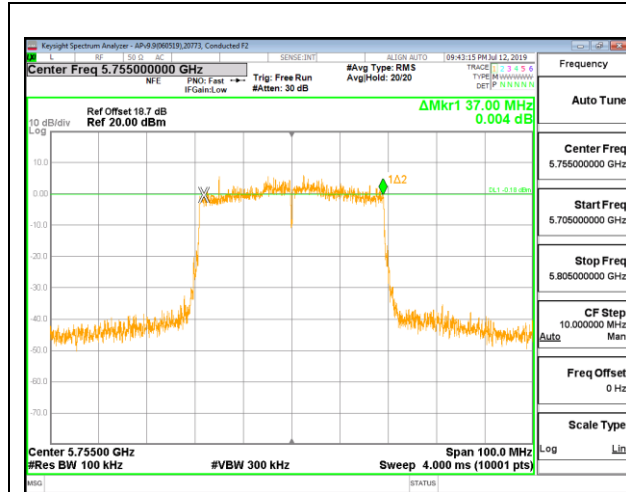

LOW CHANNEL

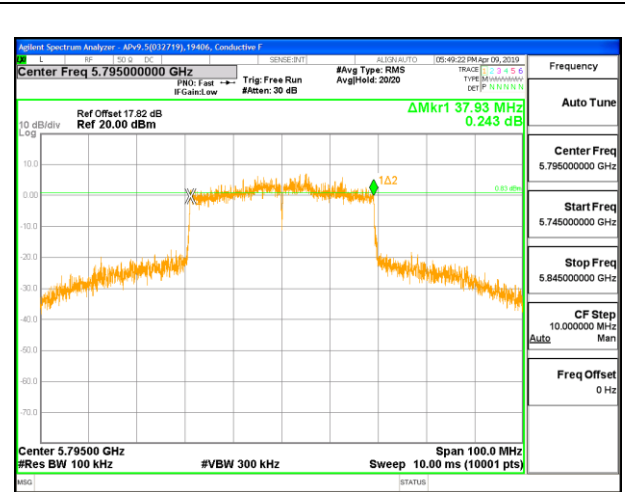


HIGH CHANNEL

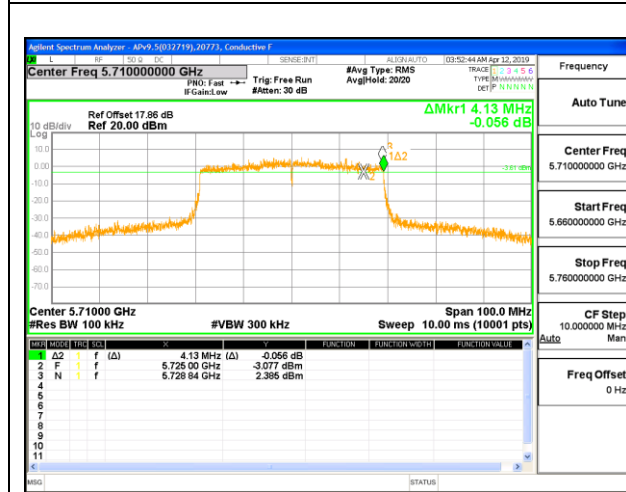

CHANNEL 142

1TX Antenna 6 MODE – 26 Tones, RU Index 0

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5755	2.070	0.5
High	5795	2.020	0.5

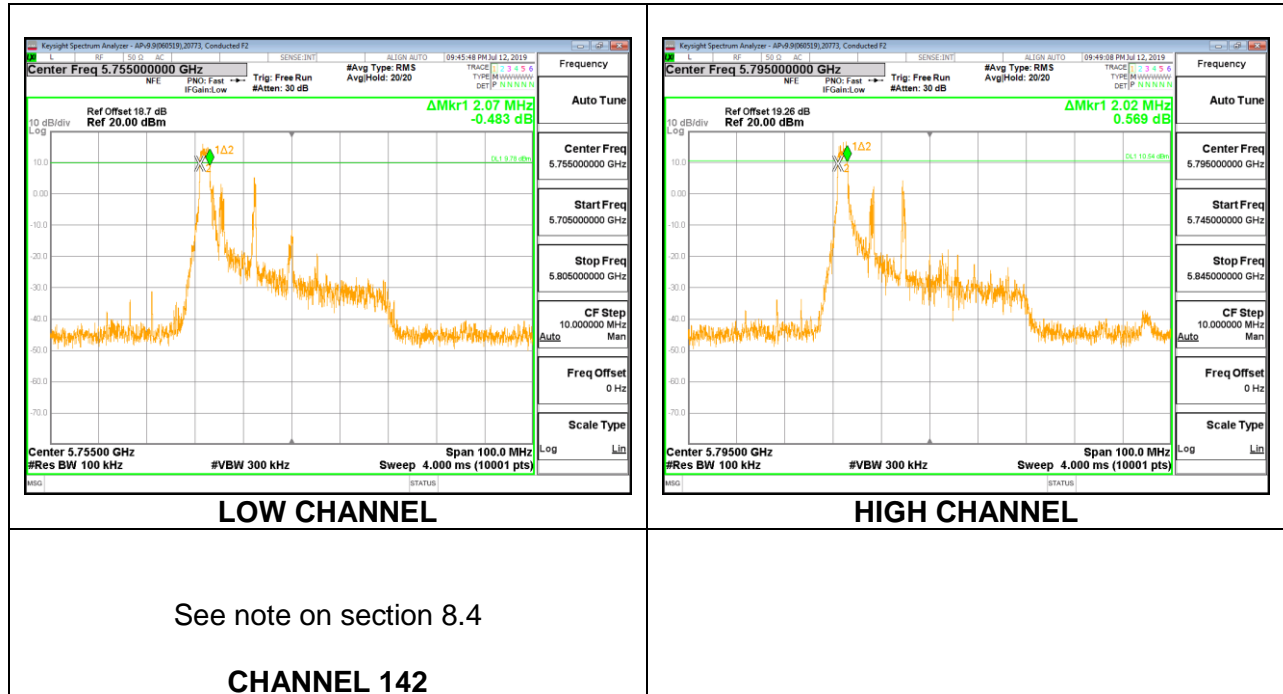

1TX Antenna 6 MODE – 26 Tones, RU Index 8

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Minimum Limit (MHz)
Low	5755	2.010	0.5
High	5795	2.090	0.5

LOW CHANNEL

HIGH CHANNEL

See note on section 8.4

CHANNEL 142