

Node-C1937 RF Enhancer

Large Area Coverage, Capacity, and High Speed Data for 1900 MHz CDMA

Now designers of 1900 MHz CDMA systems can get an RF enhancer with intelligence and performance.

The Andrew Node-C1937 is an RF enhancer for CDMA systems with up to 15 MHz of adjacent spectrum. This primary network element is ideal for the first phase of the network rollout and for any subsequent phase where cost, coverage, and quality need to be optimized. Although the Node-C1937's primary function is to increase signal strength between a mobile and a base station in areas where high-quality voice or high-speed data service is not available, it also enhances air-interface capacity and increases the network data rate.

The Node-C1937 is a dedicated CDMA device. It requires no additional hardware upgrades as a network migrates from J-STD-8 to CDMA2000 1X and beyond. The programmable radio may be upgraded locally through a USB-based web connection or remotely via a wireless modem, and the modem may be circuit switch or packet data based. This provides the network management system with on-demand, alarm generated, or heartbeat monitoring via the always-connected packet features.


Features and functions may be locally or remotely monitored and changed via a web browser. In addition, Andrew provides a dedicated OMC and has implemented a standard SNMP based MIB that can easily integrate into any 3rd party OMC platform. The graphical browser provides an intuitive setup menu, including a wizard that allows users, regardless of skill level, to correctly setup the equipment without any additional equipment.

The Node-C1937 is self-diagnosing, self-adaptive, and virtually maintenance free. It is designed to provide more than 10 years of service under virtually any condition.

- One man lift form factor
- Auto wizard setup for easy installation
- Digital filtering
- Uniform phase and magnitude amplification
- Automatic interference cancellation
- Decreased isolation requirements
- Virtual measurement equipment
- CDMA quality diagnostics
- SNMP and web-based GUI



An excellent choice for any area,
from the urban core to the rural
highway.



ANDREW®

Connecting the Wireless World


Specifications for Node-C1937 RF Enhancer

Electrical

Frequency, MHz	Uplink: 1850-1910 Downlink: 1930-1990
CDMA carriers	Option 1: 1-11 adjacent (per module), 1.23 MHz carriers Option 2: 1-3 adjacent (per module), 5 MHz carriers
Maximum downlink output power, dBm	+37.0 (1 CDMA carrier) +33.0 (2 CDMA carriers) +30.0 (4 CDMA carriers)
Maximum uplink composite output power	+23 dBm
Output power step size	1 dB
Output power accuracy over all conditions	±1.5 dB
Minimum downlink input power at full output power	-60 dBm
Maximum input power without damage	+10 dBm
Minimum antenna isolation for maximum gain	73 dB minimum
Uplink noise figure over all gain conditions	3.5 dB
Delay, μs	Option 1: < 5.7 Option 2: < 8.0

Mechanical


Height, width, depth, in (mm)	Node-C1937	Interface Unit
	21.5 x 12.5 x 10.25 (546 x 320 x 260)	21.5 x 7.5 x 10.25 (546 x 190 x 260)

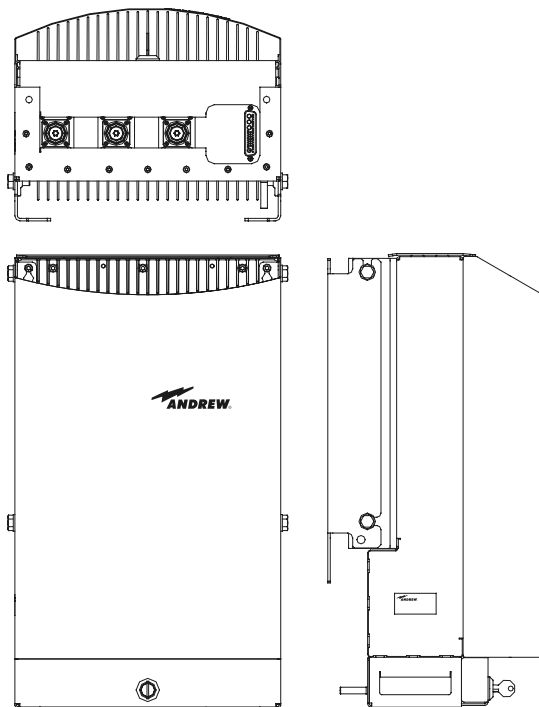

Node-C1937

Maximum gain	93 dB (automatic setting)
Gain adjust range	43 dB to 93 dB
Return loss	> 15 dB
Uplink diversity	Optional
Spectral emission mask, dBc	-45 @ 750 kHz -60 @ 1.98 MHz
Out of band gain (rejection), dB	Option 1: Gain -40 in 750 kHz Option 2: Gain -70 in 750 kHz
Modulation accuracy	RHO > 0.96
Spurious emissions	-13 dBm
Far off selectivity (ultimate rejection)	70 dB
Power supply	Standard: 110 Vac/40-60 Hz Optional: 36-72 Vdc
Power consumption, watts	200 idle 250 full output power
RF connectors	Standard: 7-16 DIN female Optional: N female
Weatherproofing	IP 65
Temperature range	-33°C to +50°C

Weight, lb (kg)	Node-C1937	Interface Unit
	55 (25)	29 (13)

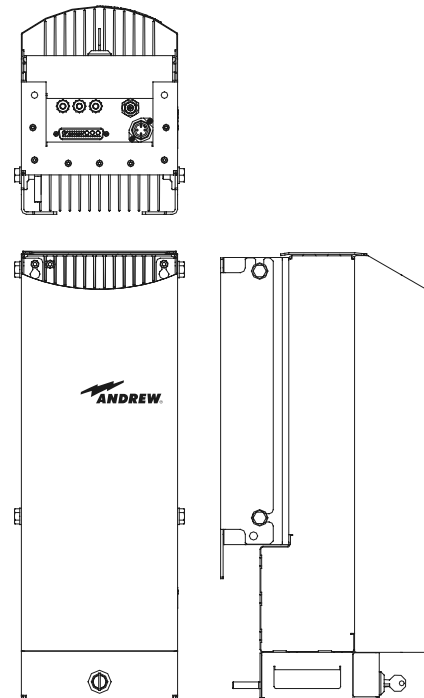

Interface Unit

product specifications

Features

Items measured

Measurement of pilot power, sync power, Ec/Io, VSWR, RSSI, multipath signals, system identification, EVM, and channel usage.

Interference cancellation equipment (ICE)

Electronic improvement of antenna isolation. Channel or multichannel capable of greater than 35 dB of enhancement.

Diversity

Spatial to time diversity implementation.

Auto configuration

Setup based on downlink power requirements, not gain. Uplink gain is automatically setup based on the downlink settings

Access

Web browser based local access and remote access. Packet data and circuit switched data options. OMC connectivity via SNMP

Contact relays

2 active low connections

Mounting

Pole mounting kit and free standing option

Technician_Setup - Microsoft Internet Explorer

File Edit View Favorites Tools Help Address http://1.2.1.1/Technician_Setup.htm Go

ID Number: 157902443
Serial Number: 000203411
Phone Number: 0019195551212
IP Address: 172.100.144.92
Date: 12/08/2003

ANDREW

Location: The Most Important Network
100 Board Walk Place
Anywhere in the World
Technician: John Doe

Help

Description	Current Configuration	New Value
Filter Selection (15 MHz Maximum Bandwidth)	1850-1855/1930-1935 MHz	Ch 1 No Change
	None	Ch 2 No Change
	1860-1865/1940-1945 MHz	Ch 3 No Change
Pilot Power to Total Power Ratio	6%, -12dB	No Change
Downlink Power	2.0W, 33dBm	Power No Change
Downlink Gain	Not Defined	Gain No Change
Relative Uplink Gain	Balanced	Relative Gain No Change
Absolute Uplink Gain	Not Defined	Absolute Gain No Change
Downlink DCM Path	Enable	No Change
Uplink DCM Path		No Change
Downlink PA		
Uplink PA		
Complete Repeater		
Interference Cancellation		

Done

Setup Menu

Alarm_Main - Microsoft Internet Explorer


File Edit View Favorites Tools Help Address http://1.2.1.1/Alarm_Main.htm Go

ID Number: 157902443
Serial Number: 000203411
Phone Number: 0019195551212
IP Address: 172.100.144.92
Date: 12/08/2003

ANDREW

Location: The Most Important Network
100 Board Walk Place
Anywhere in the World
Technician: John Doe

Help

Picture	ID	Module	Current Status	Alarm Count
	1	Power Supply	OK	0
	2	Uplink Power Amplifier	OK	0
	3	Downlink Power Amplifier	OK	0
	4	LNA	OK	0
	5	Digital Channel Module	OK	0
	6	Modem, Electronic Door Label	OK	0
	7	VSWR, ALC, RSSI	OK	0
	8	External, Fan, and Door	Warning	1

Critical Major Minor Warning OK Disabled


Clear Alarm Count Download Alarm Log Clear Alarm Log Home

Done My Computer


Alarm Menu

product specifications


Scenario 1: 3 Sector Coverage for suburban and urban wide area coverage

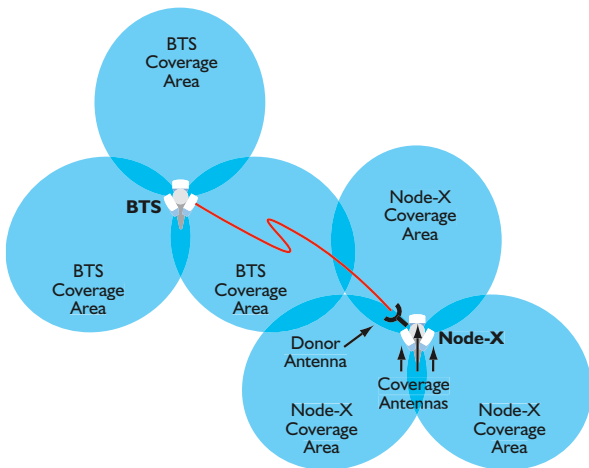

Scenario 2: Road and Rail Coverage

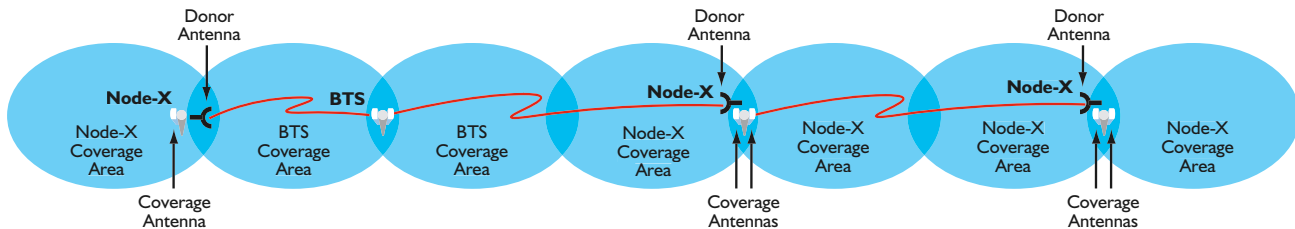

Scenario 3: Urban hole filling and speed enhancement

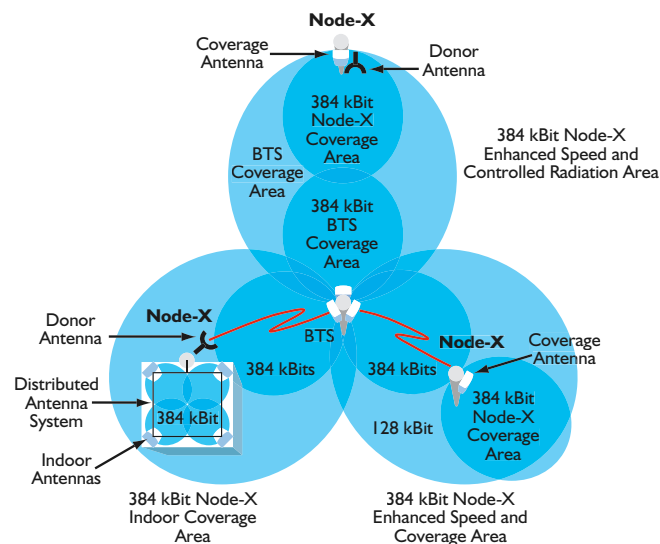

Connecting the Wireless World

Andrew Corporation
10500 W. 153rd Street
Orland Park, IL 60462 USA
Internet
www.andrew.com

Mikom GmbH
An Andrew Company
Industriering 10
86675 Buchdorf, Germany
Phone +49 (0) 9099 69 0
Fax: +49 (0) 9099 69 930

Customer Support Center
From North America:
Telephone: +1-800-255-1479
Fax: +1-800-349-5444
International:
Telephone: +1-708-873-2307
Fax: +1-708-349-5444

All designs, specifications and availabilities of products and services presented in this bulletin are subject to change without notice.

Bulletin 10933 (Rev. O 10/03) Copyright © 2003
Andrew Corporation, Orland Park, IL
60462 USA