

Designated by Ministry of International Trade and Industry

KANSAI ELECTRONIC INDUSTRY DEVELOPMENT CENTER

HEAD OFFICE
6-8-7, NISHITEMMA
KITA-KU, OSAKA, 530 JAPAN

KEC

IKOMA
TESTING LABORATORY
10630, TAKAYAMA-CHO
IKOMA-CITY, NARA, 630-01 JAPAN

*Corporate Juridical Person***ENGINEERING TEST REPORT**REPORT NO. A-018-98-C

Issued Date : September 10, 1998

This test report is to certify that the tested device properly complies with the requirements of:

FCC Rules and Regulations Part 95 ; Radio Control(R/C) Radio Service.

The tests necessary to show compliance to the requirements were performed and these results met the specifications of requirement. The results of this report should not be construed to imply compliance of equipment other than that which was tested. Unless the laboratory permission, this report should not be copied in part.

1. Applicant

Company Name : JAPAN REMOTE CONTROL CO., LTD.
Mailing Address : 2-2-12, EIWA, HIGASHI-OSAKA-CITY, 577-0809 JAPAN

2. Identification of Tested Device

FCC ID : BRWF400EX
Device Name : Radio Control Transmitter
Trade Name : JR PROPO
Model Number : F400EX
Serial Number : Prototype No.1 : Prototype Pre-production Production
Date of Manufacture : June, 1998

3. Test Items and Procedure


- Measurement of RF Power Output (Substitution Method)
- Modulation Characteristics
- Emission Bandwidth
- Measurement of Field Strength of Spurious Radiation
- Frequency Stability Measurement

Above all tests were performed under : FCC Part 2 Section 2.985, Section 2.987, Section 2.989, Section 2.993 and Section 2.995

4. Date

Receipt of Test Sample : June 10, 1998
Test Completed on : July 23, 1998

CERTIFIED BY :

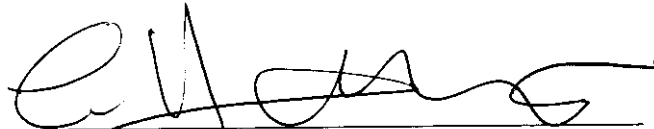
Eizo Hariya
General Manager of Ikoma Testing Laboratory

Technical Report
Transmitter Model F400EX
FCC ID# BRWF400EX

TABLE OF CONTENTS

1.0 INTRODUCTION

- 1.1 Definition
- 1.2 Application
- 1.3 Construction

2.0 THEORY OF OPERATION

- 2.1 General
- 2.2 Block Diagram

3.0 FAILURE ANALYSIS

4.0 APPENDICES

- 4.1 Transmitter Block Diagram
- 4.2 Transmitter Schematic Diagram
- 4.3 Transmitter Photographs and ID Labels
- 4.4 Transmitter Tune Up Procedure
- 4.5 Quarts Crystal Specifications
- 4.6 Test Data

Technical Report
 Transmitter Model F400EX
 FCC ID# BRWF400EX

1.0 INTRODUCTION

1.1 Definition

The Model F400EX is a transmitter for the Remote Control (R/C) of models such as airplane, helicopters, cars, boats, etc.

This Transmitter is for FM System, available for the PPM(Pulse Position Modulation).

This Transmitter is a part of the Horizon Hobbies PPM "family" of Remote Control Transmitters which at this time consists of:

Transmitter Model #	FCC ID #
GALAXY NET-72P	BRW8ZCNET72P
F400 NET-E104	BRWNET-104

Separate Applications for each transmitter and for the receiver are submitted as required by the Commission.

The Manufacturer, Japan Remote Control Company (JR), manufactures all transmitters and receivers. The PPM family of R/C systems is exported by JR to the United States of America, and several European and Asian countries.

The Applicant for this Equipment Authorization, HORIZON HOBBIES, INC. will, following receipt of Grant of Equipment Authorization, import only those versions of these R/C radios which are allowed for use in the USA under the Rules and Regulations of the Federal Communications Commission; specifically these are the 72 - 73 MHz frequency band.

The 72 - 73 MHz version of this transmitter is the subject of this Application; these are the units which will be offered for sale to the general public.

Technical Report
Transmitter Model F400EX
FCC ID# BRWF400EX

1.2 Application

The Model F400EX R/C transmitter utilizes "Frequency Modulation" to convey the PPM encoded position of its control sticks (joysticks) and toggle switches to its companion R/C receiver, where the PPM encoded pulse train is demodulated, decoded, and supplied to a number of servo-mechanisms for positioning of control surfaces, throttle etc. on the model.

The Frequency-Shift-Keying of the transmitter carrier takes place in the rhythm of the PPM pulse train.

Transmitter and receiver are very narrow band units; they have been designed to comply with the European requirements of 10 KHz channel spacing. As a result, they operate safely in the present 20 KHz channel spacing environment allowed at this time in the USA.

1.3 Construction

The Model F400EX Transmitter all consist of a plastic case.

(Reference is made to Fig. 4.1, Transmitter Block Diagram)

- * control sticks and control switches
- * a 9.6V rechargeable (NiCad) battery
- * a encoder circuitly
- * a modulator driver stage
- * a RF power stage
- * a telescopic antenna

This Transmitter is to be made available by the importer only on those carrier frequencies in the 72 - 73 MHz frequency band which are at present authorized for R/C use.

Technical Report
 Transmitter Model F400EX
 FCC ID# BRWF400EX

2.0 THEORY OF OPERATION


2.1 General

Reference is made to Figure 4.1, Transmitter Block Diagram.

The Horizon Hobbies Model F400EX R/C Transmitter is a tow sticks type Transmitter.

It operates on any of the R/C frequency(Channels) allowed by the Commission in the 72 -73 MHz frequency band. Selection of the desired RF channel is made by Quarts crystal.

This transmitter employs Frequency-Sift-Keying (FSK) of the carrier frequency, whereby the output frequency is either low or high due to the symmetrical FSK modulation process, the (center) output frequency cannot be directly measured, but must be calculated by taking the average of the high and low frequency states.

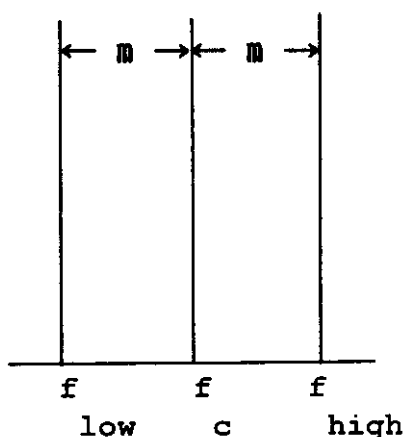

m = shift from center frequency
 m = approx. 2 KHz

$$f \text{ carrier} = \frac{f \text{ low} + f \text{ high}}{2}$$

The peak-to-peak deviation of the FSK signal is approximately 4 KHz ("sliver modulation")

Because of the unfamiliarity of the general public with the term FSK, this modulation technique is commonly named FM.

Technical Report
Transmitter Model F400EX
FCC ID# BRWF400EX

2.2 Block Diagram

(Reference is made to Figure 4.1)

The (up to) four control potentiometers are at the left side of the schematic drawing.

The control potentiometer, which is mechanically coupled to the control (joy) stick, is supplied with the regulated 5.0V voltage. The wiper on this pot is exactly centered in the neutral control stick position. All analog processing is performed as deviations from this center (reference) voltage.

It acts as a buffer/driver for the control potentiometer output voltage, and it allows additional input to be analog mixed to the control voltage.

The oscillator consists of an ECO type oscillator, excited by a quartz crystal. The crystal supports oscillation at the crystal's fundamental frequency (approximately 18MHz). The tuned circuit in the oscillator transistor's collector is tuned to the second harmonic of this frequency (approx. 36MHz).

Q12 acts as a frequency multiplier ($\times 2$)/buffer; it drives the Power Amplifier (PA). Its output frequency is $4\times$ crystal frequency.

The straight-through PA stage is followed by a matching and band pass/low-pass network. This network matches the low PA stage output impedance to the whip antenna.

The crystal load capacitance is affected by varicap D11, which is voltage-controlled by the "rounded-off square wave from the modulator transistor. The oscillator frequency is therefore switched in the rhythm of the modulate modulation pattern (FSK).

Two DC Supply Voltage enter the RF section: 9.6 Volt "law" battery voltage supplies the PA stage only. All other stages, and bias current for all stages, including the PA, are derived from the regulated 6.0 Volt source on the main encoder board.

Technical Report
Transmitter Model F400EX
FCC ID# BRWF400EX

3.0 FAILURE ANALYSIS

A failure analysis was conducted to ascertain that single-component failure will not result in unauthorized radiation.

It should be noted that component failure will result in return of the unit to the factory, or to an authorized repair station.

(Reference is made to Figure 4.2, Transmitter Schematic Diagram)

Failure of any of the transistors (predominant failure mode: emitter-collector short) will result in the unit becoming inoperative:

In the case of Q11 oscillator short, RF output will be non-existent.

Q12 or Q13 failure will result in very low, if any, output. Failure of Q11, Q12 or Q13 will register on the unit's meter which indicates collector current into the PA stage.

Failure of the MOD IN input (latch at 0 or 9.6 Volt) or modulator transistor Q14, Q15, will result in either the high frequency (carrier frequency + 2 KHz), or the low frequency (carrier frequency - 2 KHz) being transmitted. Although this failure would render the unit inoperative, the frequency tolerance would still fall within the channel bandwidth and tolerance requirements of .002% of 72 MHz = 1.44 KHz.

Failure of the varactor diode D11 (open or short) results in a measured frequency drop of 9.2 KHz (varactor short) or no change (varactor open).

Although a varactor-short failure would bring the generated frequency out-of-tolerance, the unit will become inoperative, power will be turned off, and the unit will be returned for service (Note that even in this failure mode, no harmful energy is being transmitted on neighboring channels).

Failure of the quartz crystal, X1, will inevitably result in no, or strongly reduced, output.

All other incidental failures will render the unit inoperative and because for return of the transmitter to the service facility.

Technical Report
Transmitter Model F400EX
FCC ID# BRWF400EX

Transmitter R.F. Tune Up Procedure


1. Remove six screws from transmitter. Break seal on case and remove PC assembly. Put PC assembly on bench, component side up.
2. Refer to transmitter schematic Figure 4.2.2. Soften bees wax on cores in L1, L2, L3 and L4. Using synchroscope with small 50 ohm loop, starting at L1, adjust these cores for maximum synchroscope reading. Repeat this tuning sequence until no further increase in synchroscope reading can be obtained.
3. The MOD. IN input latch at 0 volt. Observe frequency counter. Adjust the small ceramic trimmer capacitor on the PC assembly so that output frequency is exactly 2.0 KHz higher than the channel frequency.
4. The MOD. IN input latch at 9.6 Volt. Adjust the small trimmer resistor on PC assembly so that output frequency is exactly 2.0 KHz lower than channel frequency for the module.
5. Repeat step 2.
Repeat step 3 and 4.
6. Using spectrum analyzer with small 50 ohm loop, verify that subharmonic and harmonic components are at least 50 dB below carrier component. Pay special attention to 90 MHz and 144 MHz components.
7. Remove PC assembly from Transmitter. Re-apply bees wax to L1, L2, L3 and L4. Put PC assembly back into its case, replace the 6 screws and re-seal opposite edge.

SPECIFICATION OF CRYSTAL UNIT

ORDERD BY J.R

SPEC. No

1. FREQUENCY 18 MHZ (72MHZ) TX
2. HOLDER TYPE HC-50/U
3. FREQUENCY TOLERANCE +- 7 PPM/+25°C
4. EQUIVALENT RESISTANCE 20 OHMS MAX/SERIES
5. OPERABLE TEMPERATURE RANGE -20 °C----- +60 °C
6. TEMPERATURE DRIFT +- 20 PPM
7. LOADING CAPACITY 52 PF
8. DRIVE LEVEL 1 mW
9. SHUNT CAPACITY 7 PF MAX
10. MODE OF OSCILLATION FUNDAMENTAL (AT CUT)
11. INSULATION RESISTANCE 500 M OHMS MIN AT 100 V DC
12. SHOCK TEST
 DROPPING FROM 75 CM HEIGHT 3 TIMES ON FIRM WOOD
 VARIATION : FREQUENCY LESS THAN +-5 PPM
 RESISTANCE LESS THAN +-15 %
13. VIBRATION TEST
 FREQUENCY 10 TO 55HZ; AMPLITUDE 1.5mmP-P 1 CYCLE/MINUTES
 TEST TIME 120 MINUTES IN EACH DIRECTION
 VARIATION : FREQUENCY LESS THAN +-5 PPM
 RESISTANCE LESS THAN +-15 %
14. AGING
 +- 5 PPM/YEAR
15. MARKING



SHOWA CRYSTAL CO.LTD.

59.12. 100 × 100 (FN)

Figure 4.5

Transmitter Osilleto Crystal Specificatin

ENGINEERING TEST REPORT

Table of Contents

1. GENERAL INFORMATION	
1.1 Product Description	3
1.2 Description for Equipment Authorization.....	3
1.3 Test Facility	3
2. TESTED SYSTEM	
2.1 Test Mode	4
2.2 Block Diagram of EUT System	4
2.3 List of EUT System	4
2.4 List of Antenna	4
3. RF POWER OUTPUT	
3.1 Reference Rule and Specification	5
3.2 Test Configuration	5
3.3 Test Procedure	5
3.4 Test Results	6
4. MODULATION CHARACTERISTICS	
4.1 Reference Rule and Specification	7
4.2 Test Results	7
5. EMISSION BANDWIDTH	
5.1 Reference Rule and Specification	8
5.2 Test Configuration	8
5.3 Test Result	9
6. FIELD STRENGTH OF SPURIOUS RADIATION	
6.1 Reference Rule and Specification	13
6.2 Test Procedure	13
6.3 Test Configuration	14
6.4 Photographs of EUT System Configuration	15
6.5 Test Results	16
7. FREQUENCY STABILITY MEASUREMENT	
7.1 Reference Rule and Specification	17
7.2 Frequency vs Temperature Test	17
7.3 Frequency vs Voltage Test	17
8. LIST OF TEST INSTRUMENTS	18

ENGINEERING TEST REPORT

1. GENERAL INFORMATION

1.1 Product Description

The Model No.F400EX(referred as EUT in this report) is the radio control(R/C) transmitter.

1) Technical Specifications

Transmitting Frequency : 72.010 MHz ~ 72.990 MHz (72.590 MHz in EUT)
Emission Designator : F1D

2) Contained Oscillator

4th OVER-TONE : 18.1475 MHz

3) Rated Power Supply : DC 9.6 V (Ni-Cd battery)

1.2 Description for Equipment Authorization

1) Rules Part(s) under which Equipment operated

FCC Rule Part 95 ; Radio Control(R/C) Radio Service

2) Kind of Equipment Authorization

Type Acceptance Certification Verification

3) Procedure of Application

Original Equipment Modification

1.3 Test Facility

Name : KANSAI ELECTRONIC INDUSTRY DEVELOPMENT CENTER (KEC)
IKOMA TESTING LABORATORY
Open Test Site No.2

Address : 10630, Takayama-cho Ikoma-city, Nara, 630-0101 Japan

This test facility has been filed in FCC under the criteria in ANSI C63.4-1992.
The laboratory has been accredited by the NVLAP (Lab.Code:200207-0) based on
ISO/IEC Guide 25.

ENGINEERING TEST REPORT


2. TESTED SYSTEM

2.1 Test Mode

The compliance tests were performed under the following operation mode.

- 1) Carrier wave is continuously transmitted with the normal modulation.

2.2 Block Diagram of EUT System

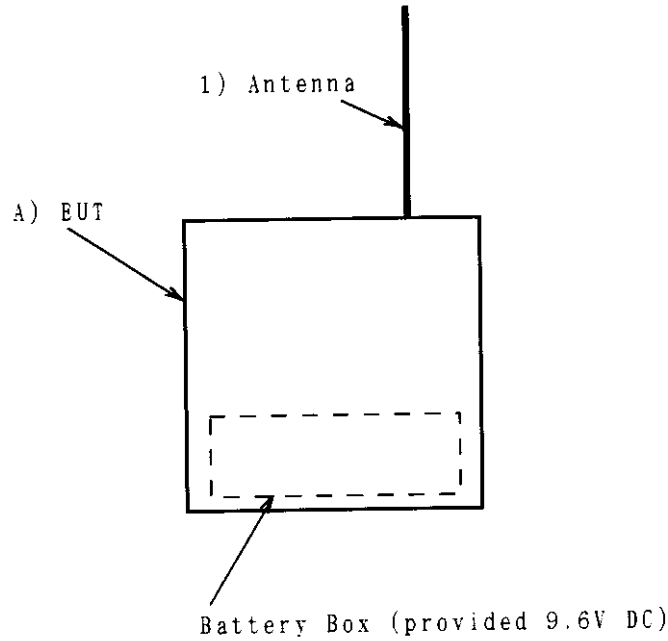

[Note]
See 2.3 List of EUT System and 2.4 List of Antenna.

2.3 List of EUT System

No	Device Name	Model Number (Serial Number)	FCC ID (Trade Name)	Note	Remark
A	Radio Control Transmitter	F400EX	BRWF400EX (JR PROPO)		1)

[Remark]
1) : EUT

2.4 List of Antenna

No	Type	Length (m)	Note	Remark
1	Antenna	0.76		


ENGINEERING TEST REPORT

3. RF POWER OUTPUT

3.1 Reference Rule and Specification

FCC Rule Part 95 [§ 95.635] and Part 2 Subpart J [§ 2.985]

3.2 Test Configuration

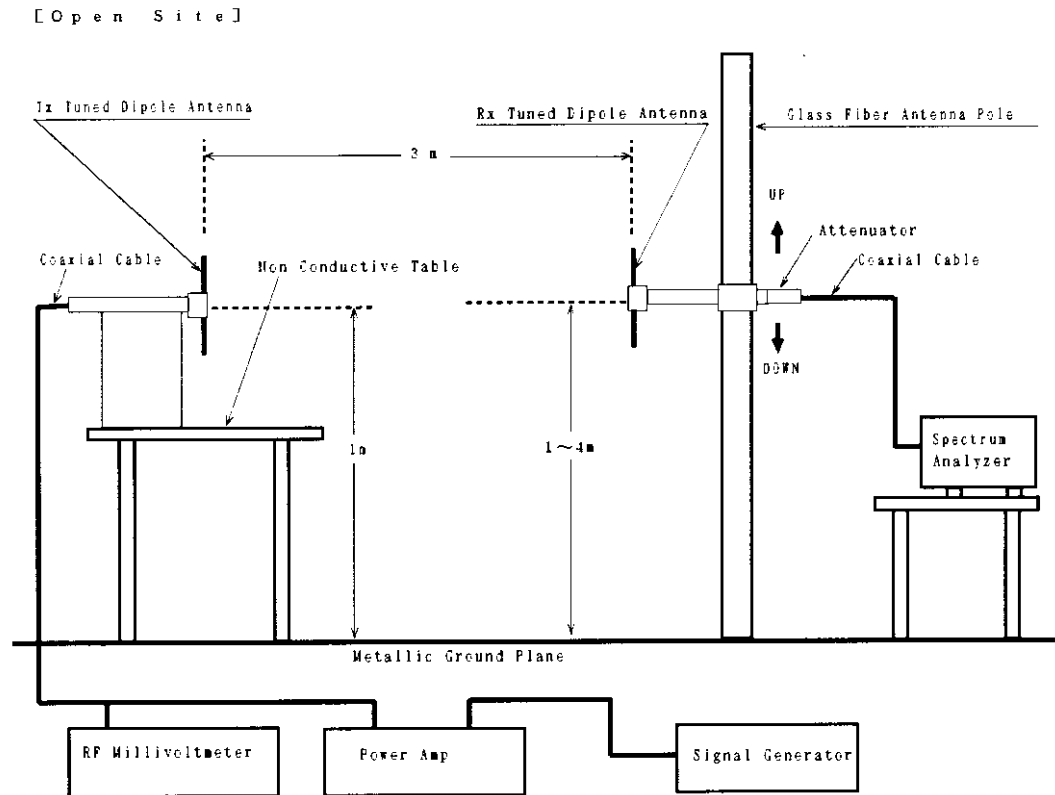

3.3 Test Procedure

- 1) Tune-up the transmitter.
- 2) The receiving antenna is adjusted to the correct length for the carrier frequency.
- 3) Raise and lower the receiving antenna to obtain a maximum reading on the Spectrum Analyzer with the antenna at horizontal polarity. Then the turntable is rotated to further increase this maximum reading. Repeat this procedure of raising and lower the antenna and rotating the turntable until the highest possible signal has been obtain.
Record this maximum reading.
- 4) Repeat step3 with the antenna polarized vertically.
- 5) Remove the transmitter and replace it with the half-wave antenna. The center of these antennas are approximately at the same location as the center of the transmitter.
- 6) Feed the half-wave antenna at the transmitter end with a signal generator connected to the antenna by means of a non-radiating cable. With the antennas at both ends horizontally polarized and with the signal generator tuned to the carrier frequency, raise and lower the receiver antenna to obtain a maximum reading at the Spectrum Analyzer. Adjust the level of the signal generator output until the previous recording maximum reading for this set of conditions its obtained.
- 7) Repeat step6 with both antennas vertically polarized.

ENGINEERING TEST REPORT

3.4 Test Result

CARRIER FREQUENCY [MHz]	SPECTRUM ANALYZER READING [dBμV]		RF METER READING [dBm]		CABLE LOSS [dB]	RF OUTPUT POWER [mW]	LIMIT [mW]
	Horiz.	Vert.	Horiz.	Vert.			
72.590	108.2	105.9	17.9	17.6	0.7	52.6	750

The RF Power Output can be calculated from following formula:

$$\text{RF Power (mW)} = 10^{(Mr - Lo) \div 10}$$

where,

Mr: RF Meter Reading (dBm)
Lo: Loss of Cable (dB)

[Environment]


Temperature : 27 °C Humidity : 55 %

[Summary of Test Results]

Above data shows that the test device complies with the requirements.
Minimum margin was 11.5 dB, horizontal polarization.

Tested Date : June 18, 1998

Tester Signature

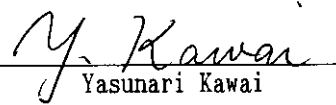
Yasunari Kawai

ENGINEERING TEST REPORT


4. MODULATION CHARACTERISTICS

4.1 Reference Rule and Specification

Part 2 Subpart J [§2.987]

4.2 Test Results

Encoded Waveform

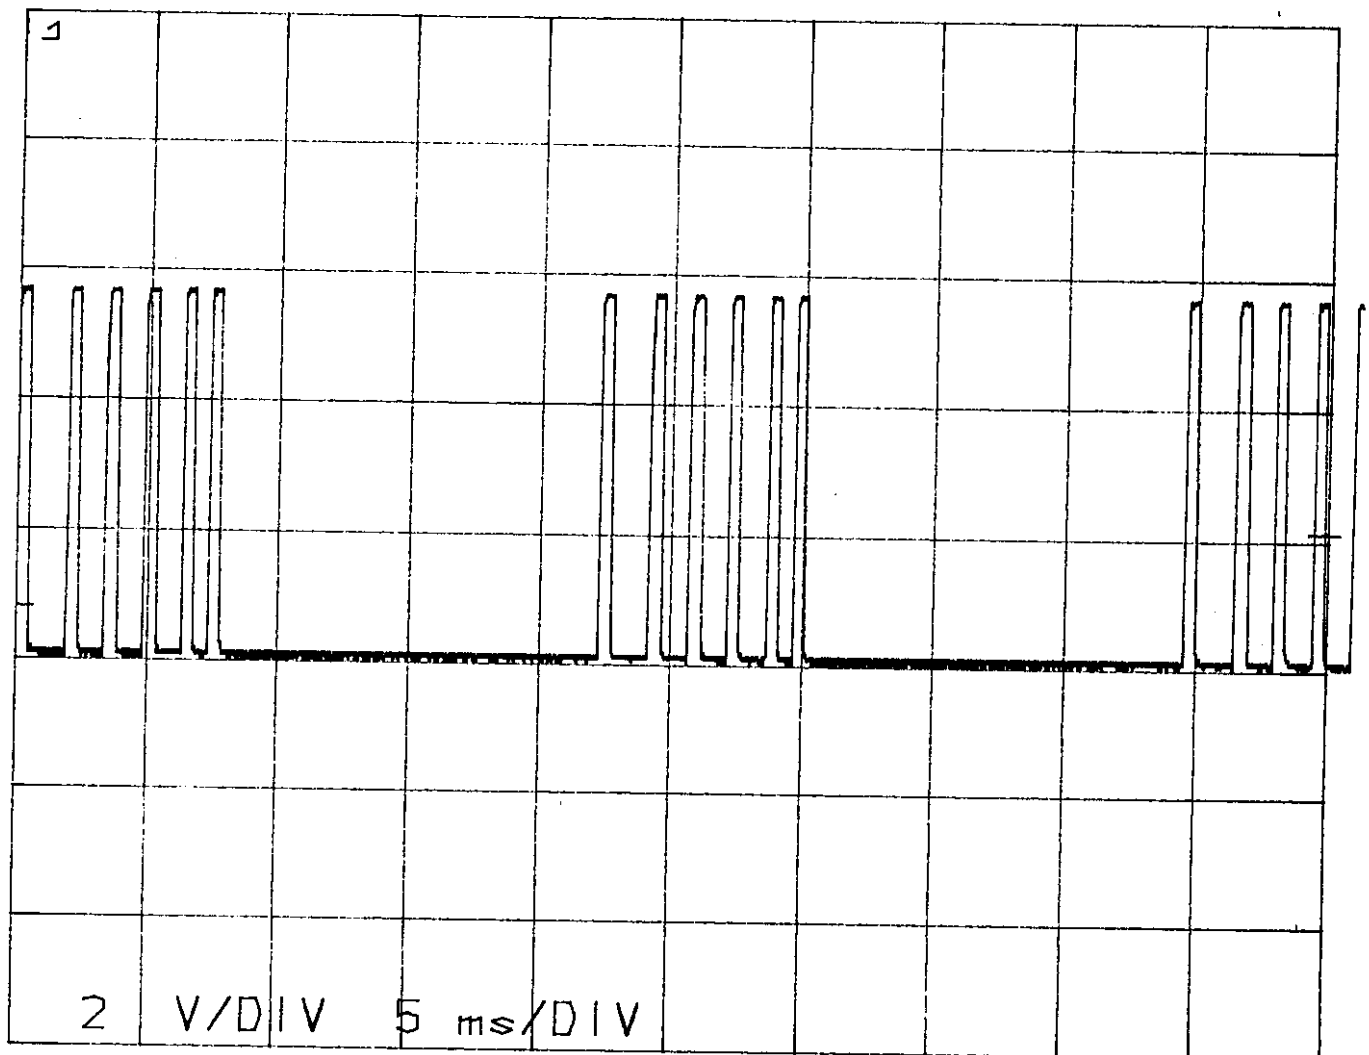


ENGINEERING TEST REPORT

5. EMISSION BANDWIDTH

5.1 Reference Rule and Specification

FCC Rule Part 95 [§ 95.631] and Part 2 Subpart J [§ 2.989]

5.2 Test Configuration

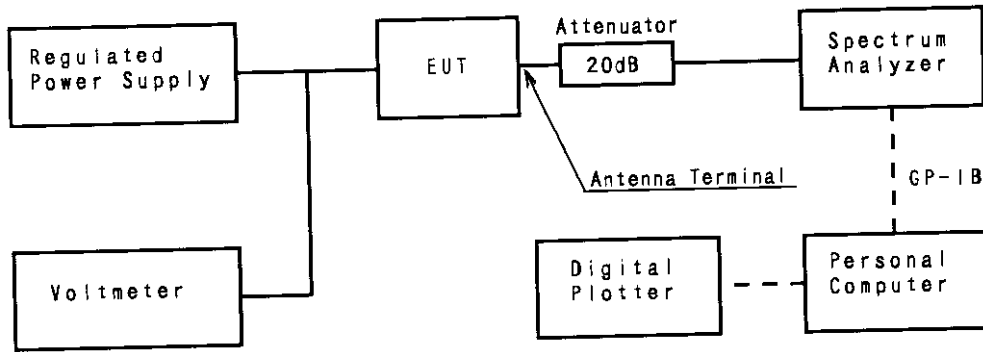

ENGINEERING TEST REPORT

5.3 Test Result

See next figure (the picture of spectrum analyzer)

Occupied Bandwidth

I measured by the spectrum analyzer TR4172 which could measure 99% occupied bandwidth(OBW).

There are 1001 data on horizontal axe of display.

One of them is V_n . Then all power P becomes following fomula.

$$P = \sum_{n=1}^{1001} \frac{V_n^2}{R} \quad \text{-----} \quad (1)$$

where, R is input impedance of TR4172.

If, at number X points from the left edge of display, sum of power becomes 0.5% of P and at number Y points, sum of power become 99.5% of P ,

$$0.005 P = \sum_{n=1}^X \frac{V_n^2}{R} \quad \text{-----} \quad (2)$$

$$0.995 P = \sum_{n=1}^Y \frac{V_n^2}{R} \quad \text{-----} \quad (3)$$

From(1)~(3), OBW becomes next.

$$O B W = \frac{f_{SPAN}(Y - X)}{1000}$$

where, F_{SPAN} is frequency span of the spectrum analyzer.

ENGINEERING TEST REPORT

Operation Mode of EUT

Normal modulation


EUT was operated the various positions of JOY STICKS & OTHER SWITCHES. (Reference level is the unmodulated level.)

Trace mode of Spectrum Analyzer : Maximum Hold

Occupied Bandwidth = 5.3kHz (99% Power)

M1=72.5875MHz(0.5% Power Point)

M2=72.5928MHz(99.5% Power Point)

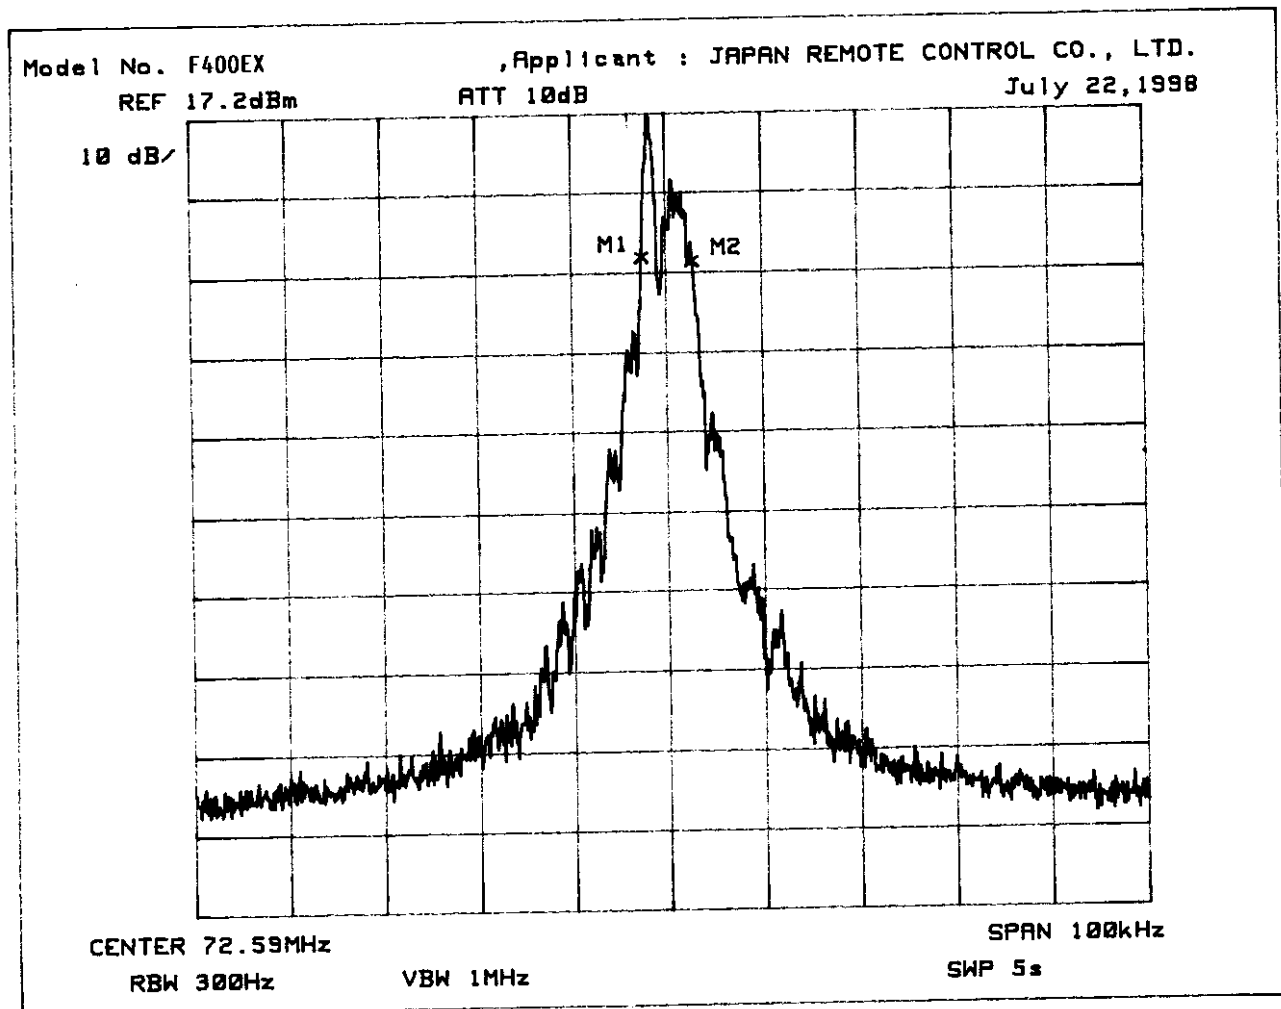

ENGINEERING TEST REPORT


Operation Mode of EUT

Non modulation
[F Low]

Occupied Bandwidth = .9kHz (99% Power)

M1=72.5878MHz(0.5% Power Point)

M2=72.5887MHz(99.5% Power Point)

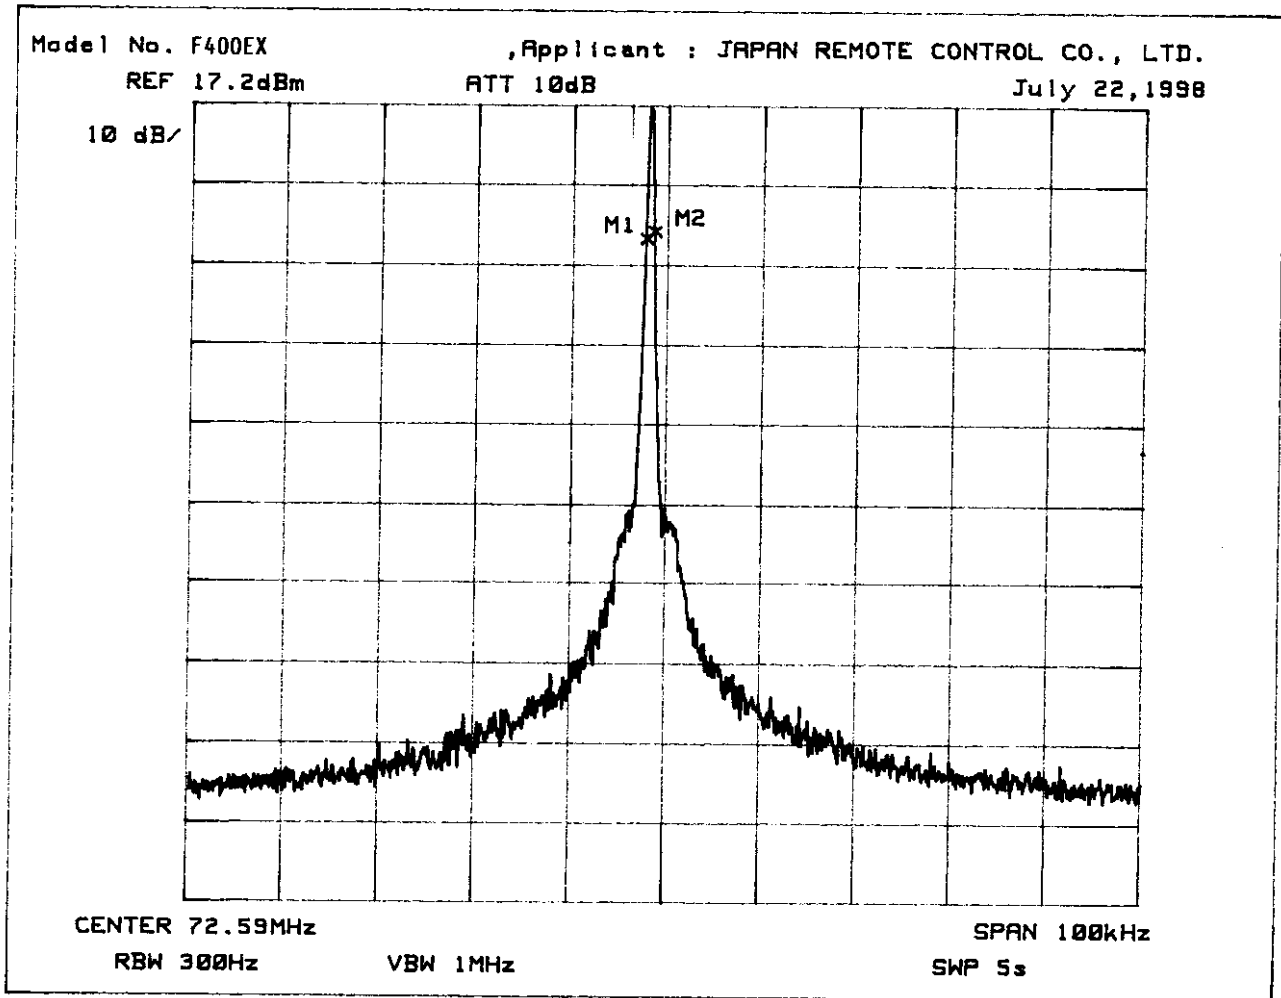

ENGINEERING TEST REPORT


Operation Mode of EUT

Non modulation
[F High]

Occupied Bandwidth = .8kHz (99% Power)

M1=72.5913MHz(0.5% Power Point)

M2=72.5921MHz(99.5% Power Point)

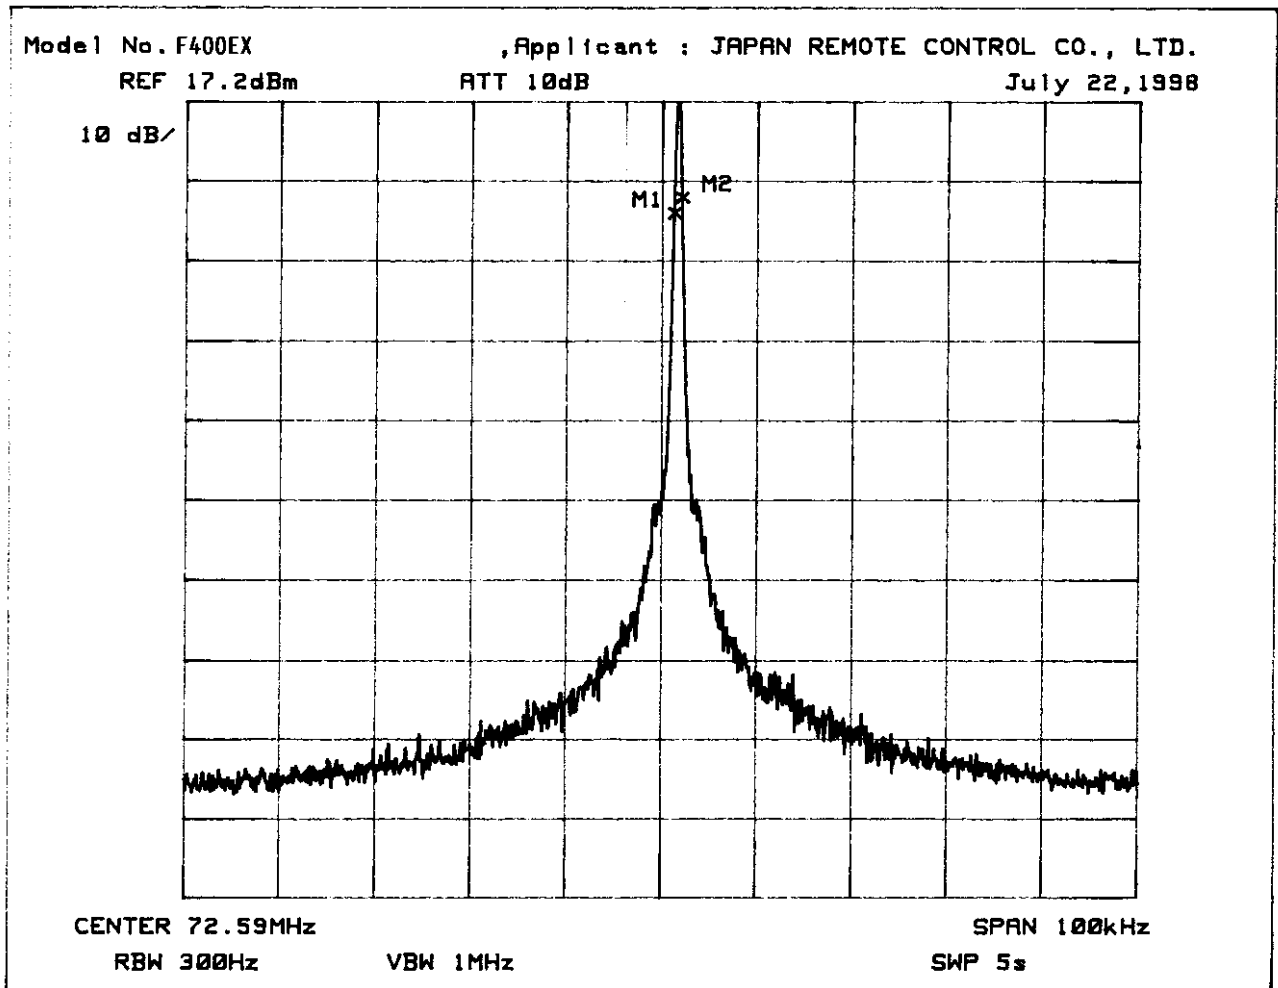

ENGINEERING TEST REPORT

6. FIELD STRENGTH OF SPURIOUS RADIATION

6.1 Reference Rule and Specification

FCC Rule Part 95 [§ 95.631] and Part 2 Subpart J [§ 2.993]

6.2 Test Procedure


- 1) Tune-up the transmitter(EUT).
- 2) Device Vertical : Place the device so that it's longest axis is vertical.
- 3) For each spurious measurement the receiving antenna is adjusted to the correct length for the frequency involved. These measurements are made from the lowest radio frequency generated in the EUT or 25MHz to the tenth harmonic of the carrier.
- 4) For each spurious frequency, raise and lower the receiving antenna to obtain a maximum reading on the spectrum analyzer with the antenna at horizontal polarity. Then the turntable is rotated to further increase this maximum reading. Repeat this procedure of raising and lower the antenna and rotating the turntable until highest possible signal has been obtain. Record this maximum reading.
- 5) Repeat Step4 for each spurious frequency with the antennae polarized vertically.
- 6) Device Horizontal : Place the device so that it's longest axis is horizontal.
- 7) Repeat Step3, Step4, and Step5
- 8) The attenuation of the spurious in dB can be calculated from the following formula:

$$\text{Spurious Attenuation [dB]} = \text{Field Strength of Carrier Emission [dB}\mu\text{V/m]} - \text{Field Strength of Spurious Emission [dB}\mu\text{V/m]}$$

ENGINEERING TEST REPORT

6.3 Test Configuration

[Open Site]

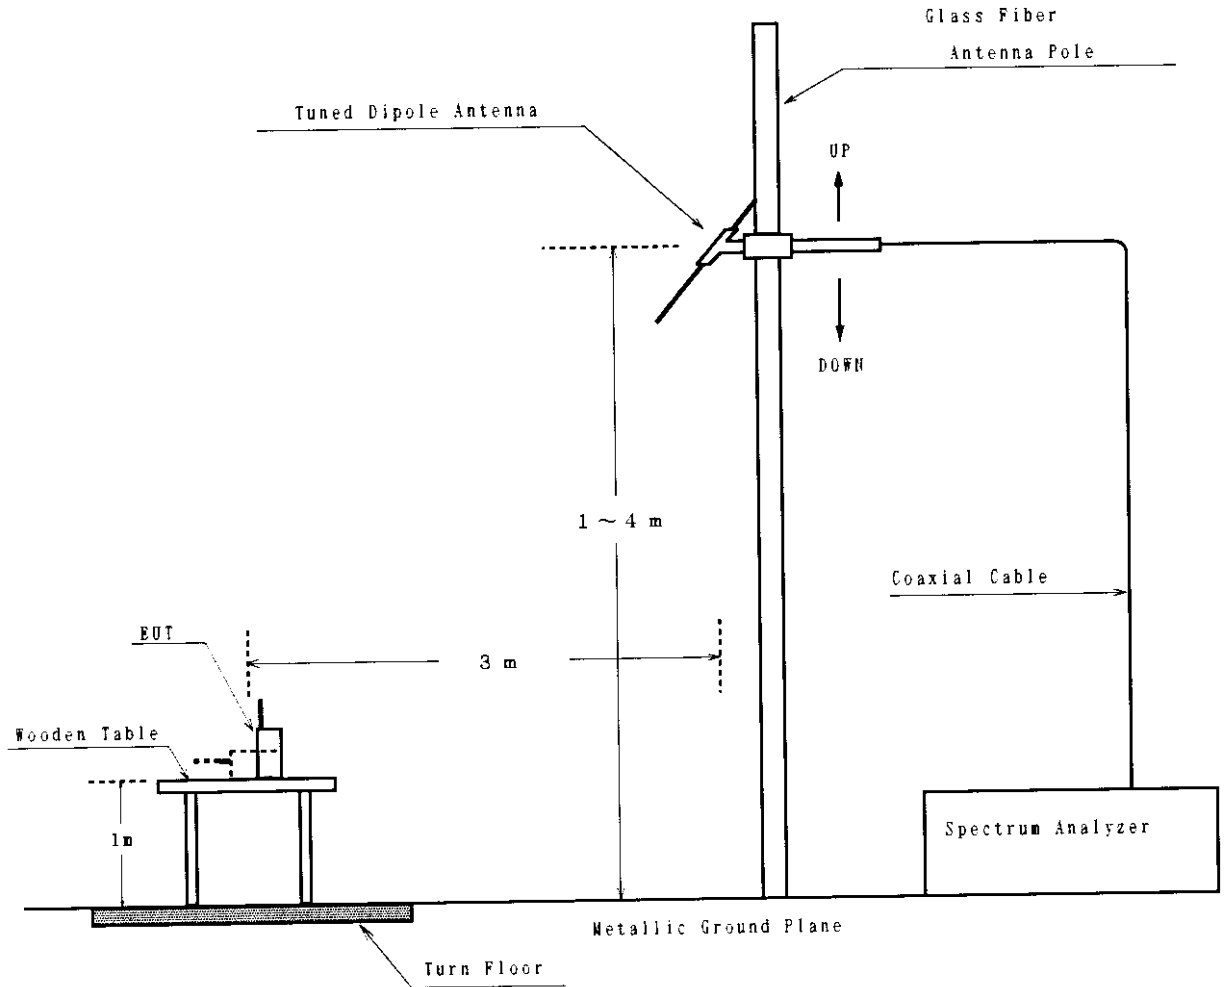

ENGINEERING TEST REPORT

6.5 Test Results

EMISSION FREQUENCY [MHz]	METER READING at 3m [dB μ V]		ANTENNA FACTOR [dB]	MAXIMUM FIELD STRENGTH [dB μ V/m]	ATTENUATION FROM CARRIER [dB]	LIMIT [dB]
	Horiz.	Vert.				
<u>Carrier Emission</u>						
72.590	108.2	105.9	7.8	116.0	—	—
<u>Spurious Emission</u>						
36.295	30.5	38.7	17.7	56.4	59.6	43.2
54.442	34.6	35.8	11.6	47.4	68.6	43.2
90.737	46.1	42.5	10.0	56.1	59.9	43.2
108.885	44.8	39.7	13.7	58.5	57.5	43.2
145.180	46.7	41.9	17.2	63.9	52.1	43.2
217.770	45.5	36.2	20.1	65.6	50.4	43.2
254.065	43.9	36.5	21.5	65.4	50.6	43.2
290.360	36.8	33.3	23.9	60.7	55.3	43.2
326.655	33.5	31.2	18.2	51.7	64.3	43.2
362.950	40.8	37.1	19.2	60.0	56.0	43.2
435.540	32.3	29.8	20.7	53.0	63.0	43.2
508.130	47.7	46.0	22.3	70.0	46.0	43.2
580.720	44.6	39.8	24.5	69.1	46.9	43.2
653.310	34.3	30.9	25.7	60.0	56.0	43.2
725.900	37.9	34.2	26.9	64.8	51.2	43.2

[Note]

Limit of the attenuation of the spurious in dB:

$$56 + 10\text{Log}(\text{Power}) = 56 + 10\text{Log}(0.0526) = 43.2\text{dB}$$

[Environment]

Temperature : 26°C Humidity : 53%

[Summary of Test Results]

Minimum Margin was 2.8 dB at 508.13 MHz, horizontal polarization.

Tested Date : June 17, 1998

Tester Signature

Y. Kawai
Yasunari Kawai

ENGINEERING TEST REPORT


7. FREQUENCY STABILITY MEASUREMENT

7.1 Reference Rule and Specification

FCC Rule Part 95 [§ 95.623] and Part 2 Subpart J [§ 2.995]

7.2 Frequency vs Temperature Test

Test Setup Diagram

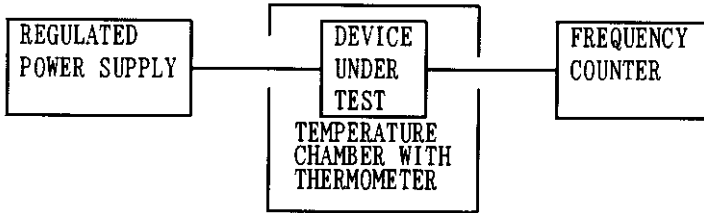

Test Result

Test Voltage: 9.6V

REFERENCE FREQUENCY [MHz]	TEMPERATURE [°C]	FREQUENCY DRIFT [%]	LIMIT [%]
72.590	-30	-0.001701	±0.002
	-20	-0.000951	
	-10	-0.000620	
	0	-0.000269	
	+10	-0.000172	
	+20	-0.000131	
	+30	0.000055	
	+40	0.000234	
	+50	0.000455	

7.3 Frequency vs Voltage Test

Test Setup Diagram : Same as (1)

Test Result

Temperature : +20°C

REFERENCE FREQUENCY [MHz]	SUPPLIED VOLTAGE [Volt]	FREQUENCY DRIFT [%]	LIMIT [%]
72.590	9.0	-0.000090	±0.002

Note Reduced primary supply voltage to the operating and point which shall be specified by the manufacturer.

[Environment] Temperature : 25°C Humidity : 55%

[Summary of Test Results]

Above data shows that the test device complies with the requirements.

Tested Date : June 22-23, 1998

Tester Signature

Y. Kawai
Masunari Kawai

ENGINEERING TEST REPORT

8. LIST OF TEST INSTRUMENTS

Instrument	Manufacturer	Model No	Specifications	KEC Control No.	if used, checked by "X".	Last Cal.	Next Cal.
Test Receiver	Rohde & Schwarz	ESVP	Frequency Range 20 MHz - 1.3 GHz	FS-48-3	<input type="checkbox"/>	1998/5	1999/5
Spectrum Analyzer	Advantest	TR4172	Frequency Range 50 Hz - 1.8 GHz	FS-44-2	<input checked="" type="checkbox"/>	1998/5	1999/5
Pre-Selector	Advantest	TR14037	Frequency Range 10 kHz - 1.0 GHz	FS-44-3	<input checked="" type="checkbox"/>	1998/5	1999/5
Biconical Antenna	Schwarzbeck	BBA9106	Frequency Range 30 MHz - 300 MHz	AN-80	<input checked="" type="checkbox"/>	1998/2	1999/2
Log-Periodic Antenna	Schwarzbeck	UHALP 9107	Frequency Range 300 MHz - 1 GHz	AN-97	<input checked="" type="checkbox"/>	1998/2	1999/2
Tuned Dipole Antenna	Kyoritsu	KBA-511AS	Frequency Range 25 MHz - 500 MHz	AN-112	<input checked="" type="checkbox"/>	1998/3	1999/3
		KBA-611S	Frequency Range 500 MHz - 1 GHz	AN-7-11	<input type="checkbox"/>	1998/3	1999/3

ENGINEERING TEST REPORT

- Continued -

Instrument	Manufacturer	Model No	Specifications	KEC Control No.	if used, checked by "X".	Last Cal.	Next Cal.
Tuned Dipole Antenna	Kyoritsu	KBA-511S	Frequency Range 25 MHz - 500 MHz	AN-7-5	<input checked="" type="checkbox"/>	1998/3	1999/3
	Kyoritsu	KBA-611S	Frequency Range 500 MHz - 1 GHz	AN-7-16	<input type="checkbox"/>	1998/3	1999/3
Signal Generator	Wiltron	6759A-10	Frequency Range 10 MHz - 26.5 GHz	SG-38	<input type="checkbox"/>	1997/9	1998/9
		6769B	Frequency Range 10 MHz - 40.0 GHz	SG-42	<input type="checkbox"/>	1997/9	1998/9
	Anritsu	MG3601A	Frequency Range 0.1 MHz - 1040 MHz	SG-40	<input type="checkbox"/>	1997/9	1998/9
				SG-41	<input checked="" type="checkbox"/>	1997/9	1998/9
Power Amp.	ENI	601L	Frequency Range 0.8 MHz - 1 GHz	AM-24	<input type="checkbox"/>	1998/6	1999/6
		411LA	Frequency Range 0.15 MHz - 300 MHz	AM-25	<input checked="" type="checkbox"/>	1998/6	1999/6
	Amplifier Research	100W1000 M1	Frequency Range 80 MHz - 1 GHz	AM-55	<input type="checkbox"/>	1997/6	1998/6
RF Millivolt-meter	Rohde & Schwarz	URV5	Frequency Range 10 kHz - 2 GHz	VV-24	<input type="checkbox"/>	1998/3	1999/3
				VV-28	<input type="checkbox"/>	1998/3	1999/3
				VV-29	<input checked="" type="checkbox"/>	1998/3	1999/3
				VV-32	<input type="checkbox"/>	1998/3	1999/3
Coaxial Cable	KEC	5D2W	Length : 27m N - N	CL-33	<input type="checkbox"/>	1998/3	1999/3
			Length : 35m N - N	CL-34	<input type="checkbox"/>	1998/3	1999/3
	Suhner	SUCOFLEX 104	Length : 1m [SMA(p)-SMA(p)]	CL-42	<input type="checkbox"/>	1998/2	1999/2
			Length : 10m [SMA(p)-SMA(p)]	CL-45	<input type="checkbox"/>	1998/2	1999/2
				CL-46	<input checked="" type="checkbox"/>	1998/2	1999/2
Attenuator	Weinschel Engineering	2	Frequency Range 1 MHz - 20 GHz -20 dB	AT-42-2	<input type="checkbox"/>	1998/2	1999/2

ENGINEERING TEST REPORT

- Continued -

Instrument	Manufacturer	Model No	Specifications	KEC Control No.	if used, checked by "K".	Last Cal.	Next Cal.
Regulated DC Power Supply	Kikusui	PAB18-3A	Output 0~18V, 3A	PD-32	<input checked="" type="checkbox"/>	—	—
Temperature Chamber with Thermometer	Tabai Mfg.	MC-710	Temperature Range -75 - +100 °C	CH-31	<input checked="" type="checkbox"/>	—	—
Frequency Counter	Advantest	TR5823H	Freq. Range 1 MHz-1300 MHz	CU-17	<input checked="" type="checkbox"/>	1998/5	1999/5
Spectrum Analyzer	Advantest	TR4172	Frequency Range 50 Hz - 1.8 GHz	SA-27	<input checked="" type="checkbox"/>	1997/8	1998/8
Digital Plotter	Hewlett Packard	7090A	Plot Area A3 size	RE-17	<input checked="" type="checkbox"/>	—	—
Multimeter	John Fluke	37	Volt Range 0.1mV - 1000 V Ampere Range 0.01 mA - 20 A	MM-91	<input checked="" type="checkbox"/>	1998/3	1999/3
Personal Computer	Hewlett Packard	9121	Memory 512kB Language BASIC	PC-38-2	<input checked="" type="checkbox"/>	—	—
Digital Oscilloscope	Matsushita Communication Ind.	VP-5740A	Frequency Range DC -10 MHz	OS-22	<input checked="" type="checkbox"/>	1998/5	1999/5