

Maritime Broadband Radio

Kongsberg Seatex



KONGSBERG

Outline



KONGSBERG

- Wireless communication in a maritime environment
- A smart antenna solution
- Test results
- Conclusion



KONGSBERG


Maritime communication requirements

A communication solution must...

- ... be reliable with a minimum loss of data packets
- ... be designed to work well in a maritime environment
- ... be able to communicate simultaneously over short and long distances
- ... work even when signal path is obstructed by large vessels
- ... be easy to operate, maintain and install

Maritime communication problem 1

- Flat sea fading
- Caused by out-of-phase Fresnel zone interference

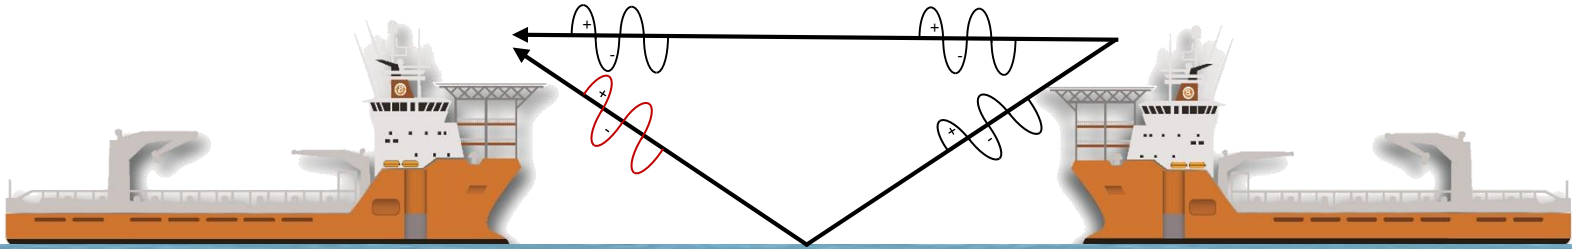

Maritime communication problem 2

- Two vessels located close to each other and a third vessel located far away
- Communication needed simultaneously between all vessels, even when one is beyond line-of-sight




Maritime communication problem 3



KONGSBERG


- Large object in the signal path between communicating vessels
- Radio communication effectively blocked in a worst-case scenario

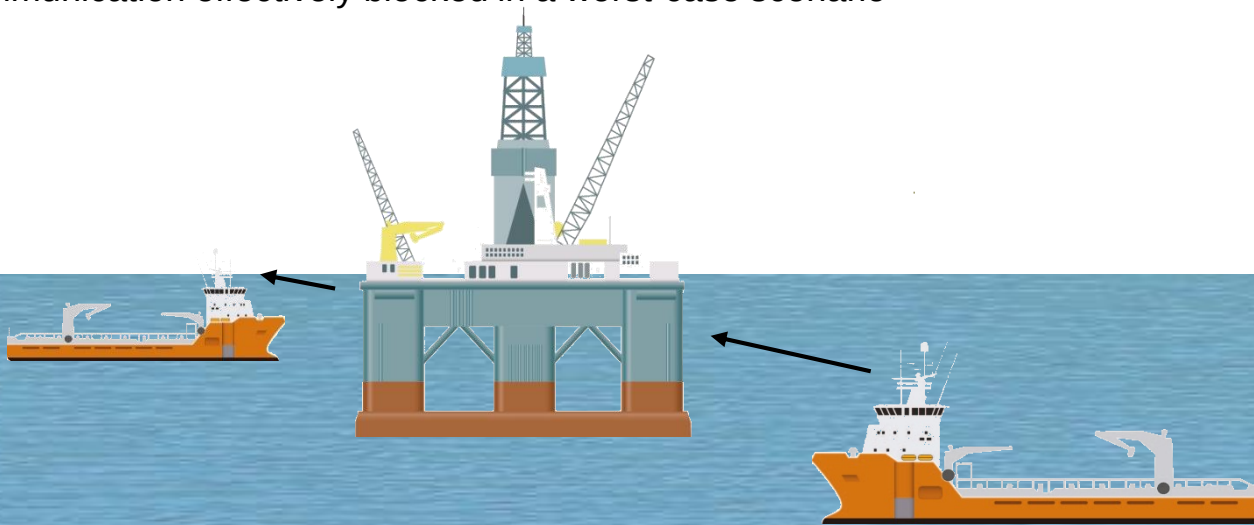



KONGSBERG

A smart antenna solution

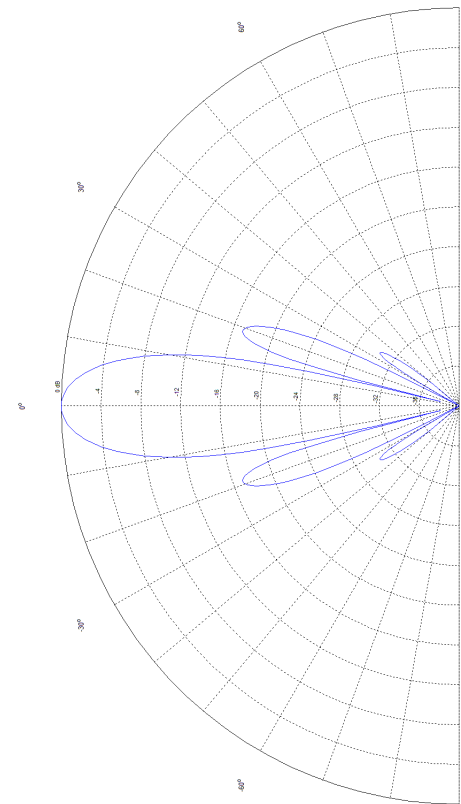


Increasing range by focusing the radio beam

- Increasing the antenna gain will increase the radio range :

$$P_{RX} = P_{TX} + G_{TX} - L_{TX} - L_{FS} - L_M + G_{RX} - L_{RX}$$

- Many traditional designs, but knowing where the direction to the transmitted signal is needed

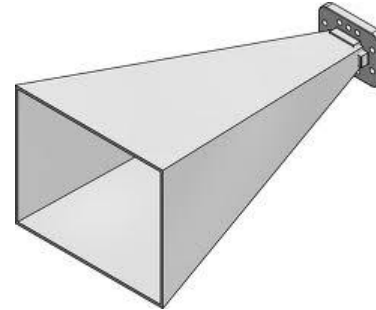

Beam forming by antenna arrays




KONGSBERG

- With a phased array antenna the radio beam can be shaped to increase gain in specific directions
- The beam can be focused instantaneously by software both for transmission and reception



Example of phased array radar antenna found on the Internet

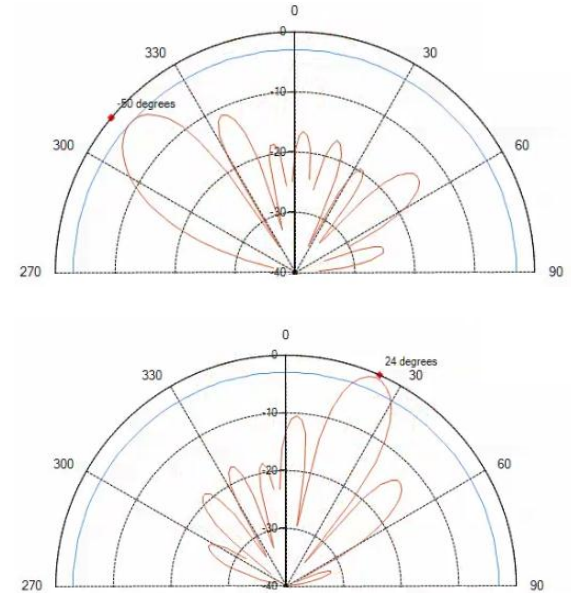

Beam forming radiation patterns



A smart antenna


- Combining up to 60 antenna elements in one antenna panel
- Simulations and experiments used to find optimal geometry
- Enables instantaneous beam forming and spatial addressing
- Compact size
- High gain

Smart antennas are antenna arrays with signal processing used to identify spatial signal signatures such as the direction of arrival of the signal, and use it to calculate beam-forming vectors, to track and locate the antenna beam on the target.



Parallel signal processing


- Massive parallel processing by use of up to 17 FPGAs handling a real-time data stream of 40 Gbps
- Operating in 5 GHz frequency band
- Real-time signal processing
- Up to 60 independent transceivers
- Fail tolerant design

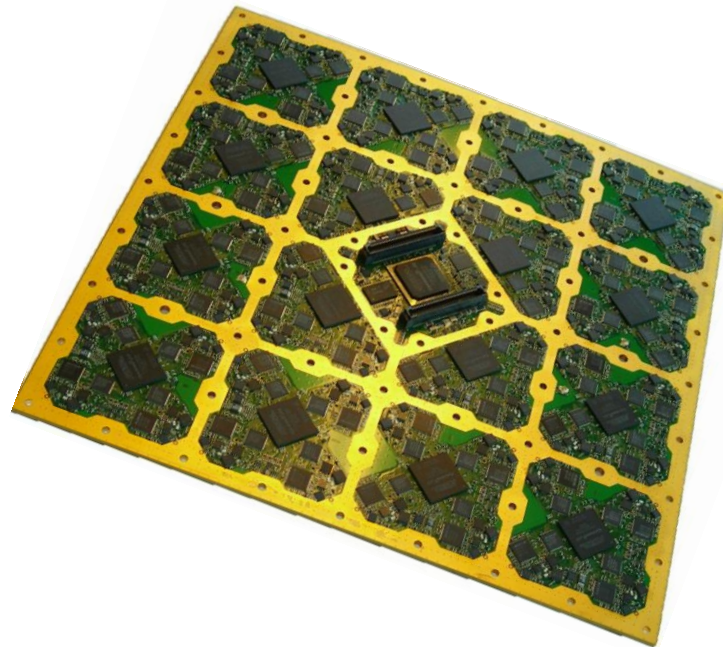

Beamforming



KONGSBERG

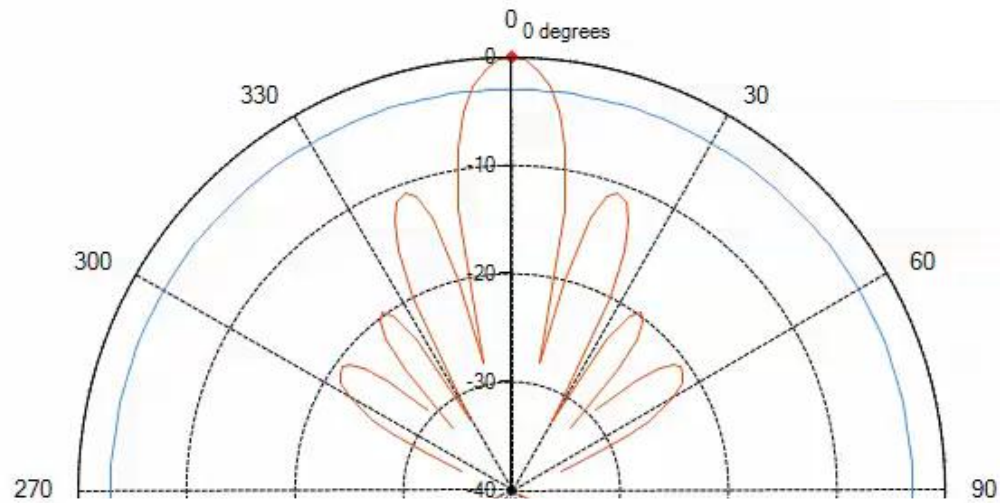


Managing the communication protocol



KONGSBERG

- In most Wi-Fi solutions the underlying protocol is invisible to the user
- Optimizing the basic protocol is complex but allows several improvements (adapting the MAC/PHY layers)
- Improved real-time capability
- Improved bandwidth utilization
- More optimal priorities between data types
- Avoiding data telegram collisions (interference)

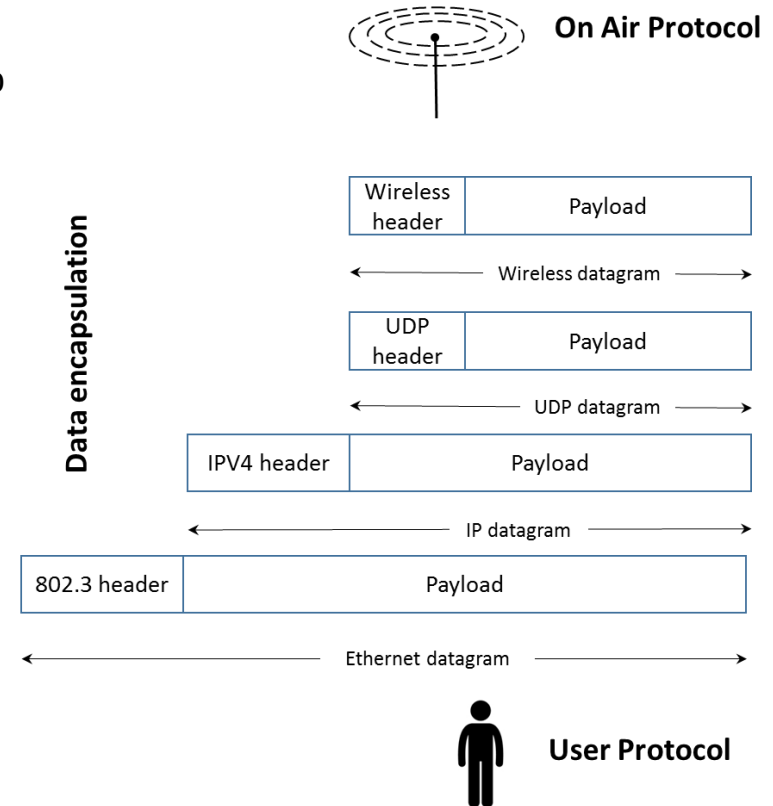

A wireless distribution system



KONGSBERG

- Several smart antenna nodes (MBR) can form a wireless distribution system to support maritime operations
- Each node can be connected to several clients by a standard IP subnet (Ethernet)
- Seamless communication between nodes (MBR units)
- Can offer virtual IP tunnels between vessels





KONGSBERG

Test results


Flat sea fading



KONGSBERG




*Testing flat sea fading on a freezing day
in Trondheim, Norway*

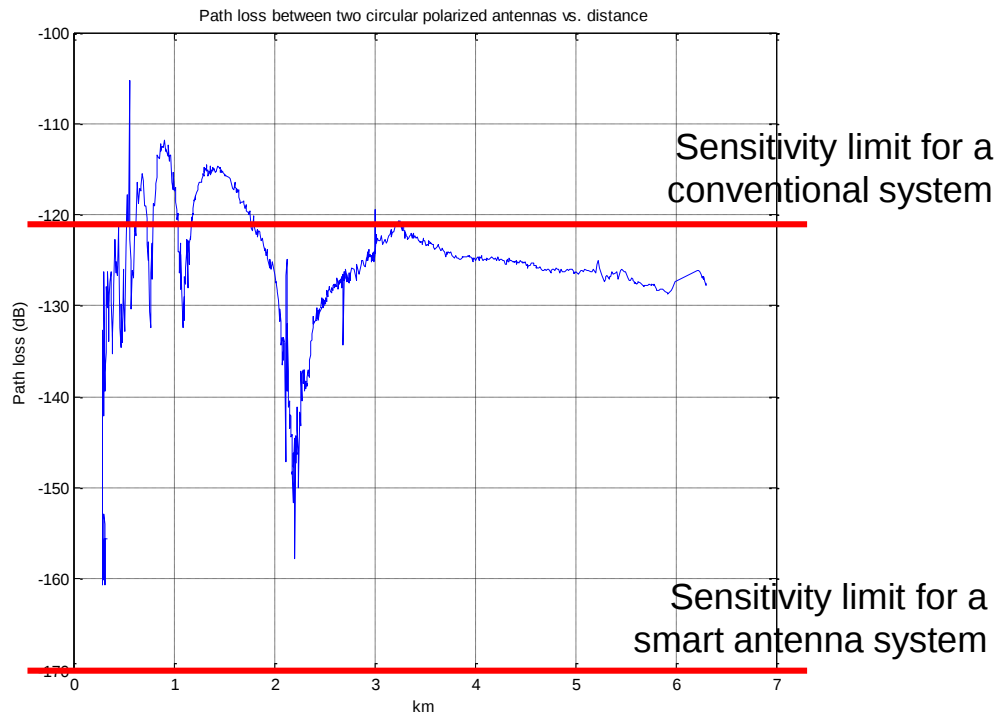

Flat sea fading – 4km to 0km



KONGSBERG

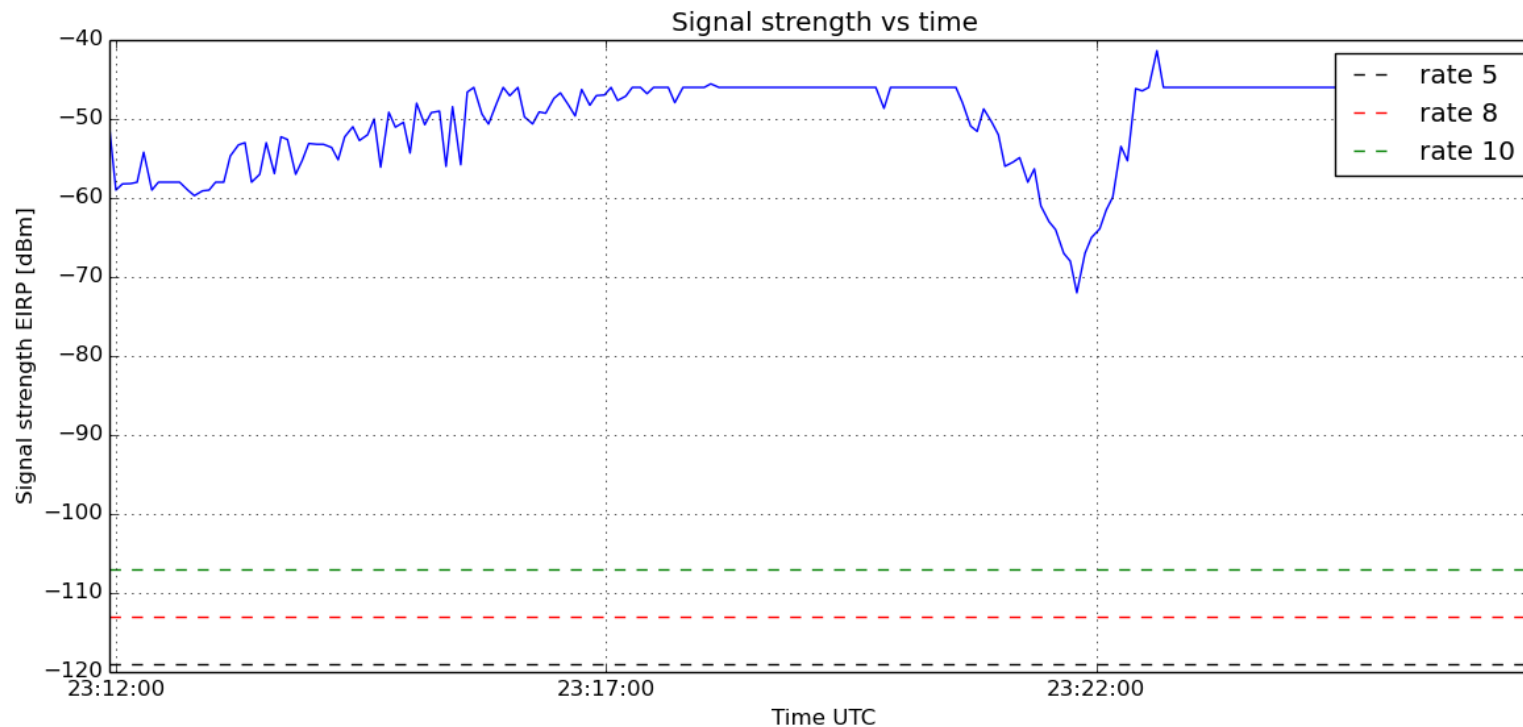



Throughput test in difficult conditions



KONGSBERG

2 Mbps


1 Mbps

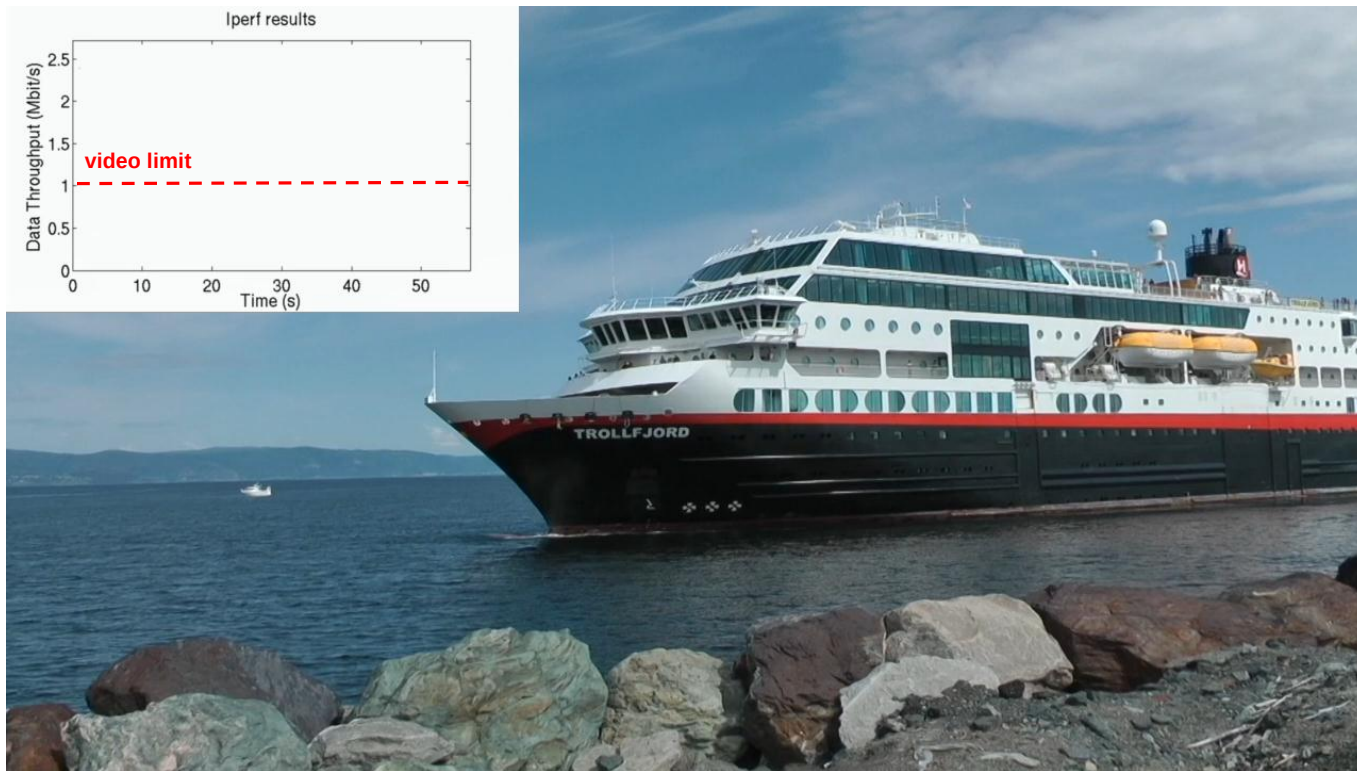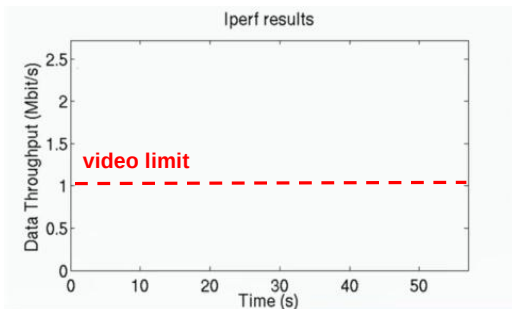

Communication beyond line-of-sight




KONGSBERG

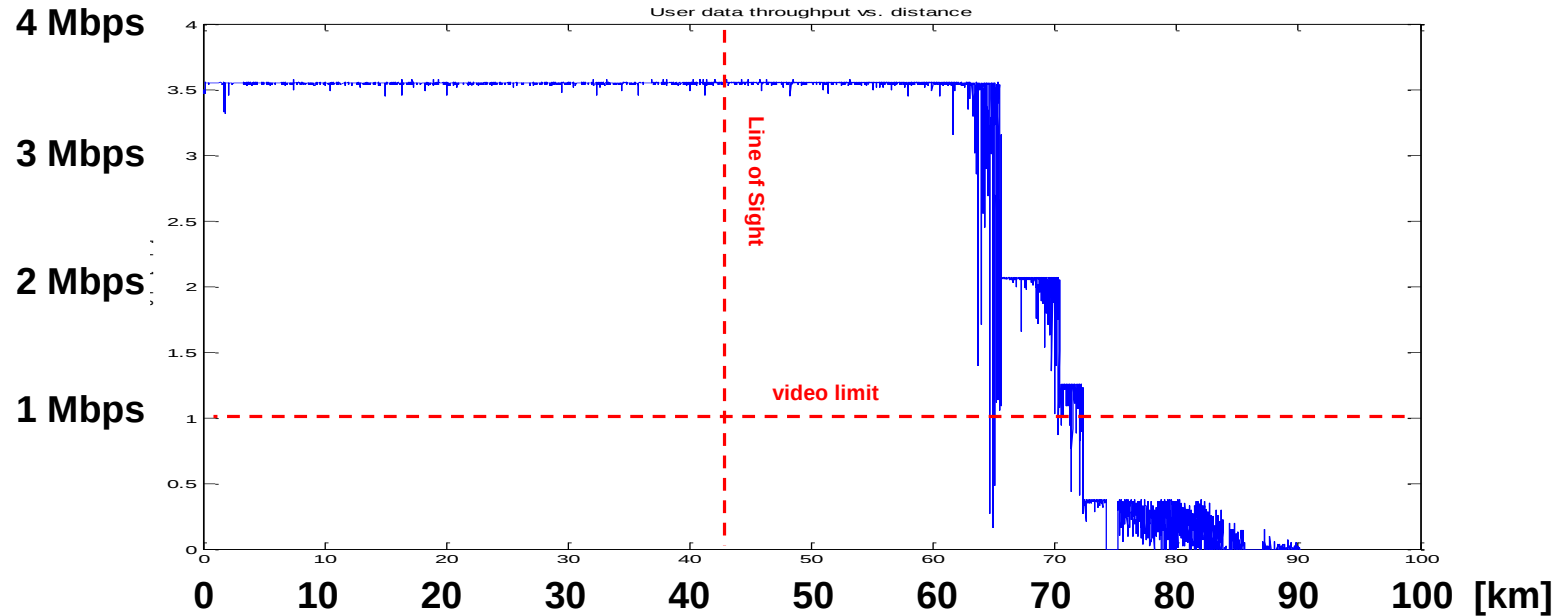

Communication beyond line-of-sight – 7Mbps




KONGSBERG

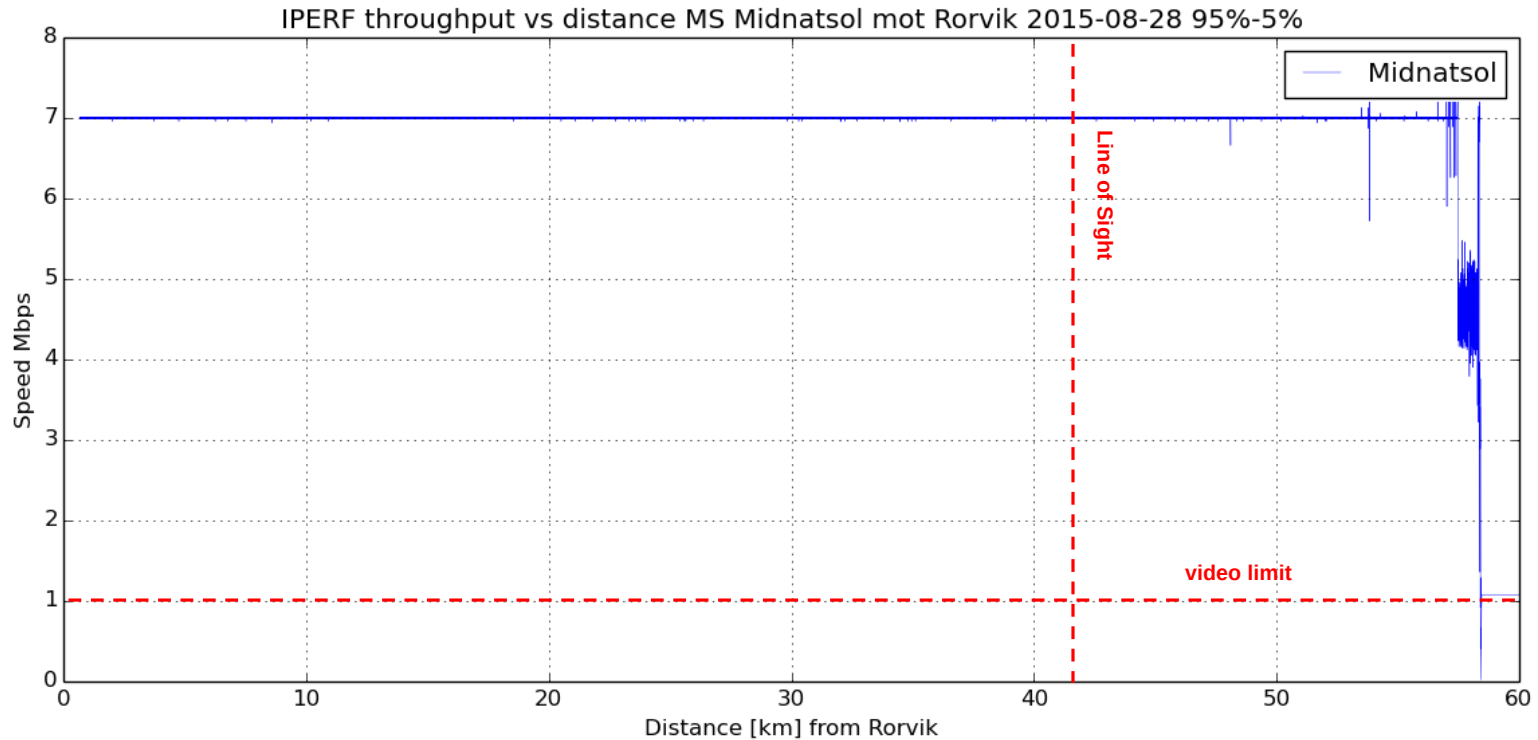




Communication beyond line-of-sight – 15Mbps

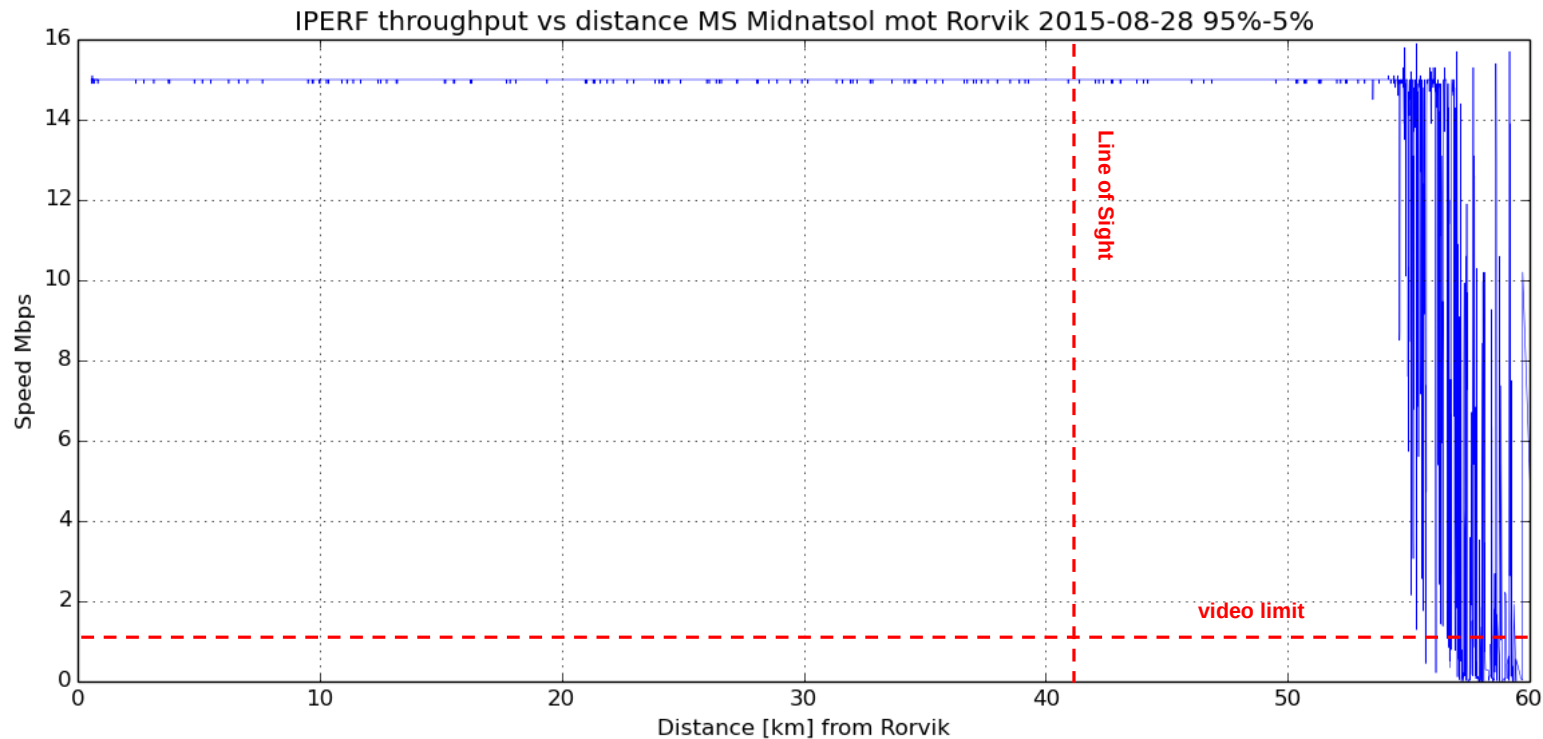

MBR System

2.2 System diagram

A basic system diagram is provided.

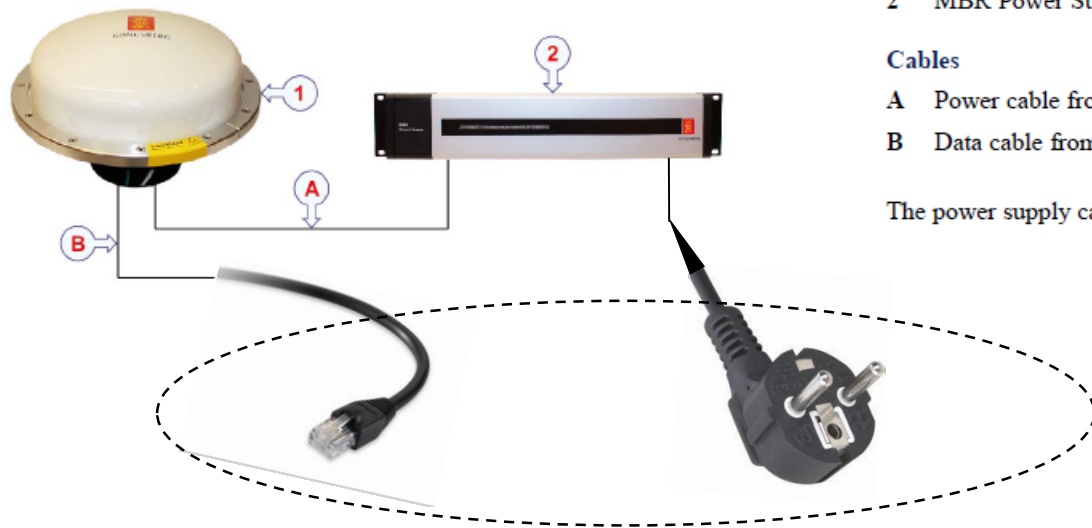

Units

- 1 MBR Radio Unit
- 2 MBR Power Supply

Cables

- A Power cable from Radio Unit to power supply
- B Data cable from Radio Unit to user equipment

The power supply can supply power to two MBR units.

MBR Products



KONGSBERG

- **MBR 189**
 - High gain version for vertical installation
- **MBR 179**
 - High gain omnidirectional version for horizontal installation
- **MBR 144**
 - Portable mobile version



MBR Products



KONGSBERG

...more numbers

	Number of transceivers / Antenna type	Tx power [W]	Antenna gain [dBi] / Max EIRP [W]	Range [km]	Operational area
MBR 189	60 / Helix	6	24 / 1500	> 50 km	100° Horizontal and Vertical
MBR 179	60 / Monopole	6	21 / 800	> 45 km	360°
MBR 144	4 / Monopole	2	9 / 31	> 15 km	360°

kongsberg.com



KONGSBERG