

APPLICATION FOR FCC CERTIFICATION
BZ5MX100U
MODULATOR INPUT
100 WATT UHF TRANSLATOR

EXHIBIT 1

PAGE 4

AUDIO FREQUENCY RESPONSE
REFERENCE 50Hz AT 0dB INTO 600 OHMS

FREQUENCY(Hz)	MODULATION	
	50%	100%
50	0	0
100	-1.45	-1.47
400	-1.41	-1.49
1000	+1.81	+2.29
5000	+7.25	+9.67
10000	+12.07	+14.84
15000	+14.84	+17.67

Tabulated below are the audio harmonic distortion measurements.

AUDIO HARMONIC DISTORTION LEVEL (%)

FREQUENCY(Hz)	MODULATION	
	50%	100%
50	3.44	1.53
100	3.39	1.49
400	3.32	1.48
1000	3.37	1.44
5000	3.27	1.41
10000	*	1.43
15000	*	1.29

* Distortion measurements above 7.5kHz at 50% modulation levels are impractical.

The output noise level (FM measured as prescribed in the band of 50 to 15000Hz) was 55dB below the level representing ± 25 kHz frequency swing.

The system noise output (AM) in the same band was 50dB below the level representing 100% amplitude modulation.

The output noise measurement had to be performed with the visual carrier operative because of the translator's common visual/aural amplifiers.

PART 74.750(d)(2):

The modulator of this translator will accept audio from the microwave television translator relay station in one of two possible ways. First, when the microwave signal carrier the audio at a separation of 4.5MHz, it will be passed through the translator's modulator multiplexed on the video. Frequency spacing, deviation, and other characteristics including distortion are therefore determined solely by the originating television station.

APPLICATION FOR FCC CERTIFICATION
BZ5MX100U
MODULATOR INPUT
100 WATT UHF TRANSLATOR

EXHIBIT 1

PAGE 5

The sound carrier deviation was monitored while the frequency vs. temperature measurements were taken, see Exhibit 4a. The equipment meets the ± 1 kHz requirement.

APPLICATION FOR FCC CERTIFICATION
 BZ5MX100U
 MODULATOR INPUT
 100 WATT UHF TRANSLATOR

EXHIBIT 4a

FREQUENCY DRIFT VS. TEMPERATURE
 M369 MODULATOR

DEGREES C	MEASURED LO FREQUENCY(Hz)		DEVIATION(Hz)	DEVIATION(%)
+50	513,242,872		-8,408	-0.001638
+40	513,245,838		-5,442	-0.001060
+30	513,249,389		-1,891	-0.000368
+25	513,251,280	REF	0	+0.0000
+20	513,253,253		+1,973	+0.000384
+10	513,256,980		+5,700	+0.001111
0	513,260,002		+8,722	+0.001699
-10	513,262,250		+10,970	+0.002137
-20	513,263,765		+12,485	+0.002432
-30	513,264,088		+12,808	+0.002495

APPLICATION FOR FCC CERTIFICATION
BZ5MX100U
MODULATOR INPUT
100 WATT UHF TRANSLATOR

EXHIBIT 8

Power requirements for the 100 Watt UHF Translator were determined as follows:

1. The translator's visual power meter measures the peak visual power by reading the average levels of a detected sample of the output. The meter is calibrated by multiplying the above visual power reading by 168%. The visual metering circuitry has a negligible response to the aural power due to the large (>10MHz) detector bandwidth. When the detector bandwidth is this large, the detector does not peak detect the intercarrier beat product.
2. The aural power is measured by reading the peak level of the detected 4.5MHz intercarrier product. The level of this product has a direct correspondence to the aural power and is independent of the visual power as long as the peak visual power exceeds the aural power. This is always true for normal operation.

BZ5MX100U
POWER MEASUREMENTS

MEASURED VISUAL POWER	MEASURED AURAL POWER	SUPPLY CURRENT TO OUTPUT DEVICES VISUAL ONLY	SUPPLY CURRENT TO OUTPUT DEVICES VISUAL & AURAL
NOTE 1	NOTE 2	NOTE 3	NOTE 3
59.5 WATTS	5.95 WATTS	13 AMPS	13 AMPS

NOTE 1: Measured on the Model 43 Bird Wattmeter with the visual carrier modulated by the standard synchronizing signal at 75% of peak amplitude and the aural carrier disabled.

NOTE 2: Measured on the Model 43 Bird Wattmeter with the visual carrier disabled.

NOTE3: The voltage across the output devices on all models is +28 volts. The output devices are operated Class A.

APPLICATION FOR FCC CERTIFICATION
 BZ5MX100U
 MODULATOR INPUT
 100 WATT UHF TRANSLATOR

EXHIBIT 9

ATTENUATION VS. FREQUENCY

MODULATING FREQUENCY REF = VISUAL CARRIER(MHz)	UPPER SIDE BAND	LOWER SIDE BAND	FCC LIMIT(dB)	FCC LIMIT(dB)
		Reference		
+0.2	0	-	-	-
-0.5	-0.5	-	-	-
+0.5	-0.1	-	-	-
+1.25	-0.3	-20	>-20	>-20
+2.0	-0.4	-36	>-20	>-20
+2.5	-0.4	-40	>-20	>-20
+3.0	-0.3	-42	>-20	>-20
+3.5	-0.3	-42	>-20	>-20
+3.58	-0.2	-44	>-42	>-42
+4.1	-0.3	-46	>-20	>-20
+4.18	-0.2	-46	>-20	>-20
+4.75	-20	>-20 -50	>-20	>-20
+5.0	-20	>-20 -50	>-20	>-20
+6.0	-50	>-20 -50	>-20	>-20
+7.0	-50	>-20 -50	>-20	>-20
+8.0	-50	>-20 -50	>-20	>-20
+9.0	-50	>-20 -50	>-20	>-20
+10.0	-50	>-20 -50	>-20	>-20


APPLICATION FOR FCC CERTIFICATION
BZ5MX100U
MODULATOR INPUT
100 WATT UHF TRANSLATOR

EXHIBIT 10a

UM700A Video Measurement Set

Channel A System Default

12-Feb-02 11:31:59

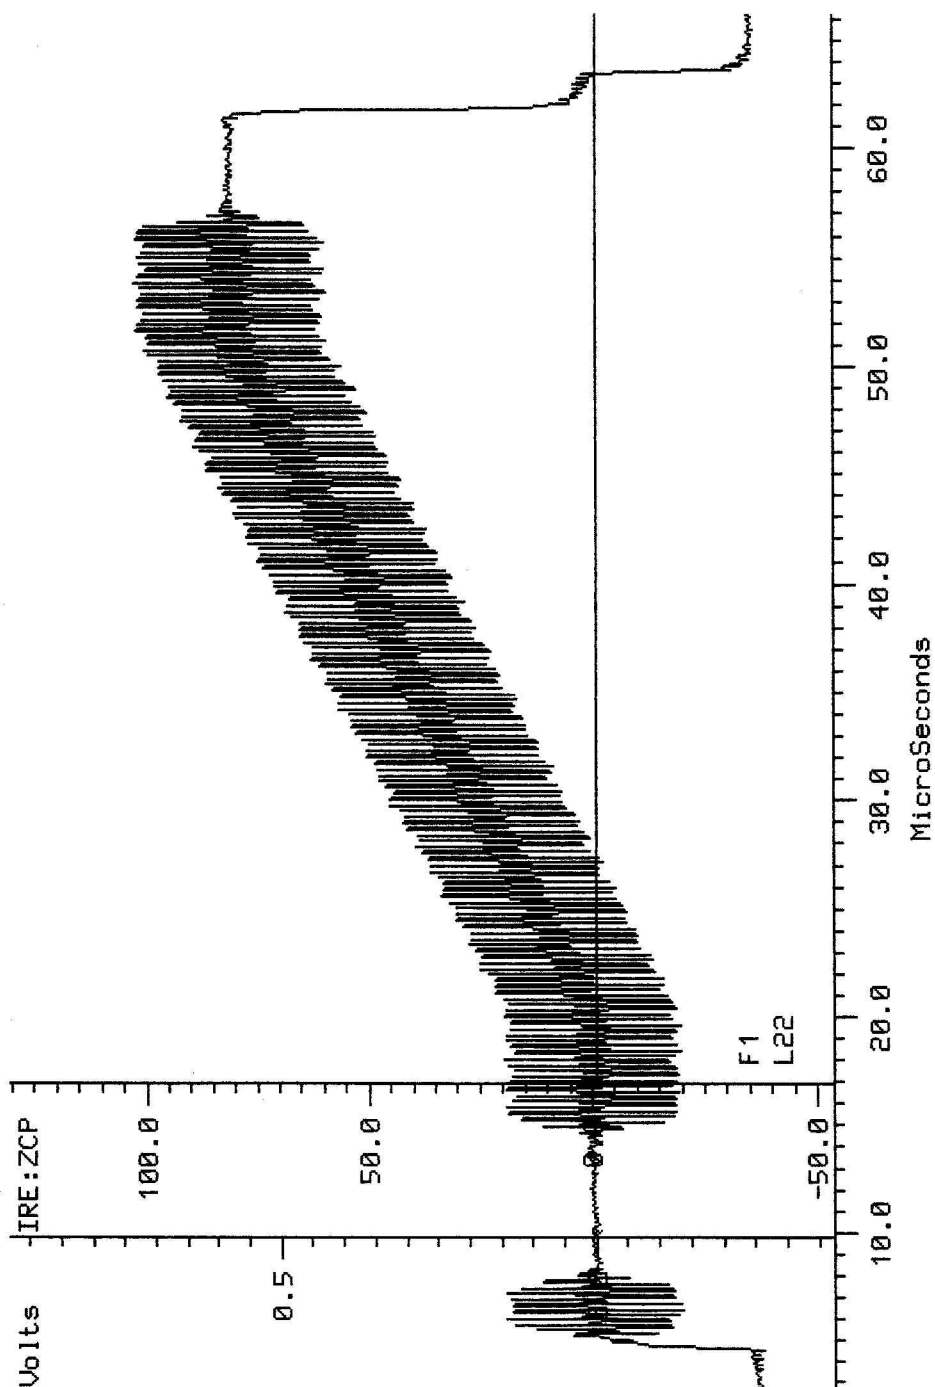

APL = 41.1%
525 line NTSC No Filtering
Slow clamp to 0.00 V at 6.63 μ S

Precision Mode Off
Synchronous Sync = Source
Frames selected: 1 2


APPLICATION FOR FCC CERTIFICATION
BZ5MX100U
MODULATOR INPUT
100 WATT UHF TRANSLATOR

EXHIBIT 10b

UM700A Video Measurement Set

Channel A System Default

12-Feb-02 11:30:25

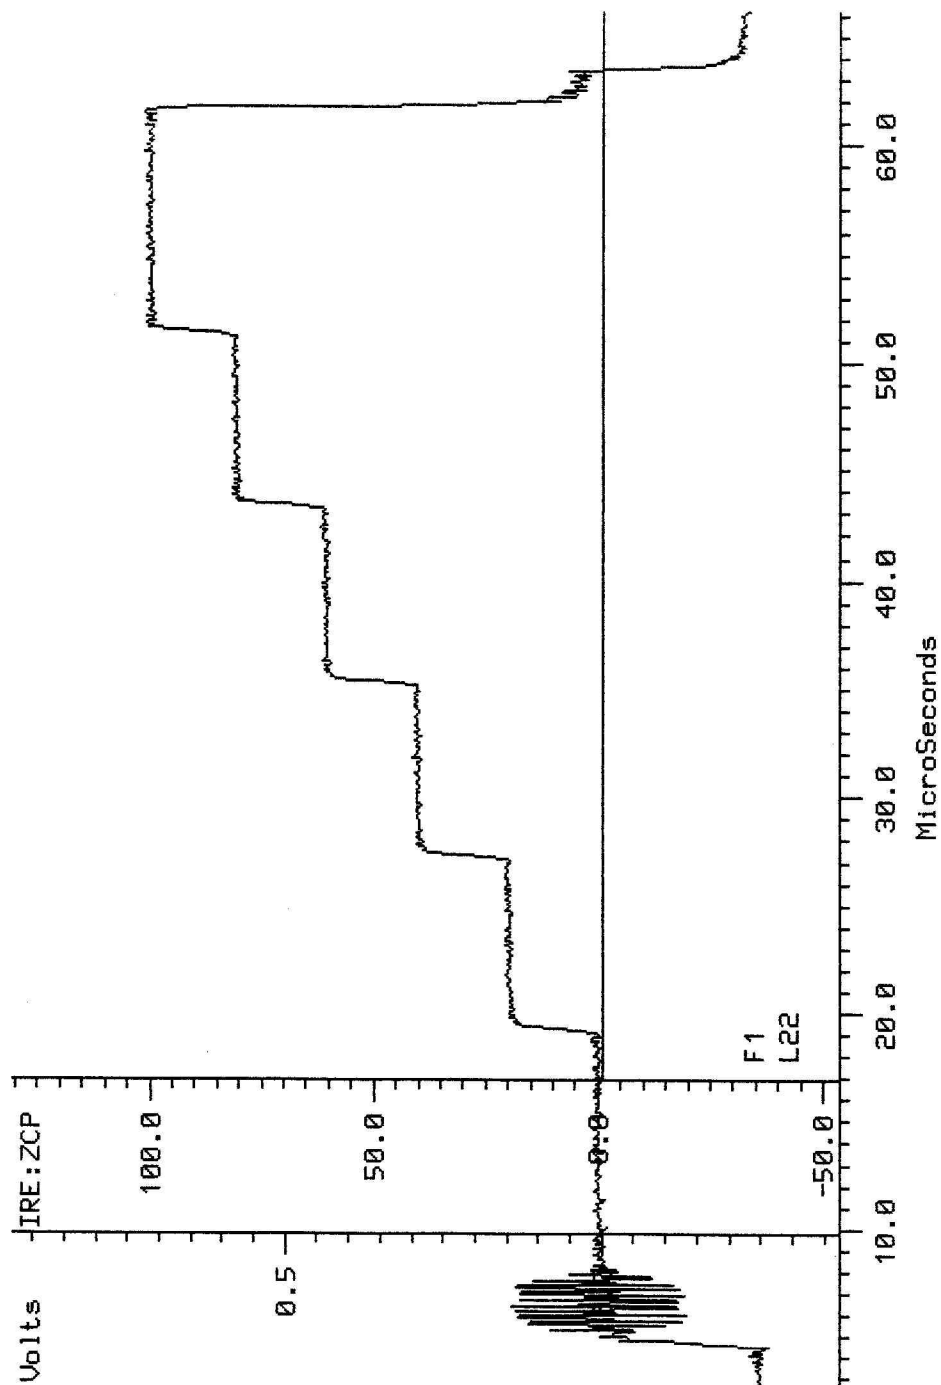

APL = 51.2%
525 line NTSC No Filtering
Slow clamp to 0.00 V at 6.63 uS

Precision Mode Off
Synchronous Sync = Source
Frames selected: 1 2

APPLICATION FOR FCC CERTIFICATION
 BZ5MX100U
 MODULATOR INPUT
 100 WATT UHF TRANSLATOR

VM700A Video Measurement Set

22-Jan-02 16:04:47

Channel A System Default

DG DP (NTSC) Wfm --> FCC Composite
 Field = 1 Line = 18 (Synchronous)
 Differential Gain (%) min = 0.00 max = 1.94 p-p/max = 1.91
 0.00 1.30 1.57 1.47 1.59 1.94

EXHIBIT 10c


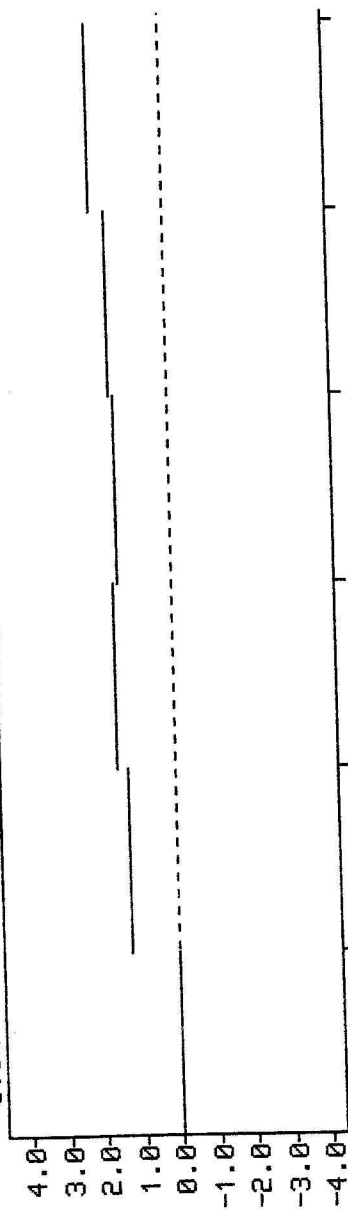


EXHIBIT 10d

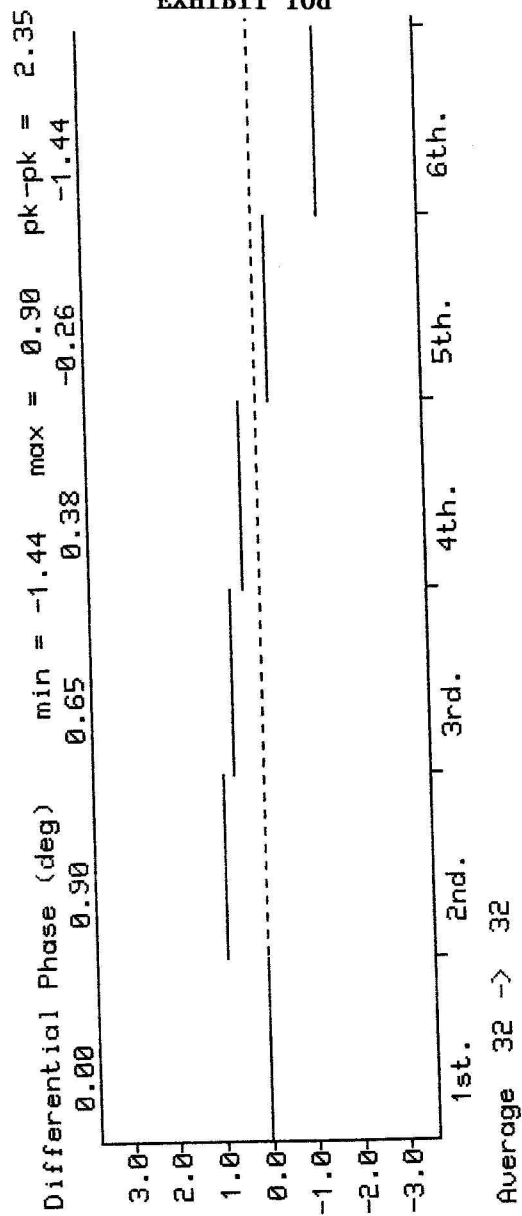

APPLICATION FOR FCC CERTIFICATION
BZ5MX100U
MODULATOR INPUT
100 WATT UHF TRANSLATOR

EXHIBIT 11a

OVERALL GROUP DELAY

FREQUENCY(MHz)	OVERALL DELAY(nS)
0.20	0 (Reference)
0.40	-30
0.60	-30
0.80	-50
1.0	-55
1.20	-55
1.40	-30
1.60	-45
1.80	-30
2.0	-45
2.20	-30
2.40	-20
2.60	-30
2.80	-10
3.0	-60
3.20	-55
3.40	-120
3.58	-160
3.80	-240
4.0	-300
4.18	-320

APPLICATION FOR FCC CERTIFICATION
BZ5MX100U
MODULATOR INPUT
100 WATT UHF TRANSLATOR

EXHIBIT 11b

UM700A Video Measurement Set

Channel A System Default


24-Jan-02 08:50:58


Wfm --> Sin X/X


Group Delay & Gain (NTSC)

Field = 1 Line = 22 (Synchronous)

Amplitude (dB) (Ref. at 0.20 MHz)

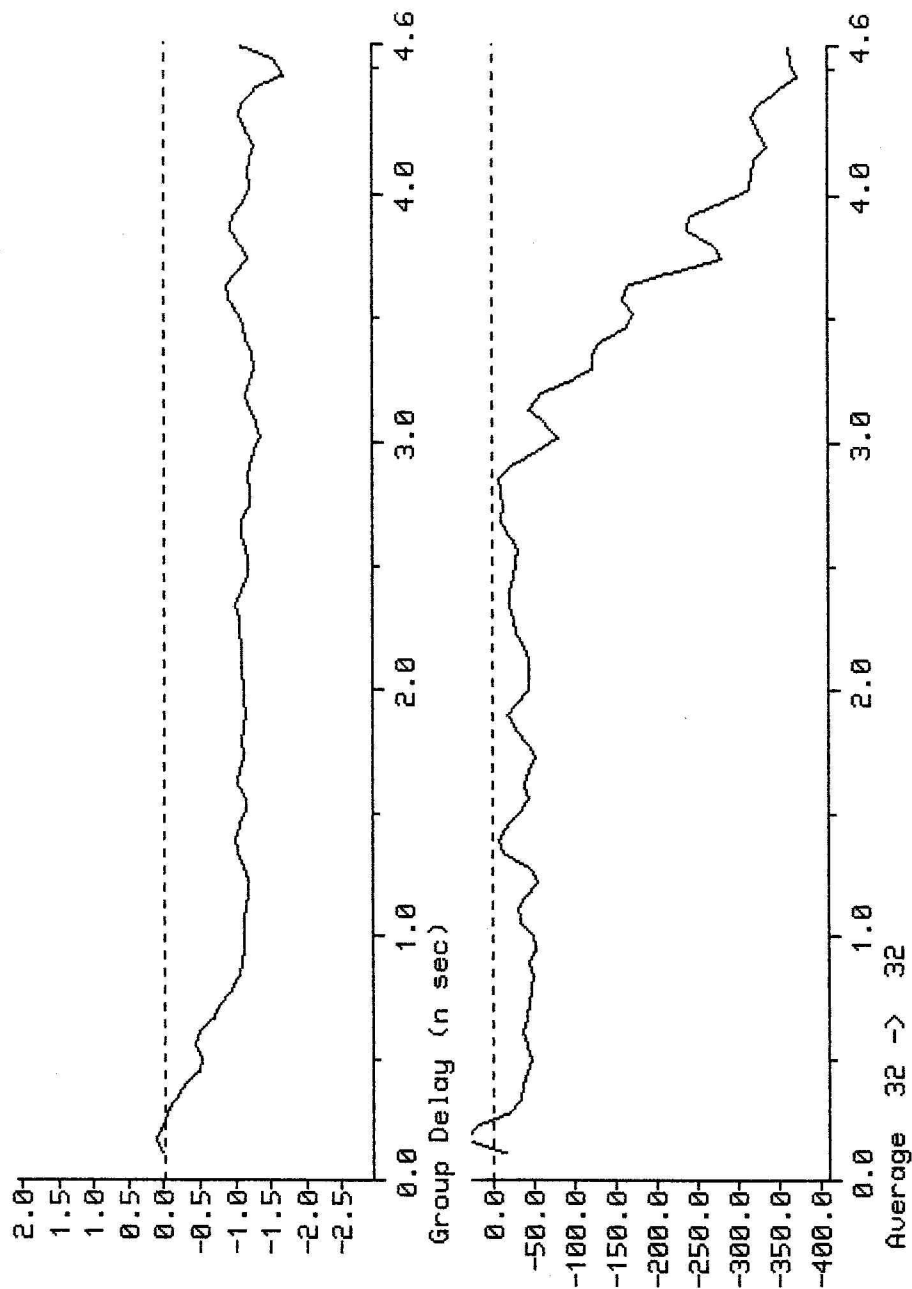

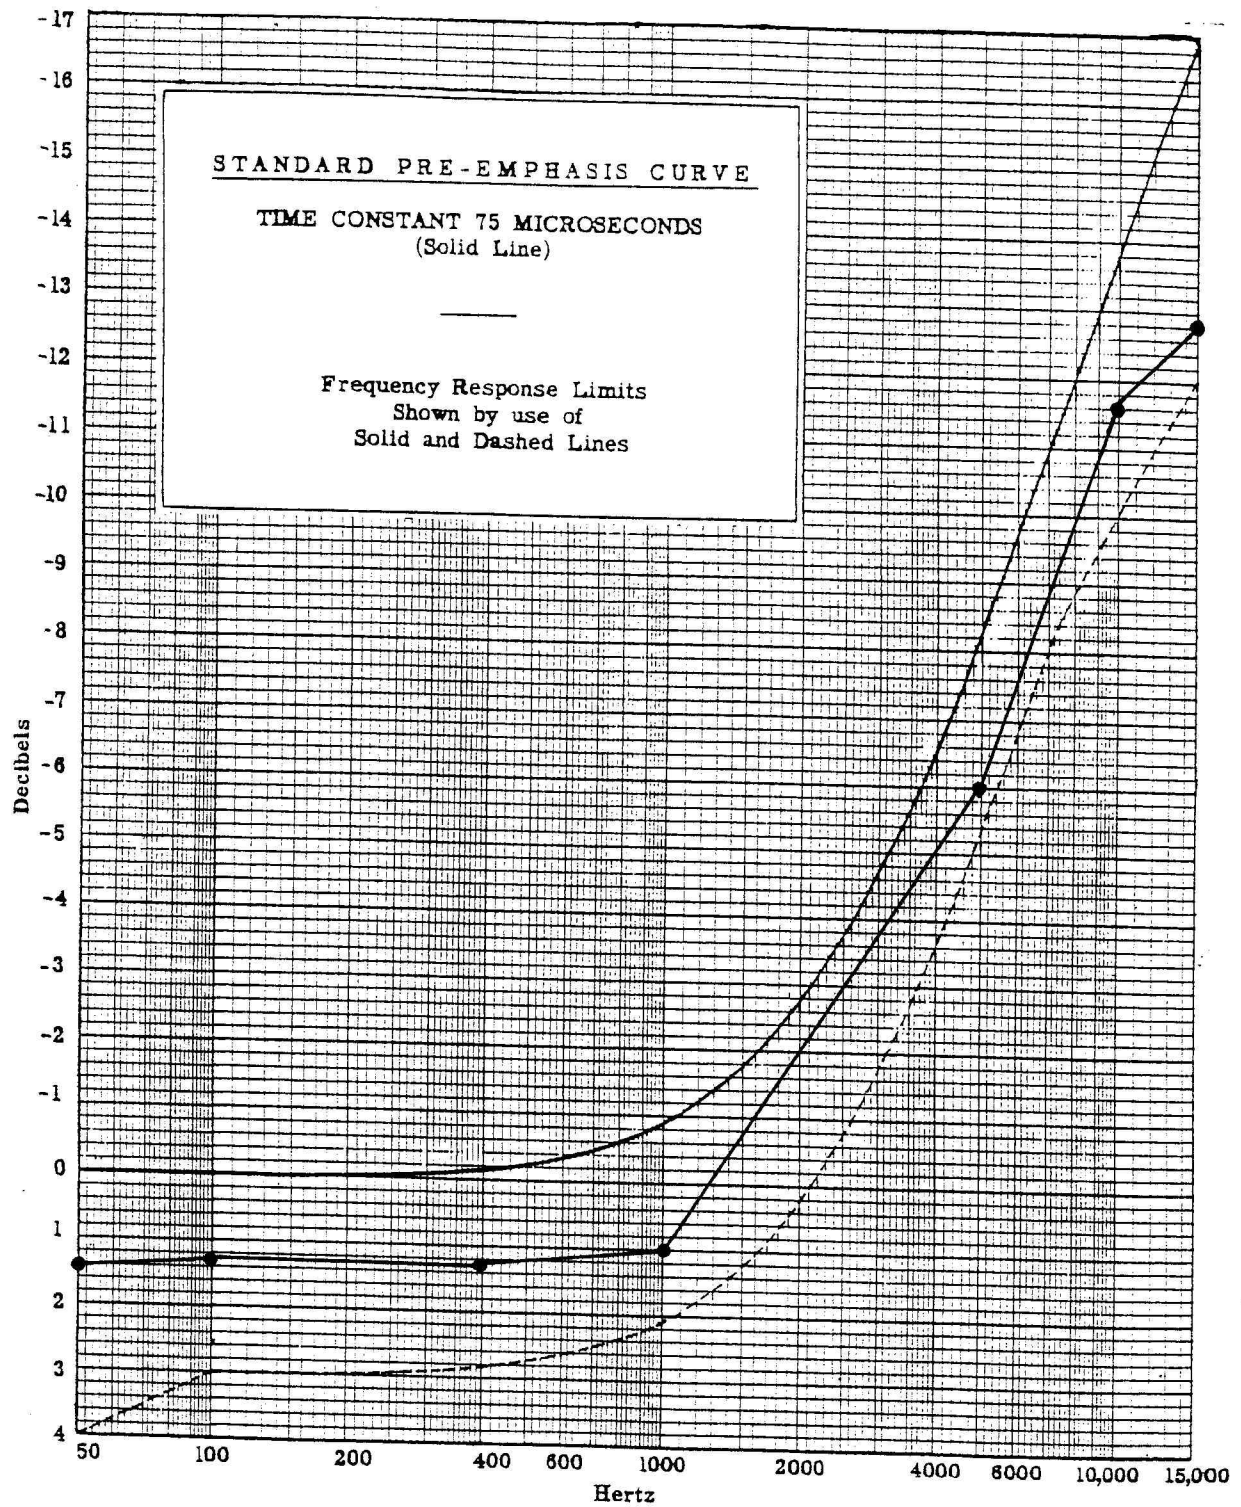AUDIO FREQUENCY RESPONSE 50 % MODULATIONReference 50 Hz; 0dB = 1.5 dB

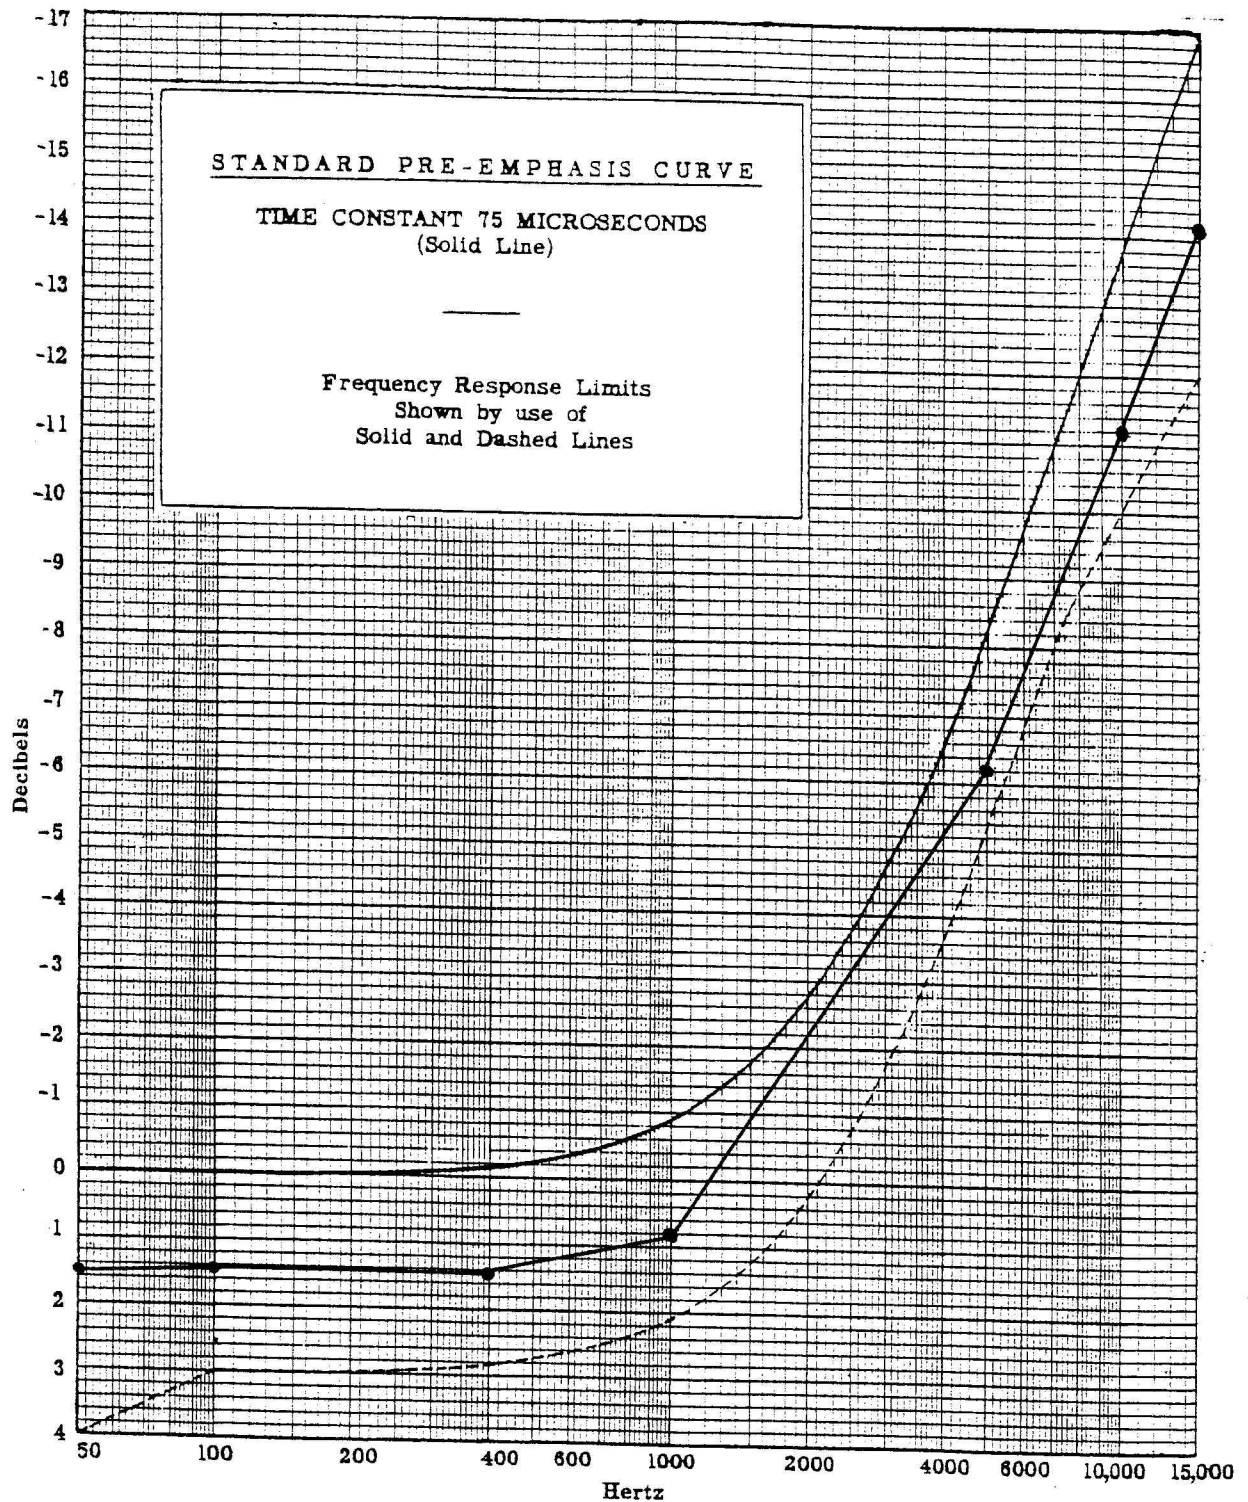AUDIO FREQUENCY RESPONSE 100 % MODULATIONReference 50 Hz; 0dB = 1.5 dB