

**FCC CERTIFICATION REPORT**

**FOR THE**

**SD1250C, 12.5 WATT DIGITAL TRANSMITTER SYSTEM**

**THOMCAST COMMUNICATIONS,  
COMWAVE DIVISION**

P.O. Box 69  
Oakhill Road  
Mountaintop, PA 18707  
570-474-6751

## TABLE OF CONTENTS

<b>1.0</b>	<b>INTRODUCTION .....</b>	<b>3</b>
<b>2.0</b>	<b>TEST EQUIPMENT .....</b>	<b>3</b>
<b>3.0</b>	<b>MEASUREMENTS.....</b>	<b>3</b>
➤	<i>RF POWER OUTPUT .....</i>	<i>3</i>
➤	<i>MODULATION CHARACTERISTICS .....</i>	<i>3</i>
❖	<i>GROUP DELAY .....</i>	<i>8</i>
➤	<i>OCCUPIED BANDWIDTH &amp; FREQUENCY RESPONSE .....</i>	<i>9</i>
❖	<i>OCCUPIED BANDWIDTH.....</i>	<i>9</i>
❖	<i>SPURIOUS EMISSIONS AT ANTENNA TERMINALS.....</i>	<i>11</i>
❖	<i>FIELD STRENGTH OF SPURIOUS RADIATION.....</i>	<i>12</i>
❖	<i>FREQUENCY STABILITY.....</i>	<i>13</i>
<b>4.0</b>	<b>SUMMARY.....</b>	<b>14</b>

## TABLE OF FIGURES

Figure 1:	64-QAM Constellation Diagram.....	4
Figure 2:	Digital modulation occupancy .....	6

## TABLE OF PLOTS

PLOT 1:	Demodulation performance of the 64 QAM transmitter.....	7
PLOT 2:	Demodulation performance of the 256 QAM transmitter.....	7
PLOT 3:	Frequency response and group delay of the 64 QAM transmitter.....	8
PLOT 4:	Frequency response and group delay of the 256 QAM transmitter.....	9
PLOT 5:	Occupied bandwidth of the 64 QAM transmitter.....	10
PLOT 6:	Occupied bandwidth of the 256 QAM transmitter.....	10
PLOT 7:	Occupied bandwidth of the QAM modulation with three equally spaced 2MHz carriers.....	11

## TABLE OF TABLES

Table 1:	Quadrant Conversion Constellation.....	4
Table 2:	MMDS Digital Transmission Format.....	5
Table 3:	64/256 QAM Modulator RF Output.....	5
Table 4:	Spurious emissions.....	12
Table 5:	Spurious Products/Harmonics Field Measurements.....	13
Table 6:	Frequency stability over temperature.....	14
Table 7:	Frequency stability over AC input voltage.....	14

## 1.0 INTRODUCTION

This report contains all the required data for certification of Thomcast's model SD1250C digital transmitter system. The data presented was taken from tests performed on a production transmitter system tuned to operate on ITFS channel C-4 (2584-2590 MHz) designed to transmit any one of 31 ITFS/MMDS television channels, in the MDS and ITFS bands. Other information required for Certification, such as circuit diagrams and descriptions, photographs, tune-up and maintenance procedures, and the technical manual are attached.

## 2.0 TEST EQUIPMENT

FCC Section 2.947 (d)

The following is a list of major test equipment, which was used in testing the transmitter for this report:

- |                                  |                        |
|----------------------------------|------------------------|
| 1. Spectrum Analyzer             | HP Model 8564E & 8593E |
| 2. Power Meter                   | HP Model 436A          |
| 3. Frequency Counter             | HP Model 5350B         |
| 4. Digital Multimeter            | Fluke Model 87         |
| 5. Vector Signal Analyzer        | HP 89441A              |
| 6. Digital Transmission Analyzer | HP 3784A               |

## 3.0 MEASUREMENTS

FCC Section 2.1033 (c)(14)

### ➤ RF POWER OUTPUT

FCC Section 2.1046 (a) (c)

Output Power: 12.5 watts average QAM modulation; 7.5 watts average QAM modulation with three equally spaced 2 MHz carriers

Method of Measurement: Per FCC 2.1046 (b)

The transmitter was operated into a dummy load of substantially zero reactance with a resistance equal to the transmission line characteristic impedance. Average power was directly measured using an HP 436A microwave power meter. The transmitter's % power meter was found to be within 2% of the indications provided by the external average power meter with output variations of 80% to 110% of the transmitter's rated output.

Output Power Calibration See technical manual, document #  
DOC16-0057

### ➤ MODULATION CHARACTERISTICS

FCC Section 2.1047

The digital modulation format is Quadrature Amplitude Modulation with a 64 or 256 point signal constellation (64 QAM and 256 QAM) with the QAM symbol rate and occupied bandwidth optimized for a 6 MHz channel plan. Forward Error Correction (FEC) uses a concatenated coding approach that produces high coding gain at moderate complexity and overhead. The system FEC is optimized for quasi-error free operation at a threshold output error event rate of one error per 15 minutes.

To achieve the appropriate level of error protection required for transmission of digital data, an FEC based on Reed-Solomon coding is used. Protection against burst errors is achieved by use of byte interleaving.

The digital input stream is organized in fixed length packets following the MPEG-2 transport multiplexer. To ensure adequate binary transitions for clock recovery, the data at the MPEG-2 transport multiplexer output is randomized according to the Pseudo Random Binary Sequence (PRBS) generator. The randomization process is also active when the modulator input bit stream is non-existent, or when it is non-compliant with the MPEG-2 transport stream format. This avoids emission of an unmodulated carrier from the modulator.

Following the energy dispersal randomization process, systematic shortened Reed-Solomon encoding is performed on each randomized MPEG-2 transport packet with  $T=8$ . This means that 8 erroneous bytes per transport packet can be corrected. This process adds 16 parity bytes to the MPEG-2 transport packet to give a codeword.

Convolutional interleaving with depth  $I=12$  is applied to error protected packets. This results in an interleaved frame. The convolutional interleaving process is based on the Forney approach, which is compatible with the Ramsey type III approach. The interleave frame is composed of overlapping error protected packets and is delimited by MPEG-2 sync bytes.


After convolutional interleaving, an exact mapping of bytes into symbols is performed. The mapping relies on the use of byte boundaries in the modulation system. The two most significant bits of each symbol are differentially encoded in order to obtain a  $\pi/2$  rotation-invariant QAM constellation.

Digital modulation adheres to Quadrature Amplitude Modulation with 64 points in the constellation diagram. Constellation points in Quadrant 1 are converted to Quadrants 2, 3 and 4 by changing the two MS ( $I_k$  and  $Q_k$ ) and by rotating the qLSBs according to the following table.

**Table 1: Quadrant Conversion Constellation.**

Quadrant	MSBs	LSBs rotation
1	00	
2	10	$+\pi/2$
3	11	$+\pi$
4	01	$+3\pi/2$

### 64-QAM

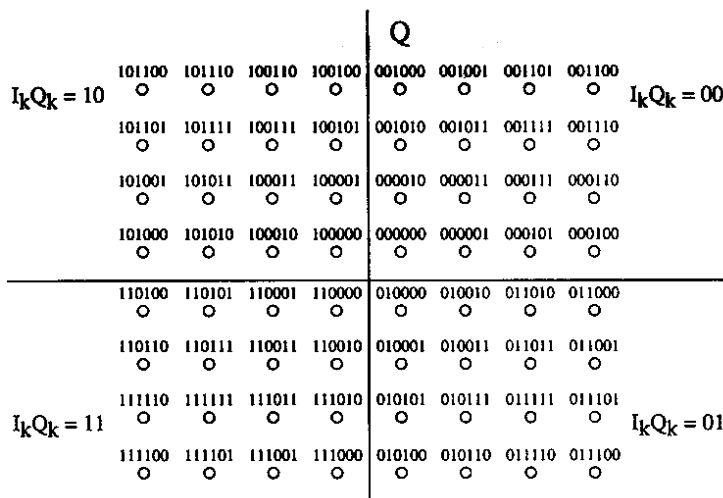

**Figure 1: 64-QAM Constellation Diagram.**

The MMDS digital modulation format is summarized in the following table:

**Table 2: MMDS Digital Transmission Format.**

<i>Parameter</i>	<i>Format</i>
Modulation	64/256 QAM rotationally-invariant coding
Symbol Size	6 bits, 3-bits for "I" and 3 bits for "Q" dimension or 8 bits, 4-bits for "I" and 4 bits for "Q" dimension
Transmission Band	2000 - 2700 MHz
Channel Spacing	6 MHz
Symbol Rate	5.056944 Msps $\pm 3$ ppm or 5.06380 Msps $\pm 3$ ppm
Frequency Response	Square-root raised-cosine filter: Roll-off = 0.18 or 0.15

**Table 3: 64/256 QAM Modulator RF Output.**

I/Q Phase Offset	< 1.0 degrees
I/Q Crosstalk	-50 dB
I/Q Amplitude Imbalance	0.05 dB max
I/Q Timing Skew	< 3.0 ns

#### **Modulator Baseband Filtering:**

Prior to modulation, the I and Q signals shall be square-root raised-cosine filtered. The roll-off factor shall be 0.15 or 0.18 depending upon modulator symbol rate.

The square-root raised cosine filter shall have a theoretical function defined by the following expression:

$$H(f) = 1 \text{ for } |f| < f_N(1 - \alpha)$$

$$H(f) = \sqrt{\left\{ \frac{1}{2} + \frac{1}{2} \sin \frac{\pi}{2f_N} \left[ \frac{f_N - |f|}{\alpha} \right] \right\}} \text{ for } f_N(1 - \alpha) \leq |f| \leq f_N(1 + \alpha)$$

Where:


$$f_N = \frac{1}{2T_s} = \frac{R_s}{2} \text{ is the Nyquist frequency and rolloff factor } \alpha = 0.15 \text{ or } 0.18$$

The value of in-band ripple  $r_m$  in the pass-band up to  $(1 - \alpha)f_N$  as well as at the Nyquist frequency  $f_N$  shall be lower than 0.4 dB. The out-of-band rejection shall be greater than 43 dB after the first upconversion.

The filter shall be phase-linear with the group delay ripple  $\leq 0.1 T_s$  (Ns) up to  $f_N$  where  $T_s = 1/R_s$  is the symbol period.

#### **Modulation Channel Occupancy:**


The digital modulation occupancy of 64/256 QAM is 5.38 MHz measured at the -3 dB roll-off points. This is shown below as compared to a standard NTSC vestigial sideband signal in a standard 6 MHz channel. The 64/256 QAM signal employs a suppressed carrier modulation with a uniform power spectral density as opposed to the usual PAL M / NTSC signal with separate analog, visual, chroma, and aural carriers.

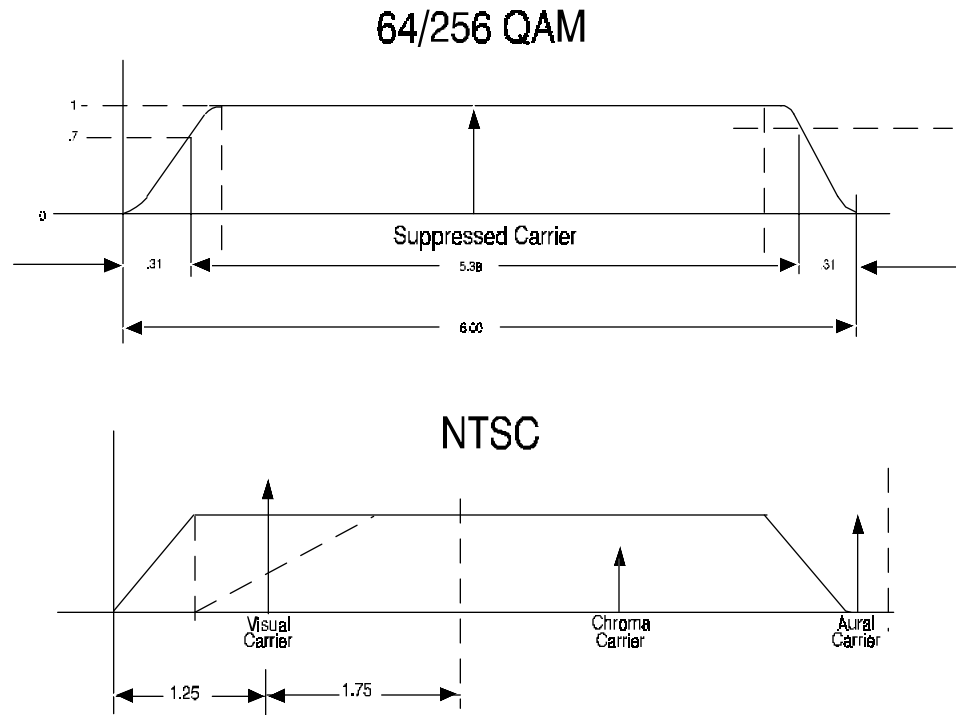

**Figure 2: Digital modulation occupancy.**

The following plots show the demodulated performance of the transmitter as measured with an HP89441A Vector Signal Analyzer.


Date: 06-08-00 Time: 17:44

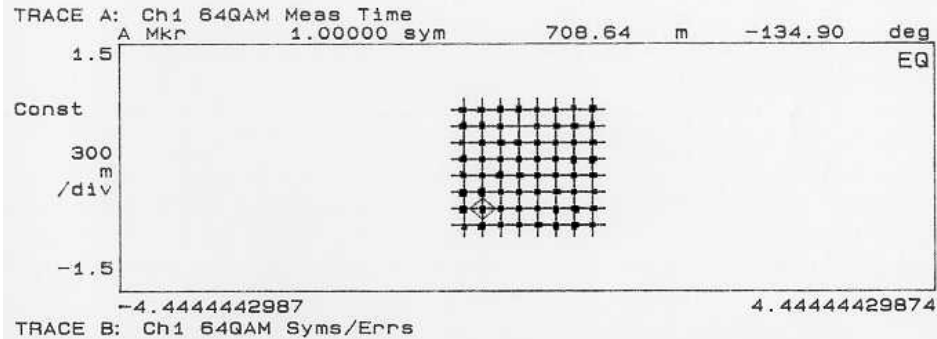

EVM	= 923.70	m%rms	2.0231	% pk at sym	18
Mag Err	= 618.30	m%rms	-1.8561	% pk at sym	18
Phase Err	= 858.75	mdeg	4.5348	deg pk at sym	238
Freq Err	= 3.7850	KHz			
IQ Offset	= -60.386	dB	SNR (MER)	= 36.933	dB
EQ					
0	00011011	01101110	11000010	11011100	00111010
48	11001101	01010110	11101110	10110001	10100011
96	00010111	10110111	11001111	10000010	00010100
144	01010010	01001101	10101011	10001111	11001011
192	11101001	00000100	01001111	01101110	10100111
240	11101101	10001011	11110001	10110011	11100011
288	11010001	10000111	01100110	10001100	01000110
336	01110010	11110100	10000001	10111101	00110110
EQ					

PLOT 1: Demodulation performance of the 64 QAM transmitter.

Date: 06-08-00 Time: 17:26

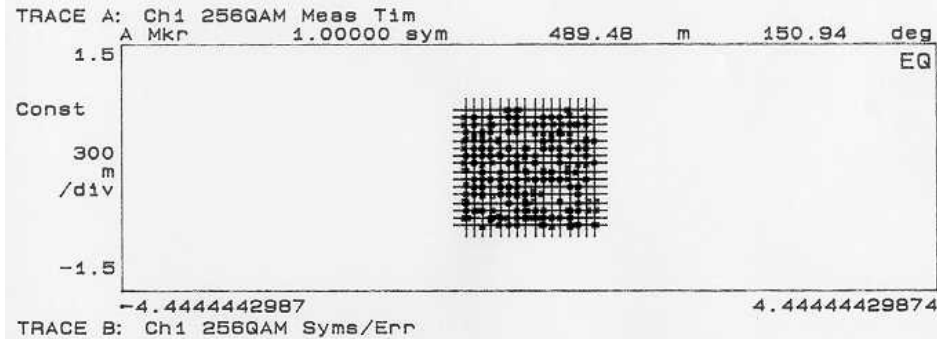


EVM	= 1.0020	%rms	3.5845	% pk at sym	37
Mag Err	= 694.22	m%rms	-3.0154	% pk at sym	37
Phase Err	= 1.0081	deg	5.8422	deg pk at sym	213
Freq Err	= 3.3848	KHz			
IQ Offset	= -57.343	dB	SNR (MER)	= 34.013	dB
EQ					
0	01100111	01011100	10111101	11001111	00110100
48	01000110	11101100	10101110	01010100	01110010
96	01111010	11001010	11001111	00001001	10010011
144	01010110	01101101	11101000	10001001	10000011
192	00011001	00110100	00001010	11110110	11011000
240	11011100	11110000	10001101	10001011	10110110
288	01010001	11011110	11101111	01011000	10111001
336	10111100	01001101	00011001	11110010	01011110
EQ					

PLOT 2: Demodulation performance of the 256 QAM transmitter.

❖ **GROUP DELAY**


FCC Section 73.687 (a) (3)

Output Power:	12.5 watts average QAM modulation; 10 watts average QAM modulation with three equally spaced 2 MHz carriers
% Video Modulation:	Not applicable
Type Video Modulation:	Not applicable
Aural Output Power:	Not applicable
Method of Measurement:	Per EIA RS-240, Section B (12c)

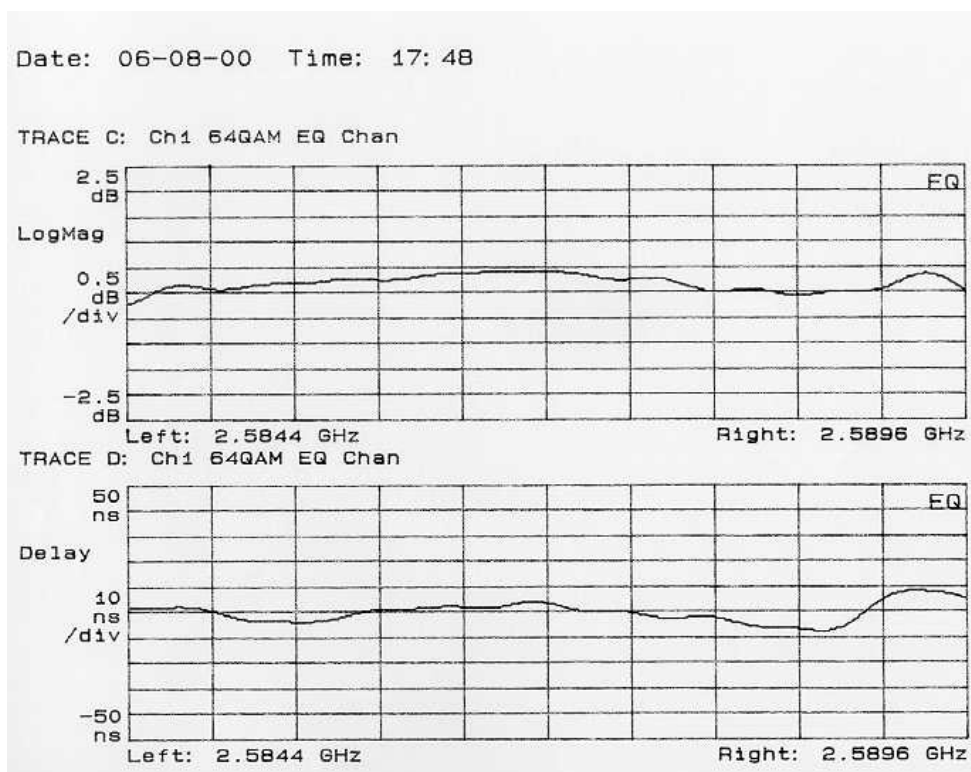

**PLOT 3: Frequency response and group delay of the 64 QAM transmitter.**



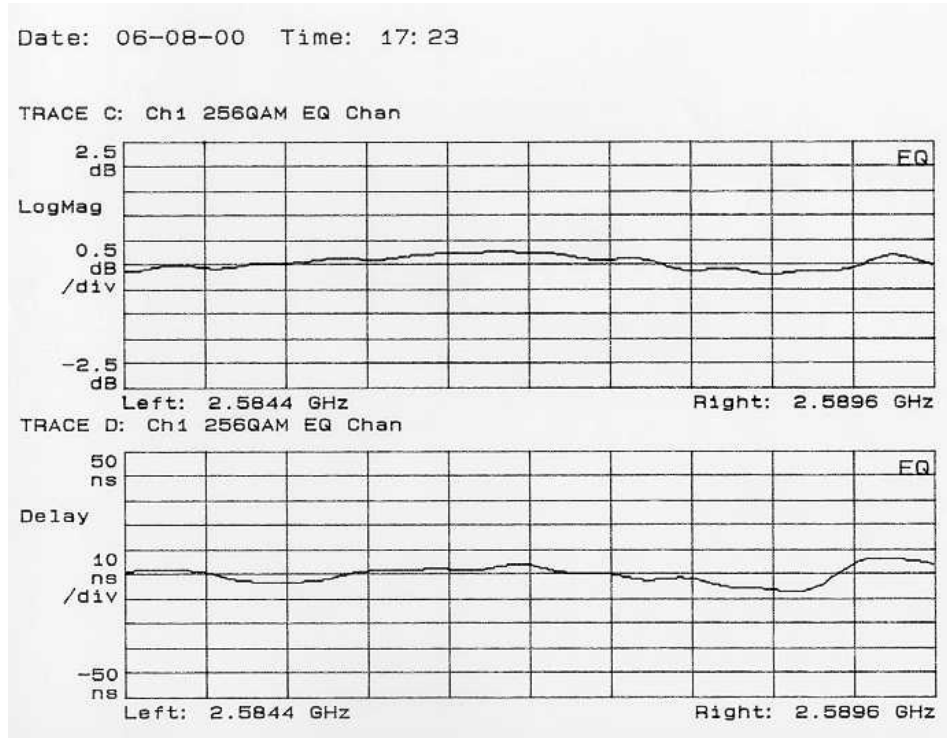

**PLOT 4: Frequency response and group delay of the 256 QAM transmitter.**

## ➤ OCCUPIED BANDWIDTH & FREQUENCY RESPONSE

FCC Section 2.1049 (e) (6) (i)

See the above plots for frequency response data.

### ❖ OCCUPIED BANDWIDTH


FCC Section 2.1047/2.1049/73.687 (a) (2)/74.936

Plots five and six demonstrate the occupied bandwidth of the QAM signal at the output of the system channel combiner at the maximum rated average power and symbol rate. The occupied bandwidth complies with the revised spectral mask per the FCC ruling. The signal meets the requirements of a sidelobe power spectral density less than -38 dB at the channel edge decreasing to less than -60 dB at  $\pm 3$  MHz from the channel edge relative to the average power spectral density of the QAM signal within the main channel.


Plot seven demonstrates the occupied bandwidth of the 64 QAM modulation with three equally spaced carriers. The additional 1 dB backoff shown in plot seven follows the well known requirements for multi-carrier systems. Specifically, Leffel<sup>1</sup> cites results showing the backoff requirement of 1 dB when signals are increased from two to three carriers. Our laboratory test results reflect the backoff requirement predicated by Leffel. That requirement is incorporated in the rated output power of our transmitter, therefore, using the QAM modulation with three equally spaced 2 MHz carriers our transmitter is rated to 7.5 watts.

Each occupied bandwidth plot is labeled corresponding to the respective modulation format.


<sup>1</sup> Leffel, Michael, (Intermodulation Distortion in a Multi-Signal Environment), RF Design, June 1995

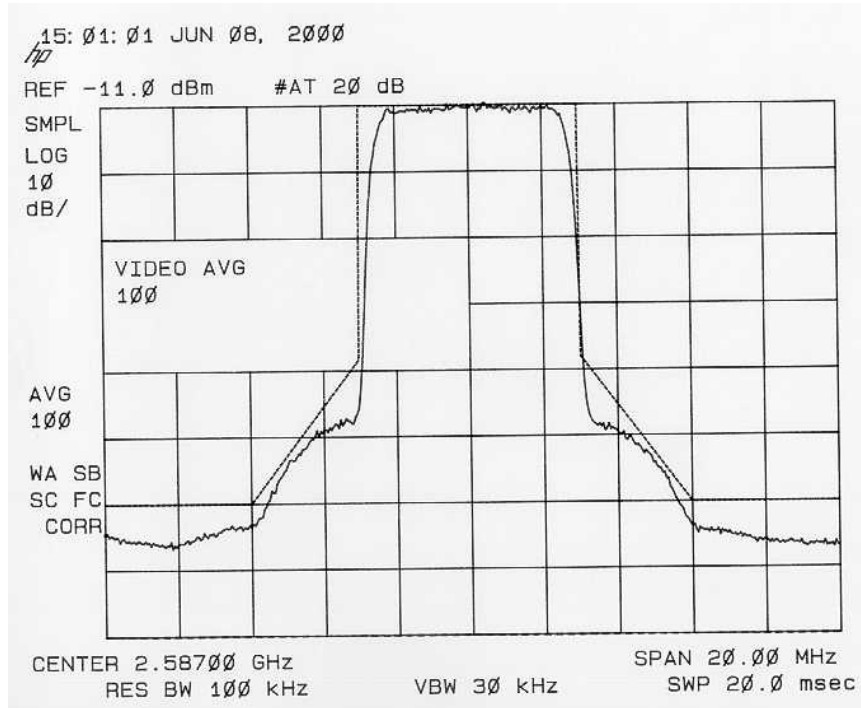

**PLOT 5: Occupied bandwidth of the 64 QAM transmitter.**

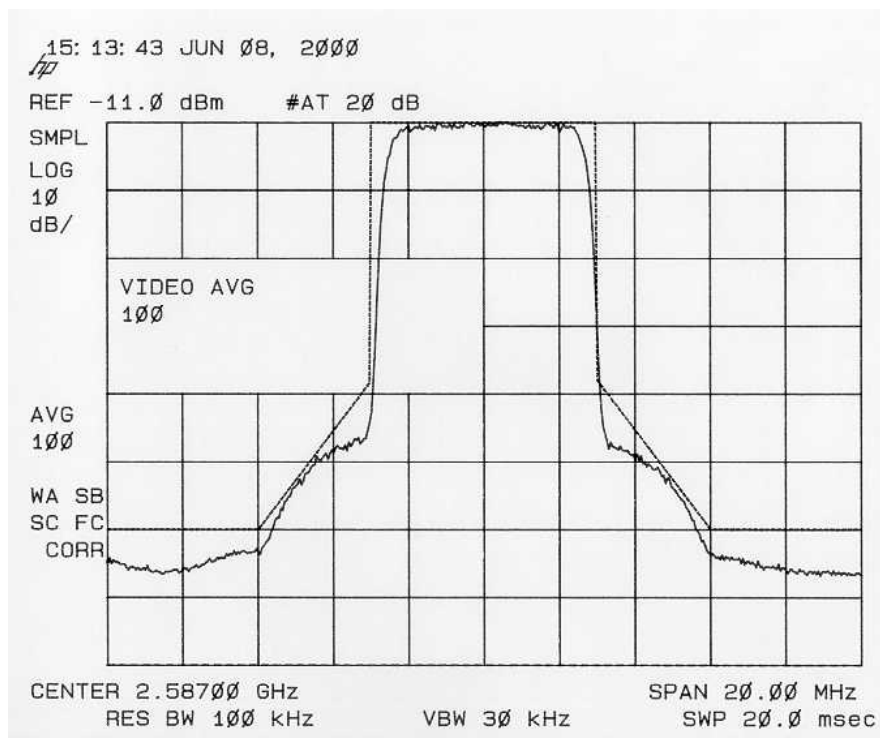

**PLOT 6: Occupied bandwidth of the 256 QAM transmitter.**

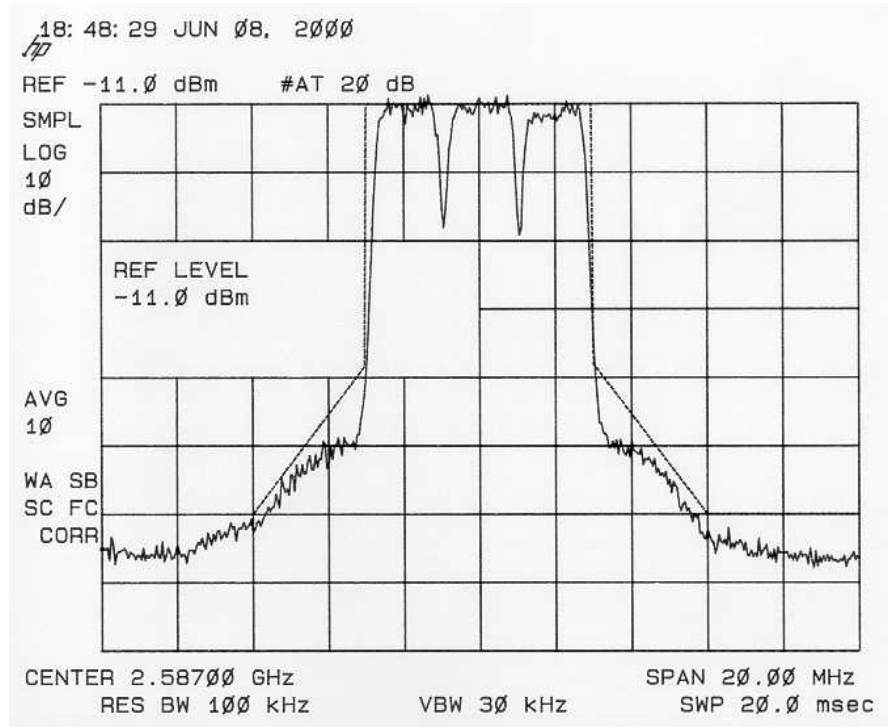

**PLOT 7: Occupied bandwidth of the QAM modulation with three equally spaced 2MHz carriers<sup>2</sup>.**

❖ **SPURIOUS EMISSIONS AT ANTENNA TERMINALS**

FCC Section 2.1051/2.1057/21.908 (b)/74.936

Average Output Power:	12.5 watts average QAM modulation; 10 watts average QAM modulation with three equally spaced 2 MHz carriers
Type Modulation:	64/256 QAM
Spectrum Analyzer Setting:	The Spectrum Analyzer setting used in conducting the spurious emissions test at the equipment output terminals was as follows
Frequency Span:	2 MHz per Division
Center Frequency:	Adjusted continuously for 10 MHz to 27 GHz
Resolution Bandwidth:	100 KHz
Video Filter:	Out
Input Attenuator Setting:	Input level was set for a full-scale calibration of the average digital power. All other frequencies were referenced to this point.
Spurious Emissions:	See chart

<sup>2</sup> Test was performed using a spectral shaping assembly and a channel combiner. The agile is routed to the correct filtering system by the spectral shaping assembly.

**Table 4: Spurious emissions.**

Frequency (MHz)	Amplitude (dBc)
2587.00	0 Carrier Reference
2631.00	-71 Local Oscillator
5174.00	<-70 2nd Harmonic
7761.00	<-70 3rd Harmonic
10348.00	<-70 4th Harmonic
12935.00	<-70 5th Harmonic
15522.00	<-70 6th Harmonic
18109.00	<-70 7th Harmonic
20696.00	<-70 8th Harmonic
23283.00	<-70 9th Harmonic
25870.00	<-70 10th Harmonic

No other spurious emissions detected.

#### ❖ FIELD STRENGTH OF SPURIOUS RADIATION

FCC Section 2.1053, 2.1057

Average Output Power: 12.5 watts average QAM modulation; 10 watts average QAM modulation with three equally spaced 2 MHz carriers

Type Modulation: 64/256 QAM

Spectrum Analyzer Settings: A spectrum analyzer used to measure the spurious emissions at a distance of 10 meters from the transmitter was set as follows:

Frequency Span:	1 MHz per division
Center Frequency:	Adjusted continuously from 10 MHz to 10 GHz
Resolution Bandwidth:	100 KHz
Video Bandwidth:	100 KHz
Analyzer Noise Threshold:	<-90 dBm

Method of Measurement:

Absolute power of the spurious radiation was measured on a spectrum analyzer at a distance of 10 meters from the transmitter. The radiation was received with a half-wave dipole antenna (gain = 2.15 dB) and measured as an absolute power level; therefore, all measurements include the dipole gain. The relative levels of the received spurious signals were calculated with respect to the absolute power level of the transmitter's output received with a dipole at 10 meters. The received power level was calculated using:

$$\text{Received @ 10 meters (dBm)} = \text{EIRP (dBm)} - \text{Path Loss (dB)} + 2.15 \text{ dB}$$

$$\begin{aligned} \text{Path Loss (dB)} &= 20 \log \text{ distance (Km)} + 20 \log \text{ frequency (center frequency) (GHz)} + 92.4 \text{ dB} \\ &= 20 \log (.010 \text{ Km}) + 20 \log (2.587) + 92.4 \text{ dB} \\ &= 60.66 \text{ dB} \end{aligned}$$

$$\begin{aligned} \text{EIRP (dBm)} &= 41 \text{ dBm (tx output)} + 2.15 \text{ dB (transmit dipole gain)} \\ &= 43.15 \text{ dBm} \end{aligned}$$

$$\begin{aligned}\text{Received Level} &= \text{EIRP dBm} - \text{Path Loss dB} + 2.15 \text{ dB} \\ &= -15.36 \text{ dBm}\end{aligned}$$

The Electric Field Intensity E(v/m) incident on a receive dipole antenna was found using:

$$\begin{aligned}E \text{ (v/m)} &= \text{Antilog} \left[ \frac{(\text{Received Level} - 2.15 \text{ dB}) - 20 \log \text{ wavelength(m)} + 6.75}{20} \right] \\ &= \text{Antilog} \frac{-15.36 \text{ dBm} - 2.15 \text{ dB} - 20 \log [0.111815132 \text{ m}] + 6.75}{20} \\ &= \text{Antilog } 0.3979\end{aligned}$$

$$E = 2.500 \text{ v/m}^3$$

Spurious Radiation:

The following measurements of radiation were taken and are given in terms of absolute and relative dBm to the average digital signal power.

**Table 5: Spurious Products/Harmonics Field Measurements.**

	Absolute Received (dBm)	Absolute Field Intensity (v/m)	Relative to Level (dBm)
10.00 MHz	*Below analyzer threshold	N/A	<-90
44 MHz	*Below analyzer threshold	N/A	<-90
2727 MHz	*Below analyzer threshold	N/A	<-90
Harmonics	*Below analyzer threshold	N/A	<-90
Sub-Harmonics	*Below analyzer threshold	N/A	<-90
* Analyzer threshold = -90 dBm			

Analyzer Settings:

Reference Level:	-20 dBm
RBW:	100 KHz
Video Average:	ON
Attenuation:	10 dB
Span:	5 MHz

#### ❖ FREQUENCY STABILITY

FCC Section 2.1055 (a) (1) / 73.687 / 21.101 (a)

Method of Measurement: The upconverter was Channel tested per FCC Part 73, Subpart E, Section IV (c)

Microwave L.O. (Synthesized)	2631.00 MHz
IF Frequency (Modulator*)	- 44.00 MHz
On Channel Frequency	2587.00 MHz

\*Modulator is certified separately.

<sup>3</sup> When using 3 carriers a 1 dB backoff occurs, therefore the received power level for 38 dBm is 1.770 v/m.

Frequency Stability over Temperature: Synthesizer

**Table 6: Frequency stability over temperature.**

Temperature	Frequency (GHz)	Error (Hz)
+25	2.631000004	4
-30	2.630999997	-3
-20	2.630999985	-15
-10	2.630999981	-19
0	2.630999971	-29
+10	2.630999967	-33
+20	2.630999957	-43
+30	2.631000024	24
+40	2.631000046	46
+50	2.631000052	52

Frequency Stability over AC Input Voltage: Synthesizer

**Table 7: Frequency stability over AC input voltage.**

AC Line (V)	LO Frequency (MHz)	Error (Hz)
95	2.631000015	15.00
100	2.631000010	10.00
110	2.631000010	10.00
115	2.631000009	9.00
120	2.631000009	9.00
125	2.631000008	8.00
130	2.631000009	9.00
135	2.631000008	8.00

**NOTE:**

Frequency stability of the microwave LO was totally dependent on the accuracy and stability of the 10 MHz reference oscillator. This is a purchased item with  $\pm 2 \times 10^{-8}$  stability over temperature range.

## 4.0 SUMMARY

This report demonstrates that the SD1250C digital television transmitter meets or exceeds the FCC certification criteria. The specified is based upon Quadrature Amplitude Modulation with a 64 or 256 point signal constellation. The occupied bandwidth conforms to the required digital spectral mask with -38 dB emissions at the channel edges and a constant slope attenuation from this level to -60 dB  $\pm 3$  MHz extending into the adjacent channels. Measurement of spurious emissions at the RF output revealed no emissions above -60 dBc. Field strength measurements of spurious emissions revealed no detectable emissions down to the analyzer noise threshold of < - 90 dBm. Frequency stability tests of the synthesizer over variations in temperature or input AC line voltage showed a maximum worst case frequency shift of 52 hertz.