


Exhibit 2

Parameters of the Station 2:

The mobile commercial test equipment signal will be generated and amplified through a waveguide to a parabolic dish antenna.

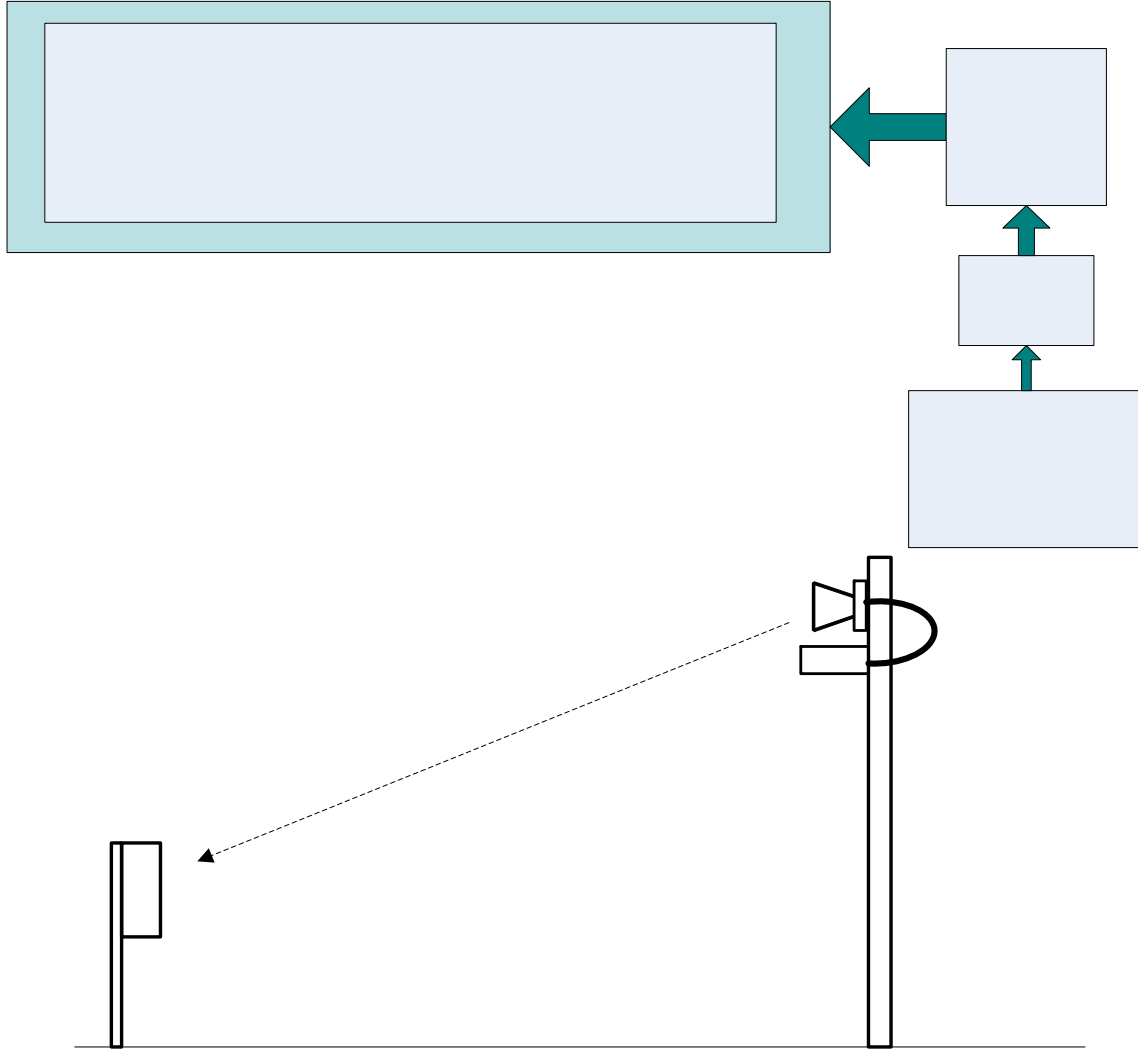

Directional Antenna:

Custom Horn Antenna

Gain: 18.4 dBi (estimated)

Beamwidth: fan beam 25° Elevation, 3° Azimuth (estimated)

Polarization: linear with any slant angle

Height: 0 to 50 feet above ground level

Azimuth pointing direction: from its location anywhere above to the SEWIP
receive tower at N 43°06'32.8" W 76°11'34.1"

Elevation pointing direction: -30 to +30 degrees above horizontal.

ERP: 1 kW