
















<h2 style="text-align: center;">MX-62</h2> <div style="text-align: center;">  <p>MX-62</p> </div> <h3 style="text-align: center;">NON-SUPERVISED EMERGENCY TRANSMITTER</h3> <h4 style="text-align: center;">Operation Instructions</h4> <div style="text-align: center;">  <p><b>Linear</b>  <small>7700 405-2024 • FAX 405-200-7948          USA &amp; Canada (800) 421-1927 • (908) 486-0123          Toll Free FAX (800) 426-1945          www.linearcorp.com</small></p> </div>	<h4 style="text-align: center;">PRODUCT DESCRIPTION</h4> <p>The Model MX-62 is a battery powered, miniature, water-resistant, non-supervised transmitter designed for use in emergency applications with Life Alert's Megacode format receivers such as the ACP2005. Each is supplied with a wristband, a pocket clip, and a Nylon pendant necklace. Pressing the button on the transmitter sends a digital coded wireless signal to its companion receiver. To insure sending a complete signal, press the transmitter button for a minimum of two seconds.</p> <p>Each MX transmitter is factory set to a unique code, so no field coding is required. This transmitter can send a signal for up to 30 seconds per activation. The red signal indicator on the transmitter lights and a built-in sounder can beep (optional) when the unit is activated.</p> <p>Every four hours the transmitter tests for a low battery. If the battery tests low, the transmitter sounder will beep irregularly and the LED will blink when the unit is activated.</p> <p>Receivers must be programmed to the transmitter's code before system testing and operation. Refer to the receiver's instructions for details on operation and programming.</p> <p>Each transmitter is sealed to provide water-resistance. The unit's battery is not replaceable. The transmitter should be discarded at the end of its battery life.</p>	<h4 style="text-align: center;">FEATURES</h4> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  <p>ACTIVATION BUTTON</p> </div> <div style="text-align: center;">  <p>SIGNAL INDICATOR</p> </div> </div> <div style="text-align: center; margin-top: 10px;">  <p>MX-62</p> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="text-align: center;">  <p>NYLON NECKLACE</p> </div> <div style="text-align: center;">  <p>POCKET CLIP</p> </div> <div style="text-align: center;">  <p>WRIST STRAP</p> </div> </div> <div style="text-align: center; margin-top: 10px;">  <p>PENDANT HOLDER</p> </div>
<h4 style="text-align: center;">WRISTBAND INSTALLATION</h4> <p style="text-align: center;">TO INSTALL WRISTBAND, SLIDE STRAPS INTO SLOTS ON ENDS OF TRANSMITTER</p> <div style="text-align: center;">  </div> <p style="text-align: center;">NOTE: THE END OF STRAP WITH VELCRO ATTACHES TO THE END CLOSEST TO THE SIGNAL INDICATOR</p>	<h4 style="text-align: center;">PENDANT HOLDER INSTALLATION</h4> <p style="text-align: center;">TO INSTALL PENDANT HOLDER, SLIDE HOLDER INTO SLOTS ON ENDS OF TRANSMITTER</p> <div style="text-align: center;">  </div> <p style="text-align: center;">NOTE: NECKLACE SIDE OF PENDANT HOLDER FITS CLOSEST TO THE SIGNAL INDICATOR</p>	<h4 style="text-align: center;">POCKET CLIP INSTALLATION</h4> <p style="text-align: center;">INSTALL THE PENDANT HOLDER THEN CUT AND REMOVE THE NECKLACE</p> <div style="text-align: center;">  </div> <p style="text-align: center;">SNAP THE POCKET CLIP INTO THE PENDANT HOLDER</p>
<h4 style="text-align: center;">BEEPER OPTION &amp; PROGRAMMING</h4> <p>PRESSING THE TRANSMITTER BUTTON FIVE TIMES IN SUCCESSION IN FIVE SECONDS WILL DISABLE THE TRANSMITTER BEEP. PRESSING THE TRANSMITTER BUTTON AGAIN FIVE TIMES IN SUCCESSION IN FIVE SECONDS WILL ENABLE THE TRANSMITTER BEEP.</p> <div style="text-align: center;">  </div> <p style="text-align: center;">PROGRAM THE TRANSMITTER INTO THE RECEIVER BY PLACING THE RECEIVER INTO PROGRAM MODE, THEN SEND A SIGNAL TO THE RECEIVER FROM THE TRANSMITTER. REFER TO THE RECEIVER'S PROGRAMMING INSTRUCTIONS FOR DETAILS.</p>	<h4 style="text-align: center;">SYSTEM TESTING</h4> <h5 style="text-align: center;">IMPORTANT! TEST SYSTEM WEEKLY</h5> <p>The manufacturer strongly recommends that you test security equipment frequently. Over a period of time, no electronic products are better than the inspection and maintenance they receive. Therefore, from the time of installation, it is absolutely necessary to test the system at least once a week.</p> <p style="text-align: center;">PLACE THE RECEIVER IN A "TEST" MODE AND ACTIVATE THE TRANSMITTER. VERIFY THAT THE SIGNAL IS RECEIVED AND THAT THE SYSTEM REPORTS AS REQUIRED.</p> <div style="text-align: center;">  </div>	<h4 style="text-align: center;">LINEAR LIMITED WARRANTY</h4> <p>This Linear product is warranted against defects in material and workmanship for twelve (12) months. The Warranty Expiration Date is labeled on the product. This warranty extends only to wholesale customers who buy direct from Linear or through Linear's normal distribution channels. Linear does not warrant this product to consumers. Consumers should require from their selling dealer as to the nature of the dealer's warranty, if any. There are no obligations or liabilities on the part of Linear Corporation for consequential damages arising out of or in connection with use or performance of this product or other indirect damages with respect to loss of property, revenue, or profit, or cost of removal, installation, or reinstallation. All implied warranties, including implied warranties for merchantability and implied warranties for fitness, are void only and Warranty Expiration Date as labeled on the product. This Linear Corporation Warranty is in lieu of all other warranties express or implied.</p> <p>All products returned for warranty service require a Return Product Authorization Number (RPAN). Contact Linear Technical Services at 1-800-421-1927 for an RPAN and other important details.</p> <h5 style="text-align: center;">IMPORTANT !!!</h5> <p>Linear radio controls provide a reliable communications link and fill an important need in portable wireless signaling. However, there are some limitations which must be observed.</p> <ul style="list-style-type: none"> <li>* For U.S. installations only: The radios are required to comply with FCC Rules and Regulations as Part 15 devices. As such, they have limited transmitter power and therefore limited range.</li> <li>* A receiver cannot respond to more than one transmitted signal at a time and may be blocked by radio signals that occur on or near their operating frequencies, regardless of code settings.</li> <li>* Changes or modifications to the device may void FCC compliance. Infrequently used radio links should be tested regularly to protect against undetected interference or fault.</li> <li>* A general knowledge of radio and its varieties should be gained prior to using as a wholesale distributor or dealer, and these facts should be communicated to the ultimate user.</li> <li>* The device complies with FCC Part 15 and Canada Rules and Regulations. Operation is subject to the following two conditions: (1) The device may not cause harmful interference and (2) the device must accept any interference received, including interference that may cause undesired operation.</li> </ul> <p style="text-align: center;">Copyright © 2004 Linear Corporation <span style="float: right;">222276 X4</span></p>

## SYSTEM TESTING

### IMPORTANT! TEST SYSTEM WEEKLY

The manufacturer strongly recommends that you test security equipment frequently. Over a period of time, no electronic products are better than the inspection and maintenance they receive. Therefore, from the time of installation, it is absolutely necessary to test the system at least once a week.

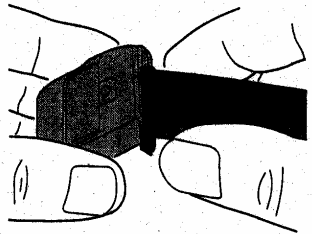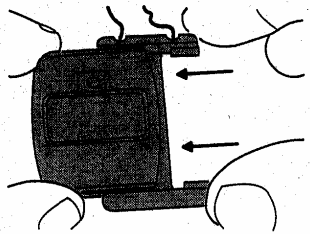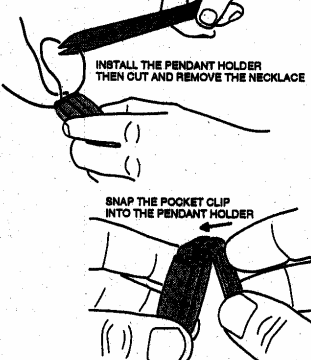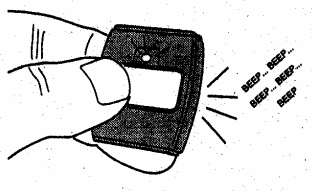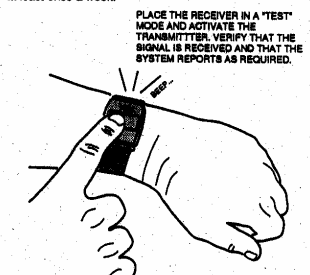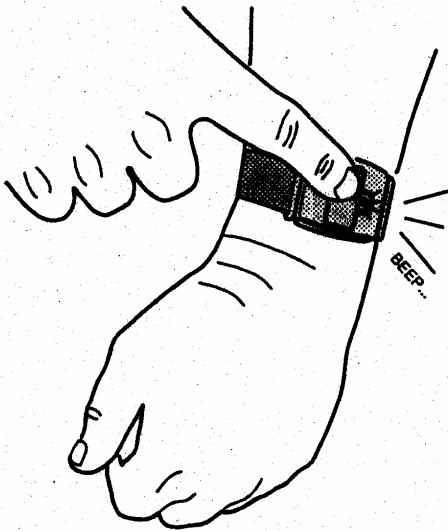

PLACE THE RECEIVER IN A TEST-MODE AND ACTIVATE THE TRANSMITTER, VERIFY THAT THE SIGNAL IS RECEIVED AND THAT THE SYSTEM REPORTS AS REQUIRED.

## LINEAR LIMITED WARRANTY

This Linear product is warranted against defects in material and workmanship for twelve (12) months. The Warranty Expiration Date is labeled on the product. This warranty extends only to wholesale customers who buy direct from Linear or through Linear's normal distribution channels. Linear does not warrant this product to consumers. Consumers should inquire from their selling dealer as to the nature of the dealer's warranty, if any. There are no obligations or liabilities on the part of Linear Corporation for consequential damages arising out of or in connection with use or performance of this product or other indirect damages with respect to loss of property, revenue, or profit, or cost of removal, installation, or rehabilitation. All implied warranties, including implied warranties for merchantability and implied warranties for fitness, are voided only until Warranty Expiration Date as labeled on the product. This Linear Corporation Warranty is in lieu of all other warranties express or implied.

All products returned for warranty service require a Return Product Authorization Number (RPAN). Contact Linear Technical Services at 1-800-421-1587 for an RPAN and other important details.

### IMPORTANT!!!

- \* Linear radio controls provide a reliable communications link and fill an important need in portable wireless signaling. However, there are some limitations which must be observed.
- \* For U.S. installations only: The radios are required to comply with FCC Rules and Regulations as Part 15 devices. As such, they have limited transmitter power and therefore limited range.
- \* A receiver cannot respond to more than one transmitted signal at a time and may be blocked by radio signals that occur on or near their operating frequencies, regardless of cord settings.
- \* Changes or modifications to the device may void FCC compliance.
- \* Infrequently used radio kits should be tested regularly to protect against undetected interference or fault.
- \* A general knowledge of radio and its variables should be gained prior to acting as a wholesale distributor or dealer, and these facts should be communicated to the ultimate users.
- \* This device complies with FCC Part 15 and Canada Rules and Regulations. Operation is subject to the following two conditions: (1) This device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

Copyright © 2004 Linear Corporation

222278 X4