


## Exhibit 2

### **Parameters of the mobile (MO) Station Location:**

Mobile test equipment will be transmitting while stationary. The proposed signal source is commercial test equipment, amplified and transmitted through a custom horn antenna.

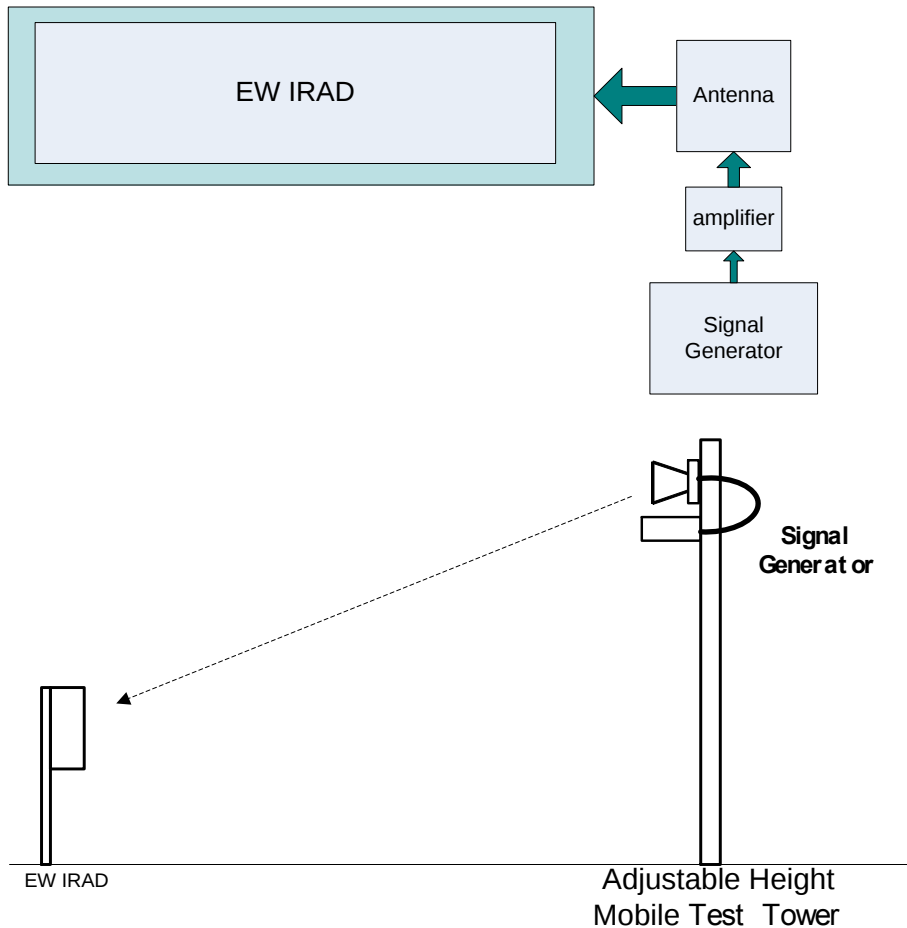

#### **Directional Antenna:**

Custom Horn Antenna

Gain: 18.4 dBi (estimated)

Beamwidth: fan beam 25° Elevation, 3° Azimuth (estimated)

Polarization: Vertical or Horizontal, Non-Circular

Height: 0 to 50 feet above ground level

Azimuth pointing direction: from its location anywhere above to the EW IRAD receive antenna

Elevation pointing direction: -30 to +30 degrees above horizontal.

ERP: 75 kW