

Crestron **CWD7807**

Two-Way RF Transceiver Module

Operations Guide



CRESTRON

This document was prepared and written by the Technical Documentation department at:



Crestron Electronics, Inc.
15 Volvo Drive
Rockleigh, NJ 07647
1-888-CRESTRON

Regulatory Compliance

Federal Communications Commission (FCC) Compliance Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following conditions:

(1) This device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

CAUTION: Changes or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

ISED Canada (IC) Compliance Statement

This device contains license-exempt transmitter/receiver that comply with Innovation, Science and Economic Development Canada's license-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference, and
2. This device must accept any interference, including interference that may cause undesired operation of the device.

To satisfy RF exposure requirements, this device and its antenna must operate with a separation distance of at least 20 centimeters from all persons and must not be colocated or operating in conjunction with any other antenna or transmitter.

Déclaration de conformité à ISDE Canada (IC) Cet appareil contient un émetteur / récepteur exempt de licence conforme aux RSS (ou aux RSS) de Innovation, Sciences et Développement économique Canada. Le fonctionnement est soumis aux deux conditions suivantes:

1. Cet appareil ne doit pas causer d'interférences, et 2. Cet appareil doit accepter toutes les interférences, y compris celles pouvant entraîner un fonctionnement non souhaité du dispositif.

Pour satisfaire aux exigences en matière d'exposition aux radiofréquences, cet appareil et son antenne doivent fonctionner à une distance de séparation d'au moins 20 centimètres de toute personne et ne doivent pas être situés dans un même lieu ni être utilisés avec toute autre antenne ou émetteur.

Tout

All brand names, product names and trademarks are the property of their respective owners.

Crestron **CWD7807**

Two-Way RF Transceiver Module

Operations Guide

©2010 Crestron Electronics, Inc.

Contents

Two-Way RF Transceiver Module: CWD7807	1
Functions and Features	1
Specifications.....	2
Physical Description	2
Setup	4
Labeling.....	4
Documentation.....	5

Two-Way RF Transceiver Module: CWD7807

Functions and Features

The CWD7807 (hereafter referred to as “module”) is a two-way radio frequency (RF) module that utilizes the 2.4 GHz frequency band to communicate with other devices.

The module operates according to the IEEE 802.15.4 specification and can be configured to minimize the possibility of interference with other devices.

The module receives RF signals from one or more Crestron devices and can transmit these signals over the air for further processing (depending on the application).

Functional Summary

- 2.4 GHz frequency band, IEEE 802.15.4 specification
- Range from 3 feet to 500 ft.
- Operates on one of sixteen available channels to establish optimal signal quality

Specifications

The table below is a summary of specifications for the


CWD7807. *Specifications of the CWD7807*

SPECIFICATION	DETAILS
Power Requirements	2.0 Watts (4VDC @ 0.5A)
Operating Frequency	2400 MHz to 2483.5 MHz (802.15.4 compliant)
Operating Ranges ¹	
Minimum Distance	3 ft
Maximum Distance Indoors (without repeater device)	50 ft
Available Channels	16 (numbered 11 through 26 per 802.15.4)
RF Output Power	67.8mW (18.31dBm)
Dimensions	Width: 1.64 in (4.1 cm) Height: 3.54 in (9.0 cm) Depth: 0.78 in (2.0 cm)
Antenna	Antenna: MICA 2.4 GHz Frequency Range: 2.4-2.5GHz Gain: 1.8 dBi max. Type: SMD VSWR: 1.8:1

- The location and orientation of the module are important factors in the RF performance. With the unit located outside of any metal enclosures, the antenna is adjusted to achieve the best range. The range is dependent on its placement and the building in which it is used. The construction of the building, obstructions, and RF interference from other devices are factors determining the effective range of the unit. To prevent unit-to-unit RF interference, multiple modules operating at the same frequencies should not be installed within 3-5 feet of each other.

Physical Description

The module, shown below, consists of various components attached to a printed circuit board.

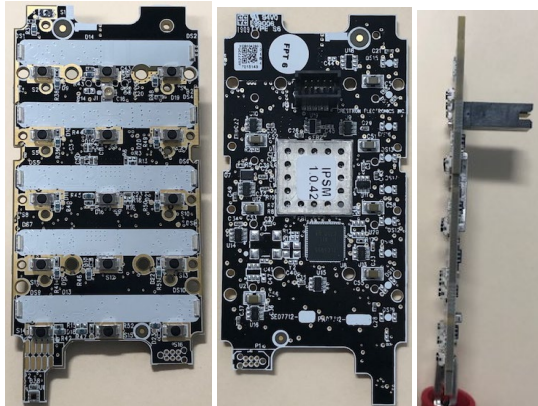


Physical View of CWD7807 (Front, Rear, Side)

Ports

The module contains a 10-pin connector. Refer to the diagrams and descriptions that follow.

Power/I-O

The 10 pin connector provides power to the module as well as communications between the module and wired devices. Refer to the following table for pin assignments of the module interface connector.

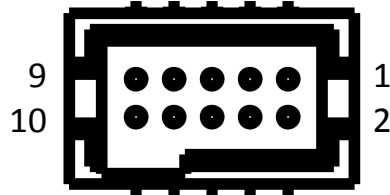

NOTE: Pin 9 provides power to the circuit card.

Power/I-O Pinout Signals


Pin #	Signal	Pin #	Signal
1	ZERO_X/PWM	6	FILTERED_ZERO_X_
2	RELAY_ON/FET_A	7	GND
3	CURRENT_SENSE	8	REMOTE_RX
4	RELAY_OFF/FET_B	9	+4V (in)
5	FAULT	10	+3.3V (out)

Setup

Hardware Hookup

Refer to the hookup diagram below, which shows the connections made to the module. Complete the connections in any order.

NOTE: To prevent unit-to-unit RF interference, multiple modules operating at the same frequencies should not be installed within three to five feet of each other.

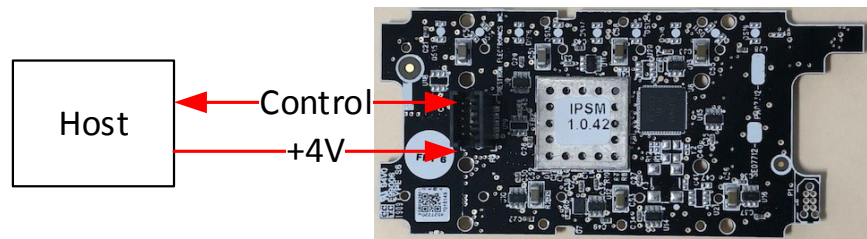

Documentation

IMPORTANT NOTE: To comply with ISED CANADA and FCC RF exposure compliance requirements, the antenna used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

REMARQUE IMPORTANTE: Pour être conforme aux exigences de conformité d'ISED CANADA et de la FCC en matière d'exposition aux radiofréquences, l'antenne utilisée pour cet émetteur doit être installée de manière à assurer une distance de séparation d'au moins 20 cm de toutes les personnes. toute autre antenne ou émetteur.

FCC Warning:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.—Consult the dealer or an experienced radio/TV technician for help.

Please note that any modifications to the device software or configuration, including but not limited to the init file(s), can cause device performance to vary beyond the scope of the currently referenced FCC authorization. Accordingly, if any user modifications are sought to be made to the device software or configuration, the user may be required to independently seek fresh FCC and other regulatory authorizations as relevant prior to distributing or marketing the devices or products incorporating the same.

ISED Canada:

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

1. This device may not cause interference.
2. This device must accept any interference, including interference that may cause undesired operation of the device.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes :

1. L'appareil ne doit pas produire de brouillage;
2. L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

This page intentionally left blank