



FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME,

MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934

Facsimiles: (03) 3406-9967

page 5 of 7

FCC ID: **F5GFP-A201**

Part 15 Sub.part B Class B Digital Device

6. TESTED SYSTEM DETAILS

6.1 Peripherals and Others:

<i>Description</i>	<i>Model Name</i>	<i>Serial No.</i>	<i>Manufacturer</i>	<i>FCC ID</i>
Personal Computer	12XL212	1V08FHNJE1N5	Compaq Computer Co., Ltd.	DOC
Mouse	M-BB48	LZE01271677	Logitech	DOC
PC Monitor	M2978	CY5430HF3CV	LG Electronics, Inc.	BEJCA500
Scanner	AS-1	0009	Fuji Photo Film Co., Ltd.	F5GAS-1
AC Adapter (for PC) LE-9702B-01		177625-001	Compaq Computer Co., Ltd.	N/A
AC Adaptor (for EUT) AC-3V		0044	Fuji Photo Film Co., Ltd.	N/A

(for AC Adapter of EUT, Input: 120V AC, 60Hz / Output: 3V DC)

Note:

*DOC: Declaration of Conformity by Manufacturer, Compaq Computer Co., Ltd., or Logitech.

* N/A: Equipment required for the Verification.



FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME,

MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934

Facsimiles: (03) 3406-9967

page 6 of 7

FCC ID: F5GFP-A201

Part 15 Sub.part B Class B Digital Device


6.2 List of Cables:

<i>Description</i>	<i>Length</i>	<i>Type of shield</i>	<i>Ferrite Core</i>
EUT / Personal Computer	1.2 m	Shielded	Add
DC Power Cord (EUT/AC adaptor)	1.9 m	Non-shielded	Add
Scanner / Personal Computer	1.5 m	Shielded	Provided
PC Monitor / Personal Computer	1.65 m	Shielded	Provided
Mouse / Personal Computer	1.9 m	Shielded	N/A
DC Power Cord (PC/AC adaptor)	1.55 m	Non-shielded	Provided
AC Power Cord (PC/AC adapter)	1.7 m	Non-shielded	N/A
AC Power Cord (Scanner)	1.8 m	Non-shielded	N/A
AC Power Cord (PC Monitor)	1.7 m	Non-shielded	N/A

Note:

* Provided: The cable is an accessory for Personal Computer, Scanner or PC Monitor that was attached a ferrite core.

Figure 6-1 System Configuration Diagram :

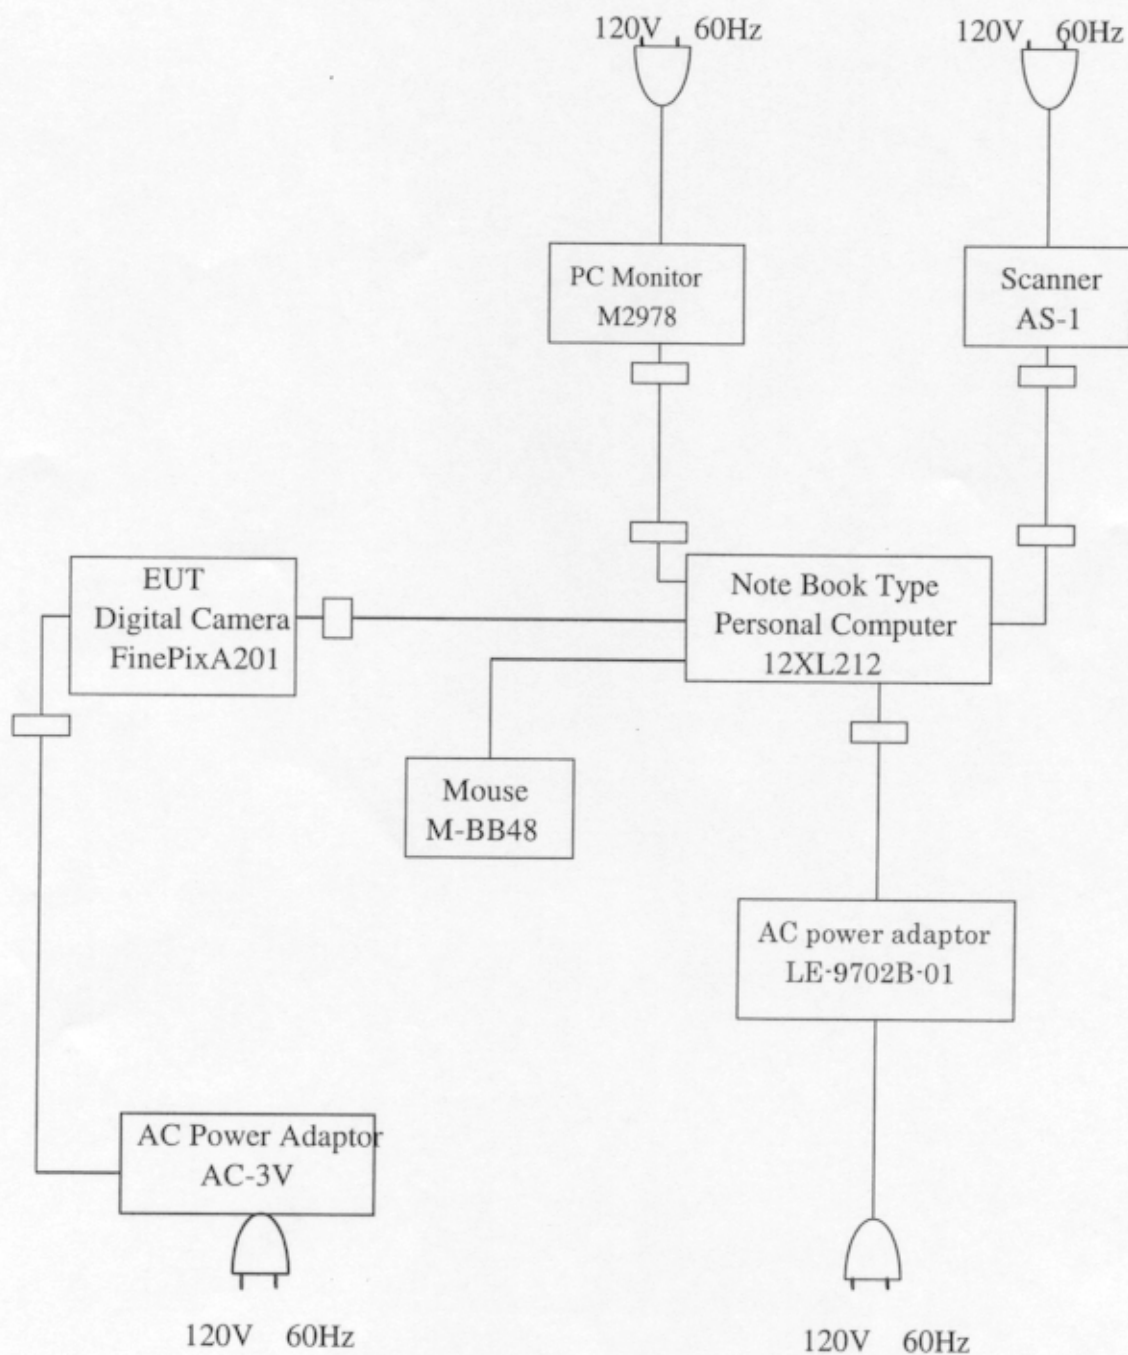



FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME,

MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934

Facsimiles: (03) 3406-9967

FCC ID: F5GFP-A201

Part 15 Subpart B Class B Digital Device

7. TEST RESULTS

7.1 Conducted Radio Noise Measurement

7.1.1 Measurement Instrumentation Used:

(Model / Serial No. / Manufacturer)

Test Receiver ----- (ESCS 30 / 825788-007 / Rohde & Schwarz)

L. I. S. N ----- (KNW-407 / 8-823-10 / Kyoritsu Electrical)

L. I. S. N ----- (KNW-407 / 8-680-7 / Kyoritsu Electrical)

Spectrum Analyzer System ----- (8568S / 2445A00924 / Hewlett Packard)

7.1.2 Measurement Procedure:

The power line conducted interference measurements were performed in a shield enclosure with peripherals placed on a table, 80cm high over a metal floor.

It was located more than required distance away from the shielded enclosure wall.

The EUT was plugged into the L.I.S.N. and the frequency range of interest scanned.

FCC ID: F5GFP-A201

Part 15 Subpart B Class B Digital Device

7.1.3 Test Data

Table 7.1-1 Conducted Radio Noise Measurement Results:

Operating mode: Camera Mode

Date of measurement: July 3, 2001

Test Procedure: ANSI C63.4-1992

Temperature: 23 degree C

Humidity: 66 %

Frequency (MHz)	Results		Results	Limit	Margin
	Meter Reading.		Emission Level		
	VA.	VB.			
	(dBuV/m)		(dBuV/m)	(dBuV/m)	(dBuV/m)
0.5300	37.9	32.0	37.9	47.9	10.0
0.9500	39.0	37.0	39.0	47.9	8.9
1.1600	38.0	36.3	38.0	47.9	9.9
2.2200	26.2	24.0	26.2	47.9	21.7
4.2300	20.1	16.2	20.1	47.9	27.8
9.9100	12.2	10.6	12.2	47.9	35.7

Note:

- 1) Emission Levels are higher levels of VA or VB of Meter Readings + Correction Factor.
- 2) VA: Between one end of the power cable and the grounded.
VB: Between the other end of power cable and the grounded.

7.1.4 Conducted Radio Noise Calculation

The conducted radio noise is calculated by adding the calibration factor to the measured reading. The basic equation and a sample calculation are as follows:

$$\text{CRN} = \text{TRM} + \text{CF}$$

$$\text{Margin} = \text{Limit} - \text{CRN}$$

where CRN = Conducted Radio Noise (dBuV)

TRM = Test Receiver Reading (dBuV)

CF : Correction Factor (dB/m)

The Correction factor includes cable loss and LISN factor.



FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME,

MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934

Facsimiles: (03) 3406-9967

FCC ID: **F5GFP-A201**

Part 15 Sub.part B Class B Digital Device

7.2 Radiated Radio Noise Measurement

7.2.1 Measurement Instrumentation Used :

(Model / Serial No. / Manufacturer)

Test Receiver ----- (ESCS 30 / 834115-020 / Rohde & Schwarz)

Bi-Conical Antenna ----- (BBA9106 / D-6901 No.2 / Schwarzbeck)

Log-Periodic Antenna ----- (UHALP9107 / 424-517 / Schwarzbeck)

Spectrum Analyzer System ----- (8568S / 2445A00924 / Hewlett Packard)

7.2.2 Measurement Procedure:

The EUT was placed in a 80cm high table along with the peripherals.

The turntable was separated from the antenna at a distance of 3 meter. Cables were placed in a position to produce maximum emission as determined by experimentation, and operation mode was selected for maximum.

The frequencies and amplitudes of maximum emission were measured at varying azimuths, antenna heights and antenna polarities.

FCC ID: F5GFP-A201

Part 15 Sub.part B Class B Digital Device

7.2.3 Test Data

Table 7.2-1 Radiated Radio Noise Measurement Results:

Operating mode: Camera Mode

Date of measurement: July 3, 2001

Test Procedure: ANSI C63.4-1992

Temperature: 22 degree C

Humidity: 67 %

Frequency	Correction	Results		Results	Limit	Margin
	Factor	Meter Reading.		Emission Level		
(Mhz)	(dB)	(dBuV/m)		(dBuV/m)	(dBuV/m)	(dBuV/m)
		Hori.	Vert.			
67.800	7.8	19.1	30.4	30.4	40.0	9.6
75.700	7.4	-	29.7	29.7	40.0	10.3
93.350	10.4	-	24.2	24.2	43.5	19.3
100.020	11.8	-	27.6	27.6	43.5	15.9
110.450	13.4	23.8	-	23.8	43.5	19.7
129.800	15.8	25.1	-	25.1	43.5	18.4
180.000	18.1	27.7	28.2	28.2	43.5	15.3
220.030	20.0	29.3	-	29.3	46.0	16.7
240.000	20.4	-	28.5	28.5	46.0	17.5
257.730	20.5	32.9	-	32.9	46.0	13.1
311.420	19.4	36.0	-	36.0	46.0	10.0
320.050	19.6	34.8	26.3	34.8	46.0	11.2
404.990	21.1	41.2	36.1	41.2	46.0	4.8
431.000	21.6	28.4	-	28.4	46.0	17.6
499.780	22.8	-	35.3	35.3	46.0	10.7
529.770	23.5	36.5	30.2	36.5	46.0	9.5
560.080	24.2	30.6	-	30.6	46.0	15.4
587.040	24.9	31.7	-	31.7	46.0	14.3
899.040	31.0	39.3	43.0	43.0	46.0	3.0

Note: 1) Meter Readings are corrected by all Correction Factors.

2) Emission Levels are higher levels of Hori. or Vert. of Meter Readings.

3) Margin = Limit - Emission Level.

4) The Emission Level at 899.040 MHz is the radiated one from a personal computer.



FUJIFILM

FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME,

MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934

Facsimiles: (03) 3406-9967

FCC ID: F5GFP-A201

Part 15 Sub.part B Class B Digital Device

7.2.4 Radiated Radio Noise Calculation

The radiated radio noise is calculated by adding the correction factor to the measured reading. The basic equation and a sample of calculation are as follows;

$$\text{RRN} = \text{TRM} + \text{CF}$$

$$\text{Margin} = \text{Limit} - \text{RRN}$$

where RRN = Radiated Radio Noise (dBuV)

TRM = Test Receiver Reading (dBuV)

CF : Correction Factor (dB/m), The correction factor includes pre-amplifier gain, cable loss and antenna factor.