



FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME,

MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934

Facsimiles: (03) 3406-9967

page 5 of 7

FCC ID : F5GFP-A203

Part 15 Sub.part B Class B Digital Device

6. TESTED SYSTEM DETAILS

6.1 Peripherals and Others:

<i>Description</i>	<i>Model Name</i>	<i>Serial No.</i>	<i>Manufacturer</i>	<i>FCC ID</i>
Personal Computer	12XL212	1V08FHNJE1N5	Compaq Computer Co., Ltd.	DOC
Mouse	M-BB48	LZE01271677	Logitech	DOC
PC Monitor	M2978	CY5430HF3CV	LG Electronics, Inc.	BEJCA500
Scanner	AS-1	0009	Fuji Photo Film Co., Ltd.	F5GAS-1
AC Adapter (for PC)	LE-9702B-01	177625-001	Compaq Computer Co., Ltd.	N/A
AC Adaptor (for EUT)	AC-3V	0044	Fuji Photo Film Co., Ltd.	N/A

(for AC Adapter of EUT, Input: 120V AC, 60Hz / Output: 5V DC)

Note:

*DOC: Declaration of Conformity by Manufacturer, Compaq Computer Co., Ltd., or Logitech.

* N/A: Equipment required for the Verification.



FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME,
MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934

Facsimiles: (03) 3406-9967

page 6 of 7

FCC ID : F5GFP-A203

Part 15 Subpart B Class B Digital Device


6.2 List of Cables:

<i>Description</i>	<i>Length</i>	<i>Type of shield</i>	<i>Ferrite Core</i>
EUT / Personal Computer	1.2 m	Shielded	Add
DC Power Cord (EUT/AC adaptor)	1.9 m	Non-shielded	Add
Scanner / Personal Computer	1.5 m	Shielded	Provided
PC Monitor / Personal Computer	1.65 m	Shielded	Provided
Mouse / Personal Computer	1.9 m	Shielded	N/A
DC Power Cord (PC/AC adaptor)	1.55 m	Non-shielded	Provided
AC Power Cord (Scanner)	1.8 m	Non-shielded	N/A
AC Power Cord (PC Monitor)	1.7 m	Non-shielded	N/A

Note:

* Provided: The cable is an accessory for Personal Computer, Scanner or PC Monitor that was attached a ferrite core.

Figure 6-1 System Configuration Diagram :

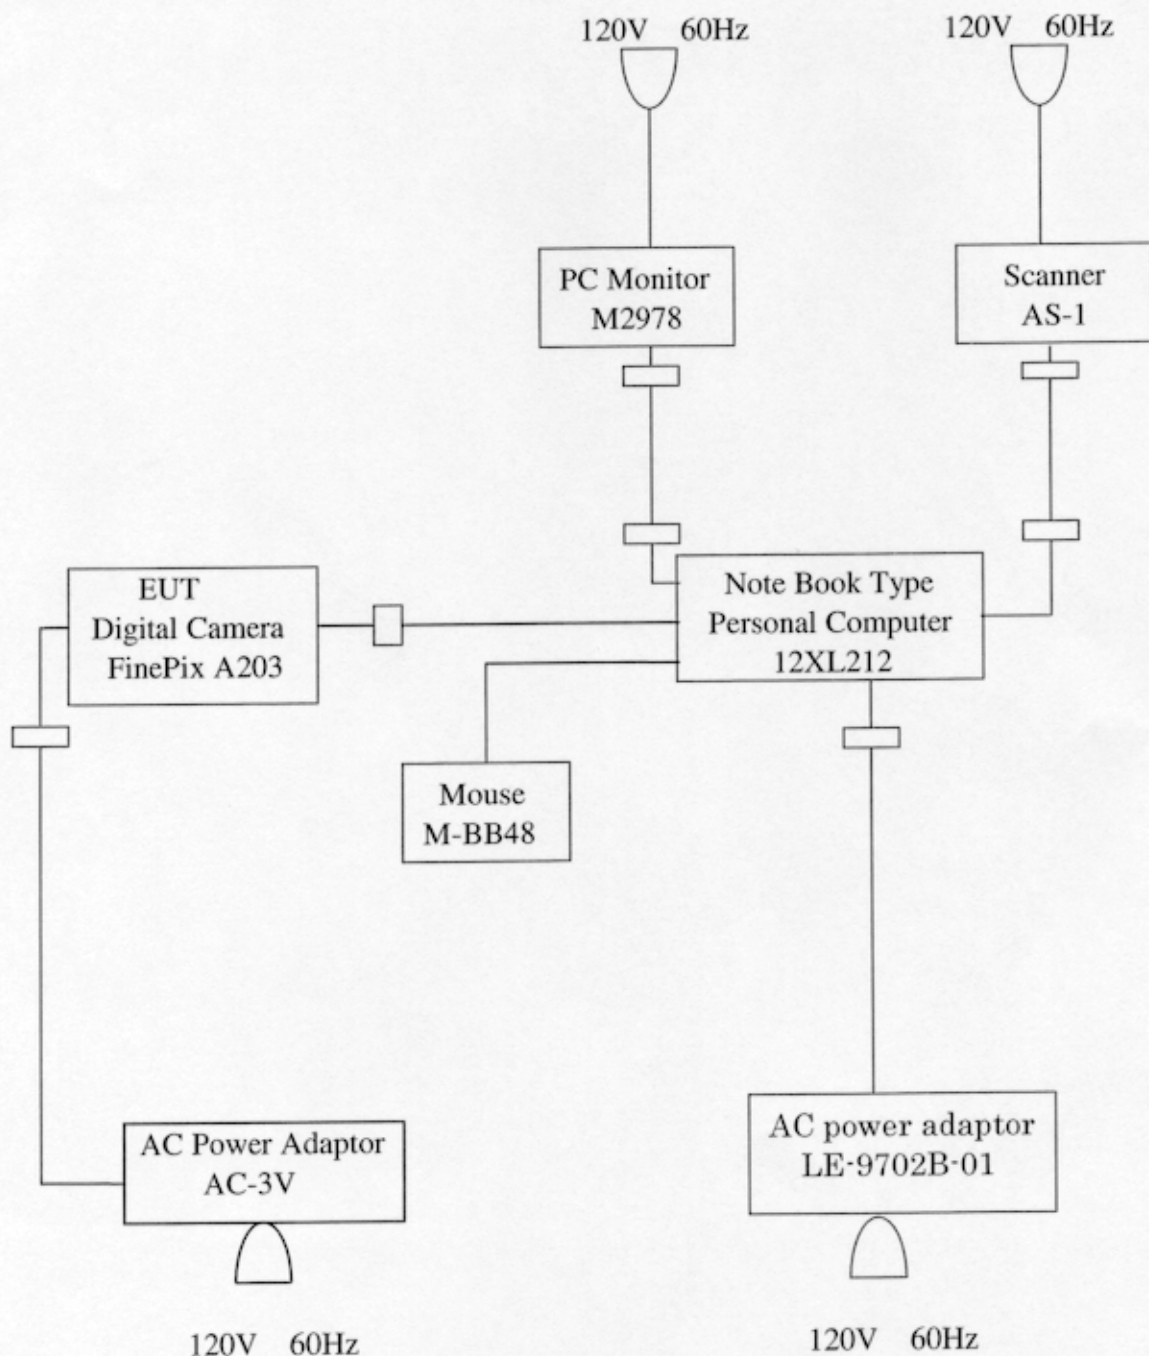



FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME,

MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934

Facsimiles: (03) 3406-9967

FCC ID : F5GFP-A203

Part 15 Sub.part B Class B Digital Device

7. TEST RESULTS

7.1 Conducted Radio Noise Measurement

7.1.1 Measurement Instrumentation Used:

(Model / Serial No. / Manufacturer)

Test Receiver ----- (ESCS 30 / 825788-007 / Rohde & Schwarz)

L. I. S. N ----- (KNW-407 / 8-823-10 / Kyoritsu Electrical)

L. I. S. N ----- (KNW-407 / 8-680-7 / Kyoritsu Electrical)

Spectrum Analyzer System ----- (8568S / 2445A00924 / Hewlett Packard)

7.1.2 Measurement Procedure:

The power line conducted interference measurements were performed in a shield enclosure with peripherals placed on a table, 80cm high over a metal floor.

It was located more than required distance away from the shielded enclosure wall.

The EUT was plugged into the L.I.S.N. and the frequency range of interest scanned.

FCC ID : F5GFP-A203

Part 15 Sub.part B Class B Digital Device

7.1.3 Test Data

Table 7.1-1 Conducted Radio Noise Measurement Results:

Operating mode: PLAY Mode Date of measurement: June 06, 2002
Test Procedure: ANSI C63.4-1992 Temperature: 17 degree C
Humidity: 62 %

Frequency (MHz)	Results Meter Reading.		Results	Limit	Margin
	VA.	VB.	Emission Level		
	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)	(dBuV/m)
0.5600	33.1	32.4	33.1	47.9	14.8
0.7100	40.8	38.4	40.8	47.9	7.1
0.8500	42.2	40.2	42.2	47.9	5.7
0.9900	38.7	38.8	38.8	47.9	9.1
1.2700	38.1	34.8	38.1	47.9	9.8
1.4100	36.6	34.7	36.6	47.9	11.3
2.8200	20.8	21.2	21.2	47.9	26.7
23.6200	16.9	15.8	16.9	47.9	31.0

Note:

- 1) Emission Levels are higher levels of VA or VB of Meter Readings + Correction Factor.
- 2) VA: Between one end of the power cable and the grounded.
VB: Between the other end of power cable and the grounded.

7.1.4 Conducted Radio Noise Calculation

The conducted radio noise is calculated by adding the calibration factor to the measured reading. The basic equation and a sample calculation are as follows:

$$\text{CRN} = \text{TRM} + \text{CF}$$

$$\text{Margin} = \text{Limit} - \text{CRN}$$

where CRN = Conducted Radio Noise (dBuV)

TRM = Test Receiver Reading (dBuV)

CF : Correction Factor (dB/m)

The Correction factor includes cable loss and LISN factor.



FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME,
MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934

Facsimiles: (03) 3406-9967

FCC ID : F5GFP-A203

Part 15 Sub.part B Class B Digital Device

7.2 Radiated Radio Noise Measurement

7.2.1 Measurement Instrumentation Used :

(Model / Serial No. / Manufacturer)

Test Receiver ----- (ESCS 30 / 834115-020 / Rohde & Schwarz)

Bi-Conical Antenna ----- (BBA9106 / D-6901 No.2 / Schwarzbeck)

Log-Periodic Antenna ----- (UHALP9107 / 424-517 / Schwarzbeck)

Spectrum Analyzer System ----- (8568S / 2445A00924 / Hewlett Packard)

7.2.2 Measurement Procedure:

The EUT was placed in an 80cm high table along with the peripherals.

The turntable was separated from the antenna at a distance of 3 meter. Cables were placed in a position to produce maximum emission as determined by experimentation, and operation mode was selected for maximum.

The frequencies and amplitudes of maximum emission were measured at varying azimuths, antenna heights and antenna polarities.

FCC ID : F5GFP-A203
Part 15 Sub.part B Class B Digital Device

7.2.3 Test Data

Table 7.2-1 Radiated Radio Noise Measurement Results:

Operating mode: PC Camera Mode
Test Procedure: ANSI C63.4-1992

Date of measurement: June 06, 2002
Temperature: 18 degree C
Humidity: 58 %

<i>Frequency</i>	<i>Correction</i>	<i>Results</i>		<i>Results</i>	<i>Limit</i>	<i>Margin</i>
	<i>Factor</i>	<i>Meter Reading.</i>		<i>Emission Level</i>		
<i>(Mhz)</i>	<i>(dB)</i>	<i>(dBuV/m)</i>		<i>(dBuV/m)</i>	<i>(dBuV/m)</i>	<i>(dBuV/m)</i>
		<i>Hori.</i>	<i>Vert.</i>			
53.000	11.5	-	23.6	23.6	40.0	16.4
68.600	7.9	26.7	26.8	26.8	40.0	13.2
120.020	14.9	26.3	24.7	26.3	43.5	17.2
134.200	16.2	-	21.0	21.0	43.5	22.5
140.020	16.4	21.3	-	21.3	43.5	22.2
180.030	18.5	-	29.6	29.6	43.5	13.9
180.140	18.8	28.6	35.1	35.1	43.5	8.4
336.020	20.3	-	31.0	31.0	46.0	15.0
356.460	20.7	36.2	35.6	36.2	46.0	9.8
358.960	20.8	38.5	35.0	38.5	46.0	7.5
368.750	20.9	34.3	-	34.3	46.0	11.7
369.250	20.9	33.6	27.9	33.6	46.0	12.4
499.830	23.6	37.7	36.3	37.7	46.0	8.3
598.850	26.0	31.8	36.2	36.2	46.0	9.8
720.000	27.8	-	35.5	35.5	46.0	10.5

Note: 1) Meter Readings are corrected by all Correction Factors.

2) Emission Levels are higher levels of Hori. or Vert. of Meter Readings.

3) Margin = Limit - Emission Level.



FUJI PHOTO FILM CO., LTD.

26-30, NISHIAZABU 2-CHOME,

MINATO-KU, TOKYO 106, JAPAN

Telephone: (03) 3406-2934

Facsimiles: (03) 3406-9967

FCC ID : F5GFP-A203

Part 15 Sub.part B Class B Digital Device

7.2.4 Radiated Radio Noise Calculation

The radiated radio noise is calculated by adding the correction factor to the measured reading. The basic equation and a sample of calculation are as follows;

$$\text{RRN} = \text{TRM} + \text{CF}$$

$$\text{Margin} = \text{Limit} - \text{RRN}$$

where RRN = Radiated Radio Noise (dBuV)

TRM = Test Receiver Reading (dBuV)

CF : Correction Factor (dB/m), The correction factor includes pre-amplifier gain, cable loss and antenna factor.