


Preliminary
Confidential

MARS 2.4GHz

Frequency hopping and Dual slot diversity description


History

Ver 0.1	JTP	980909	Initial version
Ver 0.2	FM	990111	Updated/changed for type approval
Ver 0.3	FM	990204	Updated/changed for type approval with new crystal
Ver 0.4	JTP	990818	Informative description added

	Technical Documentation			Specification
	MARS 2G4 Freq. Hopping			
File mars2.doc	Date 1999-08-18	Revision 0.4	Ref. JTP/FM	Page 1 of 12

This document and the information contained is property of RTX Telecom A/S, Denmark. Unauthorized copying is not allowed. The information in this document is believed to be correct at the time of writing. RTX Telecom A/S reserves the right at any time to change said content, circuitry and specifications.

HISTORY.....	1
1. INTRODUCTION.....	3
2. AVOIDANCE METHOD.....	3
2.1 KNOWN HOPPERS	3
2.2 MICROWAVE OVENS	3
2.3 CW INTERFERENCE ON FIXED RF CARRIERS.....	3
2.4 OTHER HOPPERS.....	3
2.5 IMPROVE RANGE / MULTI-PATH PERFORMANCE	3
3. ADAPTATION TO 2.4GHZ ISM BAND.....	4
3.1 FRAME FORMAT:.....	4
3.2 BURST FORMAT:.....	4
3.2.1 Sync-field.....	4
3.2.2 A-field.....	4
3.2.3 B-field.....	6
3.2.4 XZ-field.....	6
3.3 FREQUENCY HOPPING ALGORITHM	6
3.3.1 Excluded carriers	7
3.3.2 Hopping tables.....	8
3.3.3 Example.....	8
3.3.4 Dummy bearer example	9
3.3.5 Traffic bearer example.....	10
3.3.6 Two traffic bearers.....	11
3.4 PP SYNCHRONIZATION PROCEDURE.....	12
3.5 DUAL SLOT DIVERSITY.....	12

		Technical Documentation MARS 2G4 Freq. Hopping		Specification
File mars2.doc	Date 1999-08-18	Revision 0.4	Ref. JTP/FM	Page 2 of 12

This document and the information contained is property of RTX Telecom A/S, Denmark. Unauthorized copying is not allowed. The information in this document is believed to be correct at the time of writing. RTX Telecom A/S reserves the right at any time to change said content, circuitry and specifications.

1. Introduction

The Mars system is based on DECT the ETSI standard ETS-300-175-1 to ETS-300-175-9. The Mars system is improved by implementing extra features to combat the interference at 2.4 GHz.

The frequency hopping method for 2.4 GHz ISM band has to provide optimal performance and connection quality in environment with 5 different types of interference:

1. Other interference of MARS-type, known hopping algorithm and avoidance method (synchronized/unsynchronized).
2. Microwave ovens, sweeping the most of the band and running on 60Hz mains supply.
3. Interference on fixed RF carrier, CW interference. Direct sequence CDMA is also detected as this type of interference.
4. Other hoppers using the ISM band, with unknown hopping algorithm, example: Wireless LAN based on IEEE802.11, etc.
5. "Range / multi-path propagation"

The frame format is based on DECT, but modified from 24 timeslots to 20 timeslots and 79/23/27/35 possible RF carriers. Frequency hopping is implemented on a frame by frame basis. The system is implemented with encryption based on DECT.

2. Avoidance method

2.1 Known hoppers

Use 79 RF channels. Re-map though hopping table. Part of RFPI/RPN defines which hopping sequence to use. Bearer hand-over: change of slot-position and hopping index. Avoid modulo 16 sequences (= DECT sequences).

Different connection/bearer should use different hopping index.

2.2 Microwave ovens

Use dual slot diversity. Transmission of same B-field content in two slots on different carrier. Normal one frame delay extended to 1.5 frames delay in each direction in order to ensure seamless selection of best received burst. Total extra round-trip delay is one extra frame.

2.3 CW interference on fixed RF carriers

Exclude discrete RF carriers and adaptive use of dual-slot diversity.

2.4 Other hoppers

Appears like random interference. Adaptive usage of dual-slot diversity.

2.5 Improve range / multi-path performance

Use prolonged preamble. In the base the frequency hopping sequence must be: RX – TX

RTX		Technical Documentation		Specification	
		MARS 2G4 Freq. Hopping			
File	mars2.doc	Date	1999-08-18	Revision	0.4
				Ref.	JTP/FM
				Page	3 of 12

This document and the information contained is property of RTX Telecom A/S, Denmark. Unauthorized copying is not allowed. The information in this document is believed to be correct at the time of writing. RTX Telecom A/S reserves the right at any time to change said content, circuitry and specifications.

3. Adaptation to 2.4GHz ISM band

3.1 Frame format:

Down-link (FP to PP)

Up-link (PP to FP)

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
---	---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----

Symbol rate: 1.033570 Mbit/sec.

Frame length: 20 timeslots, same as 11.1458 msec.

Frame frequency: 89.72 Hz

Number of symbols for frame: 11520

Number of symbols per slot: 576 (440 in burst and 136 in guard space)

Frequency hopping frame begins from slot 10. Slots are used in pairs for duplex bearers (0,10), (1,11), etc. The same RF carrier used in up-link direction of a slot-pair in frame N is used in down-link direction in frame N+1.

		Frequency versus slot																			
Frame		0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19
N												x		y							
N+1		x		y								z		w							
N+2		z		w																	

3.2 Burst format:

Sync field	A field	B field	XZ	Guard space
------------	---------	---------	----	-------------

3.2.1 Sync-field

Length: up to 48 symbols consisting of

Possibly Prolonged preamble: 16 bit data
Preamble for bit-synchronization: 16 bit data
Frame synchronization word: FP: E98Ah
PP: 1675h

Pattern for transmission from FP:

1010 0101 1010 1010 1110 1001 1000 1010

Pattern for transmission from PP:

0011 0011 0011 0011 0101 1010 0101 0101 0001 0110 0111 0101


3.2.2 A-field

Total length 64 symbols

Header: 8 bit

Tail: 40 bit

CRC: 16 bit

		Technical Documentation MARS 2G4 Freq. Hopping			Specification
File mars2.doc	Date 1999-08-18	Revision 0.4	Ref. JTP/FM	Page 4 of 12	

This document and the information contained is property of RTX Telecom A/S, Denmark. Unauthorized copying is not allowed. The information in this document is believed to be correct at the time of writing. RTX Telecom A/S reserves the right at any time to change said content, circuitry and specifications.


3.2.2.1 T-MUX:

NT: RFPI is normally broadcast 7 out of every 8 frames.
 QT: Static system information
 PT: Broadcast, paging
 MT: MAC layer control
 CT: Connection oriented higher layer signaling


3.2.2.2 Derive hopping SeQuenceCode (SQC) from RFPI

In order to distribute usage of different hopping sequences, the actual used sequence is derived from the FP identity, RFPI. The RFPI is normally broadcast 7 out of every 8 frames which then allows immediate recognition of hopping sequence by the PP during the initial synchronization.

The RFPI consists of 40 bits (5 bytes):




If the ARC equal 000 the RPN has three bits in length and is a Park type A, otherwise the RPN has a length of eight and is.



Two different positions of the SeQuenceCode (SQC) inside the RFPI is defined, in order to flexibility in deciding usage of same or different hopping sequence in multi-cell systems.


Option 0:

Park type A (residential):



The SQC is located from bit a42 to a47.


Park type different from A:



The SQC is located from bit a42 to a47.


Option 1:

Park type A (residential):




The SQC is located from bit a40 to a44.

Park type different from A:



The SQC is located from bit a34 to a39.

		Technical Documentation MARS 2G4 Freq. Hopping			Specification
File mars2.doc	Date 1999-08-18	Revision 0.4	Ref. JTP/FM	Page 5 of 12	

This document and the information contained is property of RTX Telecom A/S, Denmark. Unauthorized copying is not allowed. The information in this document is believed to be correct at the time of writing. RTX Telecom A/S reserves the right at any time to change said content, circuitry and specifications.

3.2.2.3 Excluding fixed carriers.

List of excluded RF carriers or parts hereof is broadcast using paging (reserved code 3). Two different methods are defined:

PT ₃ (1): <i>EXCN0</i> [7], <i>EXCN1</i> [7], <i>EXCN2</i> [7], <i>EXCN3</i> [7]	(28 bits used)
PT ₃ (2): <i>ExcpPattern0</i> [32]	(32 bits used)
PT ₃ (3): <i>ExcpPattern1</i> [32]	(32 bits used)
PT ₃ (4): <i>ExcpPattern2</i> [15]	(15 bits used)

EXCN_x is the carrier number of an excluded RF carrier. Up to four individual carriers may be excluded using this method.

ExcpPattern_x describes a complete pattern of excluded RF carriers.

3.2.3 B-field

Format and usage of B-field is similar to DECT. 320 bits of ADPCM data.

3.2.4 XZ-field

Format and usage of XZ-field is similar to DECT. X-field is a 4-bit CRC on the B-field content. Z-field is a copy of the X field and is used to detect sliding collision.

3.3 Frequency hopping algorithm

The number of used frequencies (NUF) in hopping algorithm is:

North America	79
Most of Europe	79
Japan	23
Spain	27
France	35


In FP and PP exists a PrimaryHoppingIndexNumber (PHIN). This number is incremented modulo NUF in the end of the normal downlink half-frame. It is broadcast in Q0 message instead of PSCN.

To a simplex or an established duplex bearer is assigned a HoppingIndexOffset (HIO), which is analogue to the used RF carrier in a FDMA system. This value is broadcast in place of CN in Q0 message. In the FP in all unused slots in up-link direction the receiver is scanning with HIO=0. The receiver scanning doesn't exclude RF-carriers.

Different FPs use different hopping sequences. The different sequences are derived from the hopping table by adding an offset, SequenceCode (SQC). This is a value in the range 0 – (NUF-1), extracted from the FP identity (RFPI).

A hopping table maps an index I to a carrier number: $CN = f(I)$

The physical RF carrier is calculated by a formula based on:

		Technical Documentation MARS 2G4 Freq. Hopping		Specification
File mars2.doc	Date 1999-08-18	Revision 0.4	Ref. JTP/FM	Page 6 of 12

This document and the information contained is property of RTX Telecom A/S, Denmark. Unauthorized copying is not allowed. The information in this document is believed to be correct at the time of writing. RTX Telecom A/S reserves the right at any time to change said content, circuitry and specifications.

- PHIN
- HIO
- SQC
- NUF
- Actual used hopping table


3.3.1 Excluded carriers

Excluded carriers (exceptions) are fixed carriers that constantly are interfered by CW RF-carrier. The decision for excluding a RF carrier, are based on:

- RSSI monitor during scanning in the FP.
- Bearer quality in FP correlated to specific RF-carriers.
- Bearer quality detected in PP and reported using Q1 in MAC-header.

When exception carriers are included the complete algorithm for frequency calculation is based on:

- PHIN
- HIO
- SQC
- NUF
- FrameNumber
- ExclusionList
- Actual used hopping table

	Technical Documentation MARS 2G4 Freq. Hopping			Specification
File mars2.doc	Date 1999-08-18	Revision 0.4	Ref. JTP/FM	Page 7 of 12

This document and the information contained is property of RTX Telecom A/S, Denmark. Unauthorized copying is not allowed. The information in this document is believed to be correct at the time of writing. RTX Telecom A/S reserves the right at any time to change said content, circuitry and specifications.

3.3.2 Hopping tables

Three different hopping tables are defined.

3.3.2.1 Hopping sequence for North America and most of Europe

Frequency: $2400.983 + CN * 1.033570$ MHz

i	f(i)	i	f(i)	i	f(i)	i	f(i)	i	f(i)	i	f(i)	i	f(i)	i	f(i)
0	0	10	..	20	..	30	..	40	..	50	..	60	..	70	..
1	23	11	..	21	..	31	..	41	..	51	..	61	..	71	..
2	62	12	..	22	..	32	..	42	..	52	..	62	..	72	..
3	8	13	..	23	..	33	..	43	..	53	..	63	..	73	..
4	43	14	..	24	..	34	..	44	..	54	..	64	..	74	..
5	16	15	..	25	..	35	..	45	..	55	..	65	..	75	..
6	..	16	..	26	..	36	..	46	..	56	..	66	..	76	..
7	..	17	..	27	..	37	..	47	..	57	..	67	..	77	..
8	..	18	..	28	..	38	..	48	..	58	..	68	..	78	..
9	..	19	..	29	..	39	..	49	..	59	..	69	..		


3.3.3 Example.

This example shows receive and transmit frequencies in a number of consecutive frames. The example is seen from the FP side with two simultaneous connections. Transmission is indicated in bold.

Used hopping table: North America
 Excluded RF carrier: 11
 SeQuenceCode (SQC): 3
 HoppingIndexOffset (HIO): 0 and 2

Frequency versus slot

Frame	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	PHIN
N			49		26						3	3	3	3	65	3	3	3	3	3	0
N+1			3		65						23	23	26	23	46	23	23	23	23	23	1
N+2			26		46						62	62	65	62	46	62	62	62	62	62	2
N+3			65		46						11	11	46	11	19	11	11	11	11	11	3
N+4			46		19						46	46	46	46	74	46	46	46	46	46	4


	Technical Documentation			Specification
	MARS 2G4 Freq. Hopping			
File mars2.doc	Date 1999-08-18	Revision 0.4	Ref. JTP/FM	Page 8 of 12


This document and the information contained is property of RTX Telecom A/S, Denmark. Unauthorized copying is not allowed. The information in this document is believed to be correct at the time of writing. RTX Telecom A/S reserves the right at any time to change said content, circuitry and specifications.

3.3.4 Dummy bearer example

Dummy bearer

- Frequency hopping sequence on 79 RF carriers
- Different hopping sequence is extracted from fixed part ID.
- All RF carriers are visited in 79 frames (approx. 0.9 sec)

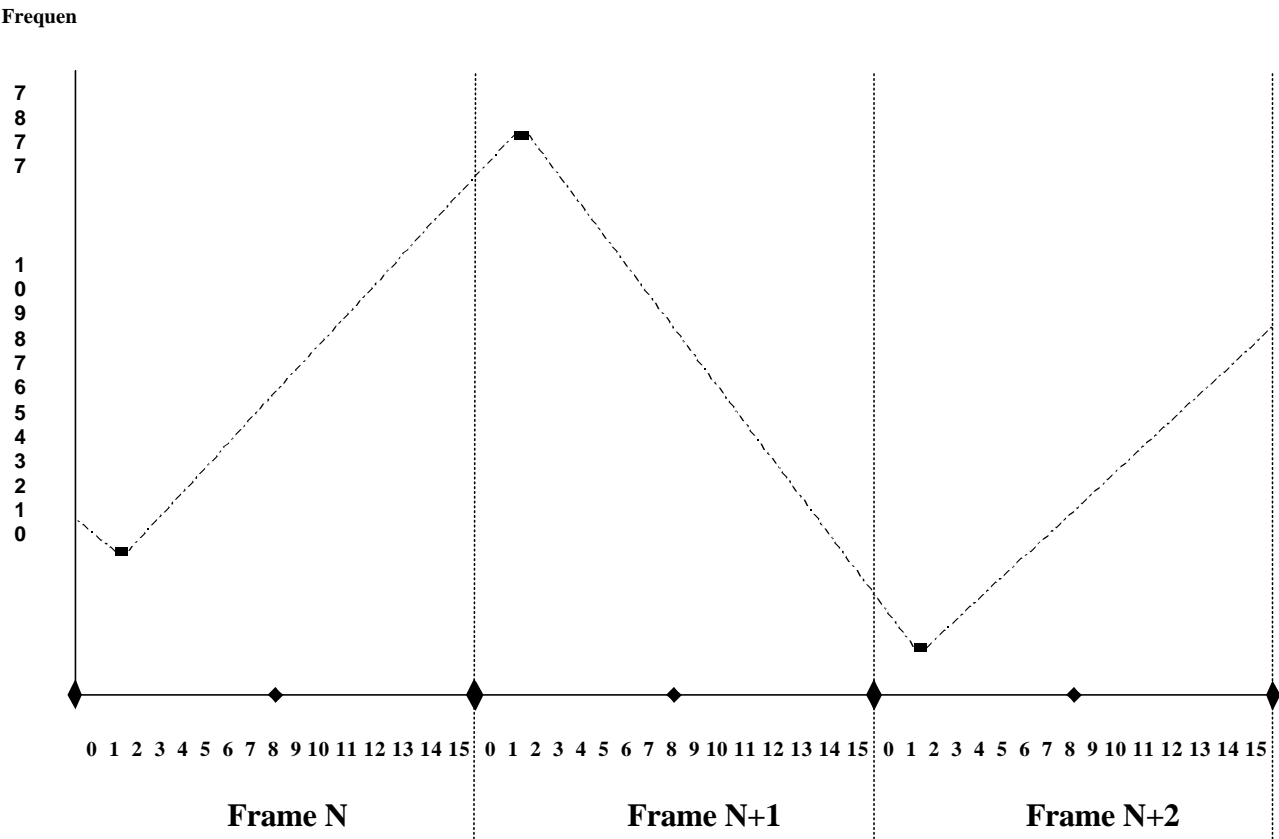


	Technical Documentation			Specification
	MARS 2G4 Freq. Hopping			
File mars2.doc	Date 1999-08-18	Revision 0.4	Ref. JTP/FM	Page 9 of 12

This document and the information contained is property of RTX Telecom A/S, Denmark. Unauthorized copying is not allowed. The information in this document is believed to be correct at the time of writing. RTX Telecom A/S reserves the right at any time to change said content, circuitry and specifications.

3.3.5 Traffic bearer example

Traffic bearer


- Handsets are transmitting on same RF carrier in frame N as basestation in frame N+1

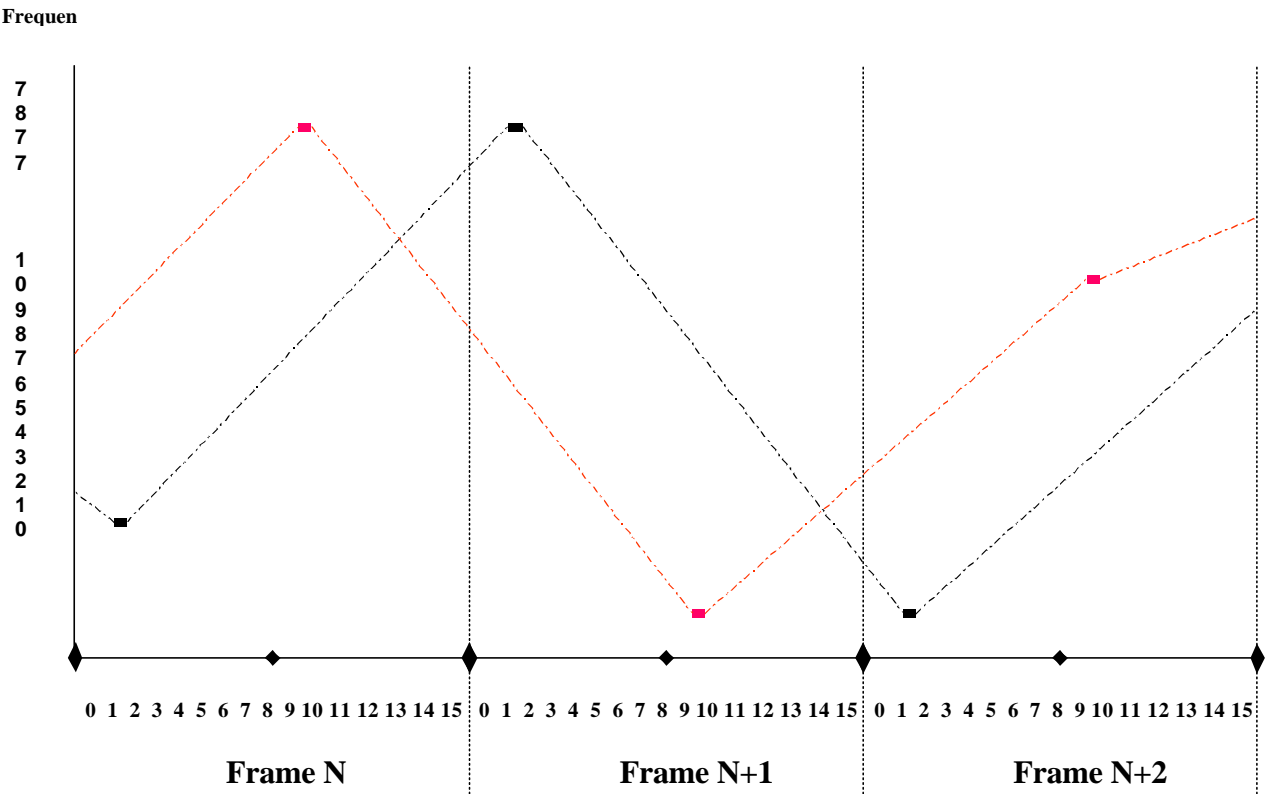

3.3.6 Two traffic bearers

Two traffic bearers

- Different connections may use same or different position in hopping sequence.
- Dynamically allocation of position in hopping sequence.

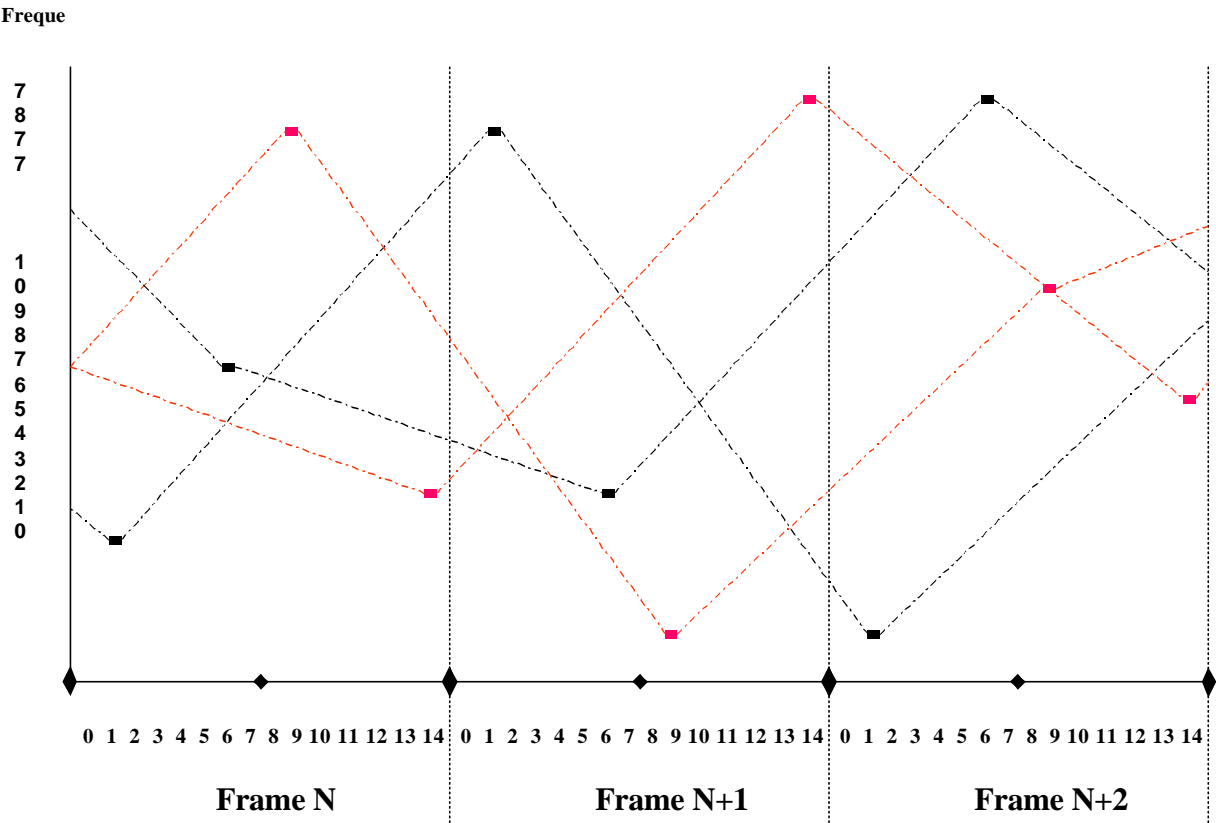


3.4 PP synchronization procedure

PP selects a random RF carrier and tries to receive a frame within 0.9 sec. If nothing is received then a new RF carrier is selected.

When a burst with correct A-CRC is received and it is a Nt (RFPI) the hopping sequence (SQC) is known and the PP must receive in the following frames using the hopping sequence. If the received A-field is different from a Nt, the PP selects a new RF carrier randomly and waits for Nt. In this state the PP do not have information of excluded RF carriers, but just follows the known hopping sequence without excluding any RF carriers. Only individual frames are missed on the excluded carriers. When PT3 is received, the PP is able to receive on exception carriers.

3.5 Dual slot diversity

Dual slot diversity is activated in case interference is detected. That is, two bearers are active, carrying the same B-field content. The receiver decides which of the received speech frames to use, depending on A-CRC and/or X-CRC. The setup and release of the 2nd bearer are performed dynamically by the FP-MAC and PP-MAC to adapt to current interference level. The two bearers are managed independently in the MAC, like a stalled intra-cell bearer hand-over with two established bearers. HoppingIndexOffset (HIO) for the two bearers are selected independently.

	Technical Documentation			Specification
	MARS 2G4 Freq. Hopping			
File mars2.doc	Date 1999-08-18	Revision 0.4	Ref. JTP/FM	Page 12 of 12

This document and the information contained is property of RTX Telecom A/S, Denmark. Unauthorized copying is not allowed. The information in this document is believed to be correct at the time of writing. RTX Telecom A/S reserves the right at any time to change said content, circuitry and specifications.