




FR1 n48 / 40MHz / Middle Channel / Conducted (dBm/10MHz)



QPSK

16QAM

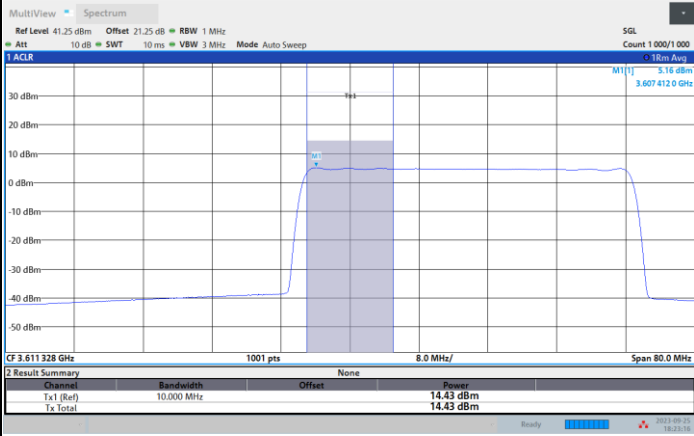

64QAM

256QAM

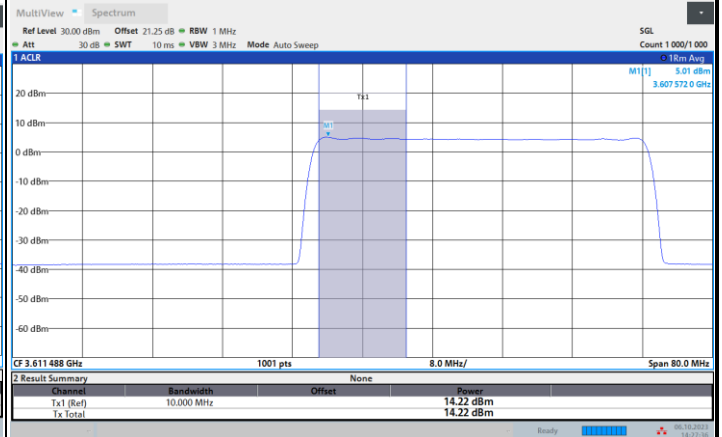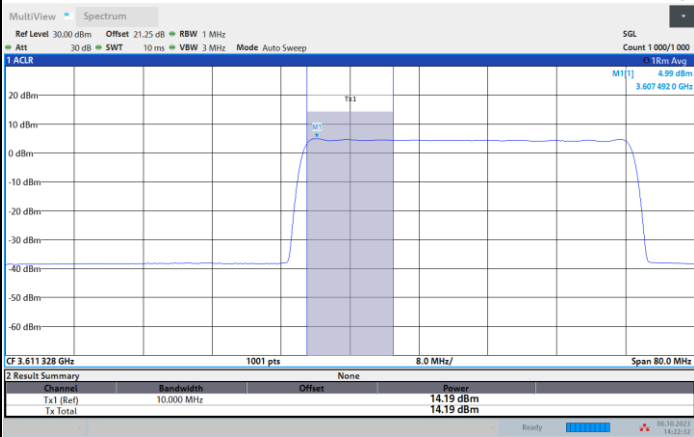





FR1 n48 / 40MHz / Highest Channel / Conducted (dBm/10MHz)

QPSK

16QAM

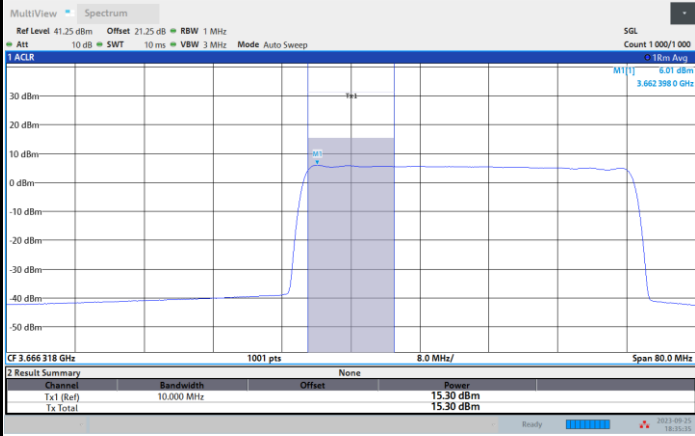


06:35:36 PM 09/25/2023

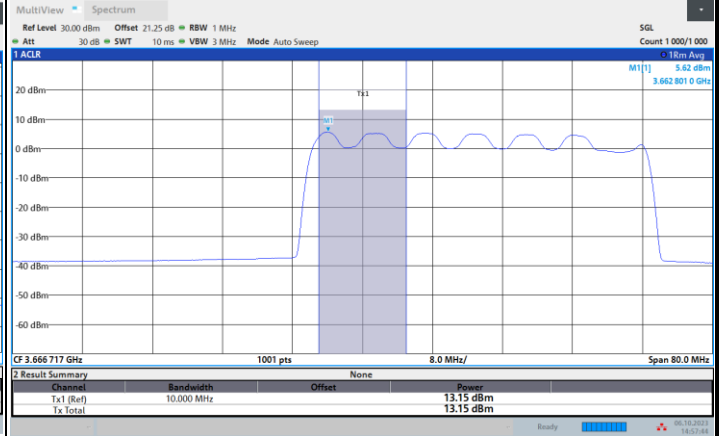


14:57:44 06.10.2023

64QAM

256QAM

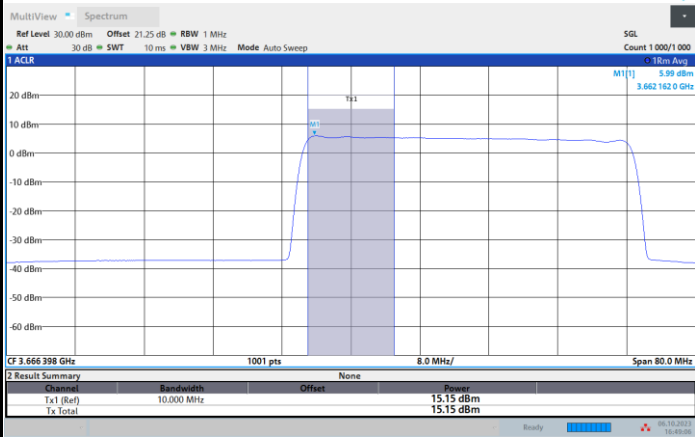

16:49:06 06.10.2023

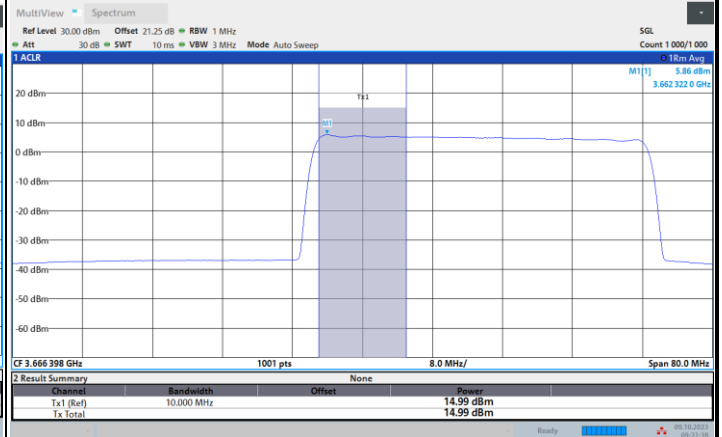

09:22:39 09.10.2023



Power Spectral Density

Mode	FR1 n48 : Conducted PSD (dBm/MHz) <SISO> Lowest Channel							
	10MHz		20MHz		40MHz		50MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	6.25	5.06	6.40	5.74	5.14	4.92	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Lowest CH	6.21	6.24	6.35	6.31	5.13	5.32	-	-
BW	60MHz		80MHz		90MHz		100MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	-	-	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Lowest CH	-	-	-	-	-	-	-	-

Mode	FR1 n48 : EIRP PSD (dBm/MHz) <MIMO 4TX> Lowest Channel							
	10MHz		20MHz		40MHz		50MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	19.77	18.58	19.92	19.26	18.66	18.44	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Lowest CH	19.73	19.76	19.87	19.83	18.65	18.84	-	-
BW	60MHz		80MHz		90MHz		100MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	-	-	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Lowest CH	-	-	-	-	-	-	-	-
Limit	20dBm/MHz							
Result	PASS							

Note

1. The measured conducted PSD result has included duty cycle offset factor.
2. The EIRP PSD = conducted PSD result + 6.02dB (4TX) + 7.5dBi MIMO antenna gain.



Mode	FR1 n48 : Conducted PSD (dBm/MHz) <SISO> Middle Channel							
	10MHz		20MHz		40MHz		50MHz	
BW								
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	4.70	5.30	6.26	5.66	5.17	5.68	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	4.76	4.79	6.48	4.86	5.03	5.02	-	-
BW	60MHz		80MHz		90MHz		100MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	-	-	-	-	-	-	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	-	-	-	-	-	-	-	-

Mode	FR1 n48 : EIRP PSD (dBm/MHz) <MIMO 4TX> Middle Channel							
	10MHz		20MHz		40MHz		50MHz	
BW								
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	18.22	18.82	19.78	19.18	18.69	19.20	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	18.28	18.31	20.00	18.38	18.55	18.54	-	-
BW	60MHz		80MHz		90MHz		100MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	-	-	-	-	-	-	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	-	-	-	-	-	-	-	-
Limit	20dBm/MHz							
Result	PASS							

Note

1. The measured conducted PSD result has included duty cycle offset factor.
2. The EIRP PSD = conducted PSD result + 6.02dB (4TX) + 7.5dBi MIMO antenna gain.



Mode	FR1 n48 : Conducted PSD (dBm/MHz) <SISO> Highest Channel							
	10MHz		20MHz		40MHz		50MHz	
BW								
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Highest CH	4.91	5.31	5.60	4.52	6.02	5.63	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Highest CH	5.01	4.97	5.35	5.27	5.97	5.92	-	-
BW	60MHz		80MHz		90MHz		100MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Highest CH	-	-	-	-	-	-	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Highest CH	-	-	-	-	-	-	-	-

Mode	FR1 n48 : EIRP PSD (dBm/MHz) <MIMO 4TX> Highest Channel							
	10MHz		20MHz		40MHz		50MHz	
BW								
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Highest CH	18.43	18.83	19.12	18.04	19.54	19.15	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Highest CH	18.53	18.49	18.87	18.79	19.49	19.44	-	-
BW	60MHz		80MHz		90MHz		100MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Highest CH	-	-	-	-	-	-	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Highest CH	-	-	-	-	-	-	-	-
Limit	20dBm/MHz							
Result	PASS							

Note



1. The measured conducted PSD result has included duty cycle offset factor.
2. The EIRP PSD = conducted PSD result + 6.02dB (4TX) + 7.5dBi MIMO antenna gain.



FR1 n48 / 10MHz / Lowest Channel / PSD



QPSK

16QAM

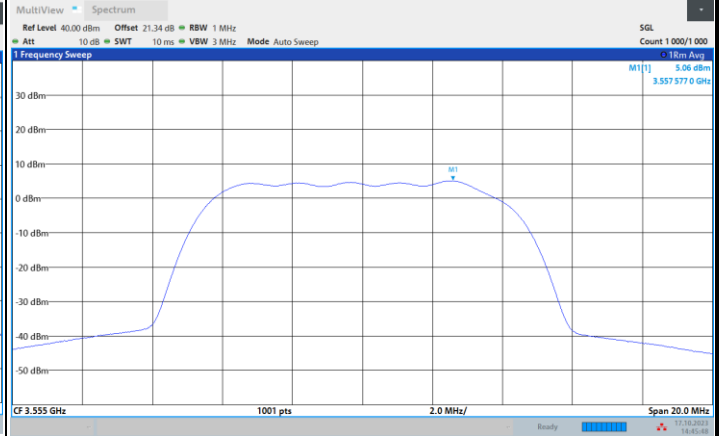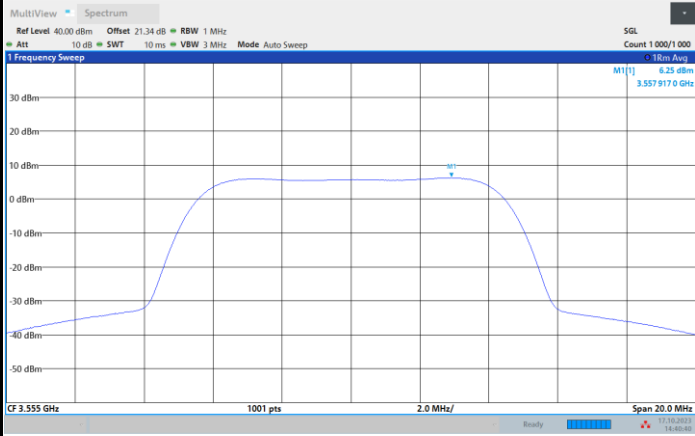

64QAM


256QAM

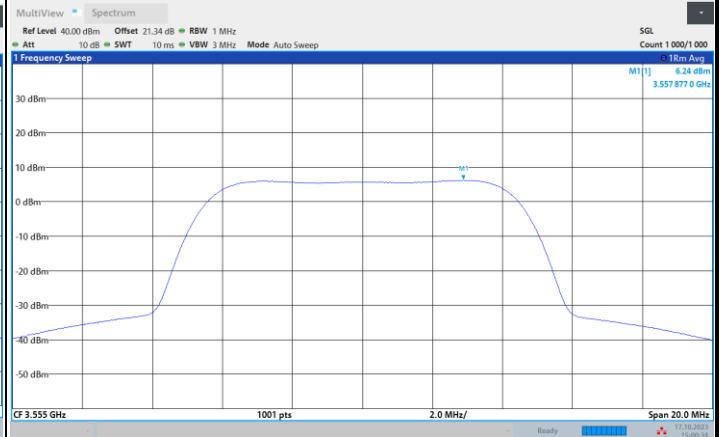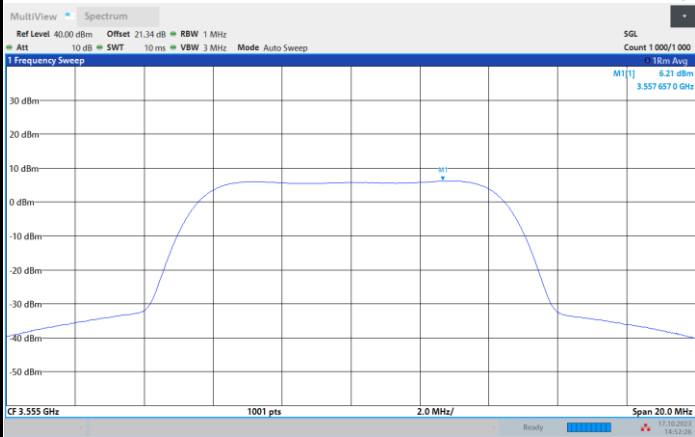




FR1 n48 / 10MHz / Middle Channel / PSD


QPSK

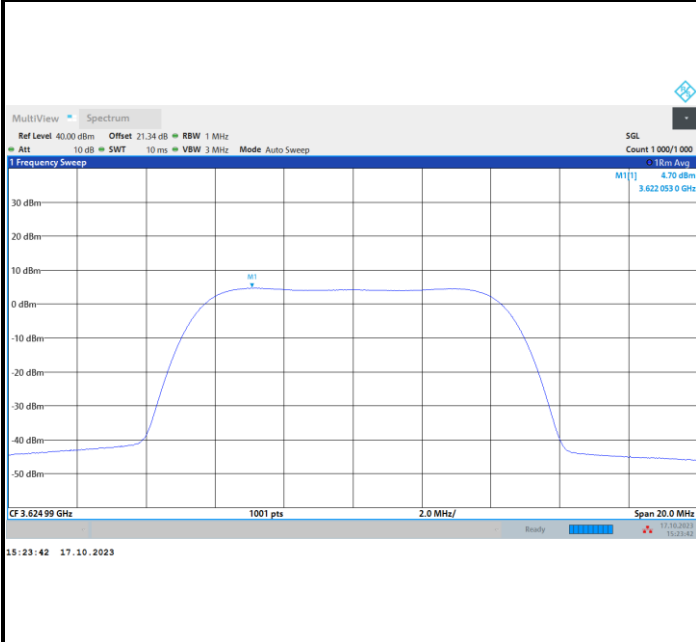


16QAM

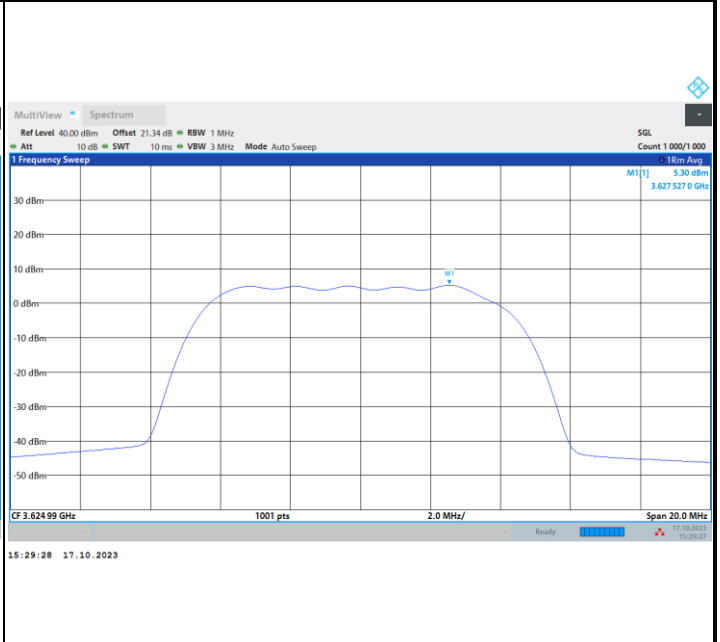

64QAM

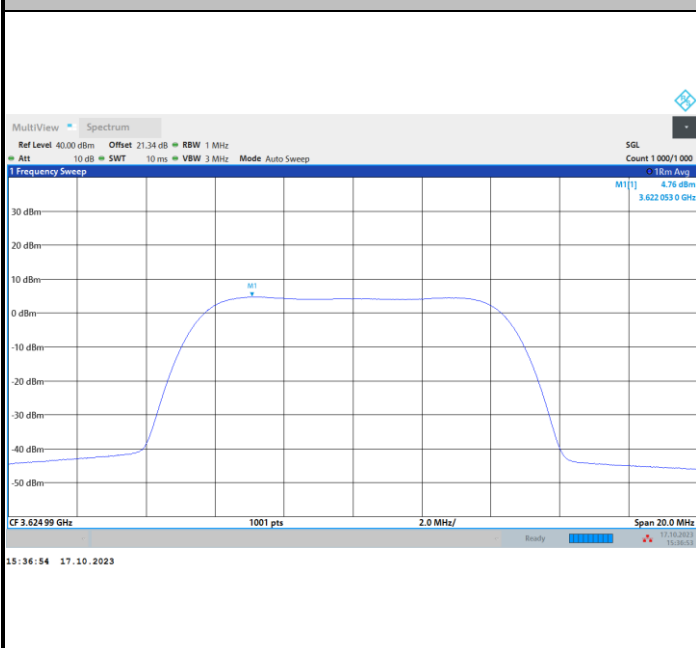


256QAM

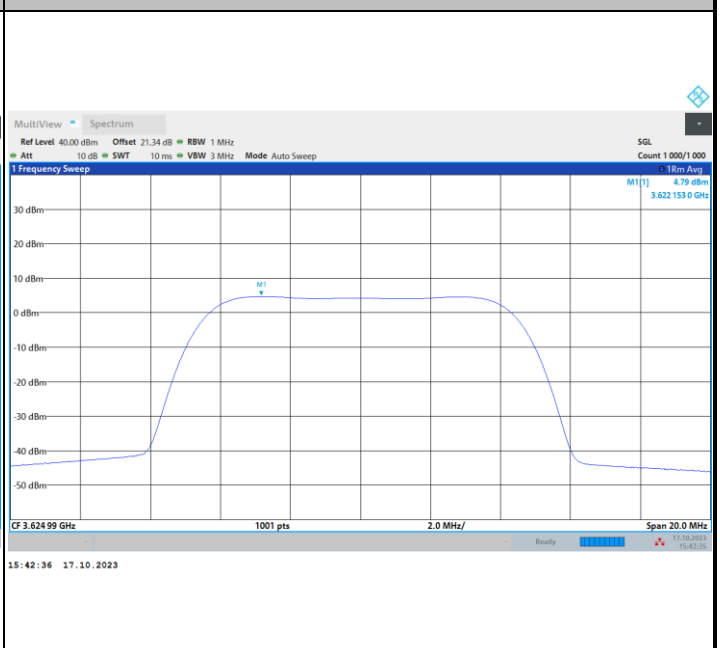




FR1 n48 / 10MHz / Highest Channel / PSD


QPSK

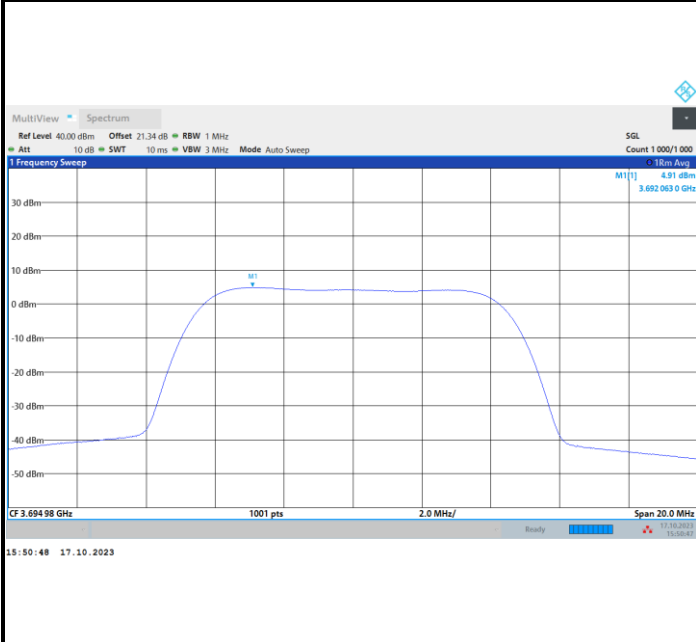


16QAM

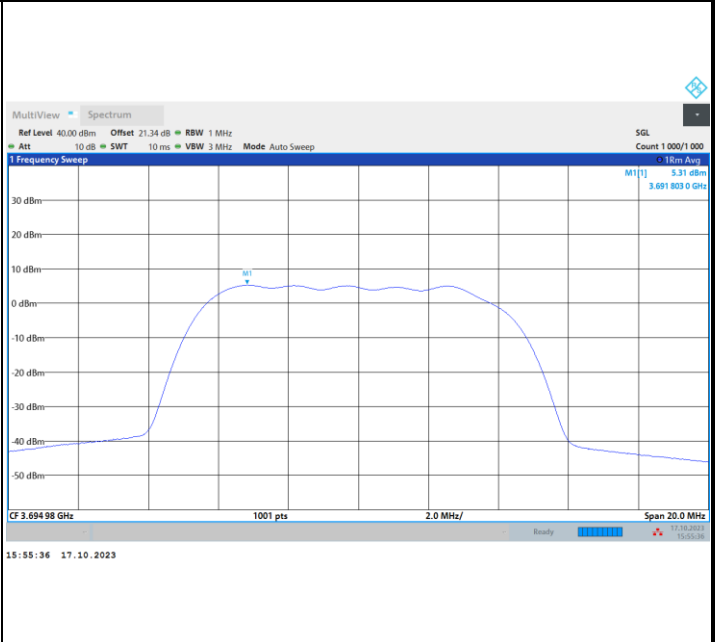

64QAM

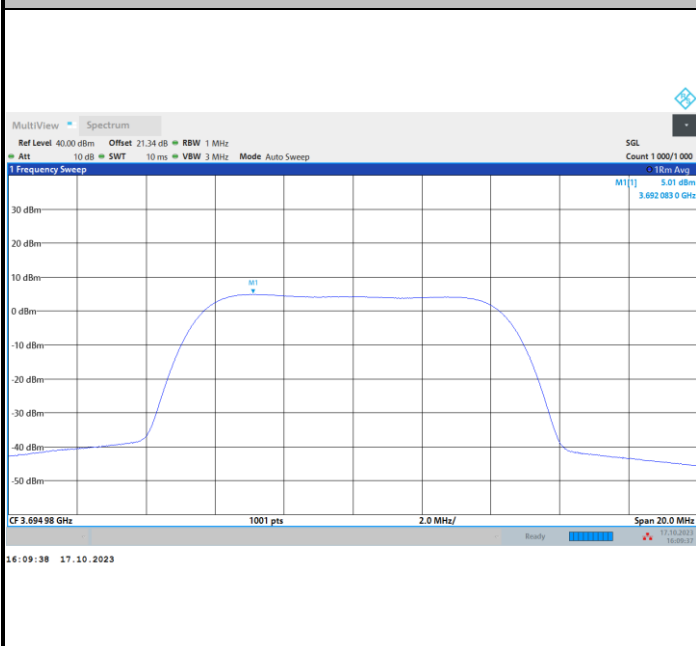


256QAM

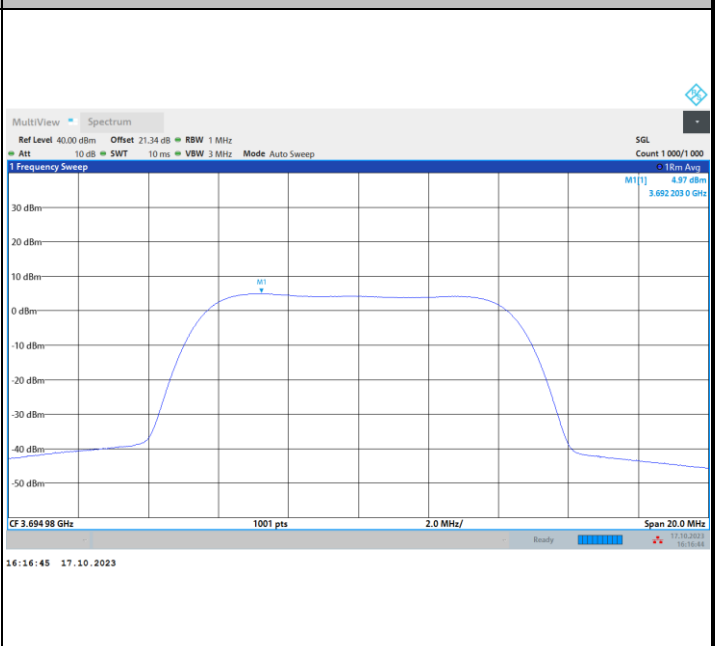




FR1 n48 / 20MHz / Lowest Channel / PSD


QPSK

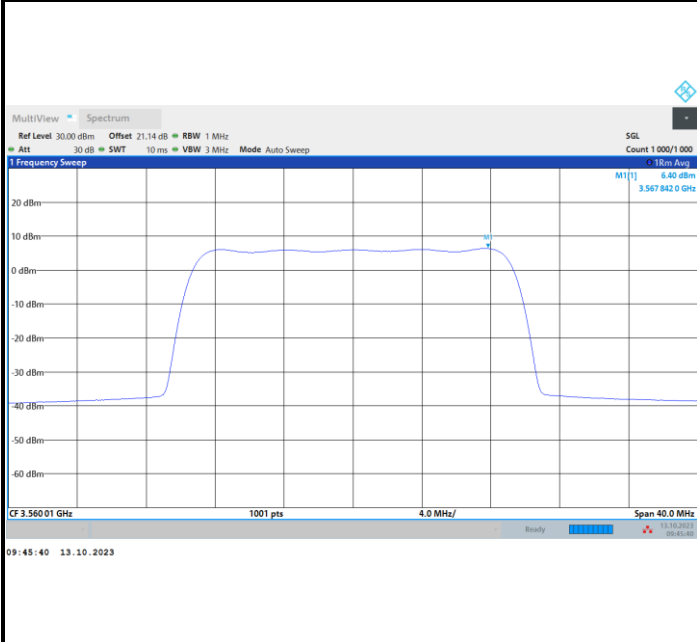


16QAM

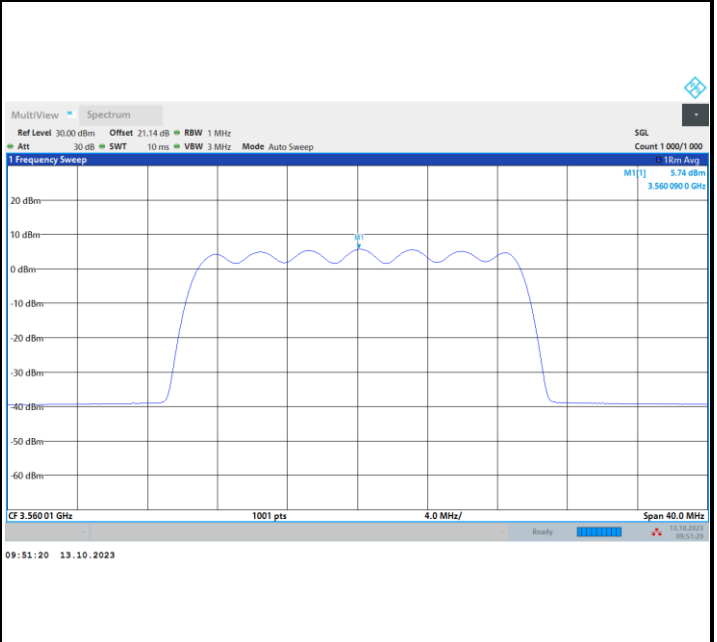

64QAM

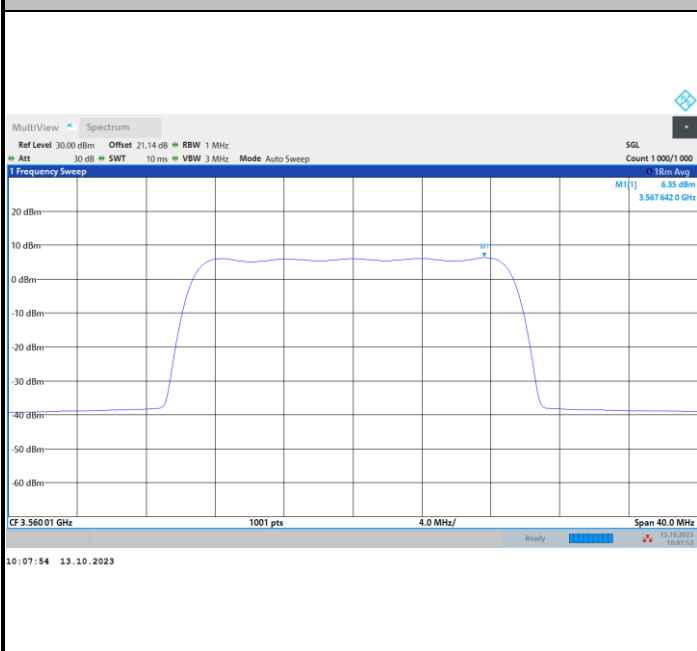


256QAM

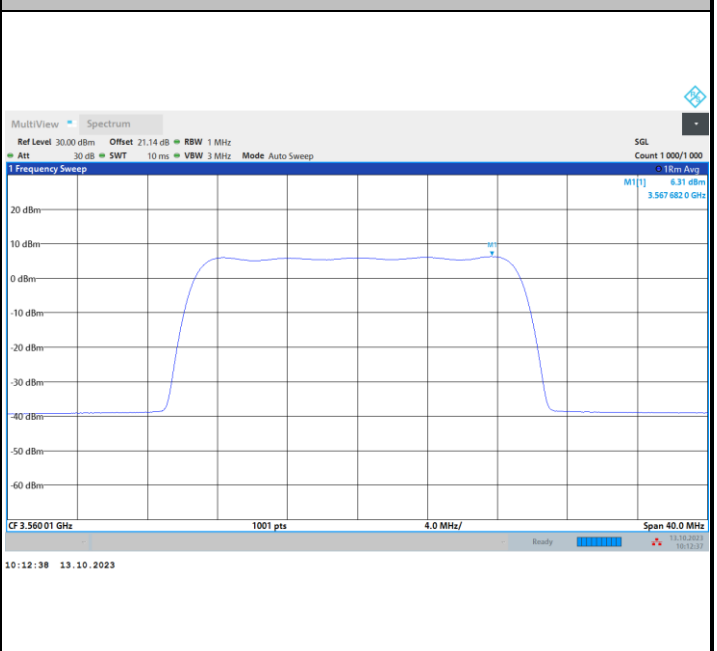




FR1 n48 / 20MHz / Middle Channel / PSD


QPSK

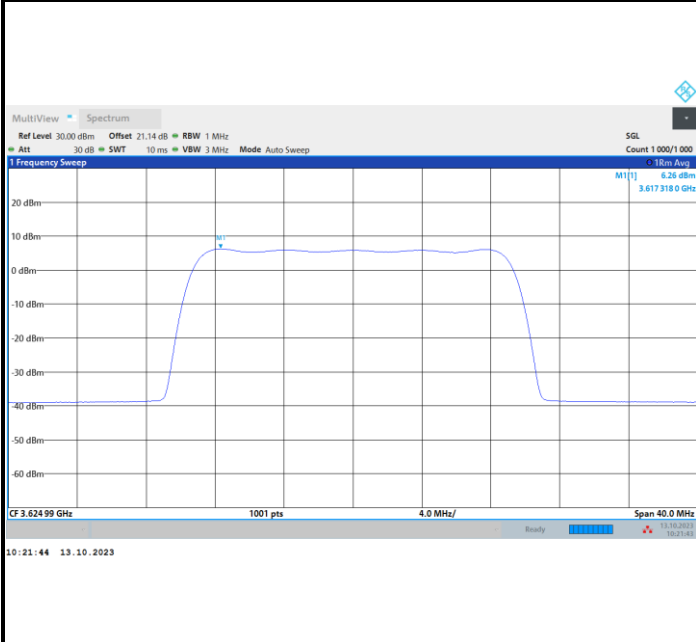


16QAM

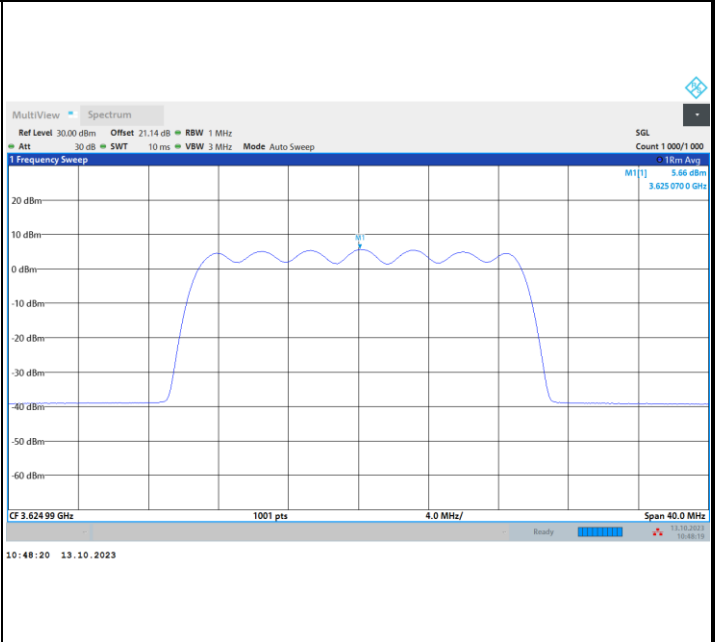

64QAM

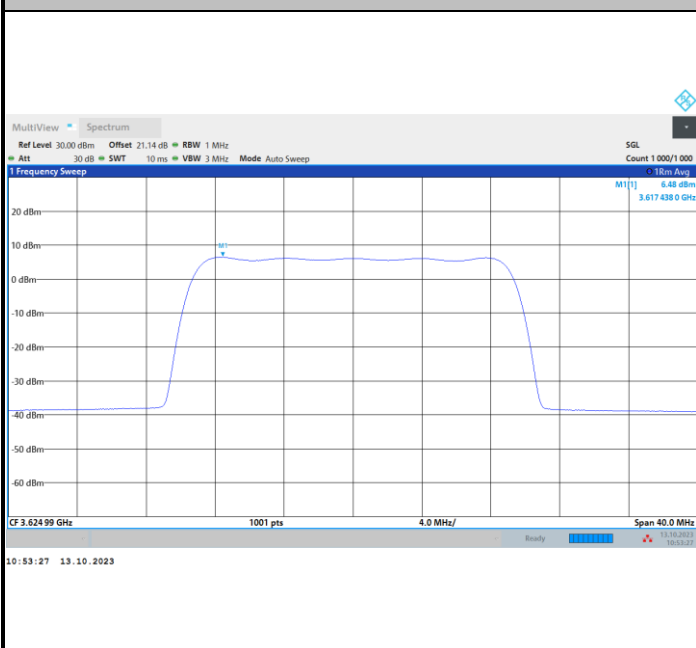


256QAM

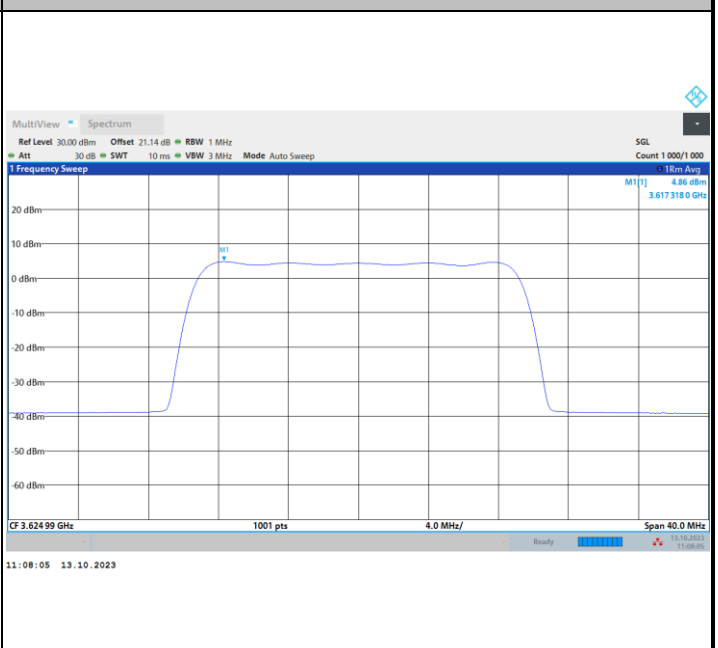




FR1 n48 / 20MHz / Highest Channel / PSD


QPSK

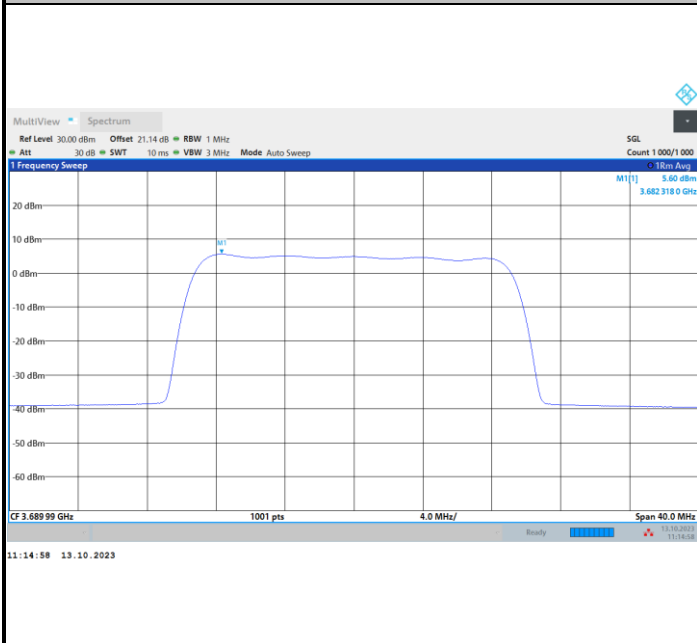


16QAM

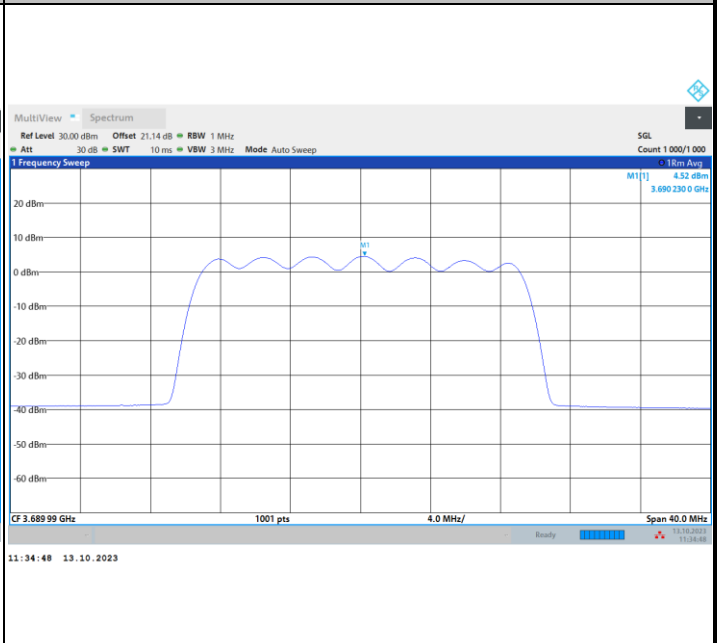

64QAM

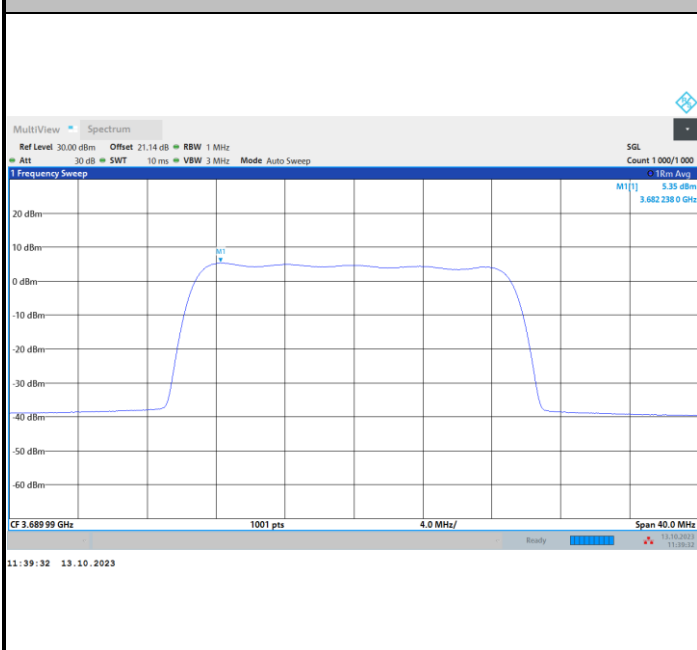

256QAM


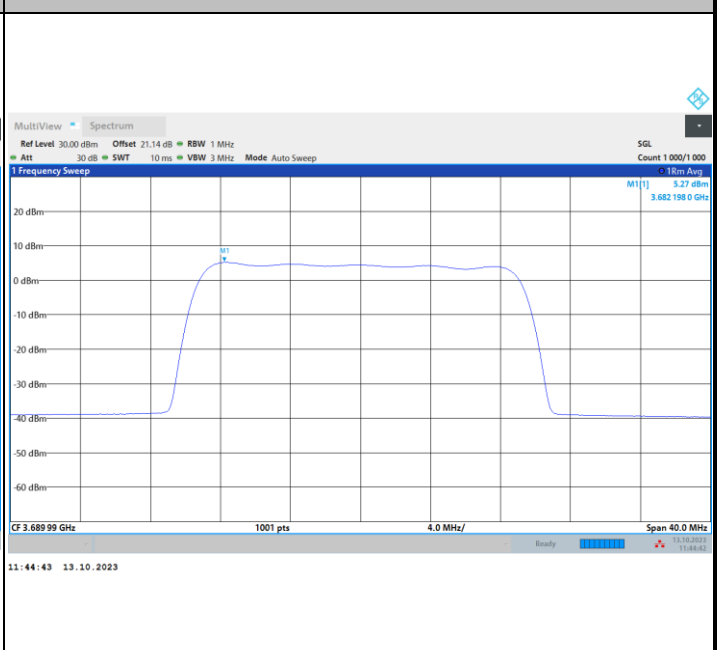




FR1 n48 / 40MHz / Lowest Channel / PSD



QPSK

16QAM

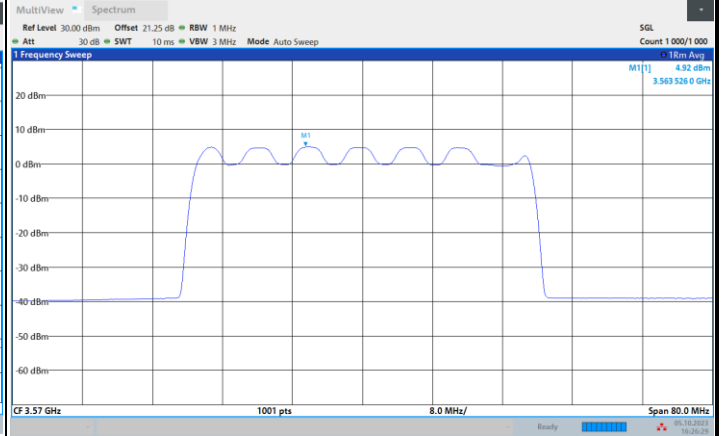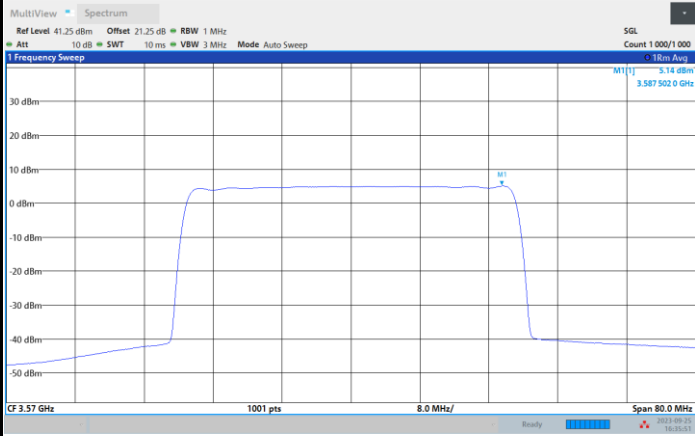

64QAM


256QAM

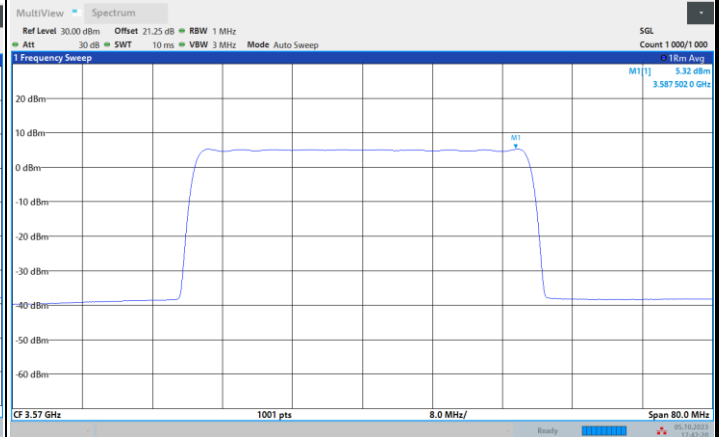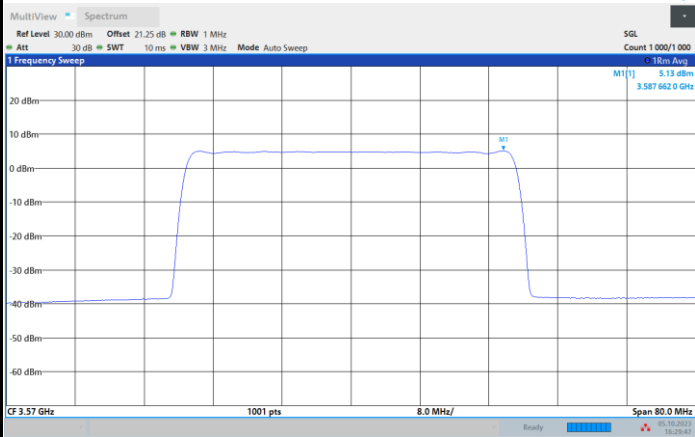




FR1 n48 / 40MHz / Middle Channel / PSD


QPSK

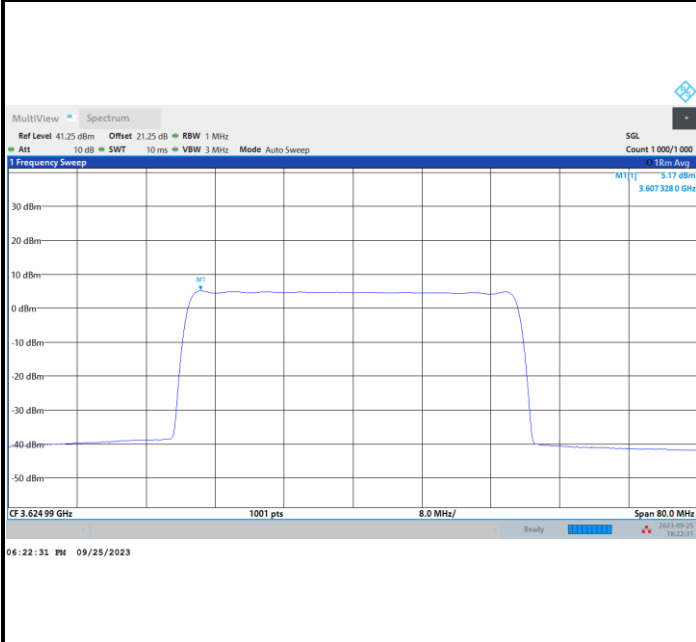


16QAM

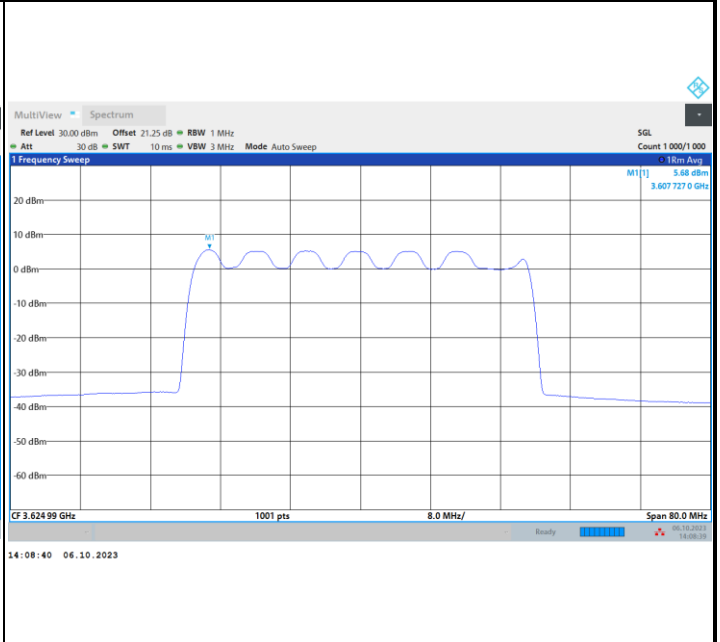

64QAM

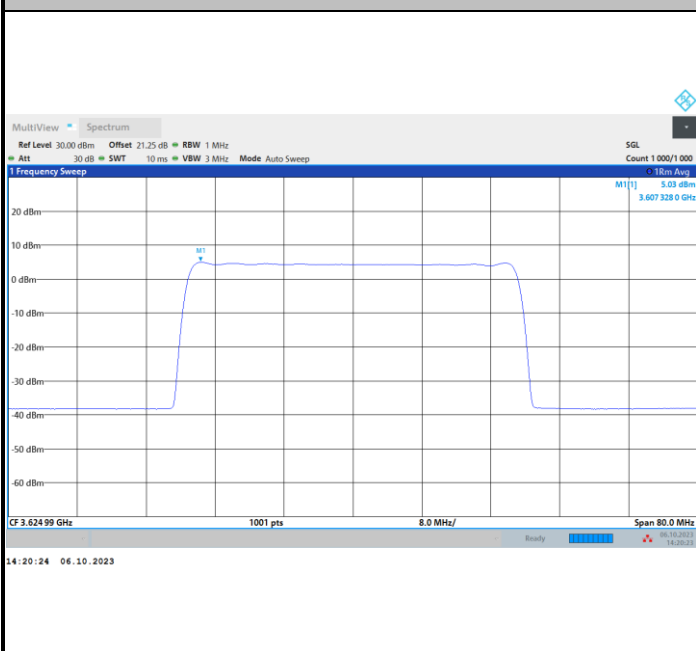

256QAM


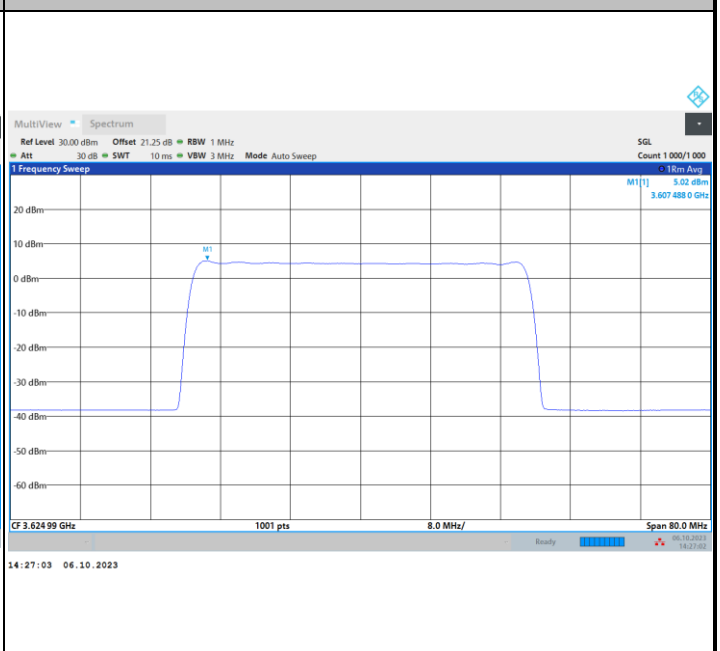




FR1 n48 / 40MHz / Highest Channel / PSD



QPSK

16QAM

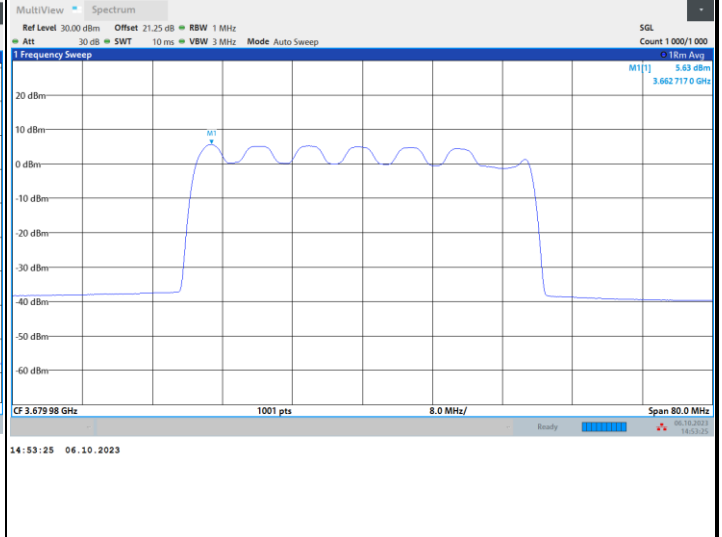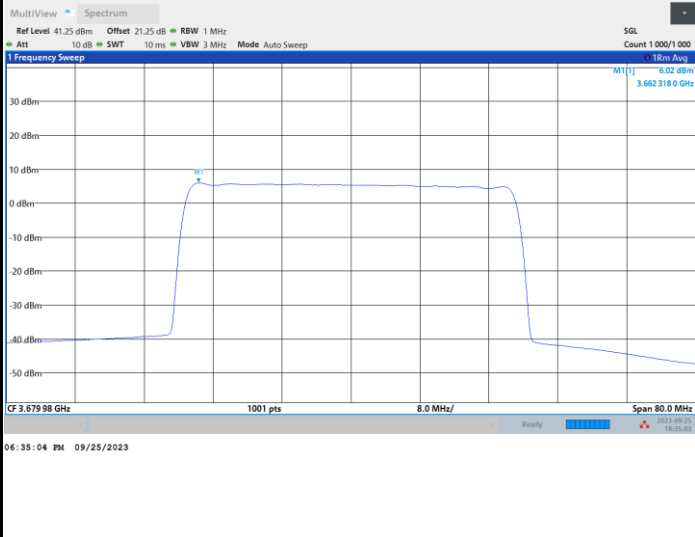

64QAM


256QAM

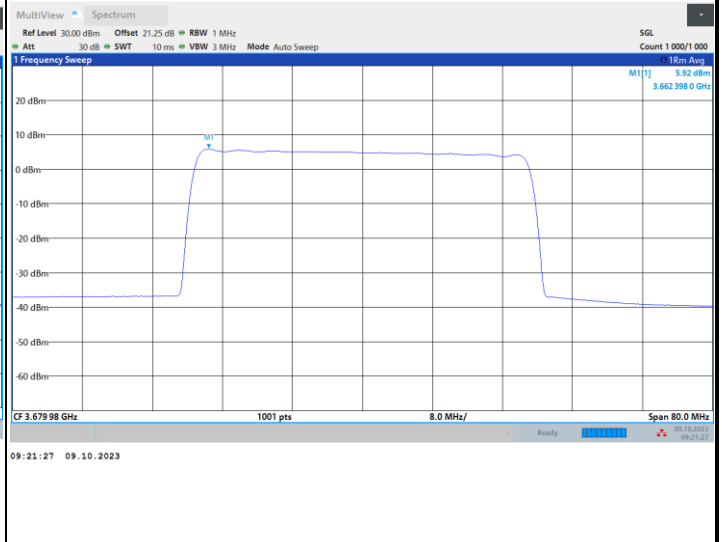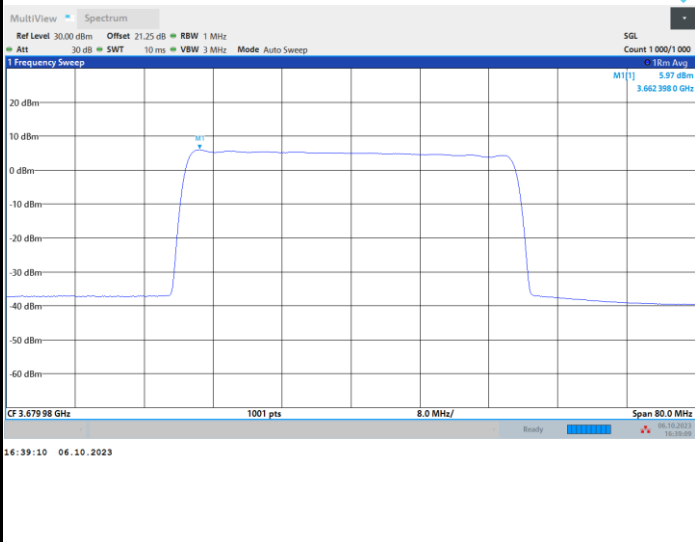



Peak-to-Average Ratio

Mode	FR1 n48 / 20MHz / PAR (dB)				Limit: 13dB
Mod.	QPSK	16QAM	64QAM	256QAM	Result
Middle CH	8.50	8.40	8.38	8.32	PASS

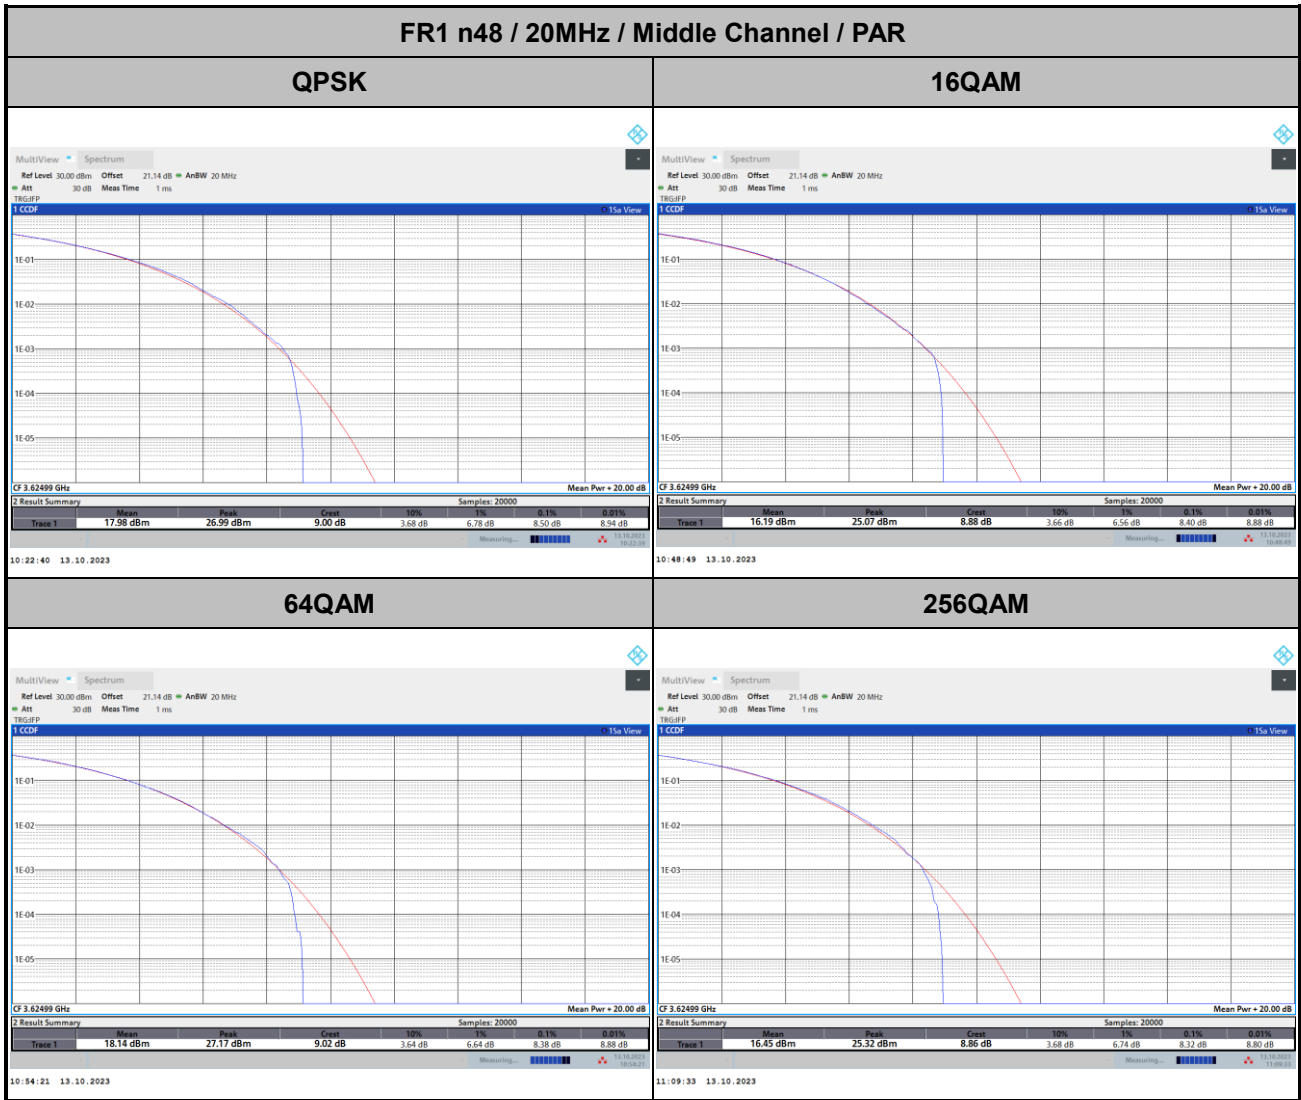



26dB Bandwidth



Mode	FR1 n48 : 26dB BW(MHz)							
BW	10MHz		20MHz		40MHz		50MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	9.23	9.13	19.26	19.26	40.28	40.36	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	9.21	9.23	19.26	19.18	40.44	40.36	-	-
BW	60MHz		80MHz		90MHz		100MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	-	-	-	-	-	-	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	-	-	-	-	-	-	-	-



FR1 n48 / 10MHz / Middle Channel / 26dB BW



QPSK

16QAM

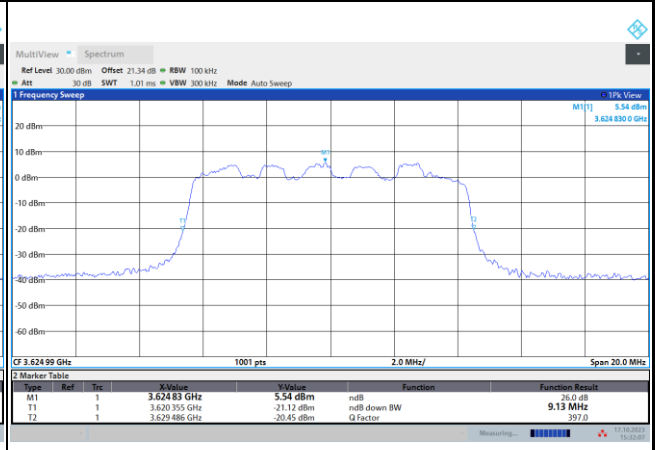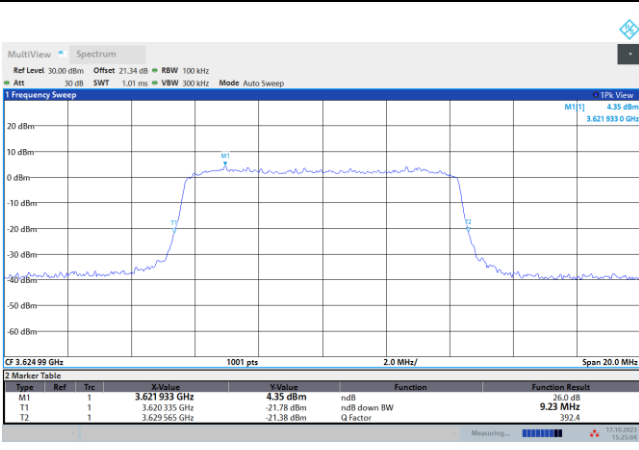

64QAM

256QAM

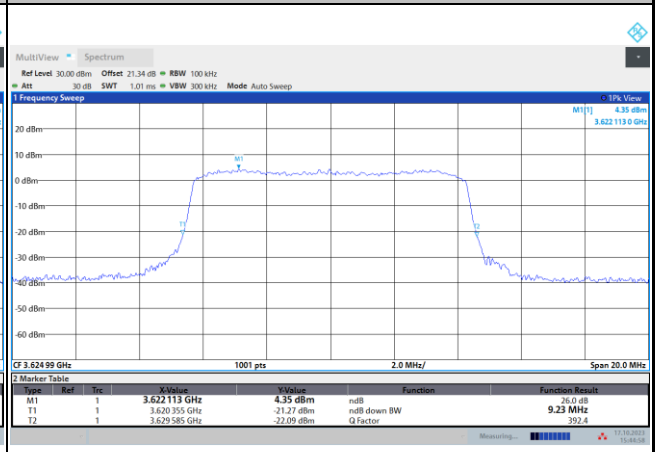
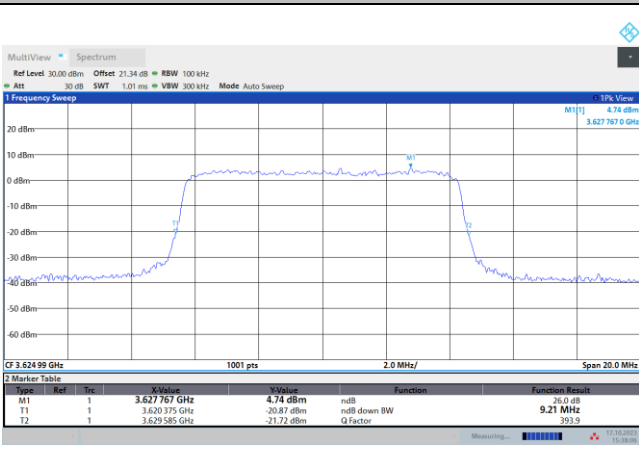




FR1 n48 / 20MHz / Middle Channel / 26dB BW



QPSK

16QAM

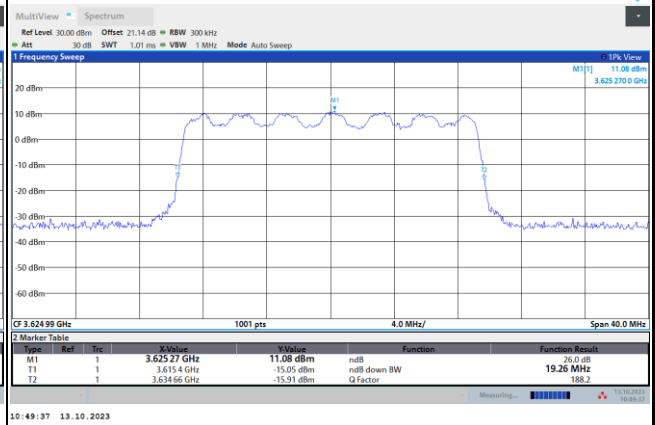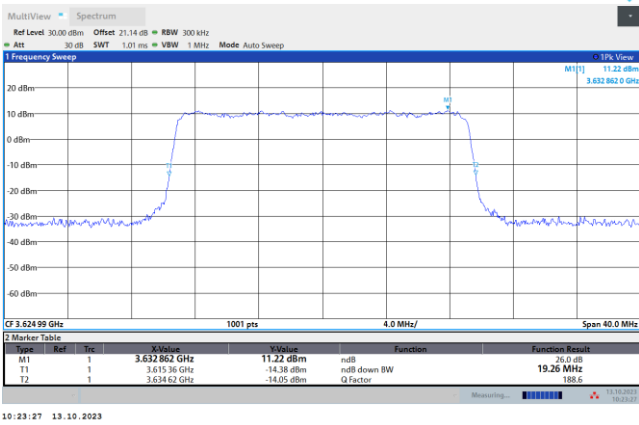

64QAM

256QAM

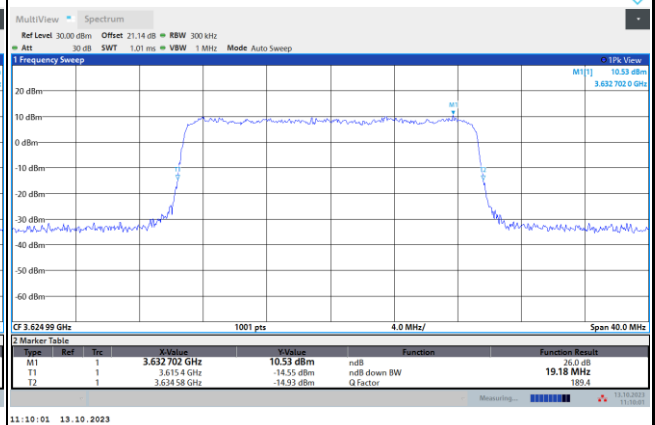
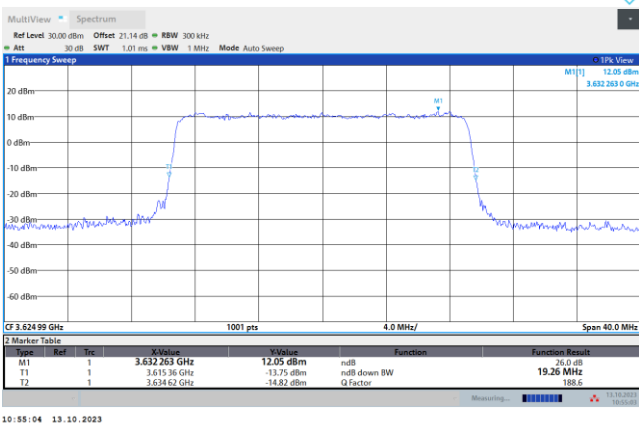




FR1 n48 / 40MHz / Middle Channel / 26dB BW

QPSK

16QAM

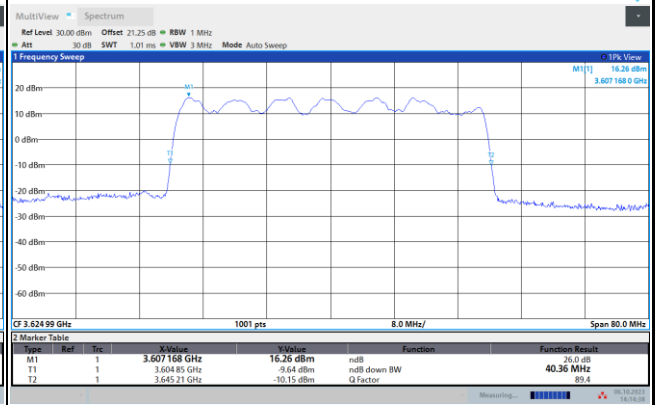
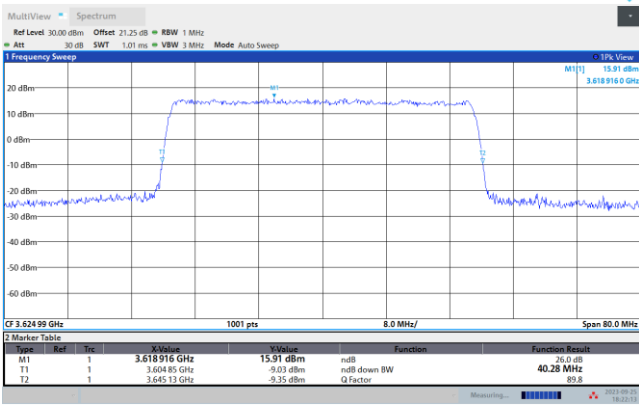


06:22:14 PM 09/25/2023

14:14:39 06.10.2023

64QAM

256QAM

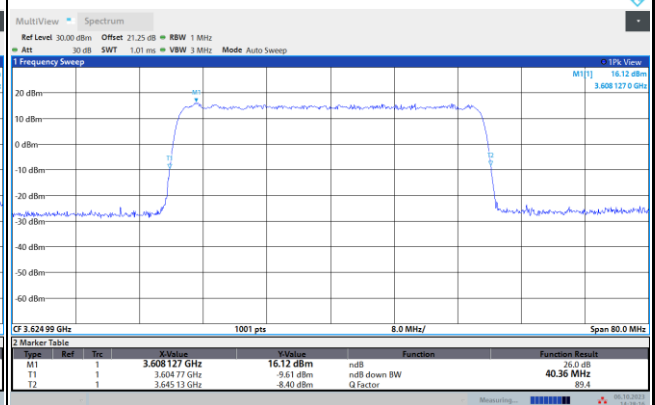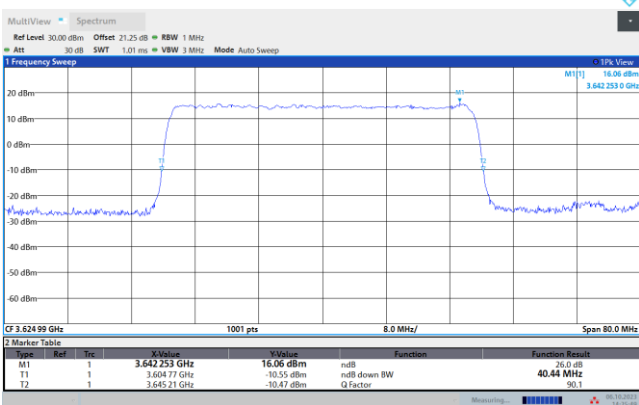

14:25:50 06.10.2023

14:28:17 06.10.2023



Occupied Bandwidth



Mode	FR1 n48 : 99%OBW (MHz)							
BW	10MHz		20MHz		40MHz		50MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	8.51	8.43	18.07	18.13	37.93	38.06	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	8.49	8.49	18.08	18.08	37.94	37.88	-	-
BW	60MHz		80MHz		90MHz		100MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	-	-	-	-	-	-	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	-	-	-	-	-	-	-	-



FR1 n48 / 10MHz / Middle Channel / 99%OBW



QPSK

16QAM

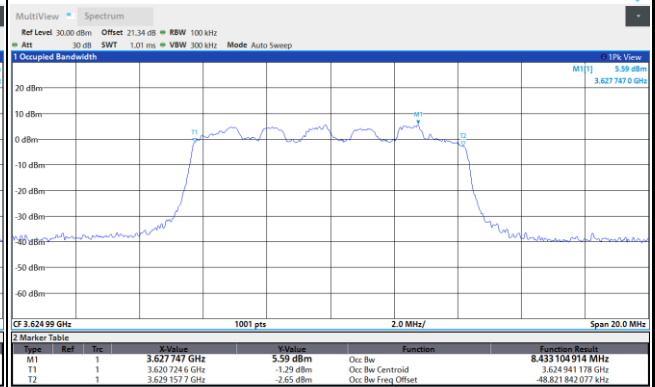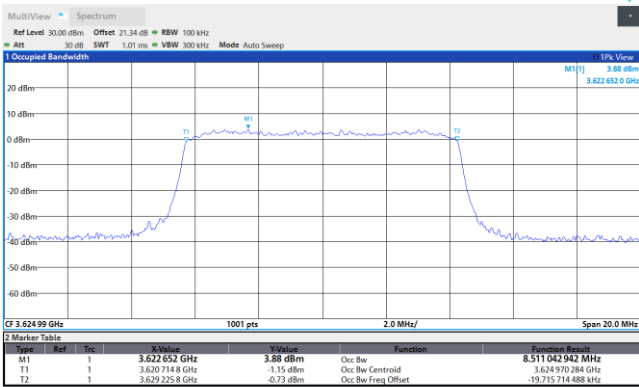

64QAM

256QAM

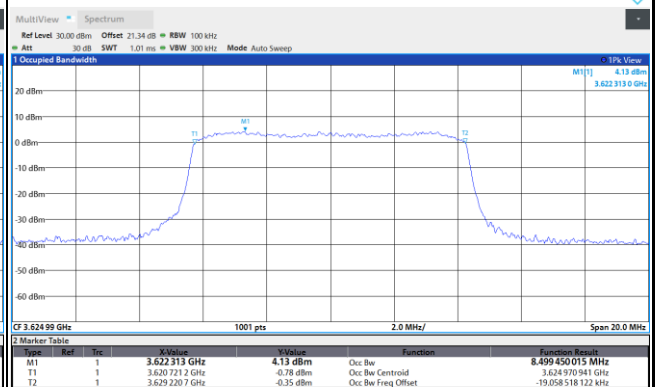
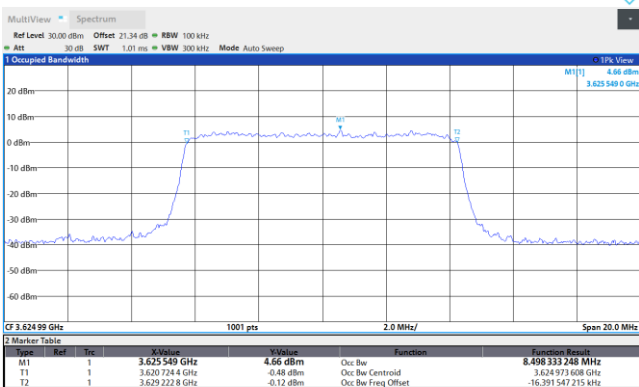




FR1 n48 / 20MHz / Middle Channel / 99%OBW



QPSK

16QAM

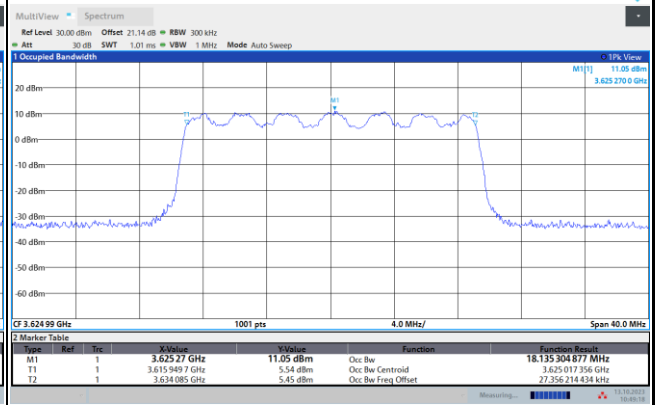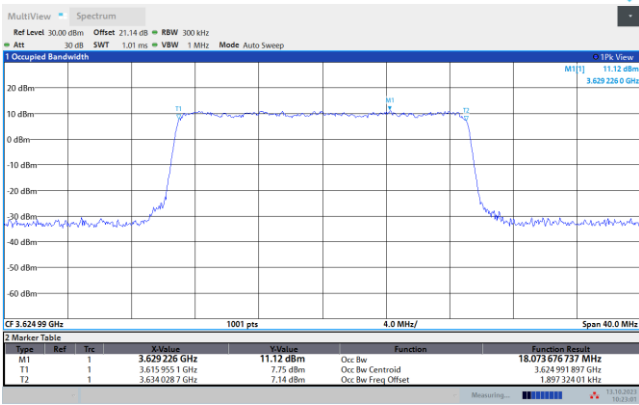

64QAM

256QAM

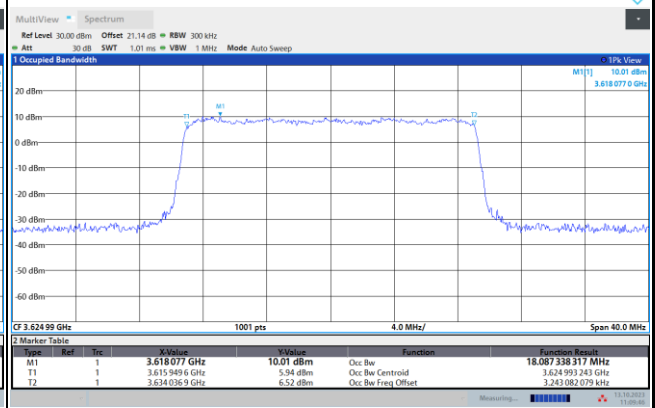
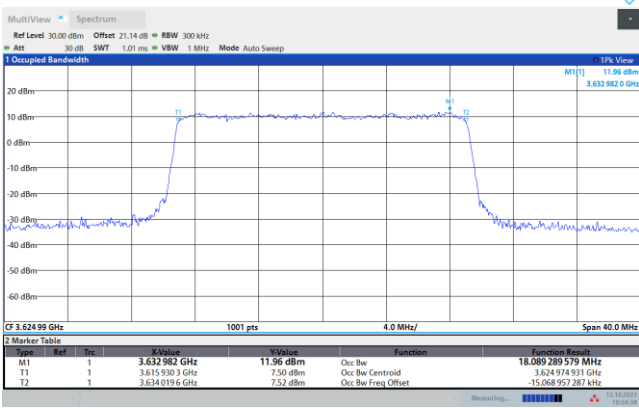




FR1 n48 / 40MHz / Middle Channel / 99%OBW

QPSK

16QAM

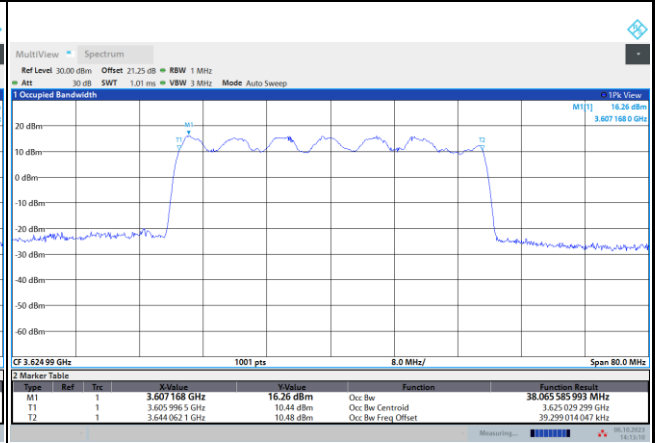
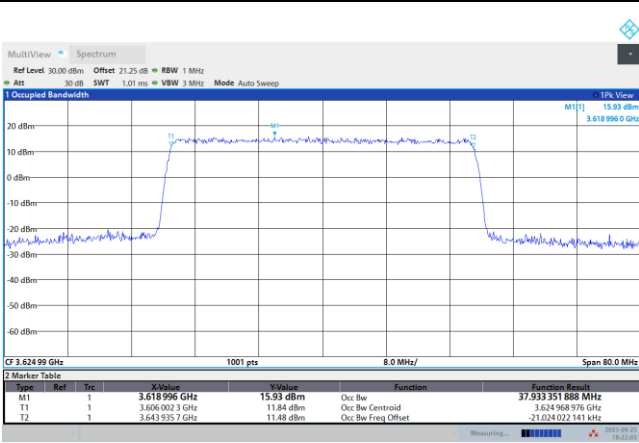


06:22:04 PM 09/25/2023

14:13:10 06.10.2023

64QAM

256QAM

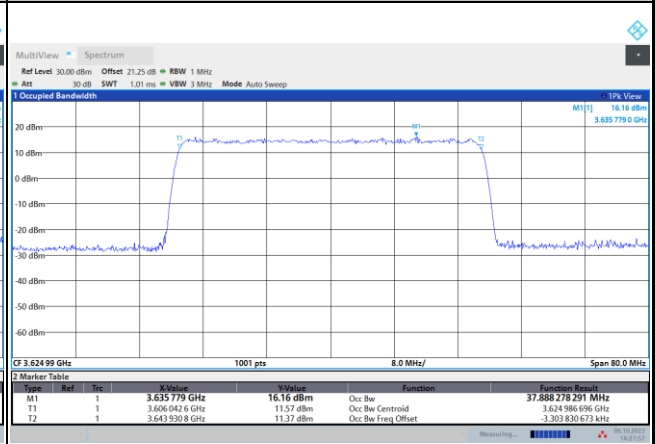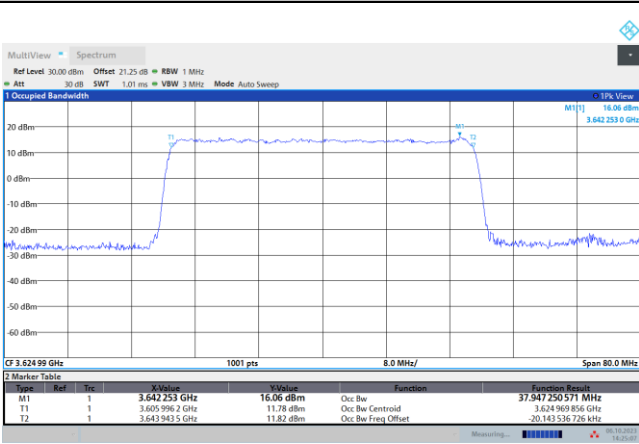

14:25:08 06.10.2023

14:27:58 06.10.2023





Unwanted Emission (MASK)

FR1 n48 / 10MHz / Lowest Channel / MASK



QPSK

16QAM

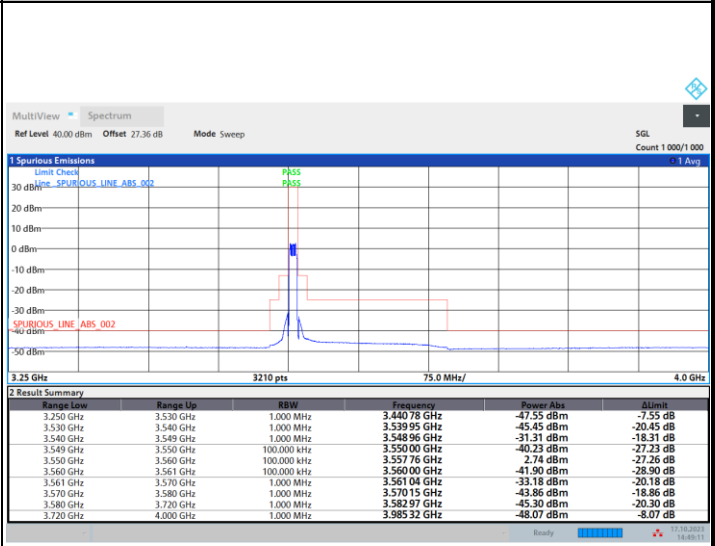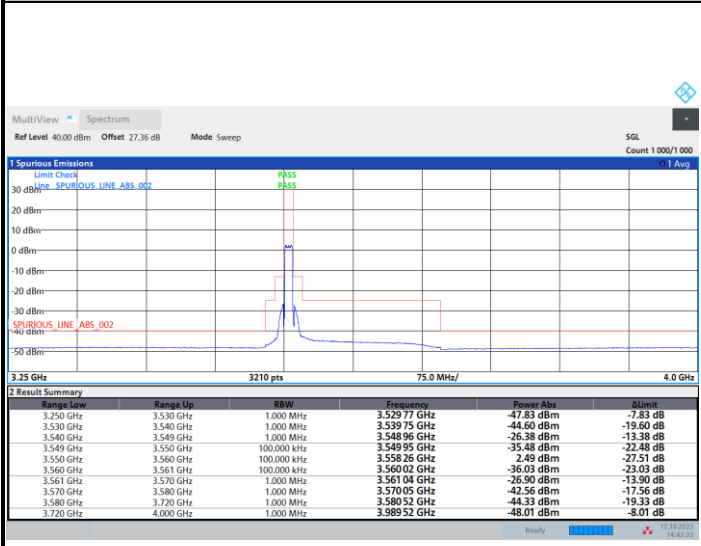

64QAM

256QAM

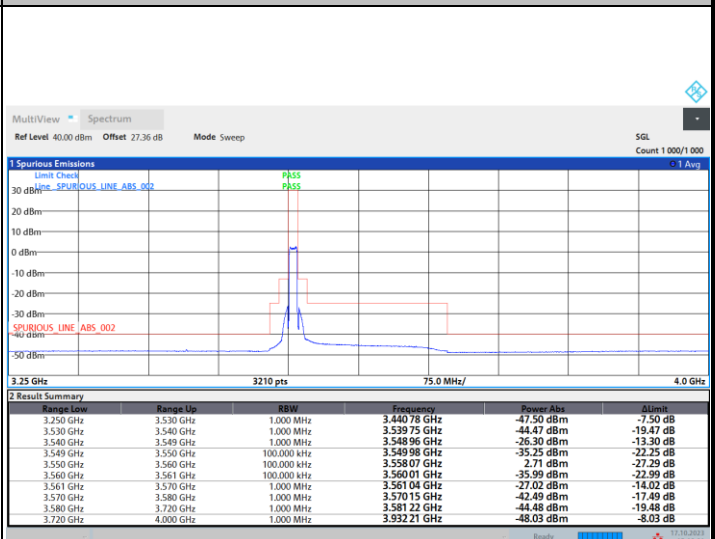
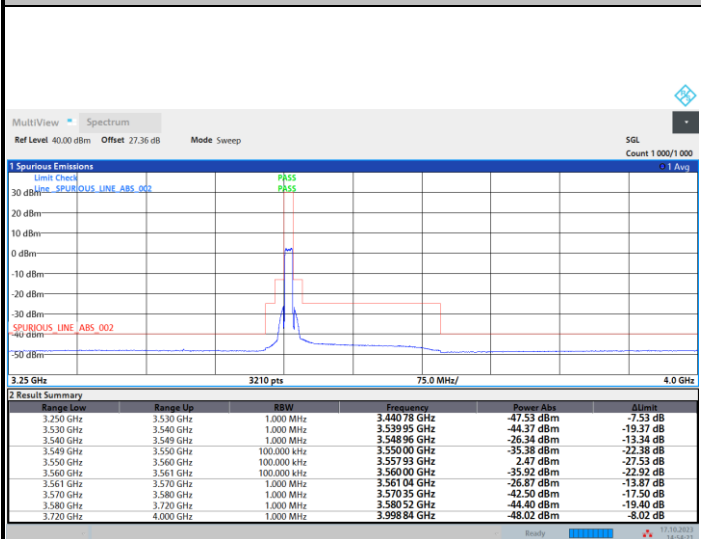




FR1 n48 / 10MHz / Middle Channel / MASK

QPSK

16QAM

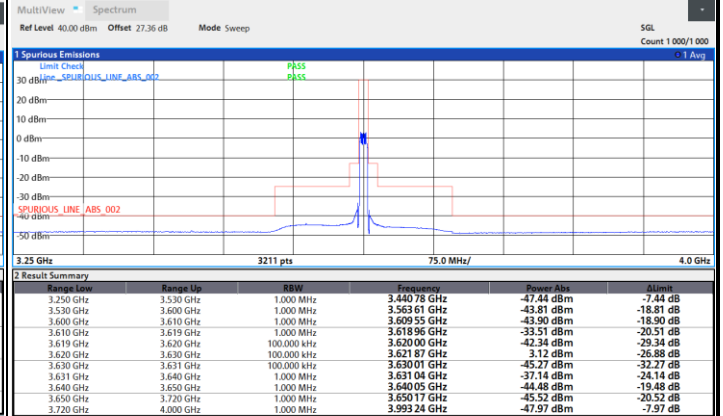
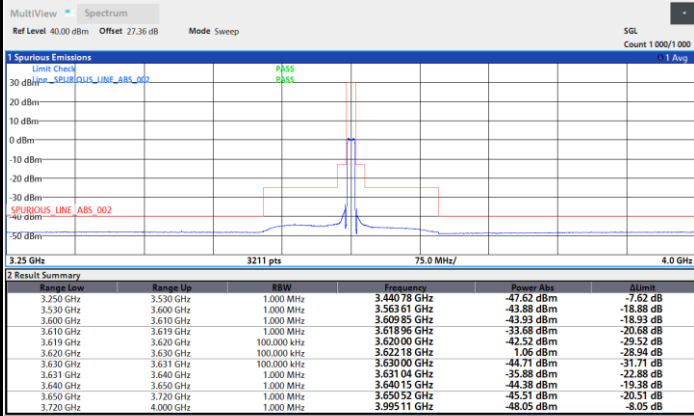


15:26:34 17.10.2023

15:33:36 17.10.2023

64QAM

256QAM

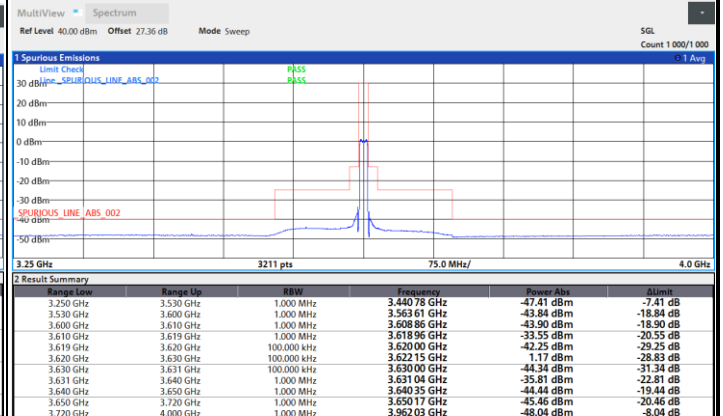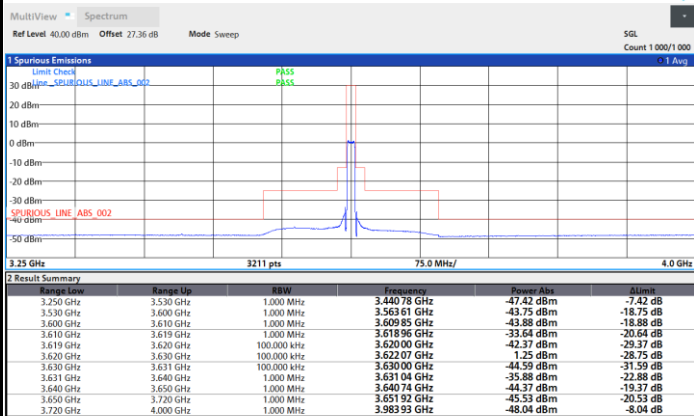

15:39:29 17.10.2023



15:46:22 17.10.2023



FR1 n48 / 10MHz / Highest Channel / MASK



QPSK

16QAM

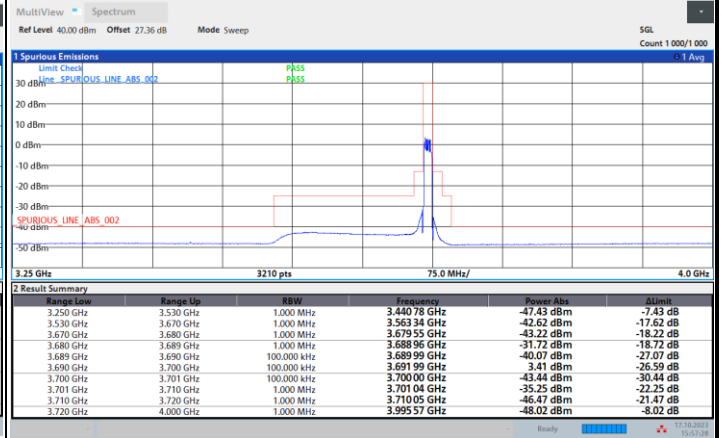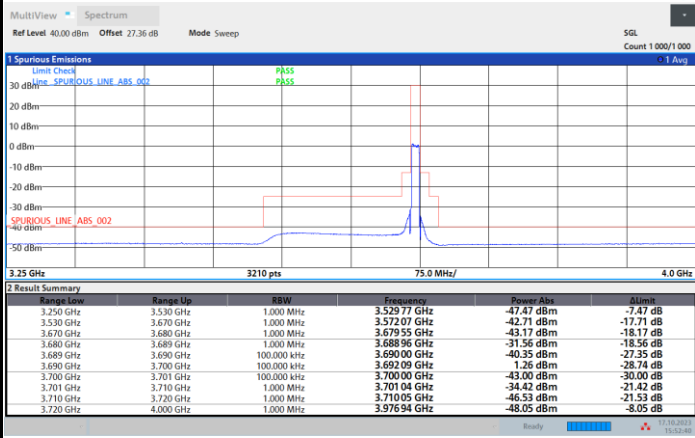

64QAM

256QAM

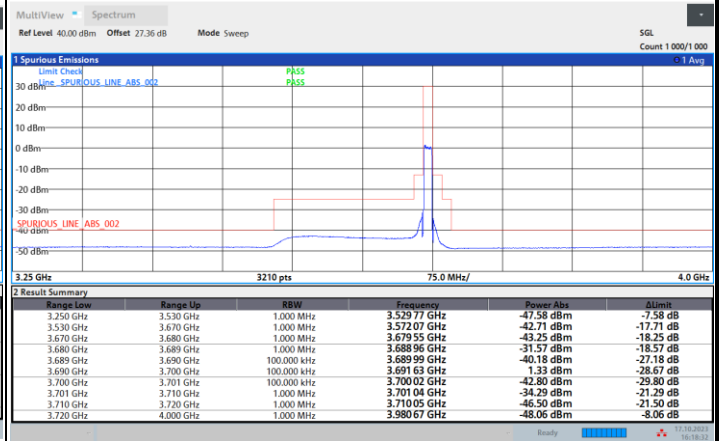
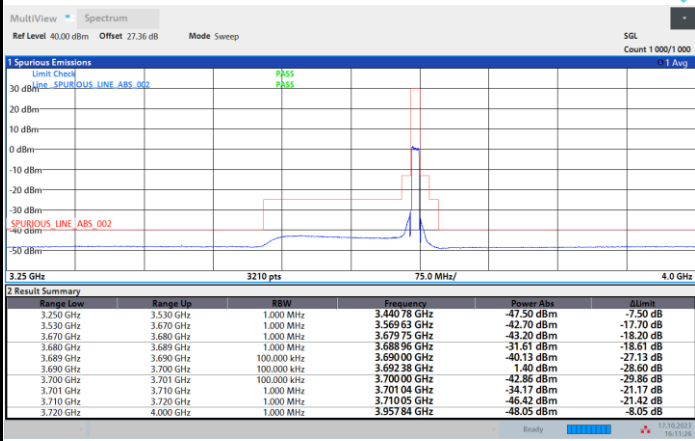




FR1 n48 / 20MHz / Lowest Channel / MASK



QPSK

16QAM

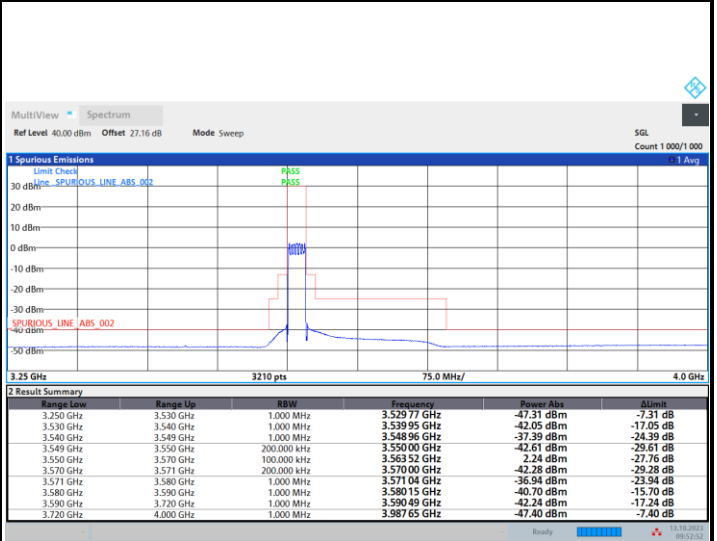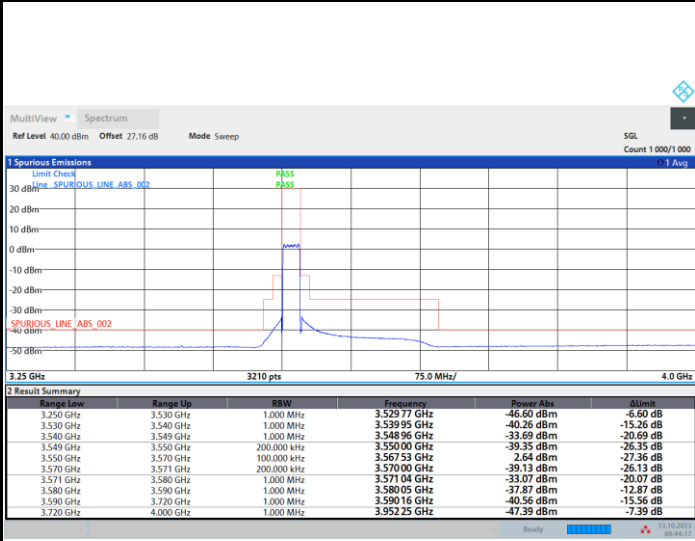

64QAM

256QAM

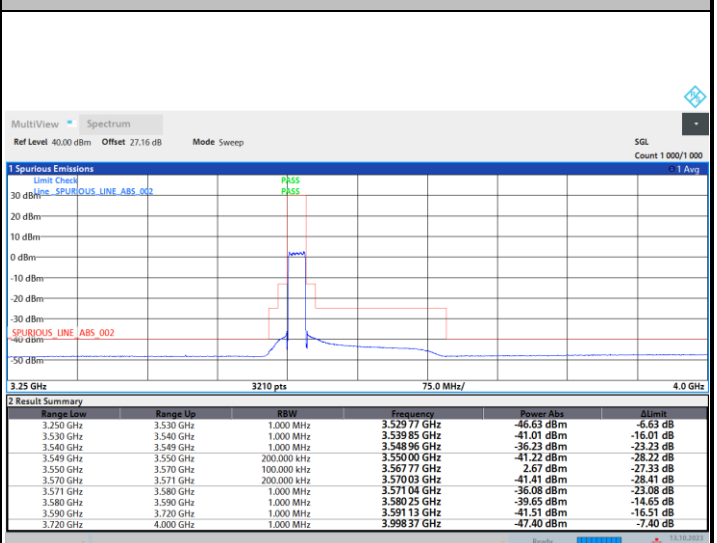
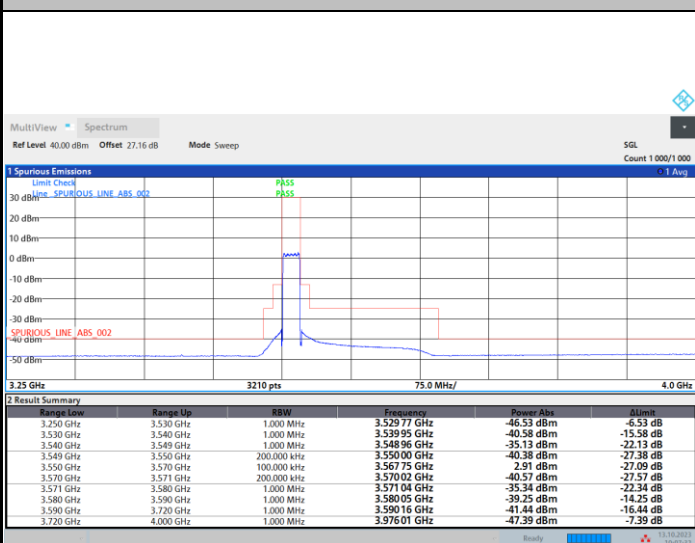




FR1 n48 / 20MHz / Middle Channel / MASK

QPSK

16QAM

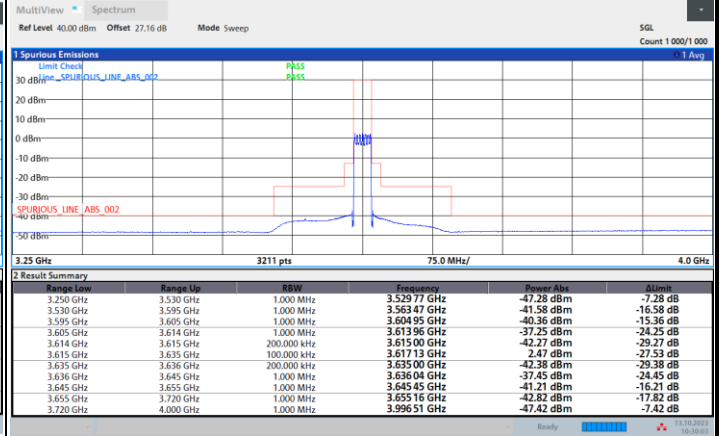
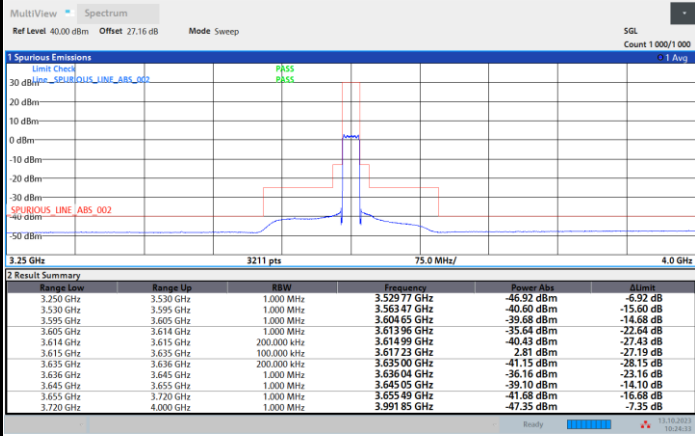


10:24:34 13.10.2023

10:30:03 13.10.2023

64QAM

256QAM

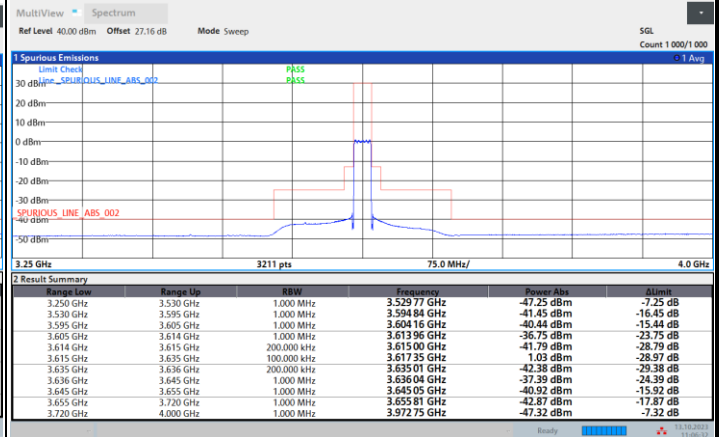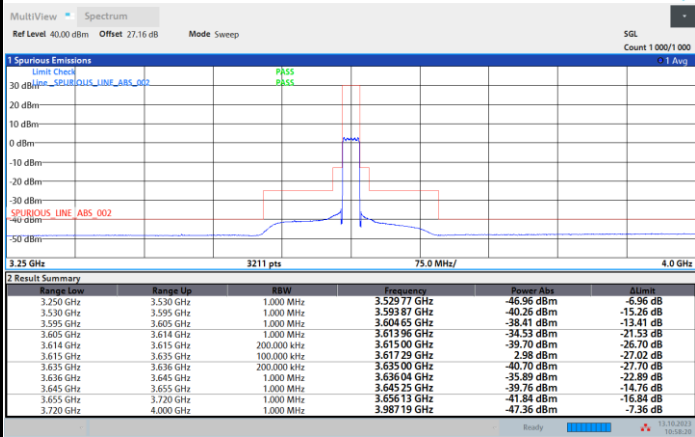

10:58:20 13.10.2023



11:06:33 13.10.2023



FR1 n48 / 20MHz / Highest Channel / MASK

QPSK

16QAM

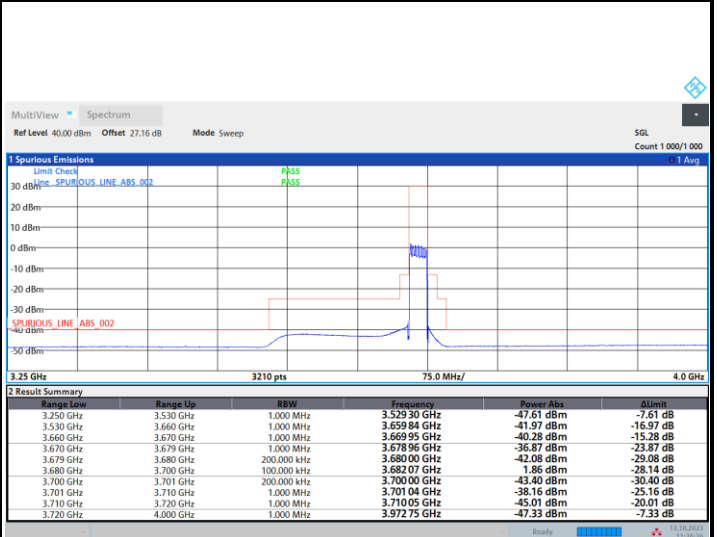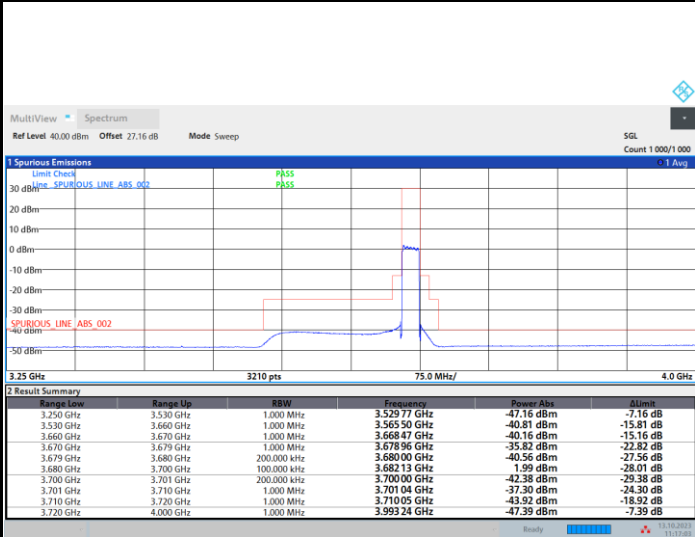

64QAM

256QAM

