



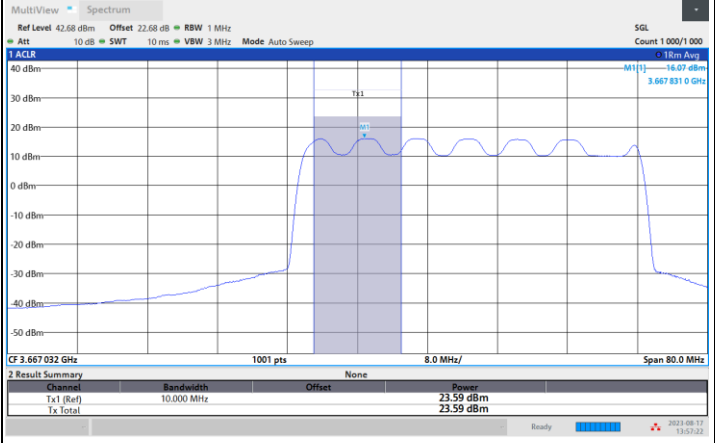

FR1 n48 / 40MHz / Highest Channel / Conducted (dBm/10MHz)



QPSK

16QAM

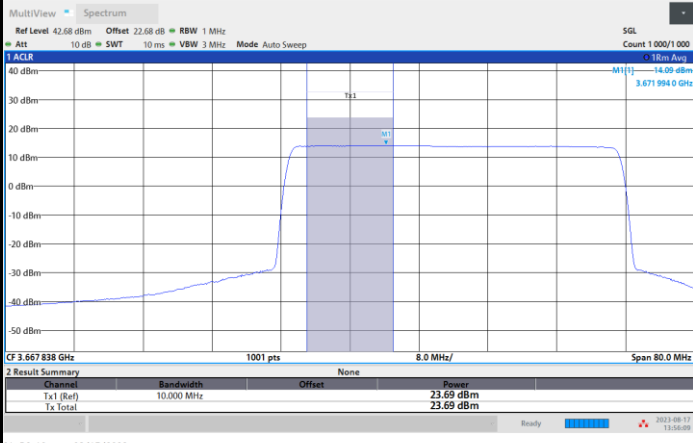

64QAM

256QAM

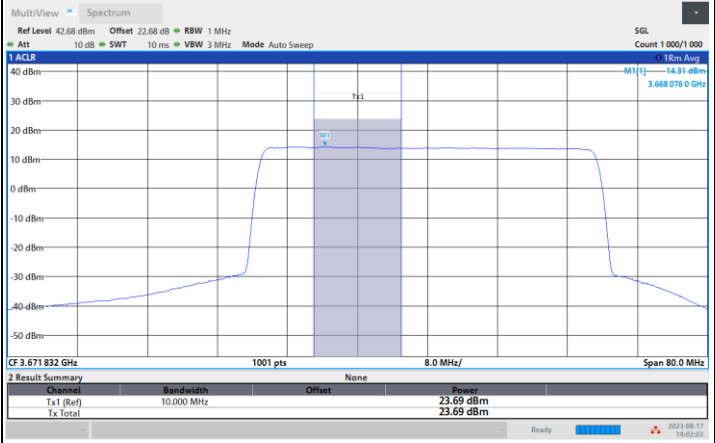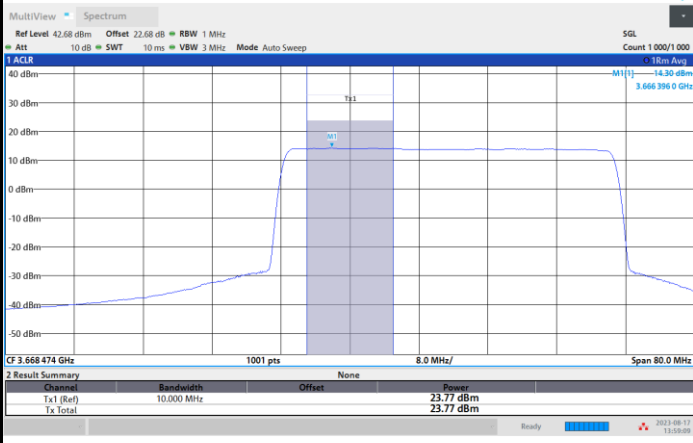



**Power Spectral Density**

Mode	FR1 n48 : Conducted PSD (dBm/MHz) <SISO> Lowest Channel							
	10MHz		20MHz		40MHz		50MHz	
BW	10MHz		20MHz		40MHz		50MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	18.00	18.86	16.59	18.24	14.71	16.53	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Lowest CH	18.07	18.06	16.67	16.57	14.64	14.72	-	-
BW	60MHz		80MHz		90MHz		100MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	-	-	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Lowest CH	-	-	-	-	-	-	-	-

Mode	FR1 n48 : EIRP PSD (dBm/MHz) <MIMO 4TX> Lowest Channel							
	10MHz		20MHz		40MHz		50MHz	
BW	10MHz		20MHz		40MHz		50MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	36.02	36.88	34.61	36.26	32.73	34.55	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Lowest CH	36.09	36.08	34.69	34.59	32.66	32.74	-	-
BW	60MHz		80MHz		90MHz		100MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Lowest CH	-	-	-	-	-	-	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Lowest CH	-	-	-	-	-	-	-	-
Limit	37dBm/MHz							
Result	PASS							

**Note**

1. The measured conducted PSD result has included duty cycle offset factor.
2. The EIRP PSD = conducted PSD result + 6.02dB (4TX) + 12dBi MIMO antenna gain.



Mode	FR1 n48 : Conducted PSD (dBm/MHz) <SISO> Middle Channel							
	10MHz		20MHz		40MHz		50MHz	
BW								
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	18.00	18.70	16.34	18.09	13.99	16.25	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	17.90	17.42	16.56	16.41	14.48	14.64	-	-
BW	60MHz		80MHz		90MHz		100MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	-	-	-	-	-	-	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	-	-	-	-	-	-	-	-

Mode	FR1 n48 : EIRP PSD (dBm/MHz) <MIMO 4TX> Middle Channel							
	10MHz		20MHz		40MHz		50MHz	
BW								
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	36.02	36.72	34.36	36.11	32.01	34.27	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	35.92	35.44	34.58	34.43	32.50	32.66	-	-
BW	60MHz		80MHz		90MHz		100MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	-	-	-	-	-	-	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	-	-	-	-	-	-	-	-
Limit	37dBm/MHz							
Result	PASS							

**Note**

1. The measured conducted PSD result has included duty cycle offset factor.
2. The EIRP PSD = conducted PSD result + 6.02dB (4TX) + 12dBi MIMO antenna gain.



Mode	FR1 n48 : Conducted PSD (dBm/MHz) <SISO> Highest Channel							
	10MHz		20MHz		40MHz		50MHz	
BW								
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Highest CH	17.41	18.22	15.90	17.62	14.02	15.99	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Highest CH	17.36	17.19	16.07	15.99	14.30	14.16	-	-
BW	60MHz		80MHz		90MHz		100MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Highest CH	-	-	-	-	-	-	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Highest CH	-	-	-	-	-	-	-	-

Mode	FR1 n48 : EIRP PSD (dBm/MHz) <MIMO 4TX> Highest Channel							
	10MHz		20MHz		40MHz		50MHz	
BW								
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Highest CH	35.43	36.24	33.92	35.64	32.04	34.01	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Highest CH	35.38	35.21	34.09	34.01	32.32	32.18	-	-
BW	60MHz		80MHz		90MHz		100MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Highest CH	-	-	-	-	-	-	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Highest CH	-	-	-	-	-	-	-	-
Limit	37dBm/MHz							
Result	PASS							


**Note**

1. The measured conducted PSD result has included duty cycle offset factor.
2. The EIRP PSD = conducted PSD result + 6.02dB (4TX) + 12dBi MIMO antenna gain.




FR1 n48 / 10MHz / Lowest Channel / PSD


QPSK

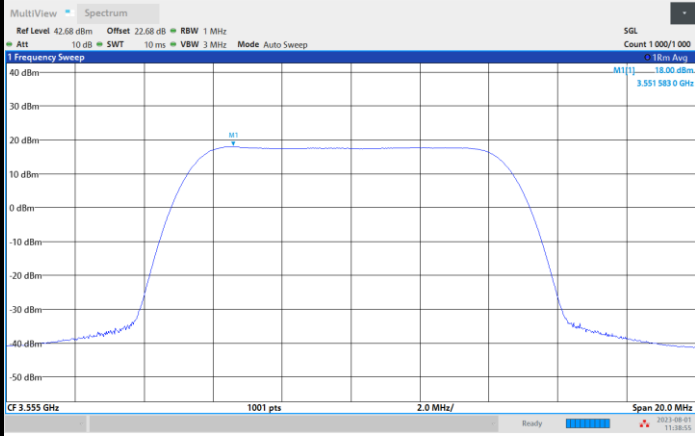


16QAM

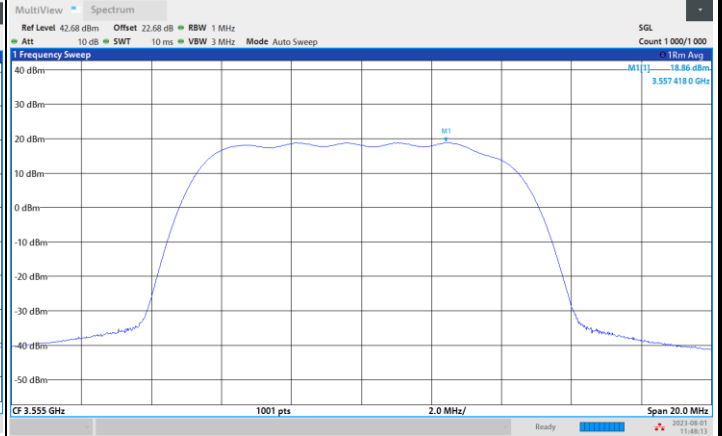

64QAM

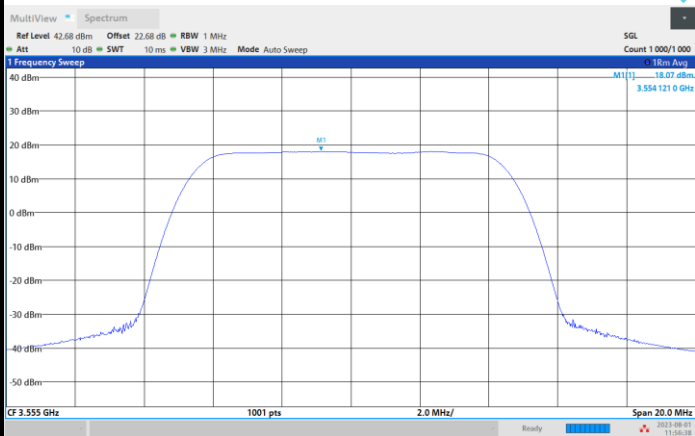


256QAM

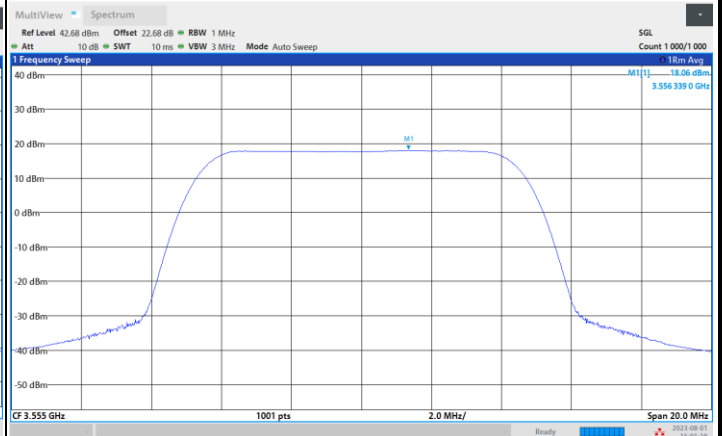




FR1 n48 / 10MHz / Middle Channel / PSD


QPSK

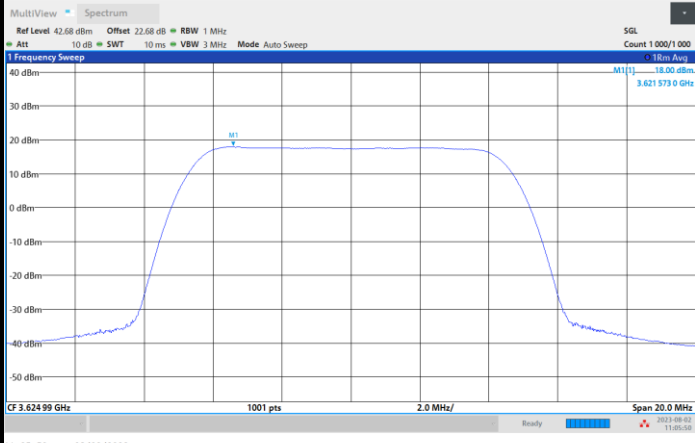


16QAM

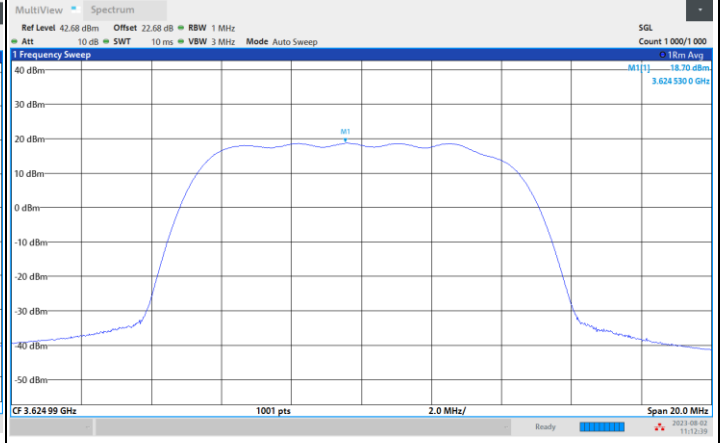

64QAM

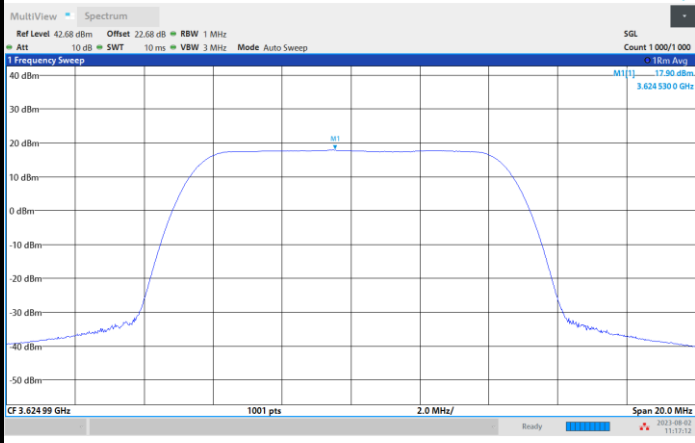

256QAM


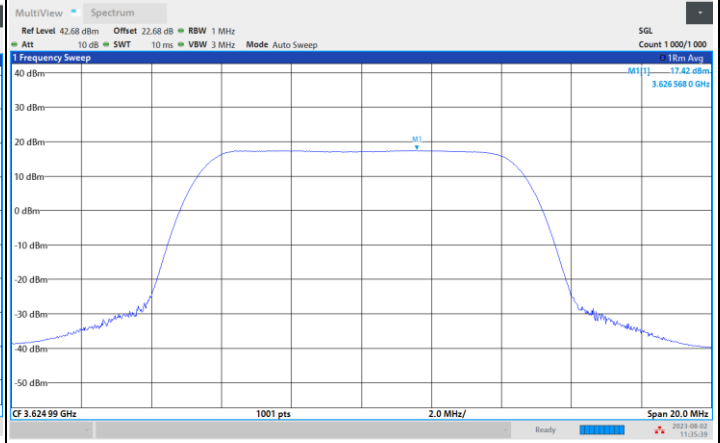




FR1 n48 / 10MHz / Highest Channel / PSD



QPSK

16QAM

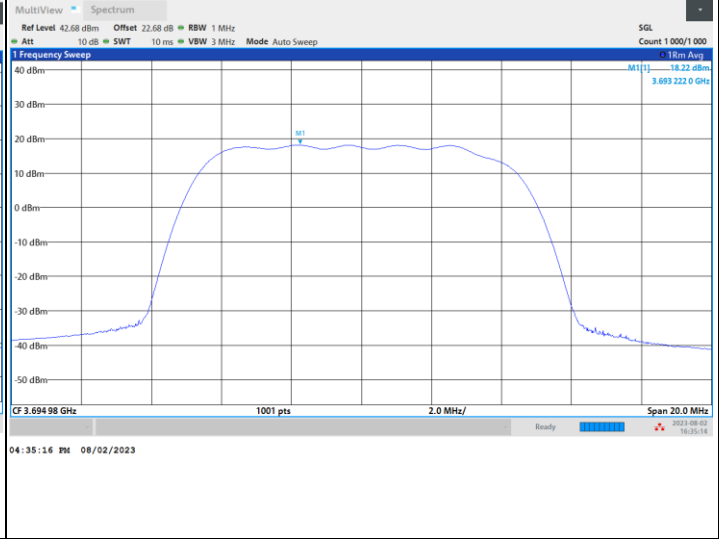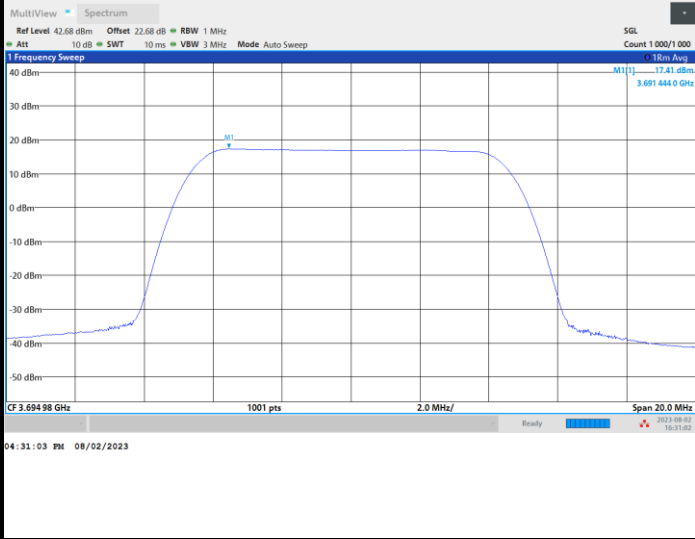

64QAM


256QAM

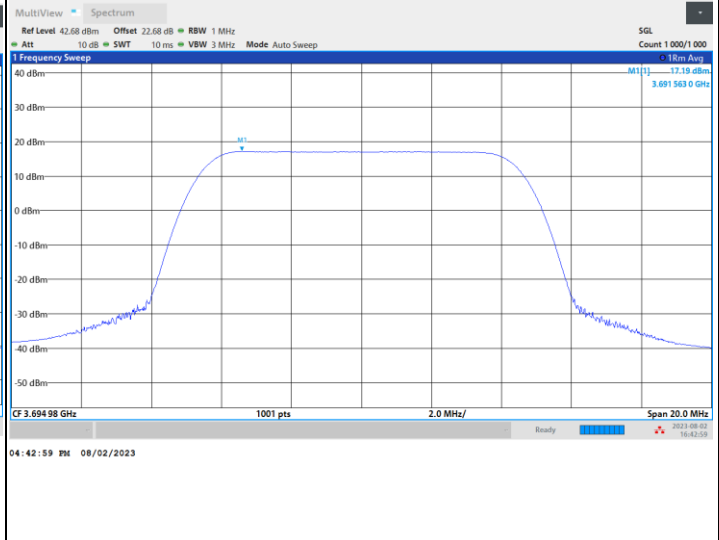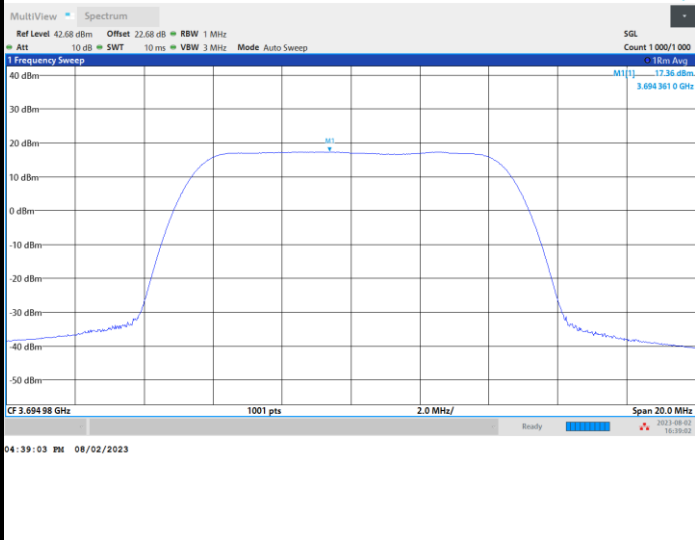




FR1 n48 / 20MHz / Lowest Channel / PSD

QPSK

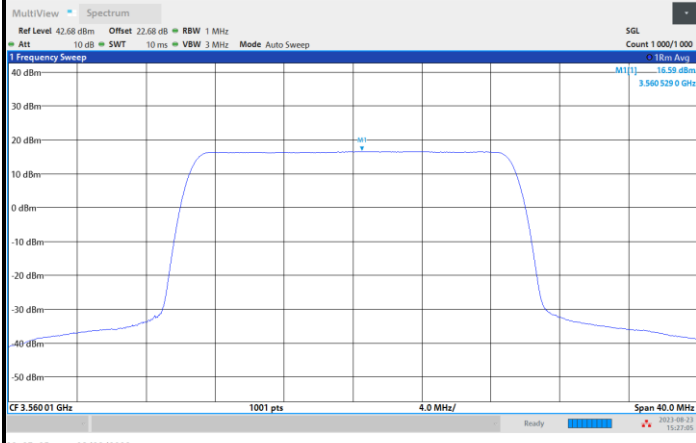


03:27:05 PM 08/23/2023

16QAM

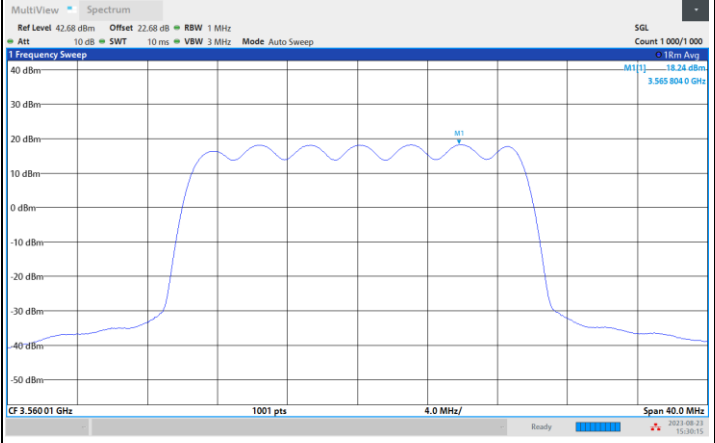


03:30:15 PM 08/23/2023

64QAM

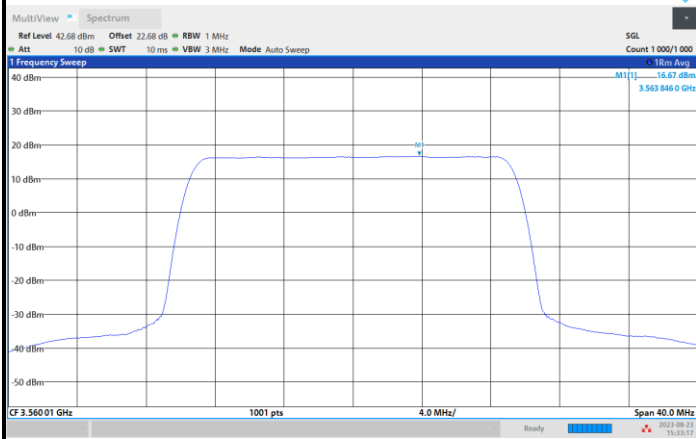

03:33:18 PM 08/23/2023

256QAM

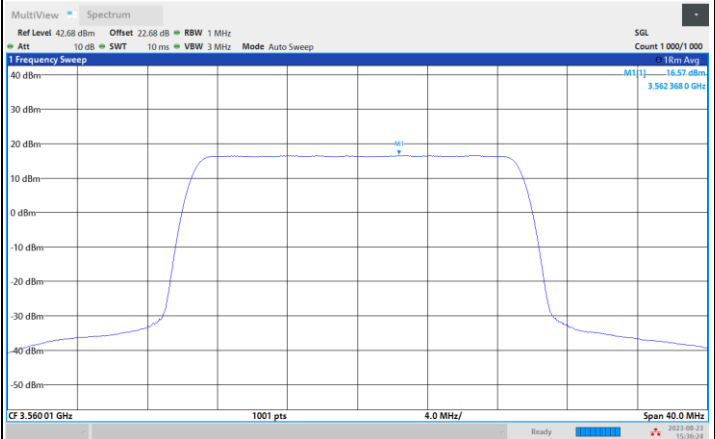


03:36:25 PM 08/23/2023






FR1 n48 / 20MHz / Middle Channel / PSD

QPSK

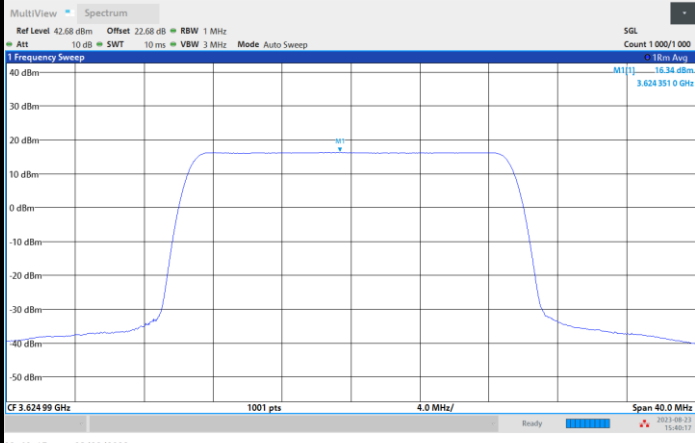


03:40:17 PM 08/23/2023

16QAM

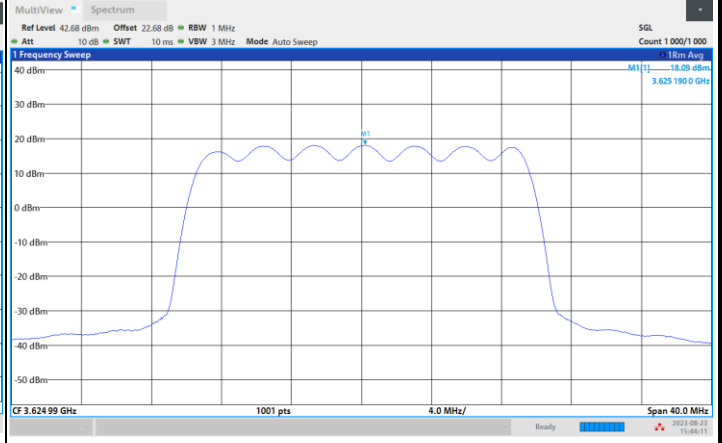


03:44:12 PM 08/23/2023

64QAM

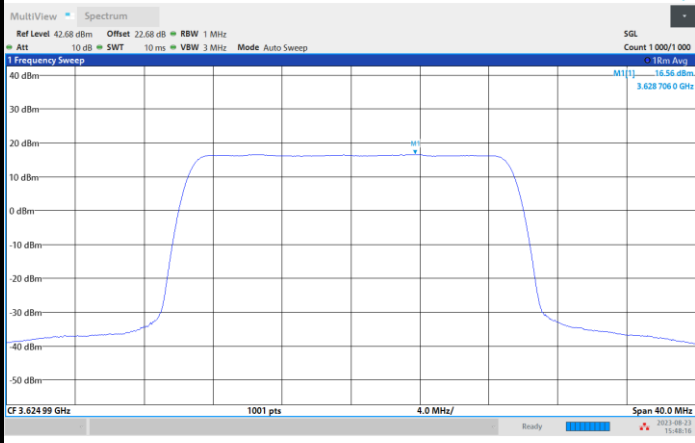

03:48:17 PM 08/23/2023

256QAM

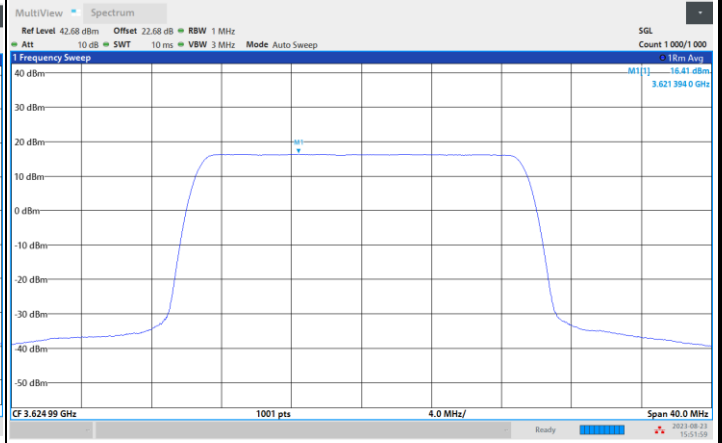



03:52:00 PM 08/23/2023



FR1 n48 / 20MHz / Highest Channel / PSD

QPSK

16QAM

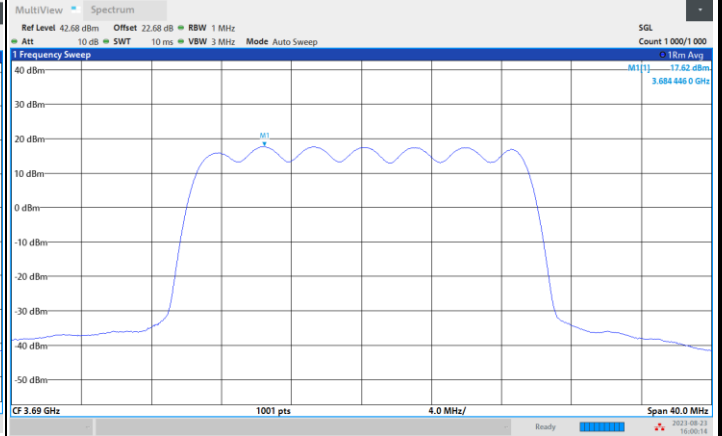
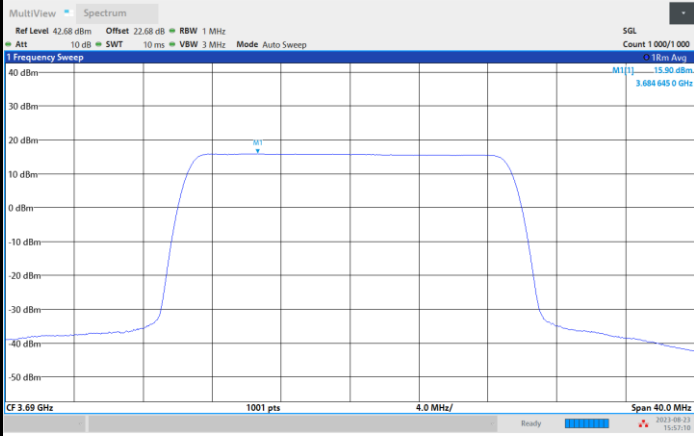


03:57:11 PM 08/23/2023

04:00:14 PM 08/23/2023

64QAM

256QAM

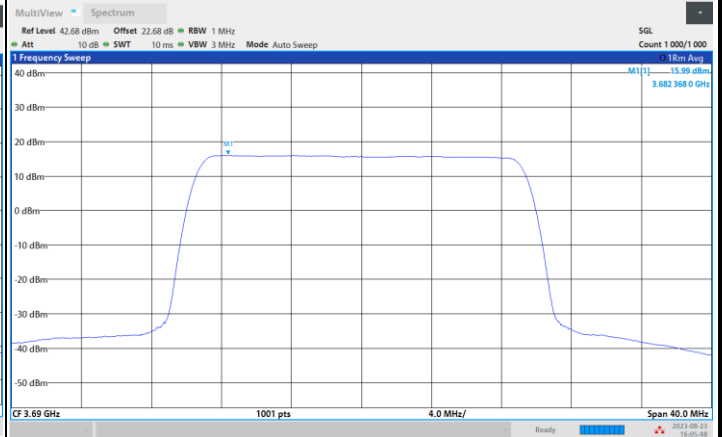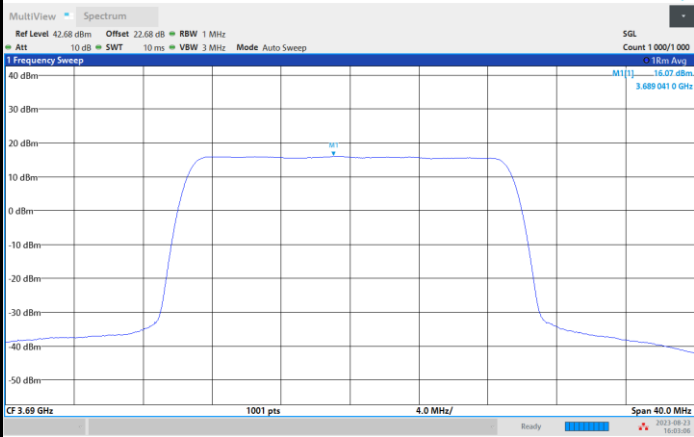


04:03:06 PM 08/23/2023

04:05:49 PM 08/23/2023




FR1 n48 / 40MHz / Lowest Channel / PSD

QPSK

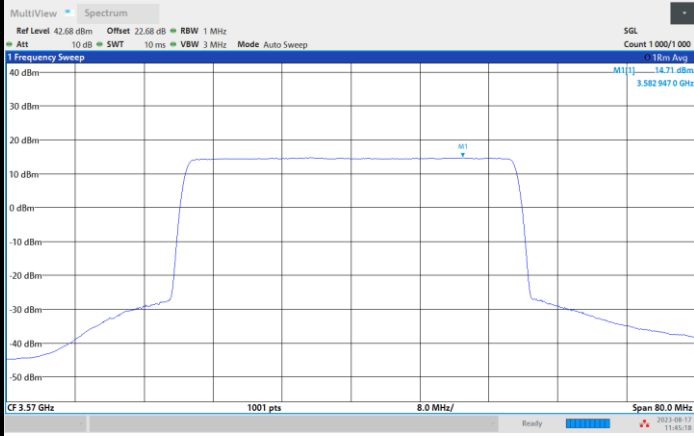


11:45:18 AM 08/17/2023

16QAM

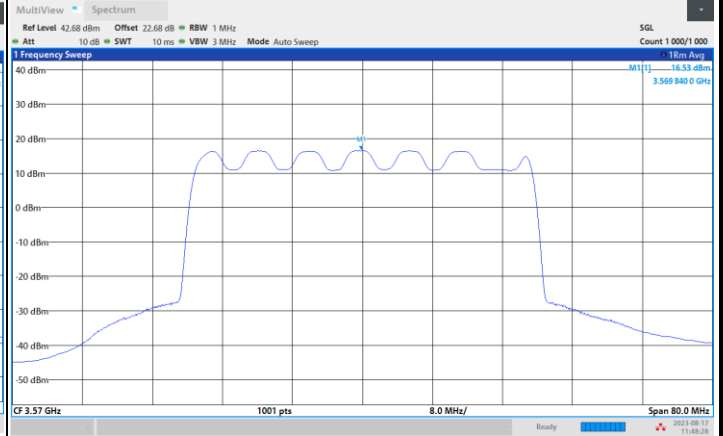


11:48:28 AM 08/17/2023

64QAM

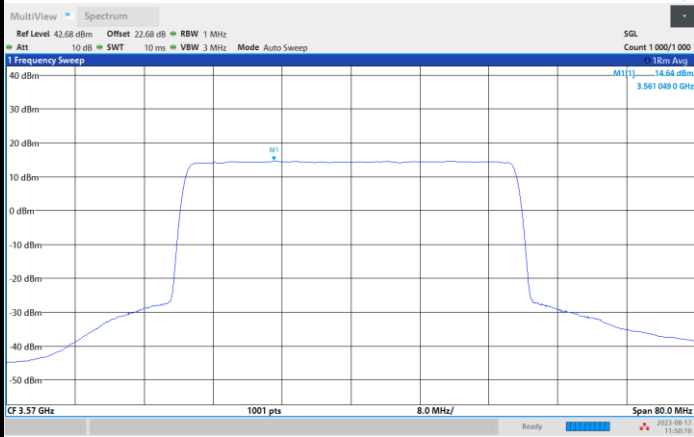

11:50:10 AM 08/17/2023

256QAM

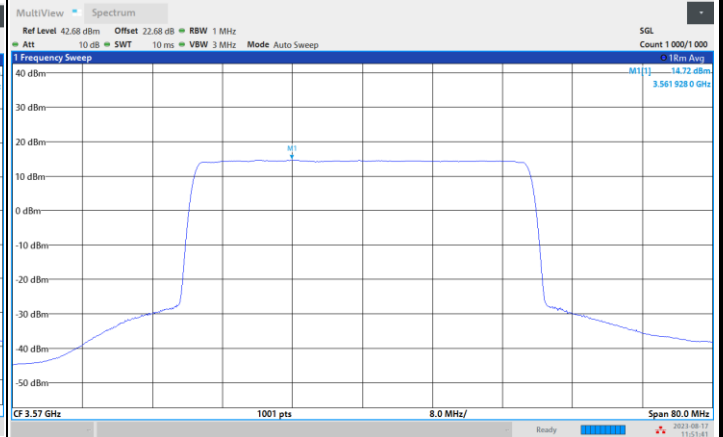


11:51:42 AM 08/17/2023




FR1 n48 / 40MHz / Middle Channel / PSD


QPSK

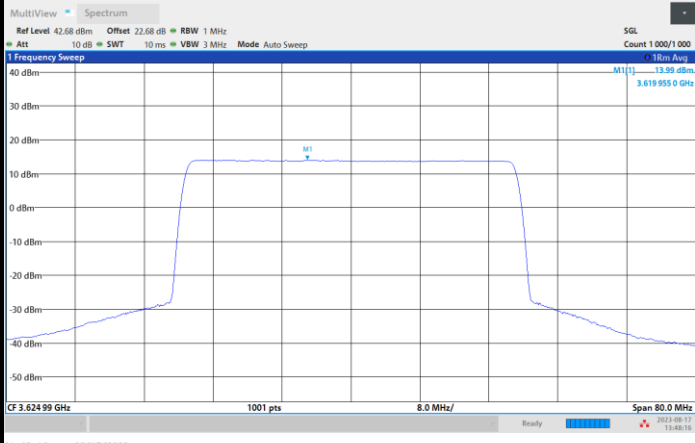


16QAM

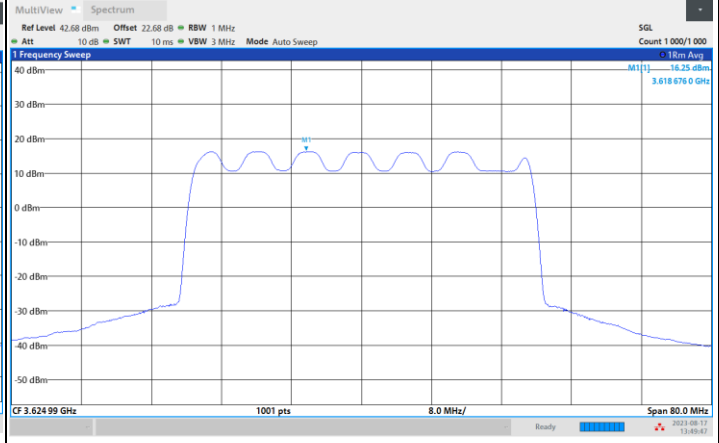

64QAM

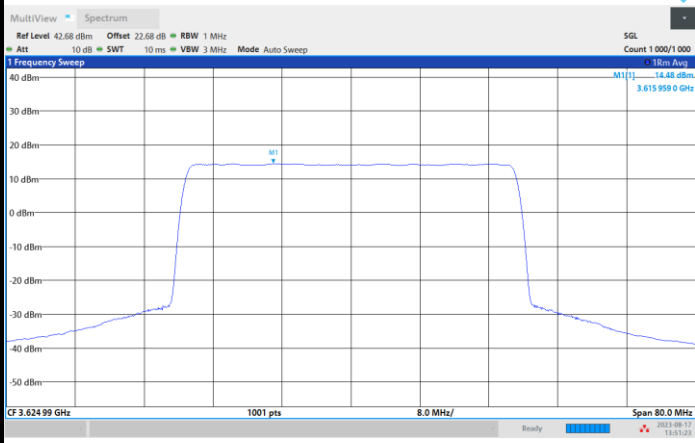

256QAM


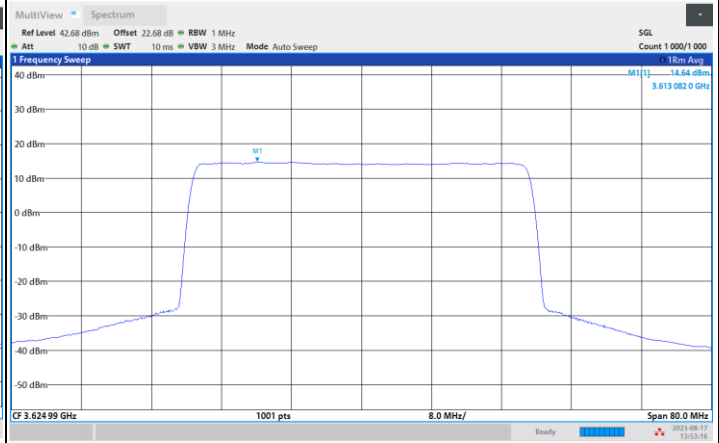




FR1 n48 / 40MHz / Highest Channel / PSD



QPSK

16QAM

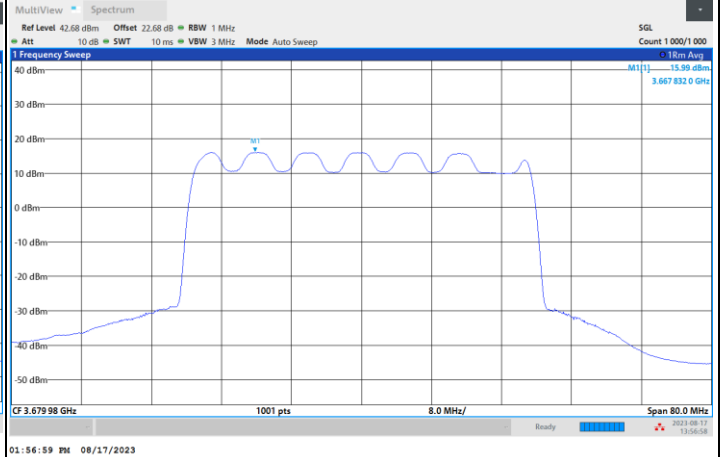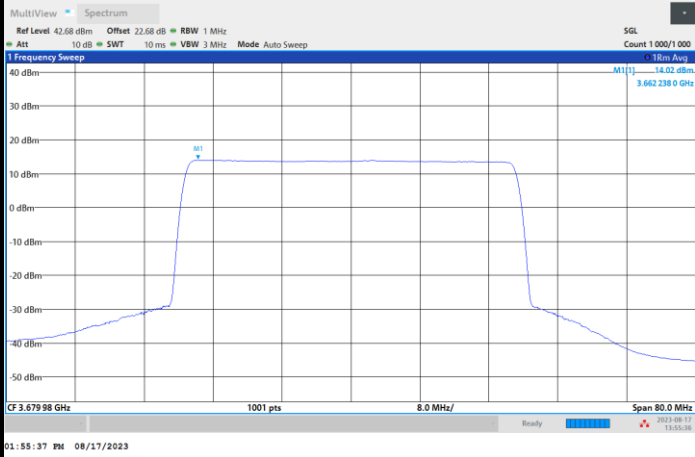

64QAM


256QAM

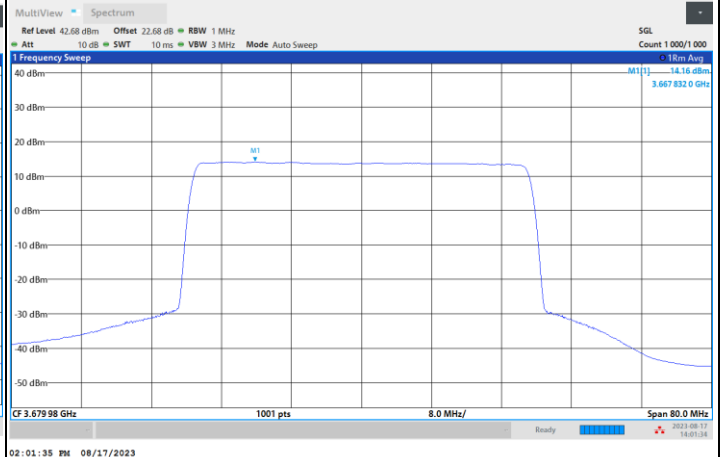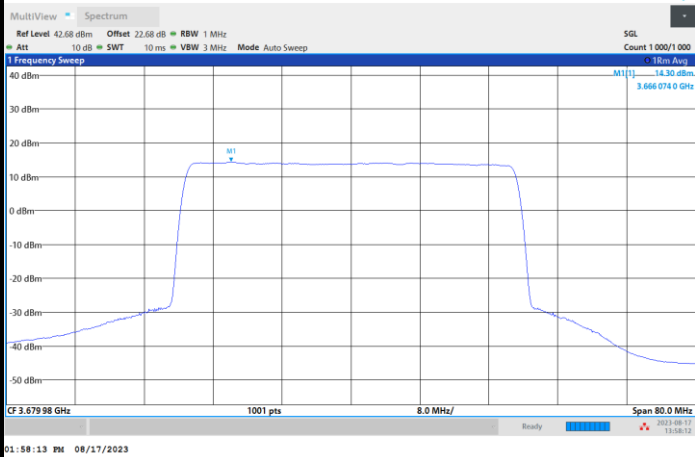



# Peak-to-Average Ratio


Mode	FR1 n48 / 20MHz / PAR (dB)				Limit: 13dB
Mod.	QPSK	16QAM	64QAM	256QAM	Result
Middle CH	7.32	7.42	7.24	7.32	PASS

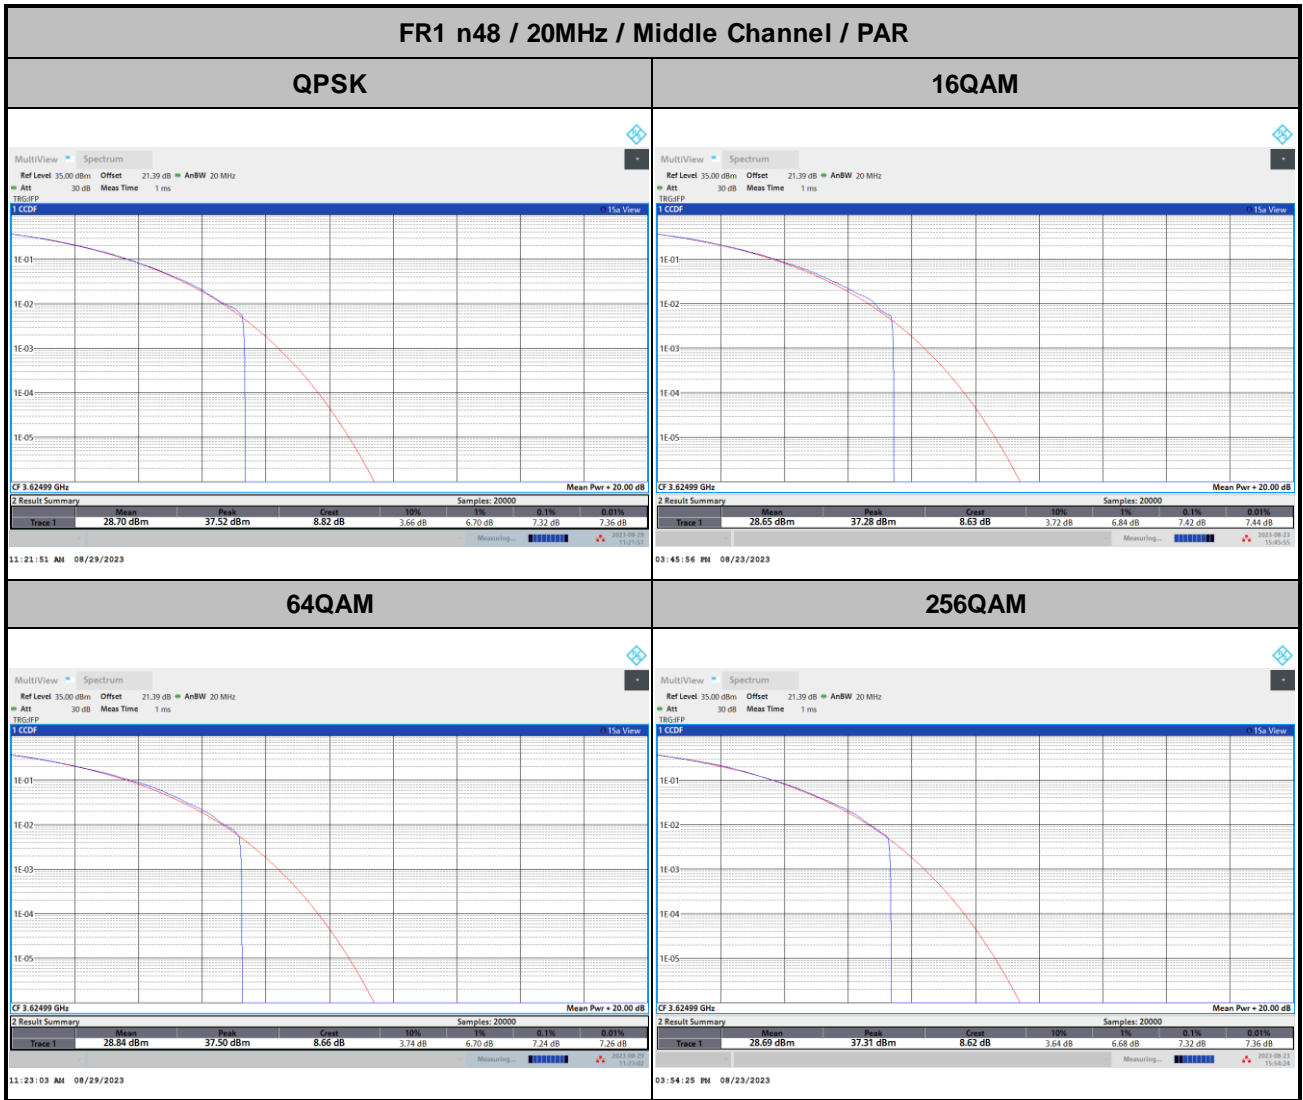



**26dB Bandwidth**

Mode	FR1 n48 : 26dB BW(MHz)							
BW	10MHz		20MHz		40MHz		50MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	9.55	9.29	19.50	19.54	40.68	40.60	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	9.39	9.41	19.58	19.58	40.68	40.52	-	-
BW	60MHz		80MHz		90MHz		100MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	-	-	-	-	-	-	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	-	-	-	-	-	-	-	-


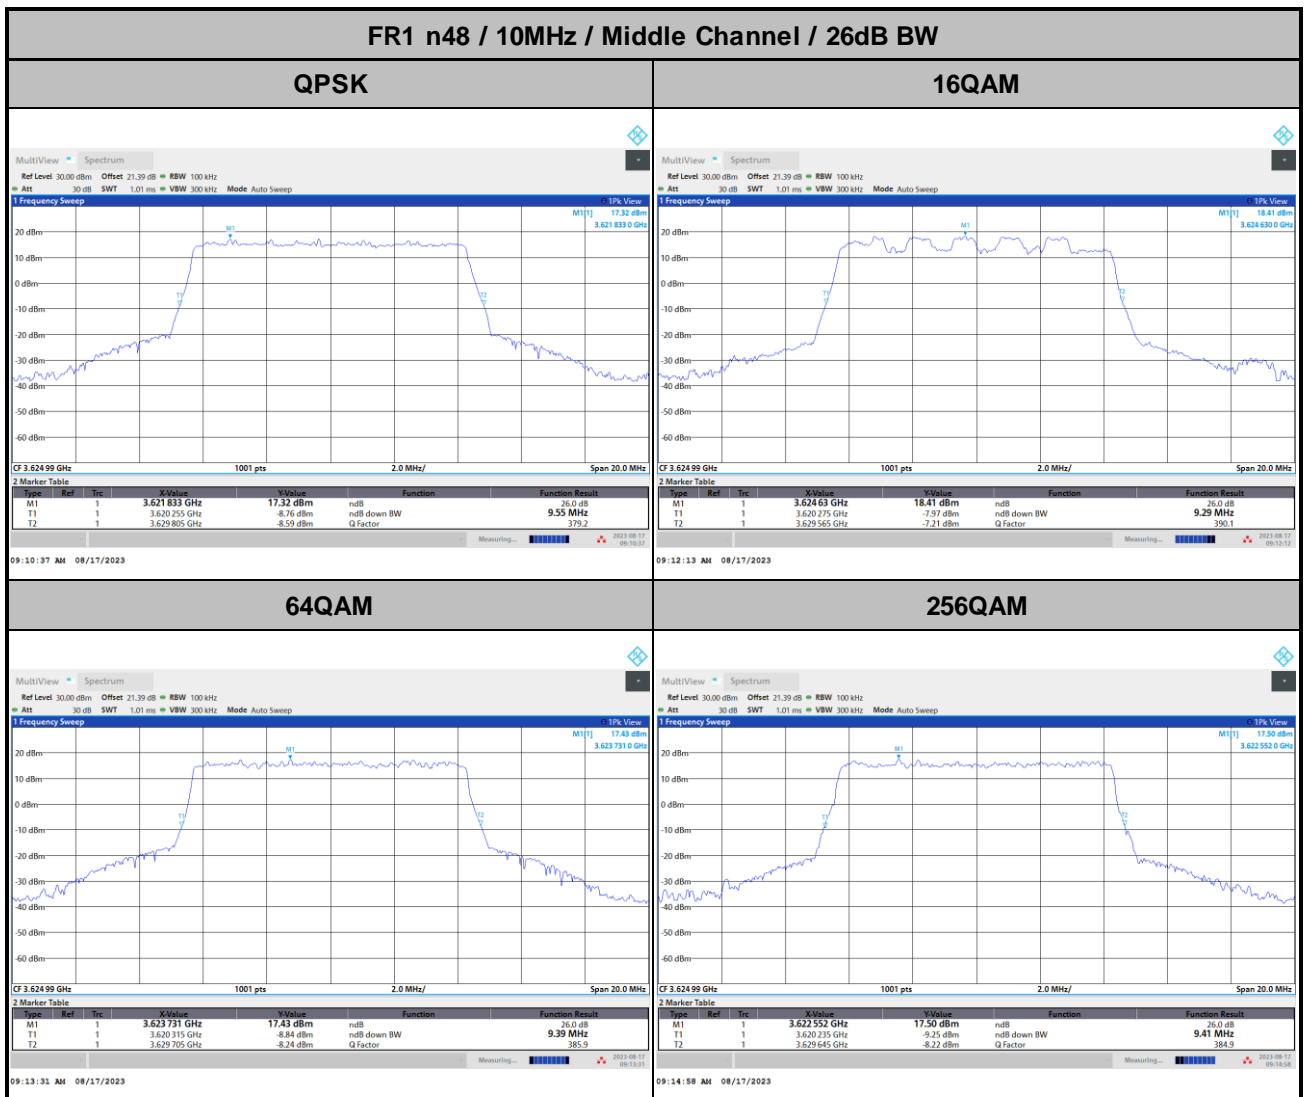




FR1 n48 / 20MHz / Middle Channel / 26dB BW



QPSK

16QAM

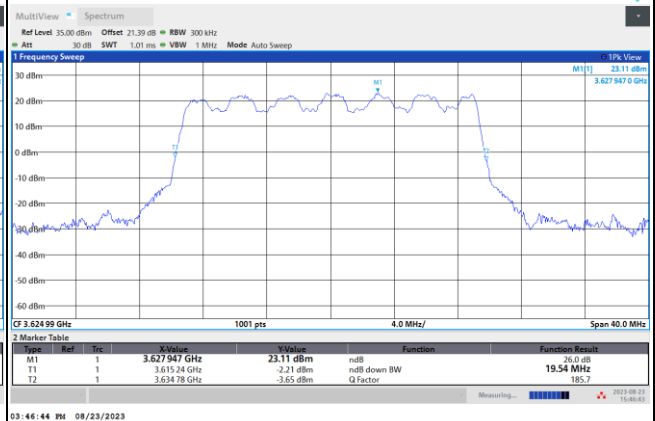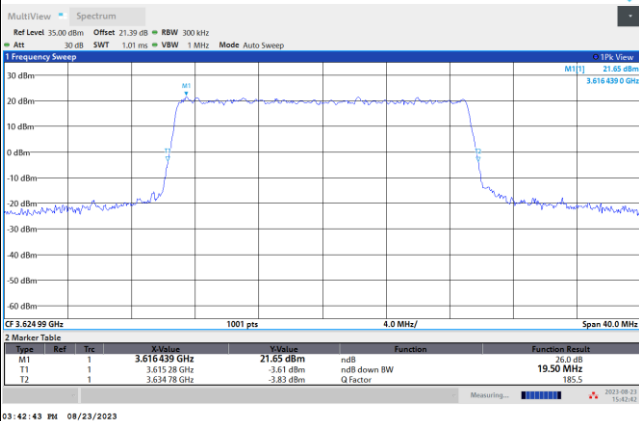

64QAM

256QAM

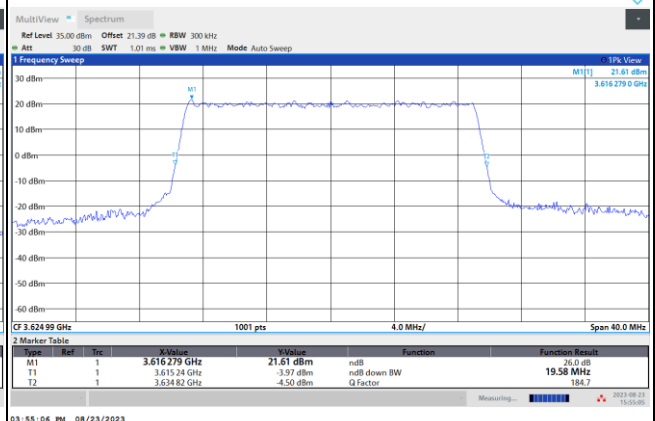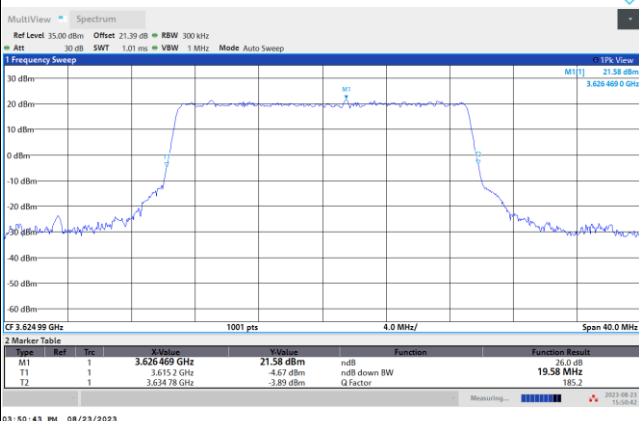







FR1 n48 / 40MHz / Middle Channel / 26dB BW


QPSK

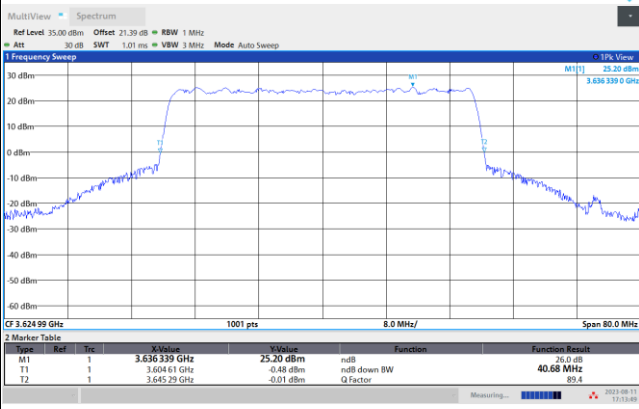


16QAM

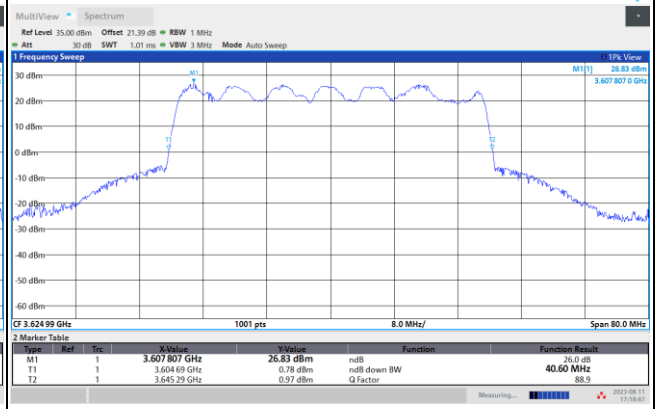

64QAM

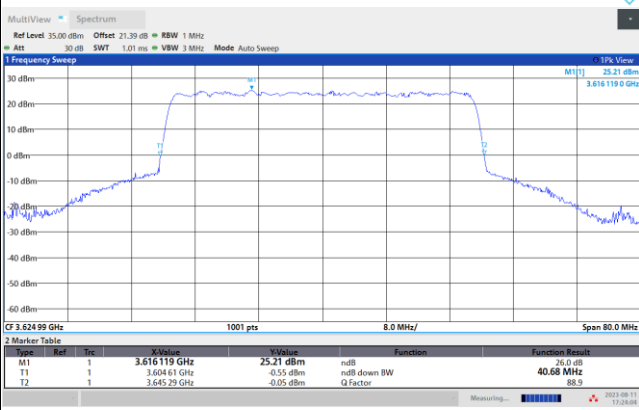


256QAM

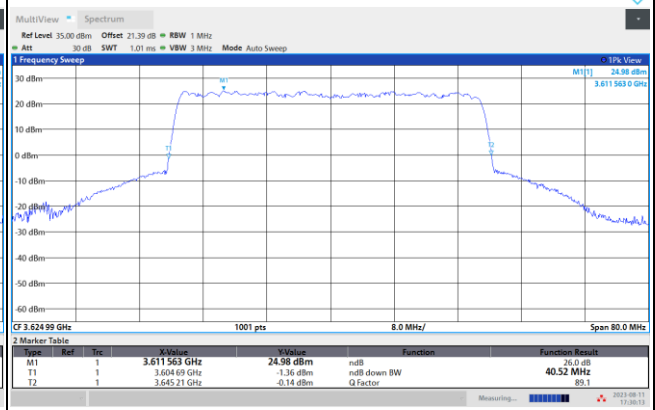



# Occupied Bandwidth


Mode	FR1 n48 : 99%OBW (MHz)							
	10MHz		20MHz		40MHz		50MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	8.57	8.50	18.21	18.24	38.07	38.14	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	8.54	8.55	18.19	18.18	38.00	37.94	-	-
BW	60MHz		80MHz		90MHz		100MHz	
Mod.	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM	QPSK	16QAM
Middle CH	-	-	-	-	-	-	-	-
Mod.	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM	64QAM	256QAM
Middle CH	-	-	-	-	-	-	-	-

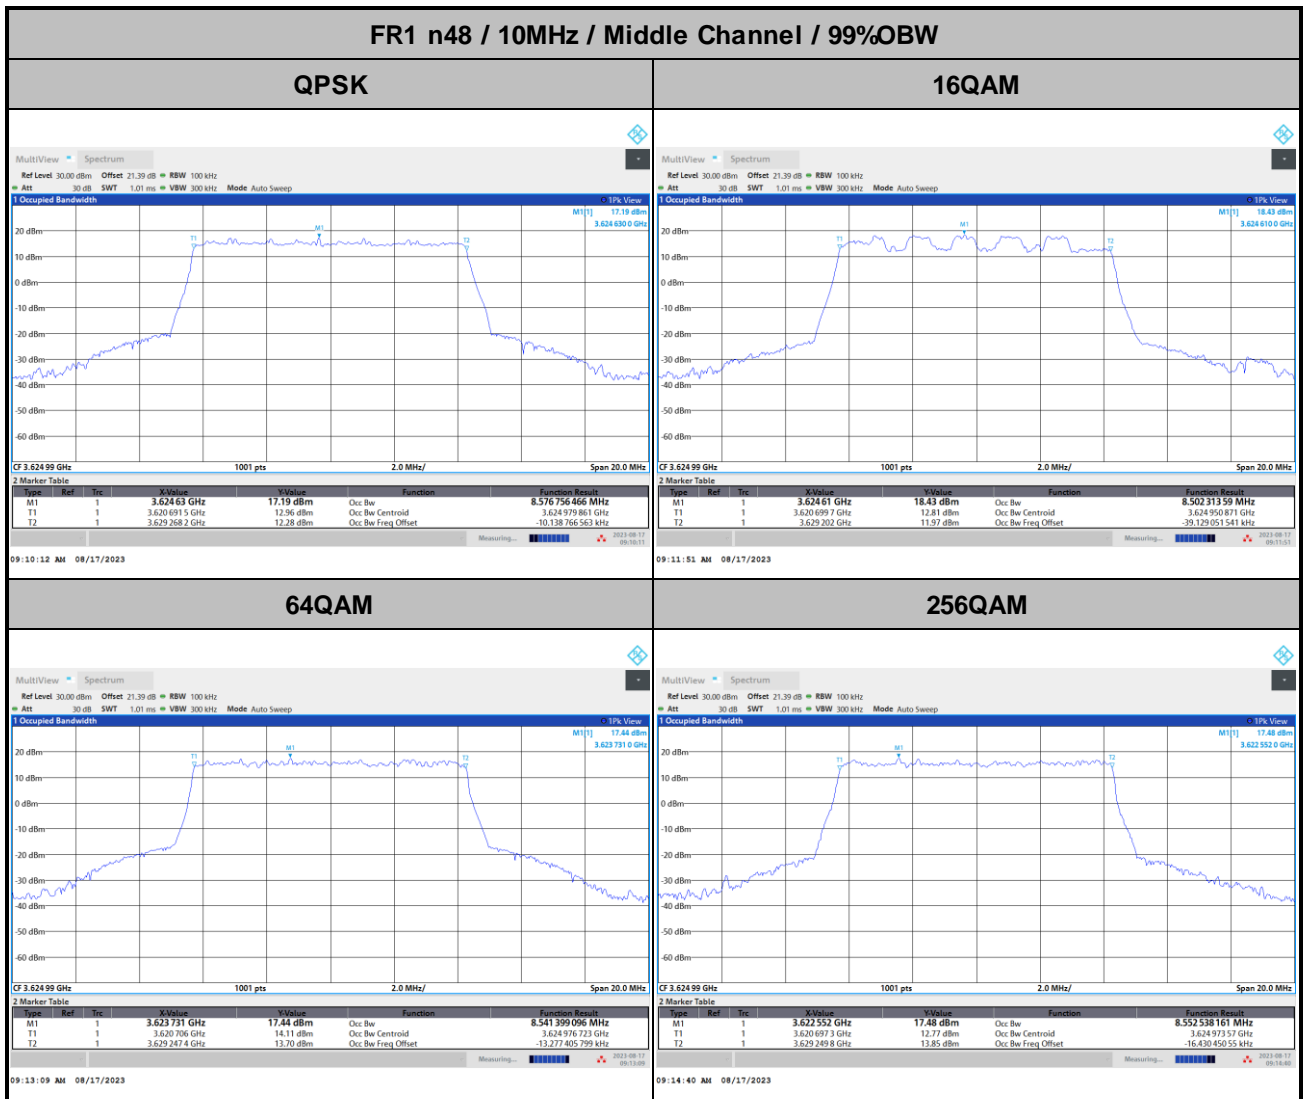




FR1 n48 / 20MHz / Middle Channel / 99%OBW


QPSK

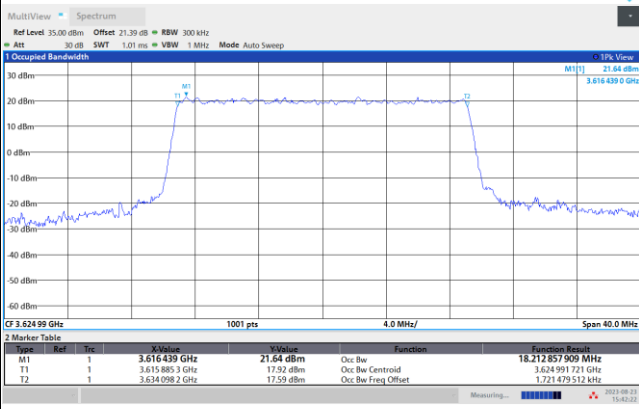


16QAM

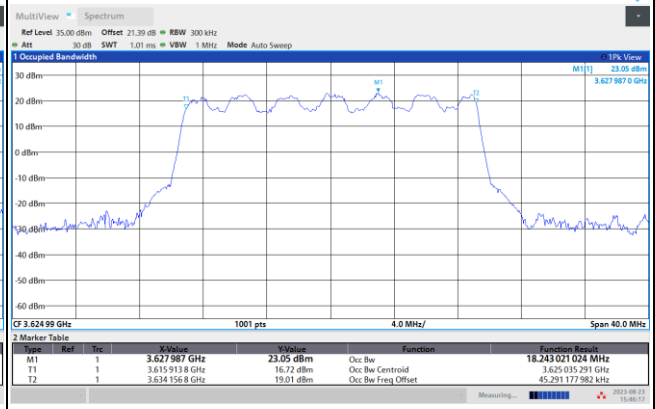

64QAM

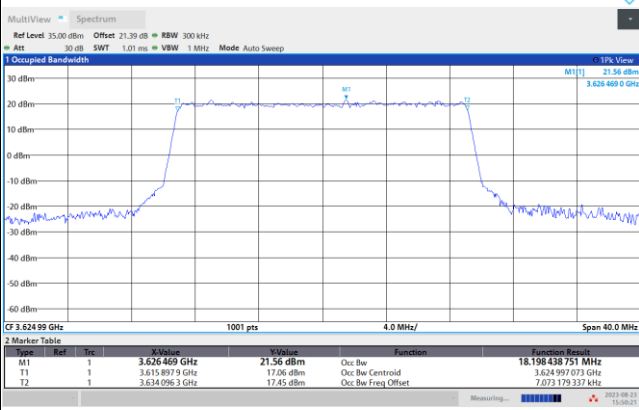

256QAM


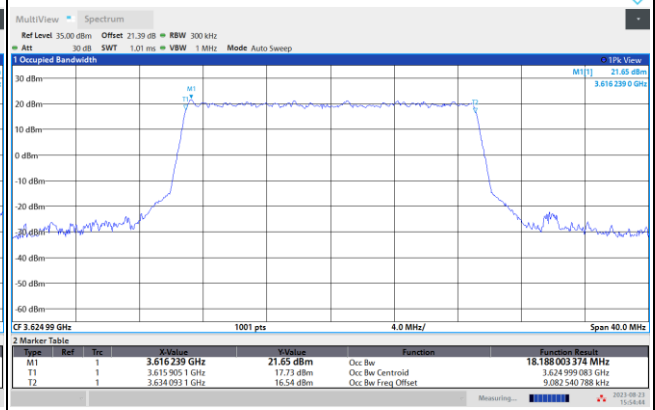




FR1 n48 / 40MHz / Middle Channel / 99%OBW



QPSK

16QAM

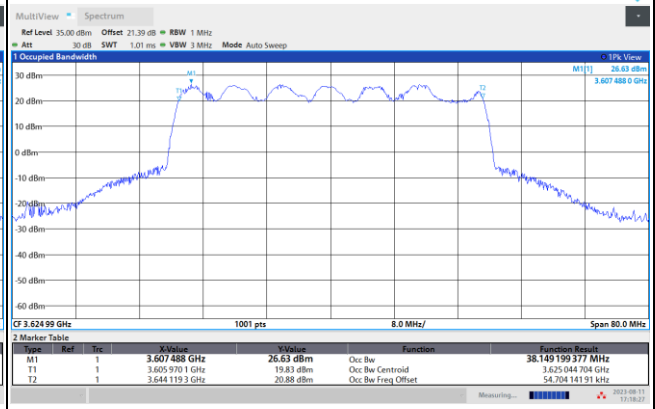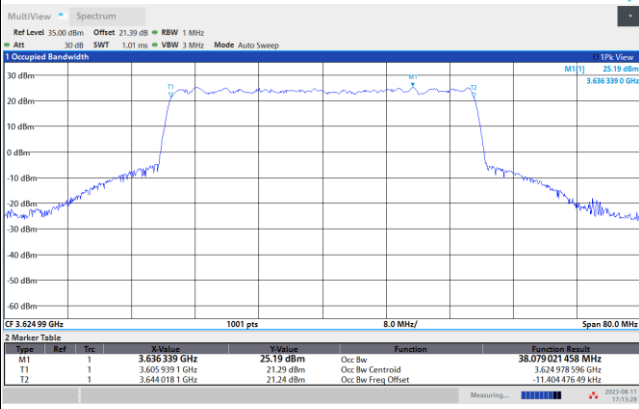

64QAM

256QAM

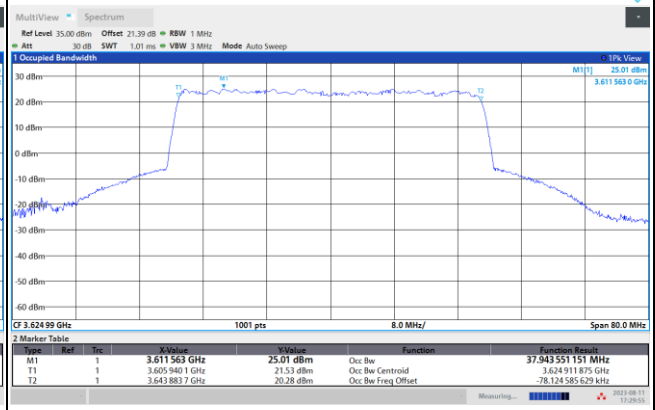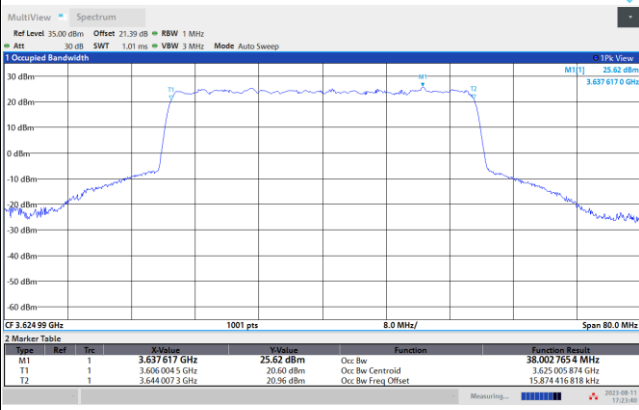





Unwanted Emission (MASK)

FR1 n48 / 10MHz / Lowest Channel / MASK



QPSK

16QAM

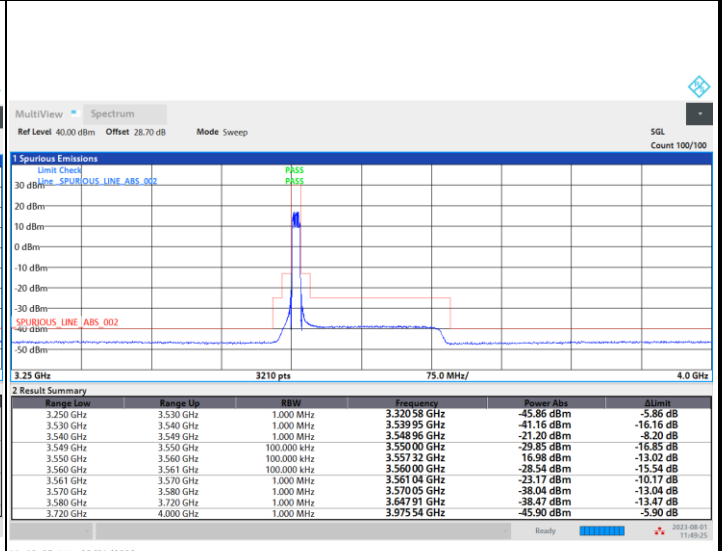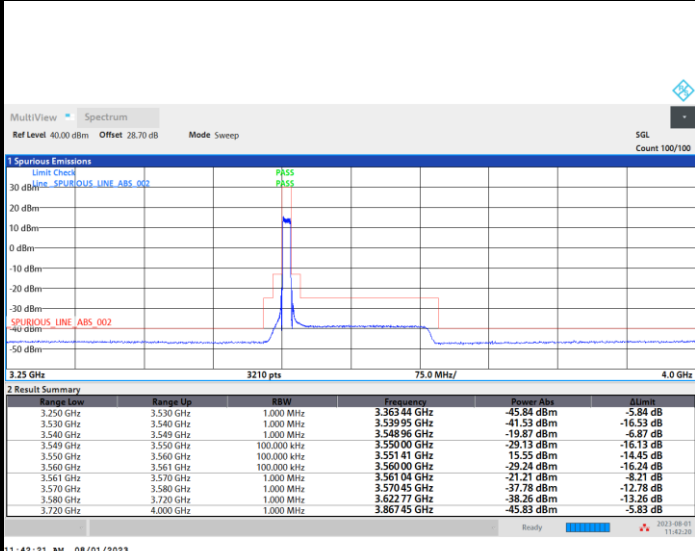

64QAM

256QAM

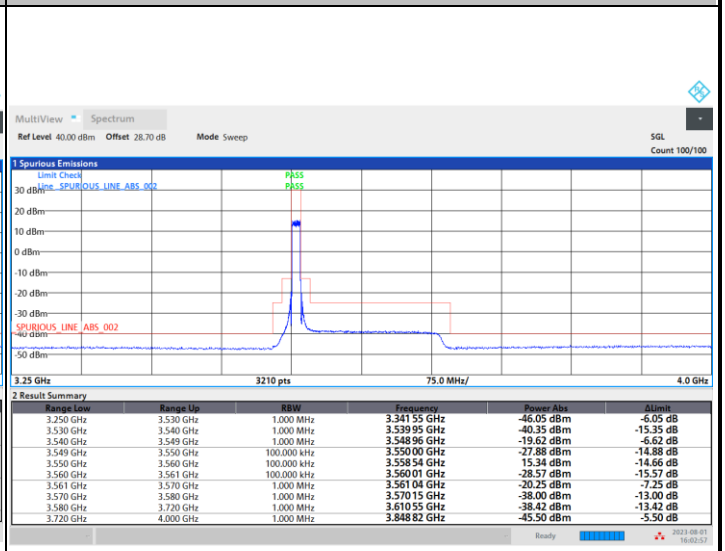
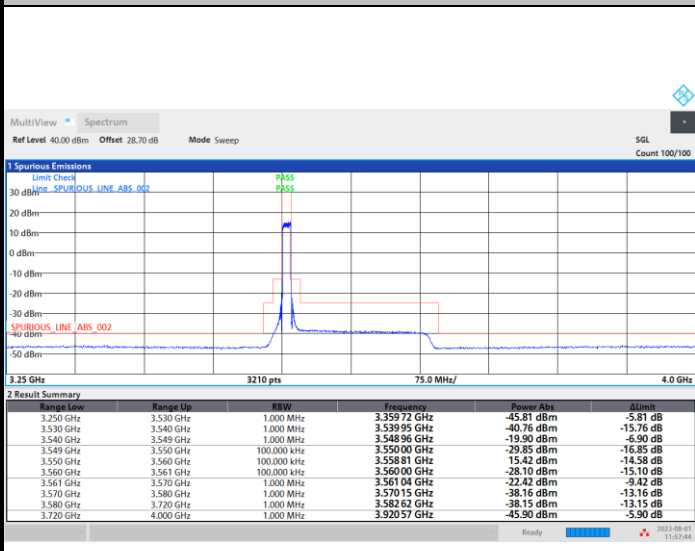




FR1 n48 / 10MHz / Middle Channel / MASK



QPSK

16QAM

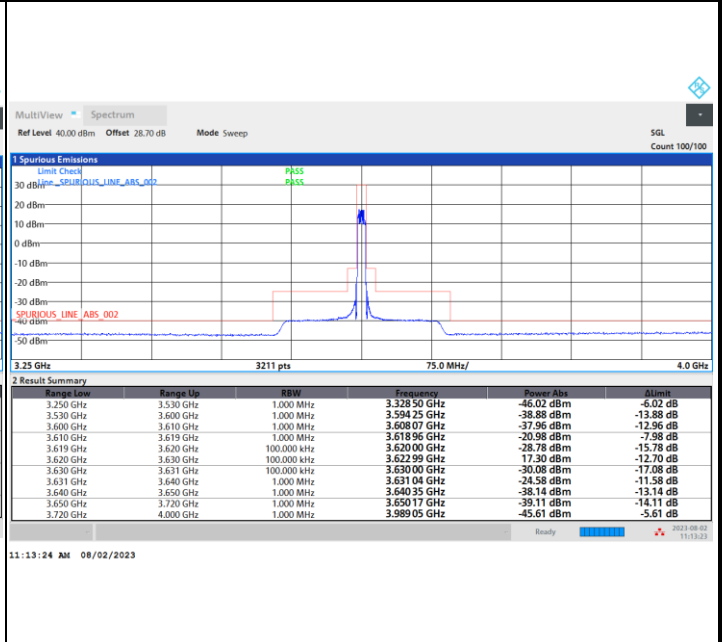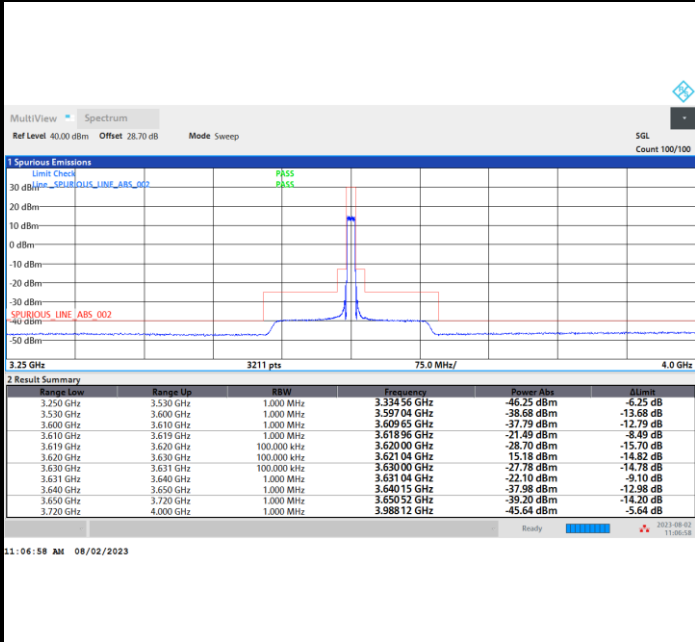

64QAM

256QAM

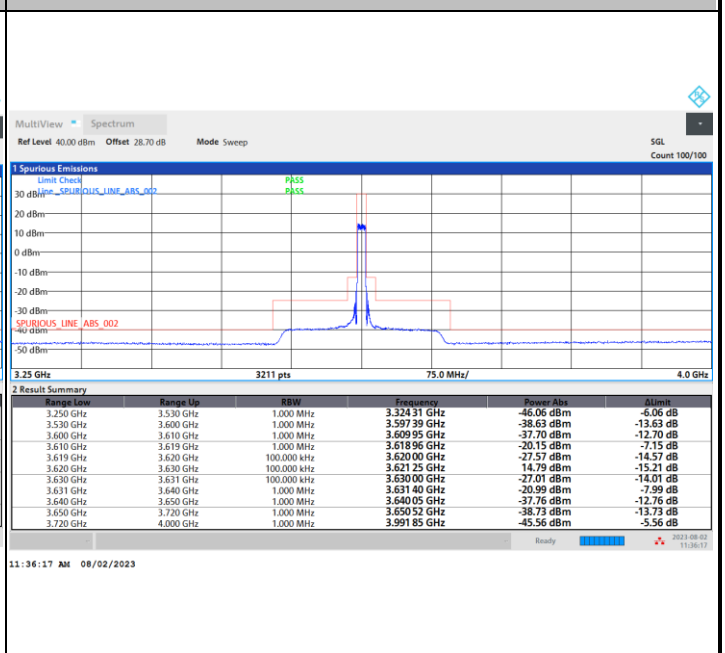
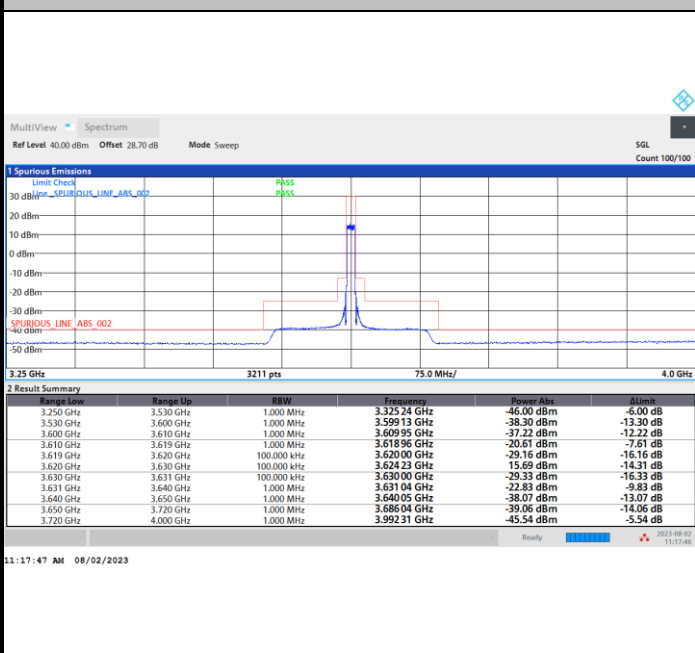




FR1 n48 / 10MHz / Highest Channel / MASK

QPSK

16QAM

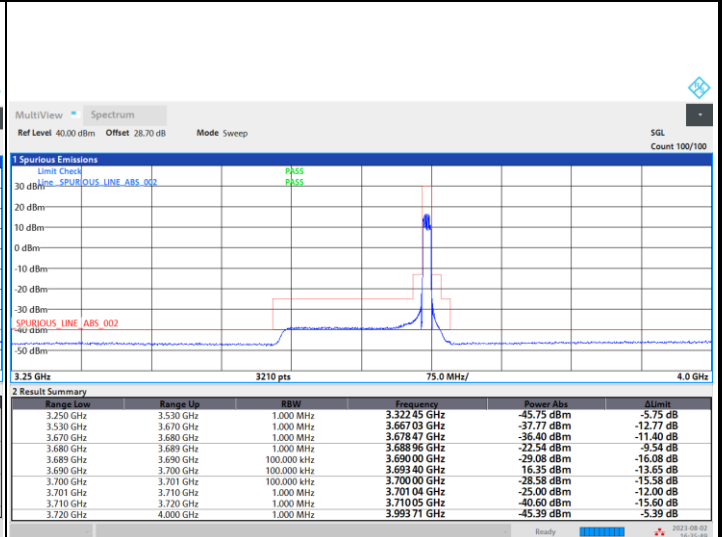
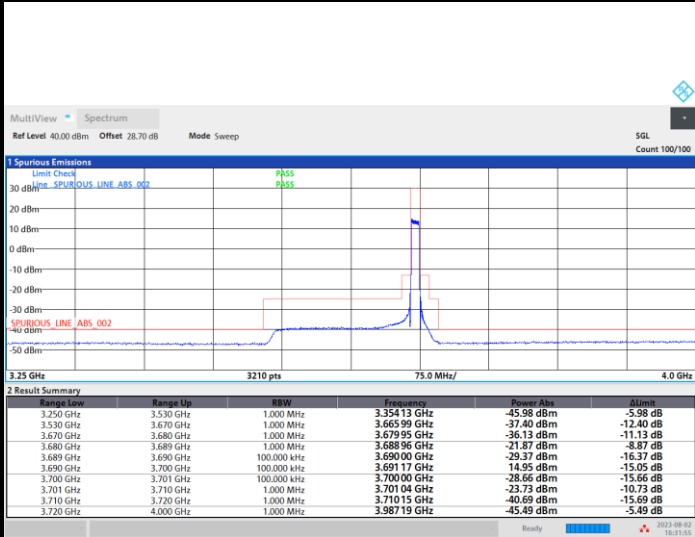


04:31:56 PM 08/02/2023

04:35:50 PM 08/02/2023

64QAM

256QAM

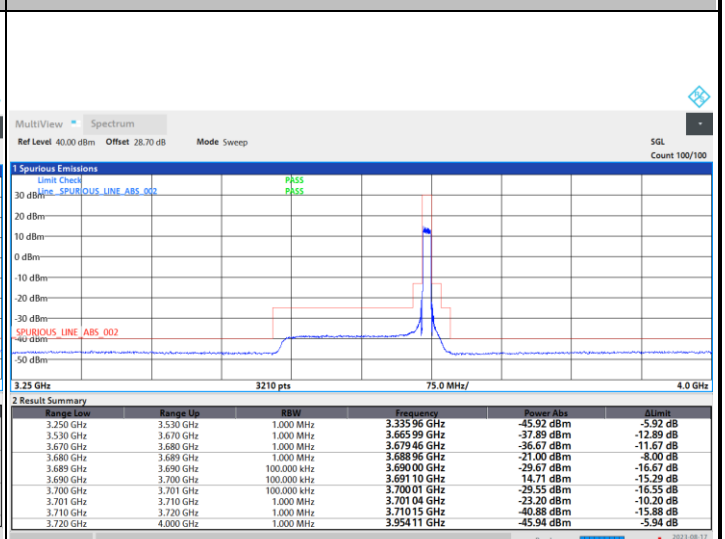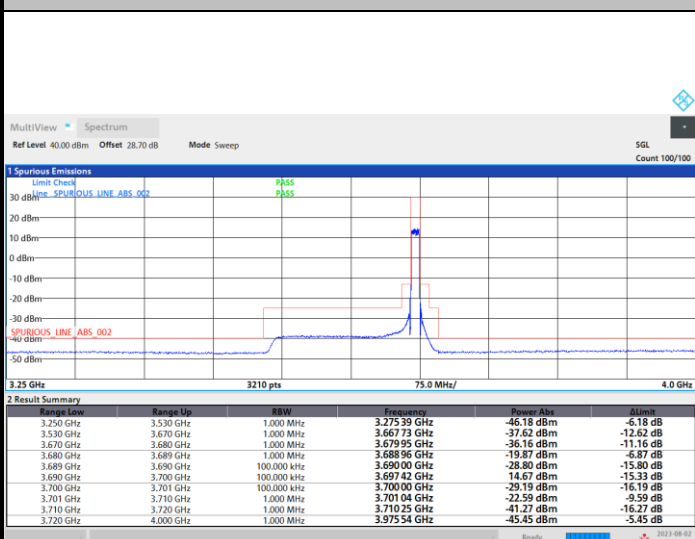

04:39:39 PM 08/02/2023



09:22:55 AM 08/17/2023



FR1 n48 / 20MHz / Lowest Channel / MASK



QPSK

16QAM

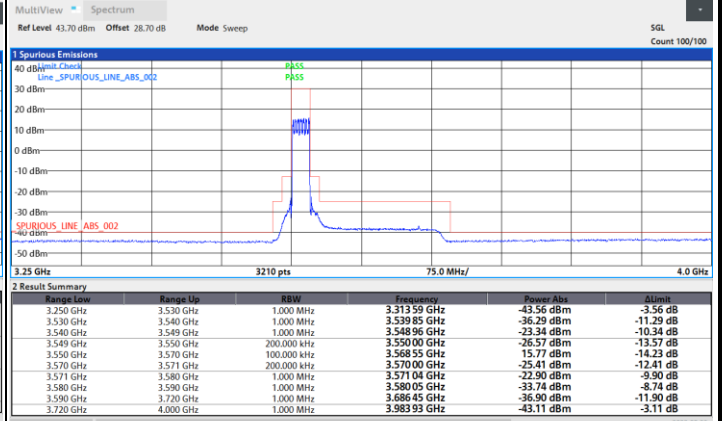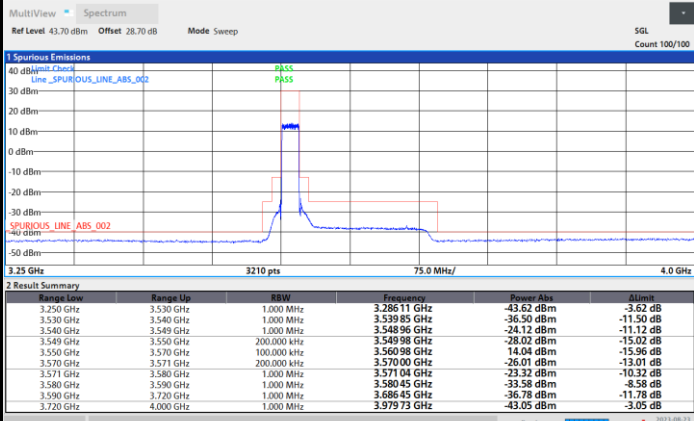

64QAM

256QAM

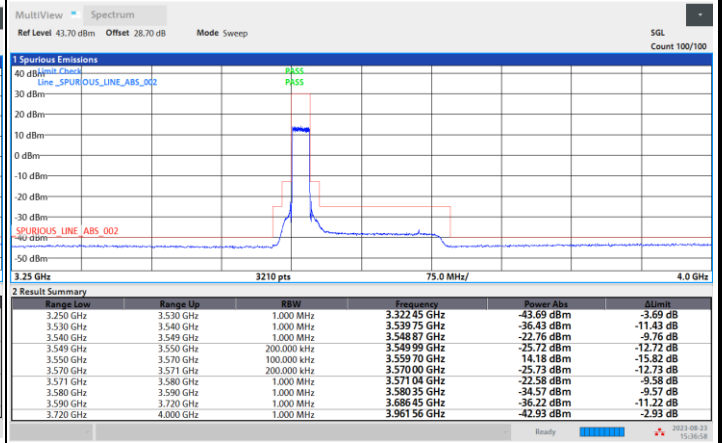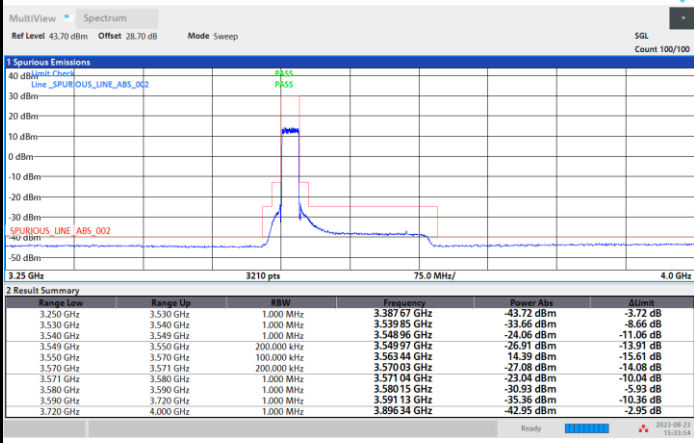







FR1 n48 / 20MHz / Middle Channel / MASK



QPSK

16QAM

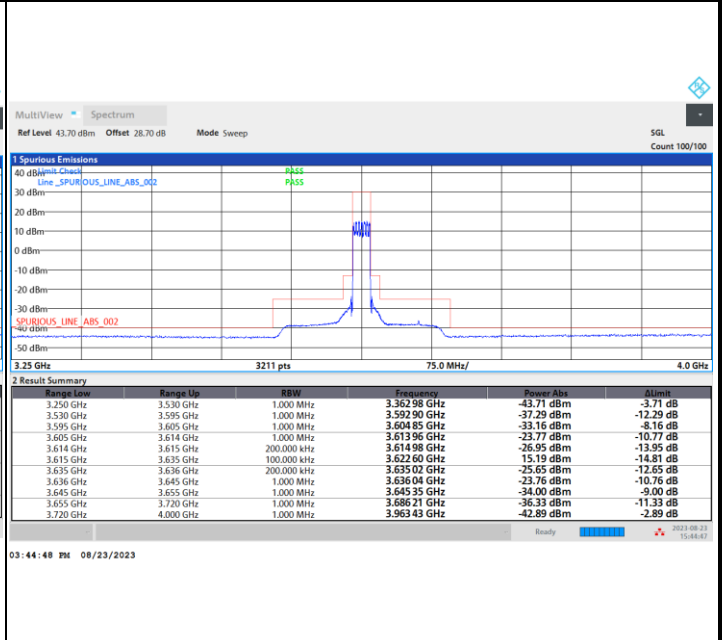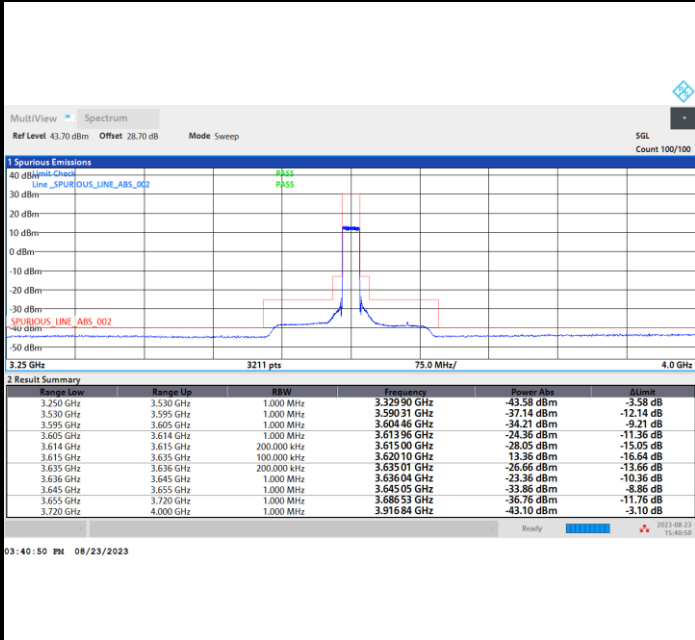

64QAM

256QAM

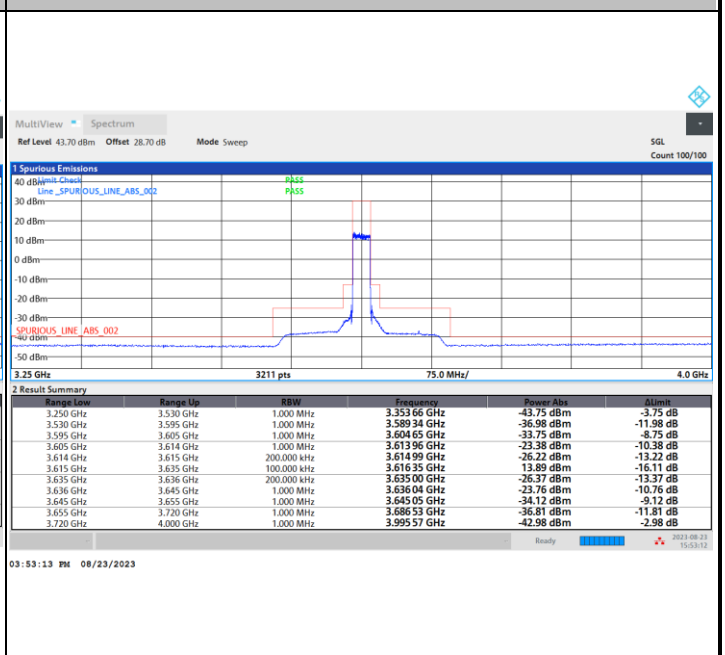
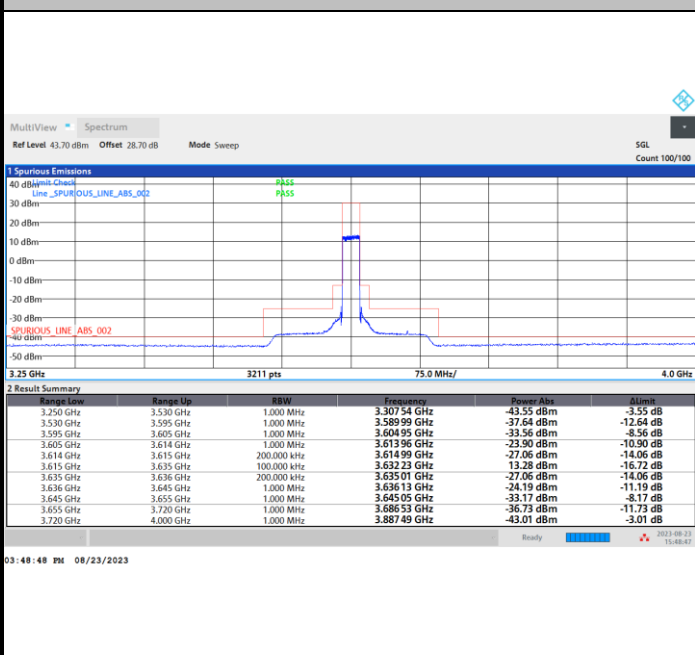




FR1 n48 / 20MHz / Highest Channel / MASK

QPSK

16QAM

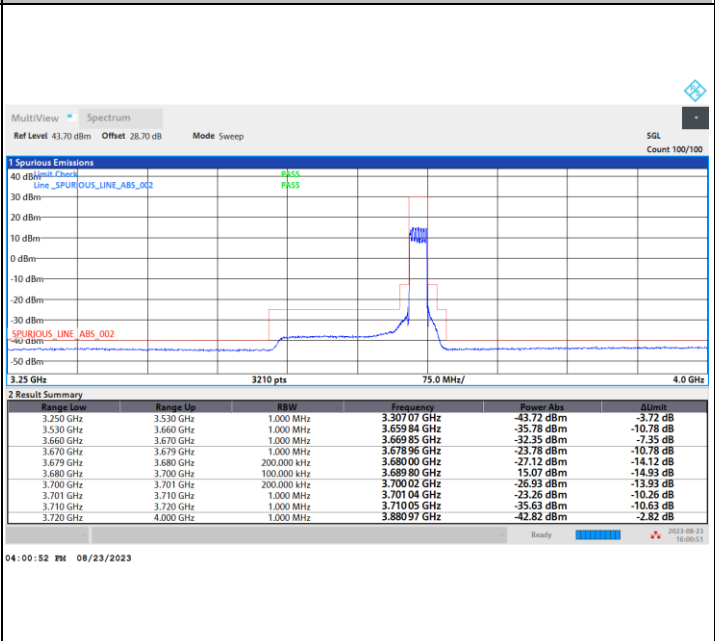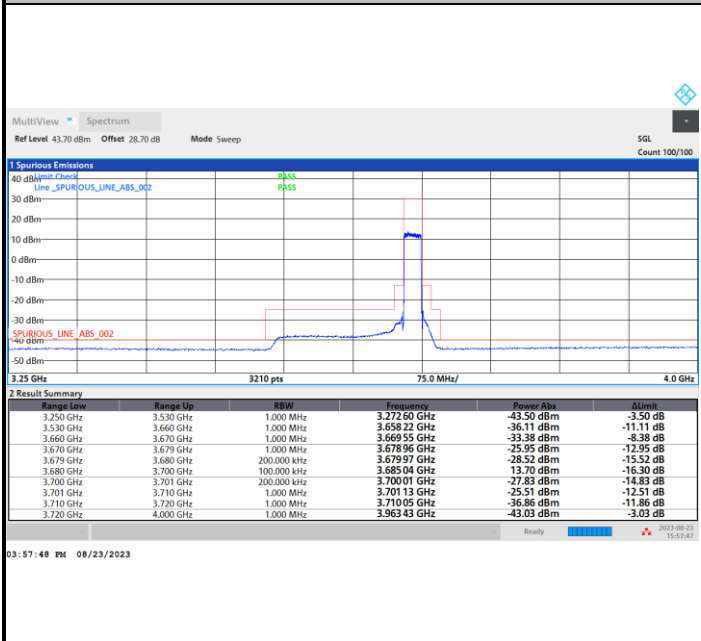

64QAM

256QAM

