

EXHIBIT C

User Manual

1. Power Switch

Make sure the correct voltage, push the power switch once to turn on. If unit still fails to operate. Secure a qualified technician or contact us for a Return Authorization prior to Shipment. *Disconnect power supply before removing receiver cover.




FIG 1

2. Power Supply Connection

Use DC power supply could switch with adaptor supply or battery of 12-18V DC. Connection DC supply, DC plug connection with "DC IN" socket (see FIG2) another plug terminal connection with battery or power supply.





FIG 2

3. Install Antenna.

Receives signals from the transmitter. Make sure the antenna is fully extended vertically.

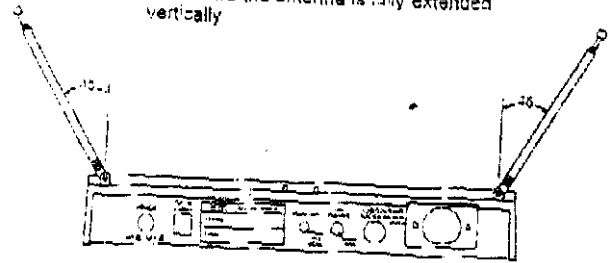

4. Volume Adjustor

The purpose of this control is to give the ability to provide an audio output level from the wireless system that is similar to that of a wired microphone.






FIG 4

NAME OF PARTS

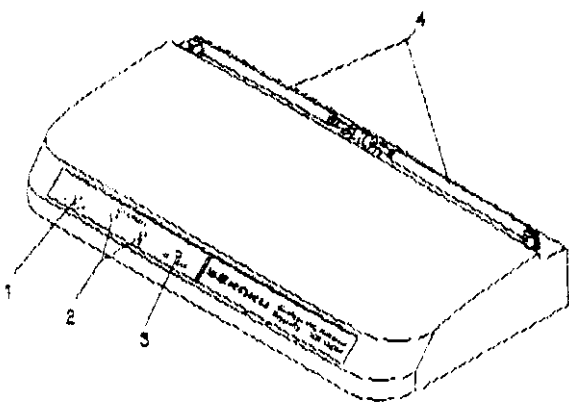


- 1. Power ON indicator.
- 2. Mic ON and Diversity Signal indicators
- 3. Audio Peak Indicator.
- 4. Telescopic Antenna

NAME OF PARTS

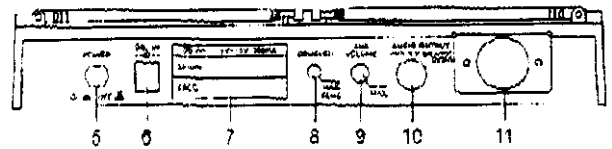

- 5. Power Switch.
- 6. DC Jacket.
- 7. Frequency label
- 8. Squelch Control.
- 9. Volume Control.
- 10. Audio output Connector
- 11. Balance Socket.


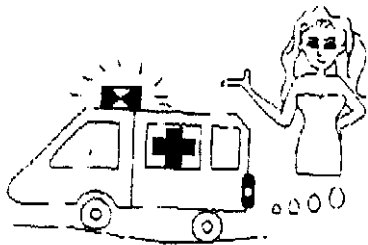


IF YOU ARE NOT TECHNICAL ENGINEER PLS. DO NOT MODIFIED OR KNOCK-DOWN IT.

INSTRUCTION MANUAL

5. Audio Output Connector


You can connect an unbalanced audio cable with a 1/4 inch phone plug between this connector and your mixer or amplifier input



6. Balance output XLR or CANNON Connection

Cable insert to balance socket output connecting with mixer or amplifier MIKE IN.


RECEPTEUR :



THE WIRELESS RECEIVER LOCATED AT GOOD CONDITION PLACE.



BE CAREFUL, DON'T DROP OFF THE MICROPHONE TO FLOOR



KEEP AWAY RAINING OR SUN SHINE.

INSTRUCTION MANUAL

7. Indicator

- a. **Power ON Indicator:**
This red light glows when the DC supply and power Switch ON. It indicates that the receiver is on.
- b. **Reception Indicator:**
This indicator does light during standby. When microphone signal is received, The green or yellow indicator light to indicate the reception of microphone.
- c. **Audio peak Indicator:**
This red light flickers when the audio signal from the microphone approaches the overload clipping level. It is affected by the transmitter gain control setting and the loudness of your voice




FIG.7




FIG.8

8. Squelch Control

This control is factory present. SQ noisy controlled adjustment. Before you turn-on the receiver, at first. The receiver already have been jamming by outside signal. Please adjust SQ control until the jamming signal has disappeared. (click-wise)

- 4 VOLUME CONTROL
- 5 AUDIO PEAK INDICATOR
- 6 TELESCOPIC ANTENNA

2

- 1 CHARACTER
- 2 SPECIFICATIONS
- 3 NAMES OF PARTS
- 4 INSTALLATION
- 5 ALL ANTENNA AND VOLUME ADJUSTOR
- 6 AUDIO OUTPUT AND BALANCE OUTPUT
- 7 MICROPHONE AND SQUELCH CONTROL
- 8 NOTE

Thank you for your purchase of our wireless microphone with receiver. Before using the microphone please read the instruction manual very carefully. Accuracy of the microphone is dependent on the quality of the microphone. If you are not satisfied with the microphone, please return it to us for a full refund. We appreciate your cooperation.

- 8 SQUELCH CONTROL

3

- LCD Indicator (Power, Diversity (A---B), Peak) and telescopic antenna.
- Compander circuit for expanding dynamic range.
- Special circuit design to delete microphone switch ON/OFF noise.
- Audio output connect with XLR balanced and mono phone jack unbalanced.

Specifications

Reception mode	Diversity mode
Frequency band	VHF Hi-Band 171-223MHz
Frequency stability	± 0.008% / 2K°C
Modulation mode	FM (F3F)
Max. deviation	± 40KHz with limiting compressor
THD	< 0.8%
Dynamic	> 100dB
SIN Ratio	> 80dB
Frequency response	50Hz-15KHz
Receiving mode	Quartz control fixed frequency
RF sensitivity	3µV for 20dB SINAD
Switch	None control (External control)
Output connector	XLR Balanced 6.3mm (1/4") mono phone jack unbalanced
Power supply	DC 12V - 18V 300mA With AC/DC adaptor
Dimensions	202 X 114 X 40 (H) mm
Net Weight	Approx. 510g

USER INFORMATION

INFORMATION TO THE USER

This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) This device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device. Pursant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception. Which can be determined by turning the equipment off and on the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This booklet is available from the US government Printing Office
*washington, DC 20402, Stock NO. 004-000-00345-4.

CAUTION: Any changes of modifications not expressly approved by the grantee of this device could void the users authority to operate the equipment.