

HEARING AID COMPATIBILITY RF EMISSIONS TEST REPORT

FCC ID : HD5-CT37X1N
Equipment : mobile computer
Brand Name : Honeywell
Model Name : CT37X1N
WD Emission Result : PASS
Applicant : Honeywell International Inc
9680 Old Bailes Rd, Fort Mill, SC 29707
Manufacturer : Honeywell International Inc
9680 Old Bailes Rd, Fort Mill, SC 29707
Standard : FCC 47 CFR §20.19
ANSI C63.19-2019
Date Tested : Oct. 11, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample provide by manufacturer and the test data has been evaluated in accordance with the test procedures given in ANSI C63.19-2019 / 47 CFR Part 20.19 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.



Approved by: Si Zhang



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



Table of Contents

1. General Information	4
2. Testing Location.....	5
3. Applied Standards	5
4. Air Interfaces	6
5. WD Emission Requirements	7
6. System Description and Operation	8
7. RF Emissions Test Procedure.....	11
8. Test Equipment List	13
9. System Validation	14
10. Modulation Interference Factor.....	15
11. Evaluation of WD RF interference potential	16
11.1 Evaluation RF _{AIPL}	16
12. Conducted RF Output Power (Unit: dBm).....	22
13. RF _{AIL} Test Results	23
14. Uncertainty Assessment	24
15. References.....	25

Appendix A. Plots of System Performance Check

Appendix B. Plots of RF Emission Measurement

Appendix C. DASY Calibration Certificate

Appendix D. Test Setup Photos

Appendix E. UID specifications for HAC RFE



History of this test report

Report No.	Version	Description	Issued Date
HA461912A	Rev. 01	Initial issue of report	Nov. 05, 2024



1. General Information

Product Feature & Specification	
Applicant Name	Honeywell International Inc
Equipment Name	mobile computer
Brand Name	Honeywell
Model Name	CT37X1N
IMEI Code	Sample 1: IMEI 1: 990021480037306 IMEI 2: 990021480037314 Sample 2: IMEI1: 990021480041126 IMEI2: 990021480041134 Sample 3: IMEI1: 990021480039666 IMEI2: 990021480039674 Sample 4: IMEI1: 990021480039260 IMEI2: 990021480039278 Sample 5: IMEI1: 990021480029527 IMEI2: 990021480029535
FCC ID	HD5-CT37X1N
HW	V1.0
SW	OS.31.001-HON.31.001
EUT Stage	Identical Prototype
Frequency Band	WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 14: 788 MHz ~ 798 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 25: 1850 MHz ~ 1915 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 30: 2305 MHz ~ 2315 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz LTE Band 42: 3450 MHz ~ 3550MHz, 3550MHz ~ 3600MHz LTE Band 43: 3600 MHz ~ 3700 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 663 MHz ~ 698 MHz 5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n7 : 2500 MHz ~ 2570 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n13 : 777 MHz ~ 787 MHz 5G NR n14 : 788 MHz ~ 798 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n26 : 814 MHz ~ 849 MHz 5G NR n30 : 2305 MHz ~ 2315 MHz 5G NR n38 : 2570 MHz ~ 2620 MHz 5G NR n41 : 2496 MHz ~ 2690 MHz 5G NR n48 : 3550 MHz ~ 3700 MHz 5G NR n66 : 1710 MHz ~ 1780 MHz 5G NR n71 : 663 MHz ~ 698 MHz 5G NR n77: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3980 MHz 5G NR n78: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3800 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz



	WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz WLAN U-NII 5: 5925 MHz ~ 6425 MHz WLAN U-NII 6: 6425 MHz ~ 6525 MHz WLAN U-NII 7: 6525 MHz ~ 6875 MHz WLAN U-NII 8: 6875 MHz ~ 7125 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz
Mode	RMC/AMR 12.2Kbps HSDPA HSUPA LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR: DFT-s-OFDM/CP-OFDM, Pi/2 BPSK/QPSK/16QAM/64QAM/256QAM WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ax HE20/HE40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80/VHT160 WLAN 5GHz 802.11ax HE20/HE40/HE80/HE160 WLAN 6GHz 802.11a/ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE NFC: ASK

2. Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory			
Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR05-KS	CN1257	314309

3. Applied Standards

- FCC CFR47 Part 20.19
- ANSI C63.19-2019
- FCC KDB 285076 D01 HAC Guidance v06r04
- FCC KDB 285076 D03 HAC FAQ v01r06



4. Air Interfaces

Air Interface	Band MHz	Type	C63.19 RF _{AIL} Tested	Simultaneous Transmitter	Name of Voice Service	Power State Compliance
WCDMA	Band II	VO	No ⁽¹⁾	WLAN, BT	CMRS Voice	Full
	Band IV			WLAN, BT		
	Band V			WLAN, BT		
	HSPA	VD	No ⁽¹⁾	WLAN, BT	Google Meet	
LTE FDD	Band 2	VD	No ⁽¹⁾	5G NR, WLAN, BT	VoLTE/ Google Meet	Full
	Band 4			5G NR, WLAN, BT		
	Band 5			5G NR, WLAN, BT		
	Band 7			5G NR, WLAN, BT		
	Band 12			5G NR, WLAN, BT		
	Band 13			5G NR, WLAN, BT		
	Band 14			5G NR, WLAN, BT		
	Band 17			5G NR, WLAN, BT		
	Band 25			5G NR, WLAN, BT		
	Band 26			5G NR, WLAN, BT		
	Band 30			5G NR, WLAN, BT		
	Band 66			5G NR, WLAN, BT		
	Band 71			5G NR, WLAN, BT		
LTE TDD	Band 41	VD	Yes	5G NR, WLAN, BT	VoLTE/ Google Meet	
	Band 38	VD	No ⁽¹⁾	5G NR, WLAN, BT		
	Band 42			5G NR, WLAN, BT		
	Band 43			5G NR, WLAN, BT		
	Band 48			5G NR, WLAN, BT		
5G NR FDD	n2	VD	No ⁽¹⁾	LTE, WLAN, BT	VoNR/ Google Meet	Full
	n5			LTE, WLAN, BT		
	n7			LTE, WLAN, BT		
	n12			LTE, WLAN, BT		
	n13			LTE, WLAN, BT		
	n14			LTE, WLAN, BT		
	n25			LTE, WLAN, BT		
	n26			LTE, WLAN, BT		
	n30			LTE, WLAN, BT		
	n66			LTE, WLAN, BT		
5G NR TDD	n41	VD	Yes	LTE, WLAN, BT		
	n38		No ⁽¹⁾	LTE, WLAN, BT		
	n48			LTE, WLAN, BT		
	n77			LTE, WLAN, BT		
	n78			LTE, WLAN, BT		
Wi-Fi	2450	VD	No ⁽¹⁾	WCDMA, LTE, 5G NR, 5/6GHz WLAN	VoWiFi/ Google Meet	Full
	5200			WCDMA, LTE, 5G NR, BT, 2.4GHz WLAN		
	5300			WCDMA, LTE, 5G NR, BT, 2.4GHz WLAN		
	5500			WCDMA, LTE, 5G NR, BT, 2.4GHz WLAN		
	5800			WCDMA, LTE, 5G NR, BT, 2.4GHz WLAN		
	UNII-5	VD	No ⁽³⁾	WCDMA, LTE, 5G NR, BT, 2.4GHz WLAN	VoWiFi/ Google Meet	Full
	UNII-6		No ⁽²⁾			
	UNII-7					
UNII-8						
BT	2450	DT	No	WCDMA, LTE, 5G NR, 5/6GHz WLAN	NA	NA

Type Transport:

VO= Voice only

DT= Digital Transport only (no voice)

VD= CMRS and IP Voice Service over Digital Transport

Remark:

- The air interface max power plus MIF is complies with ANSI C63.19-2019 Table 4.1 RF_{AIPL}
- The WLAN6GHz U-NII 6/7/8 were above 6GHz and were not evaluated due to outside of the current scope of ANSI C63.19 and FCC HAC regulations.
- The WLAN6GHz U-NII-5 was evaluated for operations which are entirely below 6 GHz, above 6 GHz were not evaluated due

- outside of the current scope of ANSI C63.19 and FCC HAC regulations.
4. Because features of Google Meet allow the option of voice-only communications, Meet has been tested for HAC/T-Coil compatibility to ensure the best user experience.
 5. UMTS/LTE/5GFR1 and WIFI operation were assessment at the maximum power to meet HAC RF compliance.
 6. There are six samples, the different between them refer to the CT37X1N_Operational Description of Product Equality Declaration which is exhibit separately. According to the differences, sample 1 was chosen to perform full testing and sample 2/3/4/5 to verify the worst case of sample 1. For sample 6, only memory is different, the differences do not affect the test, so sample 6 is not tested.

5. WD Emission Requirements

The WD's conducted power must be at or below either the stated RFAIPL (Table 4.1) or the stated peak power level (Table 4.2), or the average near-field emissions over the measurement area must be at or below the stated RFAIL (Table 4.3), or the stated peak field strength (Table 4.4). The WD may demonstrate compliance by meeting any of these four requirements, but it must do so in each of its operating bands at its established worst-case normal speech-mode operating condition.

Table 4.1 - Wireless device RF audio interference power level	
Frequency range (MHz)	RF _{AIPL} (dBm)
< 960	29
960 - 2000	26
> 2000	25


Table 4.2 - Wireless device RF peak power level	
Frequency range (MHz)	RF _{Peak Power} (dBm)
< 960	35
960 - 2000	32
> 2000	31

Table 4.3 - Wireless device RF audio interference level	
Frequency range (MHz)	RF _{AIL} [dB(V/m)]
< 960	39
960 - 2000	36
> 2000	35

Table 4.4 - Wireless device RF peak near-field level	
Frequency range (MHz)	RF _{Peak} [dB(V/m)]
< 960	45
960 - 2000	42
> 2000	41

6. System Description and Operation

<System Components>

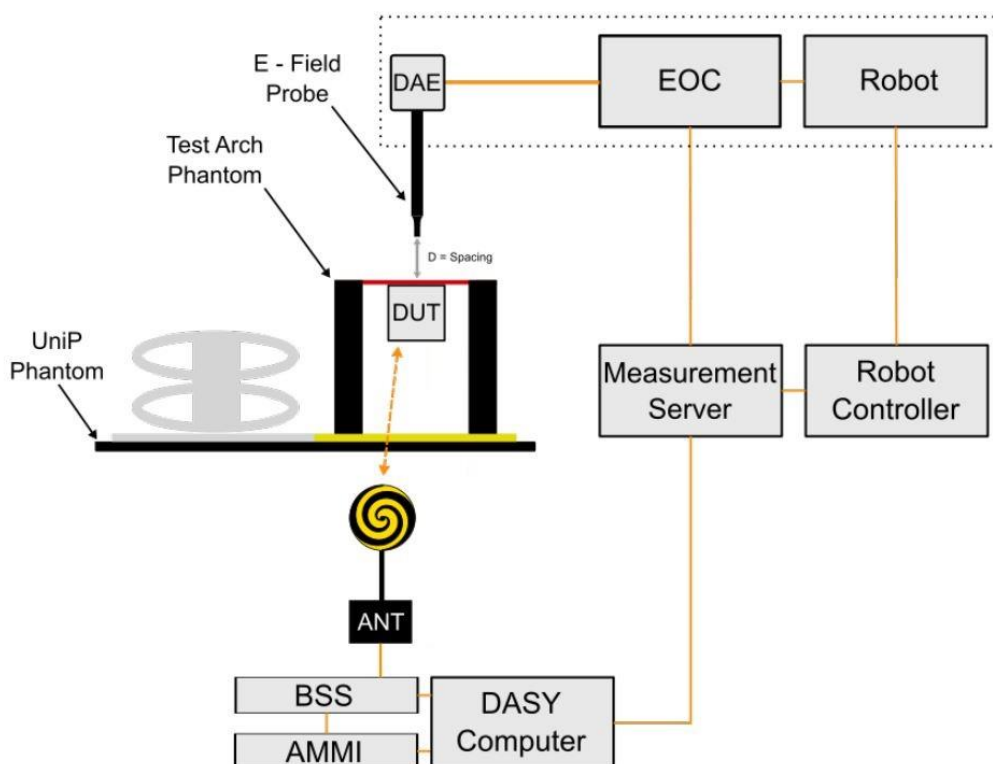

Remark:

A typical al DASY system for HAC measurements consists of

- 6-axis robotic arm (Staubli TX2-60L/ TX2-90XL) for positioning the probe
- Mounting Platform for keeping the phantoms at a field location relative to the robot
- Measurement Server for handling all time-critical tasks, such as measurement data acquisition and supervision of safety features
- EOC (Electrical to Optical Converter) for converting the optical signal from the Data Acquisition Electronics (DAE) to electrical before being transmitted to the measurement server
- LB (Light Beam unit) for probe alignment (measurement of the exact probe length and eccentricity)
- Test Arch for Device Under Test (DUT) testing
- DAE that reads the probe voltages and transmits them to the DASY PC. It is also used to detect probe touch and collision signals
- Device Holder for positioning the DUT beneath the phantom
- ANT (wideband Antenna) for broadcasting the downlink signals emitted by base station simulators (BSS) to the WD
- Operator PC for running the DASY software to define/execute the measurements.

The following components are needed for RFail measurements only:

- Modulation Interference Factor (MIF)
- Isotropic E-field, free-space probe (e.g., EF3DVx)
- Radiofrequency (RF) emission calibration dipoles for system check / validation purposes.

<EF3DV3 E-Field Probe Specification>

Construction	One dipole parallel, two dipoles normal to probe axis Interleaved sensors Built-in shielding against static charges PEEK enclosure material
Calibration	In air from 30 MHz to 6.0 GHz (absolute accuracy $\pm 5.1\%$, $k=2$)
Frequency	30 MHz – 6 GHz Linearity: ± 0.2 dB (100 MHz – 3 GHz)
Directivity	± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis)
Dynamic Range	2 – >1000 V/m
Linearity	± 0.2 dB
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 3.9 mm (body: 12 mm) Distance from probe tip to dipole centers: 1.5 mm Sensor displacement to probe's calibration point: <0.7 mm

Voltage to E-field Conversion

The measured voltage is first linearized to a quantity proportional to the square of the E-field using the (a, b, c, d) set of parameters specific to the communication system and sensor :

$$V_{\text{comp}i} = U_i + U_i^2 \cdot \frac{10^{\frac{d}{10}}}{\text{dcp}_i}$$

where $V_{\text{comp}i}$ = compensated signal of channel i (μV) ($i = x, y, z$)
 U_i = input signal of channel i (μV) ($i = x, y, z$)
 d = PMR factor d (dB) (Probe parameter)
 dcp_i = diode compression point of channel i (μV) (Probe parameter, $i = x, y, z$)

$$V_{\text{comp}i}^{\text{dB}\sqrt{\mu\text{V}}} = 10 + \log_{10}(V_{\text{comp}i})$$

$$\text{corr}_i = a_i \cdot e^{-\left(\frac{V_{\text{comp}i}^{\text{dB}\sqrt{\mu\text{V}}} - b_i}{c_i}\right)^2}$$

where corr_i = correction factor of channel i (dB) ($i = x, y, z$)
 $V_{\text{comp}i}^{\text{dB}\sqrt{\mu\text{V}}}$ = compensated voltage of channel i ($\text{dB}\sqrt{\mu\text{V}}$) ($i = x, y, z$)
 a_i = PMR factor a of channel i (dB) (Probe parameter, $i = x, y, z$)
 b_i = PMR factor b of channel i ($\text{dB}\sqrt{\mu\text{V}}$) (Probe parameter, $i = x, y, z$)
 c_i = PMR factor c of channel i (Probe parameter, $i = x, y, z$)

The voltage $V_{i\text{dB}\sqrt{\mu\text{V}}}$ is the linearized voltage in $\text{dB}\sqrt{\mu\text{V}}$:

$$V_{i\text{dB}\sqrt{\mu\text{V}}} = V_{\text{comp}i}^{\text{dB}\sqrt{\mu\text{V}}} - \text{corr}_i$$

where $V_{i\text{dB}\sqrt{\mu\text{V}}}$ = linearized voltage of channel i ($\text{dB}\sqrt{\mu\text{V}}$) ($i = x, y, z$)
 $V_{\text{comp}i}^{\text{dB}\sqrt{\mu\text{V}}}$ = compensated voltage of channel i ($\text{dB}\sqrt{\mu\text{V}}$) ($i = x, y, z$)
 Corr_i = correction factor of channel i (dB) ($i = x, y, z$)

Finally, the linearized voltage is converted in μV :

$$V_i = 10^{\frac{V_{i\text{dB}\sqrt{\mu\text{V}}}}{10}}$$

where V_i = linearized voltage of channel i (μV) ($i = x, y, z$)
 $V_{i\text{dB}\sqrt{\mu\text{V}}}$ = linearized voltage of channel i ($\text{dB}\sqrt{\mu\text{V}}$) ($i = x, y, z$)

The E-field data for each channel are calculated using the linearized voltage :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

where V_i = compensated signal of channel i , ($i = x, y, z$)
 Norm_i = sensor sensitivity ($\mu\text{V}/(\text{V/m})^2$) of channel i ($i = x, y, z$)
 ConvF = sensitivity enhancement in solution
 E_i = electric field strength of channel i in V/m

The RMS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

Averaged E-field Calculation

The averaged E-field is defined by

$$E_{\text{avg}} = \frac{1}{n} \cdot \sum_{i=1}^n E_i$$

where n = the number of measurement grid point
 E_i = the E-field measured at point i

RFail Calculation

The RFail is finally computed with

$$R\text{Fail}[\text{dB}(\text{V/m})] = 20 \cdot \log_{10}(E_{\text{avg}}) + \text{MIF}$$

where $R\text{Fail}$ = the Radio Frequency Audio Interference Level in $\text{dB}(\text{V/m})$
 E_{avg} = the averaged E-field in (V/m) calculated
 MIF = the Modulation Interference Factor in dB .

7. RF Emissions Test Procedure



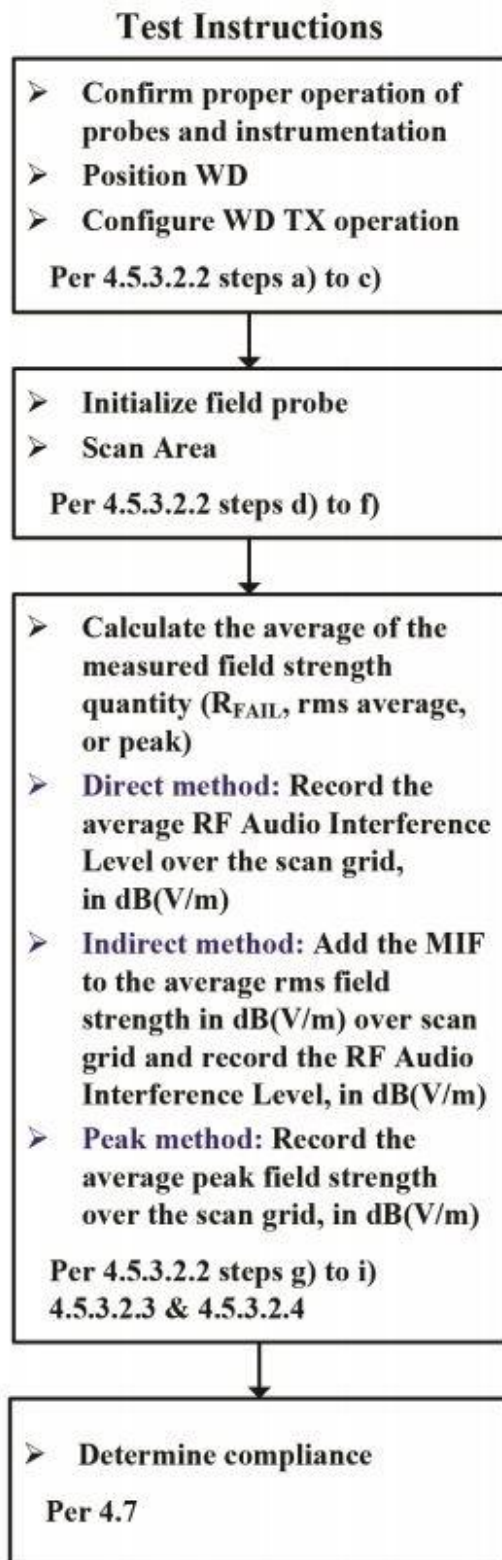


Figure of WD near-field emission scan flowchart according to ANSI C63.19:2019

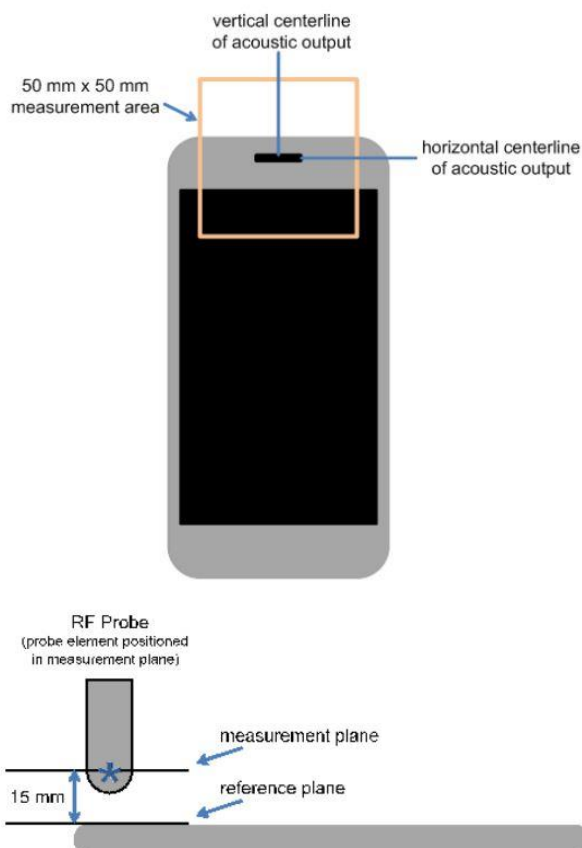

The references and reference plane that shall be used in the WD emissions measurement

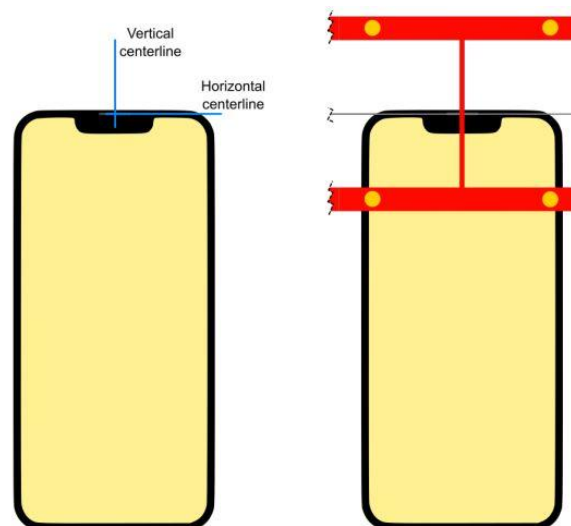

Device Under Test Positioning under the Test Arch

Test procedure: Indirect measurement—preferred

- The measurement procedure using a probe and instrumentation chain with a response of <10 kHz (see ANSI C63.19-2019 section 4.5.1) is identical to the direct measurement method of ANSI C63.19-2019 section 4.5.3.2.2; however, because of the bandwidth limitations, it cannot include the direct use of the spectral and temporal weighting functions. The output of such measurement systems must be readings of steady state rms field strength in dB(V/m).
- The RF audio interference level in dB(V/m) is obtained by adding the Modulation Interference Factor (in decibels) to the average steady state rms field strength reading over the measurement area, in dB(V/m), from Step c). Use this result to determine the WD's compliance per ANSI C63.19-2019 section 4.7.
- Scan the entire 50 mm by 50 mm measurement area in equally spaced step sizes and record the reading at each measurement point. The step size shall meet the specification for step size in ANSI C63.19:2019 section 4.5.3.
- Calculate the average of the measurements taken in Step c)
- Convert the average value found in Step d) to RF audio interference level, in volts per meter, by taking the square root of the reading and then dividing it by the measurement system transfer function, as established in ANSI C63.19:2019 section 4.5.3.2.1 pre-test procedure. Convert the result to dB(V/m) by taking the base-10 logarithm and multiplying it by 20. Expressed as a formula

$$\text{RF audio interference level in dB(V/M)} = 20 * \log(R_{\text{ave}}^{1/2} / \text{TF})$$
 where R_{ave} is the average reading
- Compare this RF audio interference level to the limits in ANSI C63.19:2019 section 4.7 and record the result
- Per ANSI C63.19-2019 section 4.6, WDs capable of operating multiple transmitters shall be subject to emissions requirements for all such transmitters expected to be operated when the WD is in voice mode operation positioned at a user's ear. Each qualified transmitter is tested individually using the method of Clause 4. Other WD transmitters shall be temporarily disabled or reduced in power level such that their average antenna input power is at least 6 dB lower than the average antenna input power of the transmitter under test. The transmitter under test is set to the fixed and repeatable combination of power and modulation characteristic that is representative of the worst case (highest interference potential) likely to be encountered while the WD is experiencing normal voice mode operation. The limiting measurement for device qualification is the highest RF audio interference potential measured for any of the WD transmitters. If the highest interference measurement is from a transmitter that is not required for normal voice mode operation, a secondary rating may be given that applies when that transmitter is disabled



8. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	2450MHz Calibration Dipole	CD2450V3	1155	2024/7/10	2025/7/7
SPEAG	2600Mhz Calibration Dipole	CD2600V3	1030	2022/6/29	2025/6/27
SPEAG	Data Acquisition Electronics	DAE4	1691	2024/04/19	2025/4/18
SPEAG	Isotropic E-Field Probe	EF3DV3	4050	2024/3/6	2025/3/5
R&S	Base Station	CMW500	143030	2024/7/4	2025/7/3
Anritsu	Vector Signal Generator	MG3710A	6201682672	2024/1/2	2025/1/1
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	NA	NA
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	NA	NA
Agilent	Dual Directional Coupler	778D	20500	2024/7/4	2025/7/3
Agilent	Dual Directional Coupler	11691D	MY48151020	2024/7/4	2025/7/3
Rohde & Schwarz	Power Meter	NRVD	102081	2024/7/4	2025/7/3
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2024/7/4	2025/7/3
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2024/7/4	2025/7/3
MCL	Attenuation1	BW-S10W5+	N/A	NA	NA
MCL	Attenuation2	BW-S10W5+	N/A	NA	NA
MCL	Attenuation3	BW-S10W5+	N/A	NA	NA
Rohde & Schwarz	Spectrum Analyzer	FSV7	101631	2024/10/11	2025/10/10
Testo	Thermo-Hygrometer	HTC-1	55013	2024/1/4	2025/1/3
SPEAG	Test Arch Phantom	N/A	N/A	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR

Note:

1. NCR: "No-Calibration Required"
2. The dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

9. System Validation

Obtaining accurate measurements and relevant quantities in Module HAC depends on the proper functioning of many components and the correct parameter settings. Faulty results due to drift, failures, or incorrect parameters might not be recognized, as the differences might not be obvious in the measurements.

SPEAG DASY incorporates a system check, also called system verification procedure, to test for the proper functioning of the system based on the tests described in ANSI C63.19-2019: the RF interference potential test setup is verified with RF Emission Calibration Dipoles.

<Test Setup>

1. Set the RF signal generator for either CW. Set its output power so the peak power applied to the antenna is equal to that recorded for the real or emulated signal using the WD modulation format
2. Average input power $P = 100 \text{ mW}$ (20 dBm) after adjustment for return loss. An input power that generates field levels similar to those from the WD or other suitable level may also be used
3. The test fixture should meet the two-wavelength separation criterion
4. The probe-to-dipole separation, which is measured from closest surface of the dipole to the center point of the probe sensor element, should be 15 mm

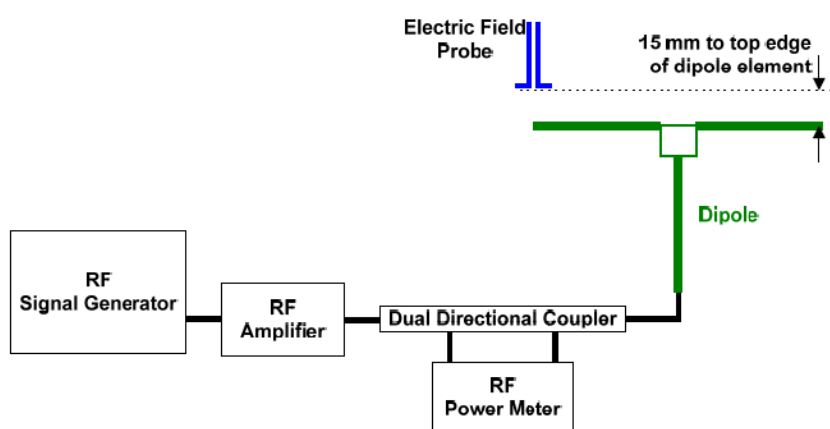


Figure of Setup Diagram

<Validation Procedure>

Place a dipole antenna meeting the requirements given in ANSI C63.19: 2019 D.11 in the position normally occupied by the WD. The dipole antenna serves as a known source for an electrical and magnetic output. Position the E-field probe so that:

- a. The probe and its cable are parallel to the coaxial feed of the dipole antenna
- b. The probe cable and the coaxial feed of the dipole antenna approach the measurement area from opposite directions; and
- c. The center point of the probe element(s) is 15 mm from the closest surface of the dipole elements

Scan the length of the dipole with the E-field probe and record the two maximum values found near the dipole ends.

Average the two readings and compare the reading to expected value in the calibration certificate or expected value in this standard.

Frequency (MHz)	Input Power (dBm)	Target Value (V/m)	E _{max} (V/m)	Deviation (%)	Date
2450	20	87.9	87.8	-0.11%	2024/10/11
2600	20	86	87.1	1.28%	2024/10/11

10. Modulation Interference Factor

For any specific fixed and repeatable modulated signal, a Modulation Interference Factor (MIF, expressed in decibels) may be developed that relates its interference potential to its steady state rms signal level or average power level. This factor is a function only of the audio frequency amplitude modulation characteristics of the signal and is the same for field strength or conducted power measurements. It is important to emphasize that the MIF is valid only for a specific repeatable audio frequency amplitude modulation characteristic. Any change in modulation characteristic requires determination and application of a new MIF.

MIF may be determined using a radiated RF field, a conducted RF signal, or, in a preliminary stage, a mathematical analysis of a modeled RF signal.

- Verify the slope accuracy and dynamic range capability over the desired operating frequency band of a fast probe or sensor, square-law detector, as specified in ANSI C63.19: 2019 D.3, and weighting system as specified in ANSI C63.19: 2019 D.4 and ANSI C63.19: 2019 D.5. For the probe and instrumentation included in the measurement of MIF, additional calibration and application of calibration factors are not required.
- Using RF illumination, or conducted coupling, apply the specific modulated signal in question to the measurement system at a level within its confirmed operating dynamic range
- Measure the steady-state rms level at the output of the fast probe or sensor
- Measure the steady-state average level at the weighting output
- Without changing the square-law detector or weighting system, and using RF illumination, or conducted coupling, substitute for the specific modulated signal a 1 kHz, 80% amplitude modulated carrier at the same frequency and adjust its strength until the level at the weighting output equals the Step d) measurement
- Without changing the carrier level from Step e), remove the 1 kHz modulation and again measure the steady-state rms level indicated at the output of the fast probe or sensor.
- The MIF for the specific modulation characteristic is given by the ratio of the Step f) measurement to the Step c) measurement, expressed in decibels ($20 \cdot \log(\text{step6}/\text{step3})$)

In practice, Step e) and Step f) need not be repeated for each MIF determination if the relationship between the two measurements has been pre-established for the measurement system over the operating frequency and dynamic ranges. In such cases, only the modulation characteristic being tested needs to be available during WD testing. Since indirect measurement procedure was using for RF audio interference power level evaluation, the MIF values applied in this test report were provided by the HAC equipment provider of SPEAG, and the worst values for all air interface are listed below to be determine the Wireless device RF audio interference power level.

UID	Communication System Name	MIF(dB)
10460	UMTS-FDD(WCDMA, AMR)	-25.43
10225	UMTS-FDD (HSPA+)	-20.39
10170	LTE-FDD(SC-FDMA,1RB,20MHz,16-QAM)	-9.76
10173	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM)	-1.44
10769	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15 kHz)	-12.08
10973	5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	-1.64
10061	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps)	-2.02
10077	IEEE 802.11g WiFi 2.4 GHz (DSSS/OFDM, 54 Mbps)	0.12
10427	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	-13.44
10069	IEEE 802.11a/h WiFi 5 GHz (OFDM, 54 Mbps)	-3.15
10616	IEEE 802.11ac WiFi (40MHz, MCS0, 90pc duty cycle)	-5.57
10671	IEEE 802.11ax (20MHz, MCS0, 90pc duty cycle)	-5.58
11026	IEEE 802.11be (320MHz, MCS0, 99pc duty cycle)	-28.73

11. Evaluation of WD RF interference potential

General Note:

1. In this report, max conducted power from each air interface was first used to evaluate whether it complies with ANSI C63.19-2019 Table 4.1 RF_{AIPL} , compliance with table 4.1 means compliance with WD emission requirements. the RF_{AIPL} evaluation refer to section 11.1 for detail.
2. If there some air interface were not meet ANSI C63.19-2019 table 4.1 requirement, these air interfaces were further evaluation ANSI C63.19-2019 Table 4.3 RF_{AIL} requirement. And the RF_{AIL} evaluation result refer to section13

11.1Evaluation RF_{AIPL}

< Max Tune-up Limit>

<Ant0>

Frequency Band		Average Power (dBm)
WCDMA	WCDMA II	25.00
	WCDMA IV	25.00
	HSPA	24.00
FDD LTE	LTE Band 25(2)	24.00
	LTE Band 66(4)	24.00
	LTE Band 7	23.00
	LTE Band 30	23.00
TDD LTE	LTE Band 41(38) PC3	23.00
	LTE Band 41 PC2	26.00
5G NR FDD	FR1 n25(2)	24.00
	FR1 n7	24.00
	FR1 n30	24.00
	FR1 n66	24.00
5G NR TDD Duty(100%)	FR1 n41(38) PC3	24.00
	FR1 n41 PC2	27.00

<Ant1>

Frequency Band		Average Power (dBm)
WCDMA	WCDMA II	24.00
	WCDMA IV	24.00
	WCDMA V	25.00
	HSPA	24.00
FDD LTE	LTE Band 25(2)	24.00
	LTE Band 66(4)	24.00
	LTE Band 26(5)	25.00
	LTE Band 7	23.00
	LTE Band 12(17)	25.00
	LTE Band 13	25.00
	LTE Band 14	25.00
	LTE Band 30	23.00
	LTE Band 71	25.00
TDD LTE	LTE Band 41(38) PC3	23.00
	LTE Band 41 PC2	26.00
5G NR FDD	FR1 n25(2)	24.00
	FR1 n26(5)	24.00
	FR1 n7	23.00
	FR1 n12	24.00
	FR1 n13	24.00
	FR1 n14	24.00
	FR1 n30	23.00
	FR1 n66	24.00
	FR1 n71	24.00
5G NR TDD Duty(100%)	FR1 n41(38) PC3	23.00
	FR1 n41 PC2	26.00

<Ant2>

Frequency Band		Average Power (dBm)
FDD LTE	LTE Band 7 Other PA	24.00
	LTE Band 30 Other PA	24.00
TDD LTE	LTE Band 42 Part 96&Part 27Q PC3	25.00
	LTE Band 48(43) Part 96	25.00
	LTE Band 41(38) PC3 Other PA	24.00
	LTE Band 41 PC2 Other PA	27.00

5G NR FDD	FR1 n30 Other PA	24.00
5G NR TDD Duty(100%)	FR1 n41(38) PC3	24.00
	FR1 n48	24.00
	FR1 n77(78) Part27Q&Part27O PC3	24.00
	FR1 n77(78) Part27Q&Part27O PC2	26.00
	FR1 n41 PC2	25.00

<Ant3>

Frequency Band		Average Power (dBm)
5G NR TDD Duty(100%)	FR1 n41(38) PC3	23.00
	FR1 n41 PC2	26.00
	FR1 n48	23.00
	FR1 n77(78) Part27Q&Part27O PC3	22.00
	FR1 n77(78) Part27Q&Part27O PC2	25.00

<Ant4>

Frequency Band		Average Power (dBm)
5G NR TDD Duty(100%)	FR1 n48	24.00
	FR1 n77(78) Part27Q&Part27O PC3	24.00
	FR1 n77(78) Part27Q&Part27O PC2	26.00

<Ant5>

Frequency Band		Average Power (dBm)
FDD LTE	LTE Band 25(2) Other PA	24.00
	LTE Band 66(4) Other PA	24.00
5G NR FDD	FR1 n25(2) Other PA	24.00
	FR1 n66 Other PA	24.00
5G NR TDD Duty(100%)	FR1 n48	21.00
	FR1 n77 Part27Q&Part27O PC3	21.00
	FR1 n77(78) Part27Q&Part27O PC2	23.00
	FR1 n78 Part27O PC3	20.00
	FR1 n78 Part27Q PC3	21.00



<WLAN Max Tune-up Limit>

Frequency Band		Average Power (dBm)
2.4GHz WLAN Ant 6+7	802.11b	23.50
	802.11g	25.00
	802.11n-HT20	24.00
	802.11n-HT40	22.00
	802.11ax-HE20	24.00
	802.11ax-HE40	23.00
5GHz WLAN Ant 6+7	802.11a	25.00
	802.11n-HT20	22.50
	802.11n-HT40	23.50
	802.11ac-VHT20	23.50
	802.11ac-VHT40	24.50
	802.11ac-VHT80	23.50
	802.11ac-VHT160	19.50
	802.11ax-HE20	24.00
	802.11ax-HE40	25.00
	802.11ax-HE80	23.50
	802.11ax-HE160	19.50
6GHz WLAN Ant 6+7	802.11a	20.50
	802.11ax-HE20	20.50
	802.11ax-HE40	20.50

<Evaluation RF audio interference power level>
General Note:

1. Use maximum power plus worst case MIF to determine whether it complies with RF_{AIPL}
2. If maximum power plus worst case MIF does not complies with RF_{AIPL} , then further evaluation RF_{AIL} include in section 13.
3. WLAN SISO modes is not necessary due the WLAN MIMO mode is the worst case.
4. According to ANSI C63.19 2019, if maximum power plus worst case MIF is complies with RF_{AIPL} , means compliance with WD emission requirements.

<Ant0>

Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dBm)	C63.19 Lowest RFAIPL (dBm)	C63.19 test required(2019)
WCDMA	25.00	-25.43	-0.43	26	No
WCDMA - HSPA	24.00	-20.39	3.61	26	No
LTE - FDD	24.00	-9.76	14.24	25	No
LTE – TDD	26.00	-1.44	24.56	25	No
5G FR1 - FDD	24.00	-12.08	11.92	25	No
5G NR - TDD-PC3	24.00	-1.64	22.36	25	No
5G NR - TDD-PC2	27.00	-1.64	25.36	25	Yes

<Ant1>

Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dBm)	C63.19 Lowest RFAIPL (dBm)	C63.19 test required(2019)
WCDMA	25.00	-25.43	-0.43	26	No
WCDMA - HSPA	24.00	-20.39	3.61	26	No
LTE - FDD	25.00	-9.76	15.24	25	No
LTE – TDD	26.00	-1.44	24.56	25	No
5G FR1 - FDD	24.00	-12.08	11.92	25	No
5G NR - TDD	26.00	-1.64	24.36	25	No

<Ant2>

Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dBm)	C63.19 Lowest RFAIPL (dBm)	C63.19 test required(2019)
LTE - FDD	24.00	-9.76	14.24	25	No
LTE – TDD_PC3	25.00	-1.44	23.56	25	No
LTE – TDD_PC2	27.00	-1.44	25.56	25	Yes
5G FR1 - FDD	24.00	-12.08	11.92	25	No
5G NR - TDD	26.00	-1.64	24.36	25	No

<Ant3>

Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dBm)	C63.19 Lowest RFAIPL (dBm)	C63.19 test required(2019)
5G NR - TDD	26.00	-1.64	24.36	25	No

<Ant4>

Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dBm)	C63.19 Lowest RFAIPL (dBm)	C63.19 test required(2019)
5G NR - TDD	26.00	-1.64	24.36	25	No



<Ant5>

Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dBm)	C63.19 Lowest RFAIPL (dBm)	C63.19 test required(2019)
LTE - FDD	24.00	-9.76	14.24	26	No
5G FR1 - FDD	24.00	-12.08	11.92	26	No
5G NR - TDD	23.00	-1.64	21.36	25	No

<WLAN Ant>

Air Interface	Air Interface	Max Average Antenna Input Power (dBm)	Worst Case MIF (dB)	Power + MIF(dBm)	C63.19 Lowest RFAIPL (dBm)	C63.19 test required(2019)
2.4GHz WLAN	802.11b	23.50	-2.02	21.48	25	No
	802.11g	25.00	0.12	25.12	25	Yes
	802.11n-HT20	24.00	-13.44	10.56	25	No
	802.11n-HT40	22.00	-13.44	8.56	25	No
	802.11ax-HE20	24.00	-5.58	18.42	25	No
	802.11ax-HE40	23.00	-5.58	17.42	25	No
5GHz WLAN	802.11a	25.00	-3.15	21.85	25	No
	802.11n-HT20	22.50	-13.44	9.06	25	No
	802.11n-HT40	23.50	-13.44	10.06	25	No
	802.11ac-VHT20	23.50	-5.57	17.93	25	No
	802.11ac-VHT40	24.50	-5.57	18.93	25	No
	802.11ac-VHT80	23.50	-5.57	17.93	25	No
	802.11ac-VHT160	19.50	-5.57	13.93	25	No
	802.11ax-HE20	24.00	-5.58	18.42	25	No
	802.11ax-HE40	25.00	-5.58	19.42	25	No
	802.11ax-HE80	23.50	-5.58	17.92	25	No
6GHz WLAN	802.11a	20.50	-3.15	17.35	25	No
	802.11ax-HE20	20.50	-5.58	14.92	25	No
	802.11ax-HE40	20.50	-5.58	14.92	25	No

12. Conducted RF Output Power (Unit: dBm)

Band 41 (HPUE)_Ant 2								
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Low Middle Ch. / Freq.	Power Middle Ch. / Freq.	Power High Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				39750	40185	40620	41055	41490
Frequency (MHz)				2506	2549.5	2593	2636.5	2680
20	QPSK	1	0	25.99	26.08	26.12	26.02	26.04

FCC_n41(HPUE)_Ant 0						
BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.
Channel				509202	518598	528000
Frequency (MHz)				2546.01	2592.99	2640
100	QPSK	1	1	25.46	25.72	25.55

<WLAN Ant 6+7>

2.4GHz WLAN	Mode	Channel	Frequency (MHz)	Average power (dBm)
	802.11g 6Mbps	1	2412	20.85
		6	2437	23.59
		11	2462	20.79



13. RF_{AIL} Test Results

General Note:

1. The HAC measurement system applies MIF value onto the measured RMS E-field, which is indirect method in ANSI C63.19-2019 version, and reports the RF audio interference level.
2. Phone Condition: Mute on; Backlight off; Max Volume.
3. Since the LTE B41 and NR n41 power class 3 maximum power plus MIF is complies with ANSI63.19-2019 Table 4.1 RF_{AIPL}, therefore, only power class2 evaluated RF_{AIL}.

Plot No.	Air Interface	Modulation / Mode	Channel	Sample	Transmit Ant.	Average Antenna Input Power (dBm)	MIF	E-Field (dBV/m)
1	LTE Band 41_HPUE	20M_QPSK_1_0	39750	1	Ant 2	25.99	-1.44	19.7
2	LTE Band 41_HPUE	20M_QPSK_1_0	40185	1	Ant 2	26.08	-1.44	21.64
3	LTE Band 41_HPUE	20M_QPSK_1_0	40620	1	Ant 2	26.12	-1.44	23.48
4	LTE Band 41_HPUE	20M_QPSK_1_0	41055	1	Ant 2	26.02	-1.44	27.89
24	LTE Band 41_HPUE	20M_QPSK_1_0	41055	2	Ant 2	26.02	-1.44	28.51
25	LTE Band 41_HPUE	20M_QPSK_1_0	41055	3	Ant 2	26.02	-1.44	28.53
26	LTE Band 41_HPUE	20M_QPSK_1_0	41055	5	Ant 2	26.02	-1.44	27.2
27	LTE Band 41_HPUE	20M_QPSK_1_0	41055	4	Ant 2	26.02	-1.44	14.05
5	LTE Band 41_HPUE	20M_QPSK_1_0	41490	1	Ant 2	26.04	-1.44	25.92
18	FR1 n41_HPUE	100M_QPSK_1_1	518598	1	Ant 0	25.72	-1.64	16.32
19	FR1 n41_HPUE	100M_QPSK_1_1	509202	1	Ant 0	25.46	-1.64	18.08
28	FR1 n41_HPUE	100M_QPSK_1_1	509202	2	Ant 0	25.46	-1.64	10.64
29	FR1 n41_HPUE	100M_QPSK_1_1	509202	3	Ant 0	25.46	-1.64	11.91
30	FR1 n41_HPUE	100M_QPSK_1_1	509202	5	Ant 0	25.46	-1.64	11.75
31	FR1 n41_HPUE	100M_QPSK_1_1	509202	4	Ant 0	25.46	-1.64	15.56
20	FR1 n41_HPUE	100M_QPSK_1_1	528000	1	Ant 0	25.55	-1.64	16.41
21	WLAN2.4GHz	802.11g 6Mbps	1	1	Ant 6+7	20.85	0.12	11.58
22	WLAN2.4GHz	802.11g 6Mbps	6	1	Ant 6+7	23.59	0.12	11.6
32	WLAN2.4GHz	802.11g 6Mbps	6	2	Ant 6+7	23.59	0.12	11.36
33	WLAN2.4GHz	802.11g 6Mbps	6	3	Ant 6+7	23.59	0.12	10.81
34	WLAN2.4GHz	802.11g 6Mbps	6	5	Ant 6+7	23.59	0.12	9.3
35	WLAN2.4GHz	802.11g 6Mbps	6	4	Ant 6+7	23.59	0.12	27.81
23	WLAN2.4GHz	802.11g 6Mbps	11	1	Ant 6+7	20.79	0.12	10.94

Test Engineer : Martin Li, Varus Wang, Light Wang, Ricky Gu

14. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances. Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is showed below Table.

The judgment of conformity in the report is based on the measurement results excluding the measurement uncertainty.

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (Eav)	Standard Uncertainty (E) (±%)
Measurement System					
Probe Calibration	5.1	Normal	1	1	5.1
Axial Isotropy	4.7	Rectangular	√3	1	2.7
Sensor Displacement	7.2	Rectangular	√3	0.5	2.1
Boundary Effects	2.4	Rectangular	√3	1	1.4
Phantom Boundary Effects	7.2	Rectangular	√3	1	4.2
Linearity	4.7	Rectangular	√3	1	2.7
Scaling with PMR Calibration	10.0	Rectangular	√3	1	5.8
System Detection Limit	1.0	Rectangular	√3	1	0.6
Readout Electronics	0.3	Normal	1	1	0.3
Response Time	0.8	Rectangular	√3	0	0.0
Integration Time	2.6	Rectangular	√3	0	0.0
RF Ambient Conditions	3.0	Rectangular	√3	1	1.7
RF Reflections	12.0	Rectangular	√3	1	6.9
Probe Positioner	1.2	Rectangular	√3	1	0.7
Probe Positioning	3.0	Rectangular	√3	1	1.7
Extrap. and Interpolation	1.0	Rectangular	√3	1	0.6
Test Sample Related					
Device Positioning Vertical	4.7	Rectangular	√3	1	2.7
Device Positioning Lateral	1.0	Rectangular	√3	1	0.6
Device Holder and Phantom	2.4	Rectangular	√3	1	1.4
Power Drift	5.0	Rectangular	√3	1	2.9
Phantom and Setup Related					
Phantom Thickness	2.4	Rectangular	√3	1	1.4
Combined Std. Uncertainty					13.1%
Coverage Factor for 95 %					K=2
Expanded STD Uncertainty					26.3%
Declaration of Conformity: The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.					
Comments and Explanations: The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.					

Uncertainty Budget of HAC free field assessment



15. References

- [1] ANSI C63.19:2019, "American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids", Aug. 2019.
- [2] FCC KDB 285076 D01v06r04, "Equipment Authorization Guidance for Hearing Aid Compatibility", Sep 2023.
- [3] FCC KDB 285076 D03v01r06, "Hearing aid compatibility frequently asked questions", Jul. 2022
- [4] SPEAG DASY System Handbook