

## **Appendix F. FCC 3G SAR Measurement Procedures**

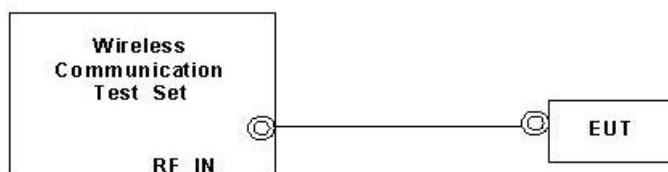
### **Conducted Output Power:**

The EUT was tested according to the requirements of the FCC 3G procedures and the TS 34.121. The EUT's WCDMA and HSDPA function is Release 5 version supporting HSDPA Category 8. A detailed analysis of the output power for all WCDMA and HSDPA modes is provided in the tables below.

<b>WCDMA SAR Test mode - Conducted Power</b>							
<b>Mode</b>	<b>Setup</b>	<b>Cell band (850)</b>			<b>PCS band (1900)</b>		
		<b>CH4132</b>	<b>CH4182</b>	<b>CH4233</b>	<b>CH9262</b>	<b>CH9400</b>	<b>CH9538</b>
		<b>826.4 (MHz)</b>	<b>836.4 (MHz)</b>	<b>846.6 (MHz)</b>	<b>1852.4 (MHz)</b>	<b>1880.0 (MHz)</b>	<b>1907.6 (MHz)</b>
<b>WCDMA</b>	<b>RMC 12.2Kbps</b>	23.37	23.49	23.29	22.63	22.76	22.47
<b>HSDPA</b>	<b>Subtest 1</b>	23.12	23.33	23.10	22.42	22.55	22.26
	<b>Subtest 2</b>	23.13	23.26	23.09	22.46	22.59	22.35
	<b>Subtest 3</b>	22.28	22.40	22.21	21.52	21.65	21.37
	<b>Subtest 4</b>	22.16	22.31	22.15	21.48	21.65	21.45

**WCDMA Setup Configuration:**

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting
  - i. Data rates: Varied from RMC 12.2Kbps
  - ii. RMC Test Loop = Loop Mode 1
  - iii. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Setup Configuration**

**HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set DeltaACK, DeltaNACK and DeltaCQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

**Table C.10.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH**

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c/\beta_d$	$\beta_{hs}$ (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ , and  $\Delta_{CQI} = 24/15$  with  $\beta_{hs} = 24/15 * \beta_c$ .

Note 3: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 11/15$  and  $\beta_d = 15/15$ .

**Setup Configuration**

Call Setup Screen									
Call Control		Active Cell Operating Mode						Call Parms	
Channel (UARFCN) Info		<div>UE Information</div> <div>           INSI:            INEI:            Power Class:         </div>						<div>Cell Power</div> <div>-86.00</div>	
Cell Parameters								<div>dBm/3.84 MHz</div>	
Generator Info		<div>UE Expected Open Loop Transmit Power</div> <div>           Initial PRACH TX Power: -11.70 dBm            Initial DPCH TX Power: -0.56 dBm         </div>						<div>Channel Type</div> <div>12.2k + HSPA</div>	
Uplink Parameters		<div>Uplink Parameters</div> <div>           PRACH Preambles: 64            PRACH Ramping Cycles(MAX): 2            Available Subchannels (Bit Mask): 000000000001            Uplink DPCH Scrambling Code: 0            Uplink DPCH Bc/Bd Control: Manual            Manual Uplink DPCH Bc: 11            Manual Uplink DPCH Bd: 15            Maximum Uplink Transmit Power Level: 21 dBm         </div>						<div>Paging Service</div> <div>RB Test Mode</div>	
UE Rep Meas		<div>Value</div> <div>           PRACH Preambles: 64            PRACH Ramping Cycles(MAX): 2            Available Subchannels (Bit Mask): 000000000001            Uplink DPCH Scrambling Code: 0            Uplink DPCH Bc/Bd Control: Manual            Manual Uplink DPCH Bc: 11            Manual Uplink DPCH Bd: 15            Maximum Uplink Transmit Power Level: 21 dBm         </div>						<div>HSPA Parameters</div>	
Close Menu		<div>Active Cell</div> <div>Idle</div>						<div>34.121 Preset Call Configs</div>	
2 of 4		<div>Sys Type: UTRA FDD</div> <div>IntRef Offset</div>						<div>Channel (UARFCN) Parms</div>	
								1 of 3	

Example for HSPA Subtest 1, and other subtests following table, C11.1.3  
(Gain Factors ( $\beta_c = 11$  and  $\beta_d = 15$ ))

Call Setup Screen									
Call Control		Active Cell Operating Mode						Serving Grant	
Additional Screens		<div>UE Information</div> <div>           INSI:            INEI:            Power Class:         </div>						<div>AG Mode</div> <div>Single Shot</div>	
Cell Parameters		<div>UE Expected Open Loop Transmit Power</div> <div>           Initial PRACH TX Power: -11.70 dBm            Initial DPCH TX Power: -0.56 dBm         </div>						<div>Single Shot AG</div> <div>20: (119/15)^2</div>	
Generator Info		<div>Call Processing Status</div> <div>           Current Service Type: None            MM Status: Abs Single Shot AG            GMM State: Index 15: (67/15)^2            Current DPCH: Index 16: (75/15)^2            HSUPA In: Index 17: (84/15)^2            UE Rep E-DCH: Index 18: (95/15)^2            Last Received: Index 19: (106/15)^2            Throughput: Index 20: (119/15)^2            ACKs Transmitted:         </div>						<div>Send Single Shot Absolute Grant</div>	
Uplink Parameters		<div>Information</div> <div>           OSCH Cat: ----            Ratio: ---- %            kbps            Transmitted: ----         </div>						<div>Send Relative Grant Up</div>	
UE Rep Meas		<div>Active Cell</div> <div>Idle</div>						<div>Send Relative Grant Down</div>	
Trig Output Setup		<div>Sys Type: UTRA FDD</div> <div>IntRef Offset</div>						<div>Return</div>	
Sys Frame Clock								1 of 2	
2 of 4									

Example: AG – Index = 20 for HSPA subtest 1

Call Setup Screen																																																																																																													
Screen Ctrl	Recorded E-TFCI Information							E-TFCI Record																																																																																																					
Channel (UARFCN) Info	<div>E-TFCI Recording State</div> <div>Idle</div>							E-TFCI Rec Count																																																																																																					
								15																																																																																																					
HSPA Information	<div>Recorded E-TFCI Values</div> <table border="1"> <tr><td>1:</td><td>75</td><td>11:</td><td>75</td><td>21:</td><td>----</td><td>31:</td><td>----</td><td>41:</td><td>----</td></tr> <tr><td>2:</td><td>75</td><td>12:</td><td>75</td><td>22:</td><td>----</td><td>32:</td><td>----</td><td>42:</td><td>----</td></tr> <tr><td>3:</td><td>75</td><td>13:</td><td>75</td><td>23:</td><td>----</td><td>33:</td><td>----</td><td>43:</td><td>----</td></tr> <tr><td>4:</td><td>75</td><td>14:</td><td>75</td><td>24:</td><td>----</td><td>34:</td><td>----</td><td>44:</td><td>----</td></tr> <tr><td>5:</td><td>75</td><td>15:</td><td>75</td><td>25:</td><td>----</td><td>35:</td><td>----</td><td>45:</td><td>----</td></tr> <tr><td>6:</td><td>75</td><td>16:</td><td>----</td><td>26:</td><td>----</td><td>36:</td><td>----</td><td>46:</td><td>----</td></tr> <tr><td>7:</td><td>75</td><td>17:</td><td>----</td><td>27:</td><td>----</td><td>37:</td><td>----</td><td>47:</td><td>----</td></tr> <tr><td>8:</td><td>75</td><td>18:</td><td>----</td><td>28:</td><td>----</td><td>38:</td><td>----</td><td>48:</td><td>----</td></tr> <tr><td>9:</td><td>75</td><td>19:</td><td>----</td><td>29:</td><td>----</td><td>39:</td><td>----</td><td>49:</td><td>----</td></tr> <tr><td>10:</td><td>75</td><td>20:</td><td>----</td><td>30:</td><td>----</td><td>40:</td><td>----</td><td>50:</td><td>----</td></tr> </table>							1:	75	11:	75	21:	----	31:	----	41:	----	2:	75	12:	75	22:	----	32:	----	42:	----	3:	75	13:	75	23:	----	33:	----	43:	----	4:	75	14:	75	24:	----	34:	----	44:	----	5:	75	15:	75	25:	----	35:	----	45:	----	6:	75	16:	----	26:	----	36:	----	46:	----	7:	75	17:	----	27:	----	37:	----	47:	----	8:	75	18:	----	28:	----	38:	----	48:	----	9:	75	19:	----	29:	----	39:	----	49:	----	10:	75	20:	----	30:	----	40:	----	50:	----	Start Recording E-TFCI Values	
1:								75	11:	75	21:	----	31:	----	41:	----																																																																																													
2:	75	12:	75	22:	----	32:	----	42:	----																																																																																																				
3:	75	13:	75	23:	----	33:	----	43:	----																																																																																																				
4:	75	14:	75	24:	----	34:	----	44:	----																																																																																																				
5:	75	15:	75	25:	----	35:	----	45:	----																																																																																																				
6:	75	16:	----	26:	----	36:	----	46:	----																																																																																																				
7:	75	17:	----	27:	----	37:	----	47:	----																																																																																																				
8:	75	18:	----	28:	----	38:	----	48:	----																																																																																																				
9:	75	19:	----	29:	----	39:	----	49:	----																																																																																																				
10:	75	20:	----	30:	----	40:	----	50:	----																																																																																																				
E-TFCI Recording Information	<div>15/15</div>							Send Step Up TPC Bit Pattern																																																																																																					
Clear UE Info								Send Step Down TPC Bit Pattern																																																																																																					
Return								Return																																																																																																					
		Background		Active Cell		Sys Type: UTRA FDD																																																																																																							
				Connected																																																																																																									
				IntRef		Offset																																																																																																							

Example: Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1



**Reference:**

- [1] 941225 D01 SAR test for 3G devices v02, SAR Measurement Procedures for 3G Devices CDMA 2000/Ev-Do/WCDMA/HSDPA/HSPA Oct. 2007 Laboratory Division Office of Engineering and Technology Federal Communications Commission
- [2.] TS 34.121 Universal Mobile Telecommunications System (UMTS); Terminal Conformance Specification, Radio Transmission and Reception (FDD)
- [3.] HSUPA Measurement Guide with 8960 V7.5.0 Release 7 (2007-06) Ver.: v.02.18