


NOTES
CONTRACTOR TO VERIFY HEIGHT AND DIRECTION OF ANTENNAS
WITH PROJECT MANAGER.
ALL ANTENNA AZIMUTHS TO BE FROM TRUE NORTH.
CONTRACTOR TO VERIFY LIGHTNING ROD EXTENDS 2 MIN. ABOVE
ALL ANTENNAS & EQUIPMENT.

EUREN HYBRID CABLE LENGTH	
QUANTITY FROM SHELTER BAYCAP SPD	1
LENGTH FROM SHELTER BAYCAP SPD TO COAX PORT	20 FT
LENGTH ALONG ICE BRIDGE	20 FT
LENGTH FROM T.O.C. TO TOWER TOP BAYCAP SPD	220 FT
TOTAL LENGTH OF HYBRID CABLE	260 FT
ROUNDED LENGTH**	270 FT

HYBRID JUMPER CABLE INFO	
BAYCAP TO REMOVE RADIO	
ALPHA SECTOR	16.4 FT 5 m
BETA SECTOR	16.4 FT 5 m
GAMMA SECTOR	16.4 FT 5 m

** PREFERRED JUMPER LENGTH OF 5m (16.4')
* MAXIMUM JUMPER LENGTH OF 5m (16.7')

5G radio to be mounted
at 41.1m above ground

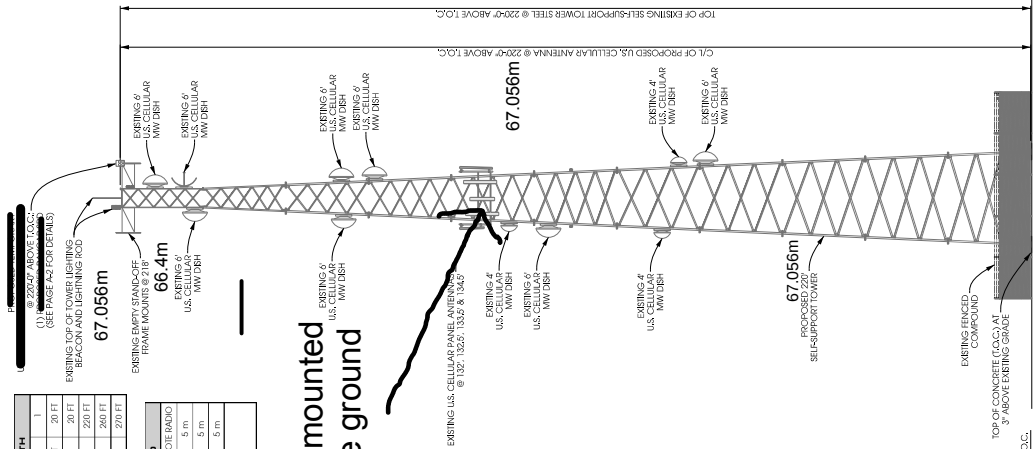

A TOWER PROFILE (SOUTH ELEVATION)

SCALE: 11" x 17" - 1/4" = 1'-0"
22" x 34" - 1/2" = 1'-0"

TOWER ELEVATION





EXISTING SECTOR FRAMES



NOTE:
ALL ANTENNA AZIMUTHS TO BE FROM TRUE NORTH

NOTE:
APPROX. TOWER WIDTH @ 220'-0" = 5'

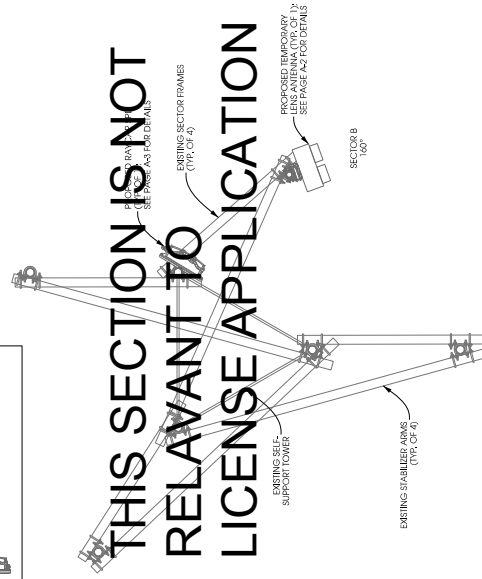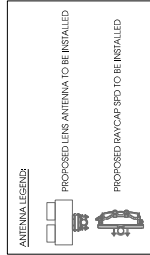

B ANTENNA PLATFORM ASSIGNMENT

SCALE: 11" x 17" - 1/4" = 1'-0"
22" x 34" - 1/2" = 1'-0"