



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2341-2
FCC ID : IHDT56AM1
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Apr. 10, 2023 ~ May 12, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer..... 5

 1.3 Product Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test..... 6

 1.5 Modification of EUT 6

 1.6 Testing Location 7

 1.7 Test Software..... 7

 1.8 Applicable Standards..... 8

 1.9 Specification of Accessory..... 8

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9

 2.1 Carrier Frequency and Channel 9

 2.2 Test Mode..... 10

 2.3 Connection Diagram of Test System..... 11

 2.4 Support Unit used in test configuration and system 11

 2.5 EUT Operation Test Setup 12

 2.6 Measurement Results Explanation Example..... 12

3 TEST RESULT..... 13

 3.1 26dB & 99% Occupied Bandwidth Measurement 13

 3.2 Maximum Conducted Output Power Measurement 15

 3.3 Power Spectral Density Measurement 17

 3.4 Unwanted Emissions Measurement 19

 3.5 AC Conducted Emission Measurement..... 24

 3.6 Antenna Requirements 26

4 LIST OF MEASURING EQUIPMENT 27

5 MEASUREMENT UNCERTAINTY 28

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. AC CONDUCTED EMISSION TEST RESULT

APPENDIX C. RADIATED SPURIOUS EMISSION

APPENDIX D. DUTY CYCLE PLOTS

APPENDIX E. SETUP PHOTOGRAPHS



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Report only	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 3.07 dB at 5149.94 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 14.32 dB at 0.163 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:
1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"
Disclaimer:
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2341-2
FCC ID	IHDT56AM1
IMEI Code	Conducted: 352000530005895/352000530005903 Conduction: 352000530005416/352000530005424 Radiation: 352000530016413/352000530016421
HW Version	DVT2
SW Version	TLA33.30
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5700 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 17.79 dBm / 0.0601 W 802.11n HT20 : 17.91 dBm / 0.0618 W 802.11ac VHT20 : 17.86 dBm / 0.0611 W <5260 MHz ~ 5320 MHz> 802.11a : 18.29 dBm / 0.0675 W 802.11n HT20 : 18.30 dBm / 0.0676 W 802.11ac VHT20 : 18.30 dBm / 0.0676 W <5500 MHz ~ 5700 MHz > 802.11a : 18.35 dBm / 0.0684 W 802.11n HT20 : 18.47 dBm / 0.0703 W 802.11ac VHT20 : 18.85 dBm / 0.0767 W
Antenna Type / Gain	<5180 MHz ~ 5240 MHz> PIFA Antenna with gain -2.5 dBi <5260 MHz ~ 5320 MHz> PIFA Antenna with gain -1.0 dBi <5500 MHz ~ 5700 MHz> PIFA Antenna with gain -0.7 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

Note:

1. For 802.11n HT20 / ac VHT20 mode, the testing have assessed 802.11n HT20 for U-NII-1 and 802.11ac VHT20 for U-NII-2A & 2C by referring to their maximum conducted power.
2. Ant 1 in Conducted and RSE test data corresponds to BT/WIFI antenna in EP.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People’s Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS TH01-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City Guangdong Province China 518103 TEL: +86-755-33202398		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH03-SZ	CN1256	421272

Note: Test data subcontracted: Radiated Spurious Emission test case in section 3.4 of this report

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	CO01-KS	AUDIX	E3	6.2009-8-24
2.	03CH03-SZ	AUDIX	E3	6.2009-8-24



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.9 Specification of Accessory

Specification of Accessory				
AC Adapter 1 (US)	Brand Name	Motorola (Salcomp)	Model Name	MC-201L
AC Adapter 1 (EU)	Brand Name	Motorola (Salcomp)	Model Name	MC-202L
AC Adapter 1 (AR)	Brand Name	Motorola (Salcomp)	Model Name	MC-206L
AC Adapter 1 (BR)	Brand Name	Motorola (Salcomp)	Model Name	MC-207L
AC Adapter 1 (CHILE)	Brand Name	Motorola (Salcomp)	Model Name	MC-209L
AC Adapter 2 (US)	Brand Name	Motorola (Aohai)	Model Name	MC-201L
AC Adapter 2 (EU)	Brand Name	Motorola (Aohai)	Model Name	MC-202L
AC Adapter 2 (AR)	Brand Name	Motorola (Aohai)	Model Name	MC-206L
AC Adapter 3 (US)	Brand Name	Motorola (Aohai)	Model Name	MC-101
AC Adapter 3 (EU)	Brand Name	Motorola (Aohai)	Model Name	MC-102
AC Adapter 3 (UK)	Brand Name	Motorola (Aohai)	Model Name	MC-103
AC Adapter 3 (AU)	Brand Name	Motorola (Aohai)	Model Name	MC-105
AC Adapter 4 (US)	Brand Name	Motorola (Chenyang)	Model Name	MC-101
AC Adapter 4 (EU)	Brand Name	Motorola (Chenyang)	Model Name	MC-102
AC Adapter 4 (UK)	Brand Name	Motorola (Chenyang)	Model Name	MC-103
AC Adapter 4 (AU)	Brand Name	Motorola (Chenyang)	Model Name	MC-105
AC Adapter 5 (US)	Brand Name	Motorola (Salcomp)	Model Name	MC-101
AC Adapter 5 (EU)	Brand Name	Motorola (Salcomp)	Model Name	MC-102
AC Adapter 5 (UK)	Brand Name	Motorola (Salcomp)	Model Name	MC-103
AC Adapter 5 (AU)	Brand Name	Motorola (Salcomp)	Model Name	MC-105
Battery 1	Brand Name	Motorola(ATL)	Model Name	PC50
Battery 2	Brand Name	Motorola (SCUD)	Model Name	PC50
Earphone 1	Brand Name	Motorola (New leader)	Model Name	NLD-EM313A-20SF
Earphone 2	Brand Name	Motorola (JWELL)	Model Name	JWEP1205-L20H
USB Cable 1	Brand Name	Motorola (SAIBAO)	Model Name	SLQ-A214A
USB Cable 2	Brand Name	Motorola (JWELL)	Model Name	ATOC



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	40	5200	48	5240

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	56	5280	64	5320

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5500- 5700 MHz MHz U-NII-2C	100	5500	112	5560
	104	5520	116	5580
	108	5540	132	5660
	136	5680	140	5700

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	120	5600	124	5620
	128	5640	-	-



2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11ac VHT20	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM850 Idle + BT Link + WLAN Link(5G) + Adaptor5 + Earphone2 + USB Cable2 + Battery1
Remark: For Radiated Test Cases, The tests were performance with Adapter 3, Earphone 1 and USB Cable 1	


CO-location
802.11n HT20_Ch36 + LTE Band 13

Ch. #		U-NII-1 : 5180-5240 MHz	U-NII-2A : 5260-5320 MHz	U-NII-2C : 5500- 5700 MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140


Ch. #		U-NII-1 : 5180-5240 MHz	U-NII-2A : 5260-5320 MHz	U-NII-2C : 5500- 5700 MHz
		802.11n HT20	802.11ac VHT20	802.11ac VHT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

2.3 Connection Diagram of Test System

For AC Conducted Emission:

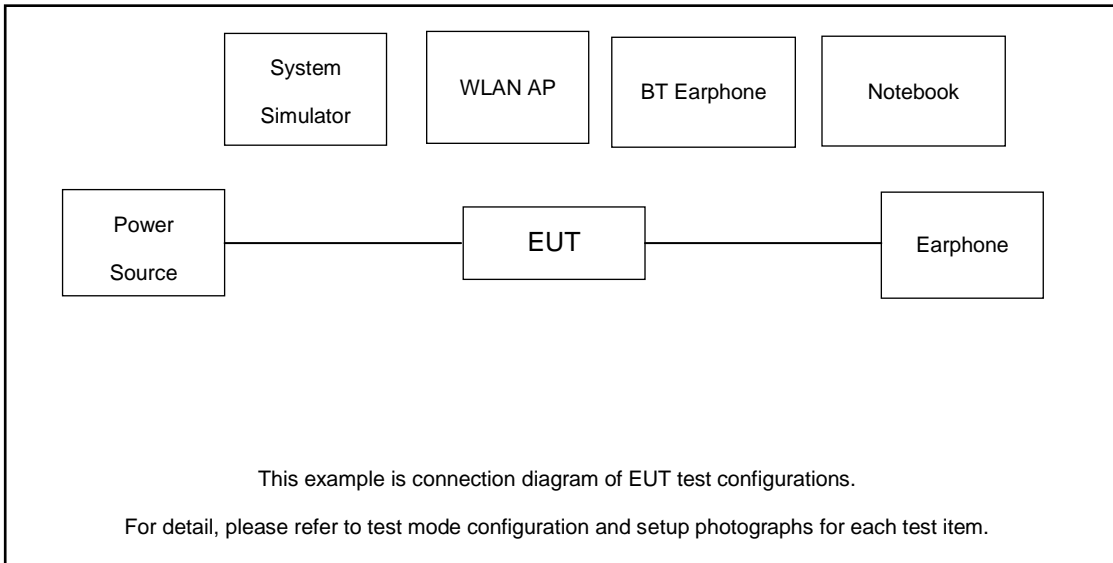

For Radiated Emission:

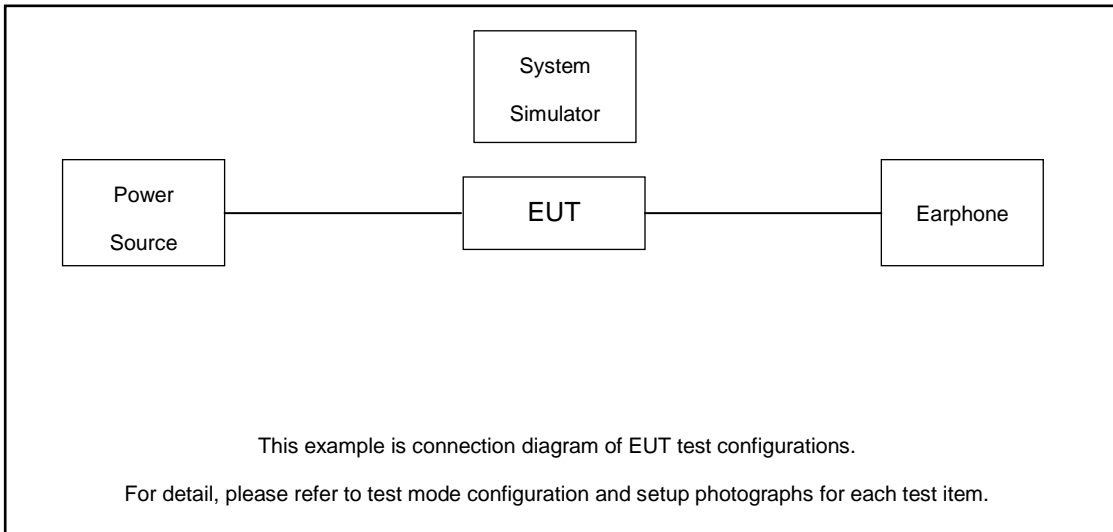

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	LTE Base Station	Anritus	MT8821C	N/A	N/A	Unshielded, 1.8m
2.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A
3.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	shielded cable DC O/P 1.8m ; Unshielded AC I/P cable 1.8m
4.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded, 1.8m



2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 8.0 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 8.0 + 10 = 18.0 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the OBW and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.



3.1.4 Test Setup

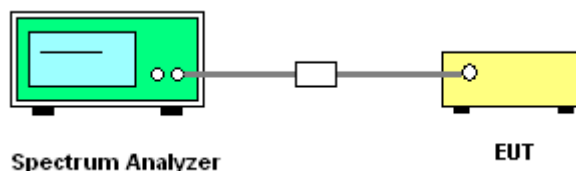



3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.

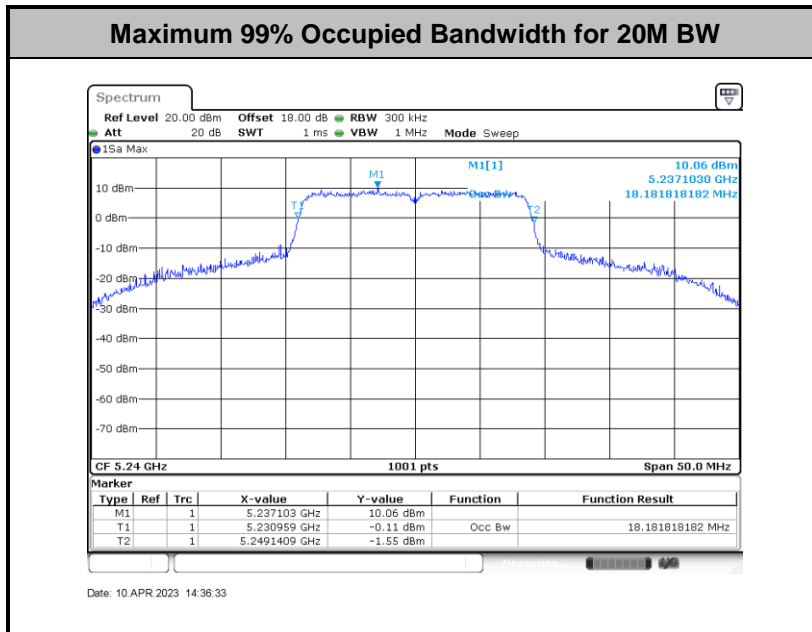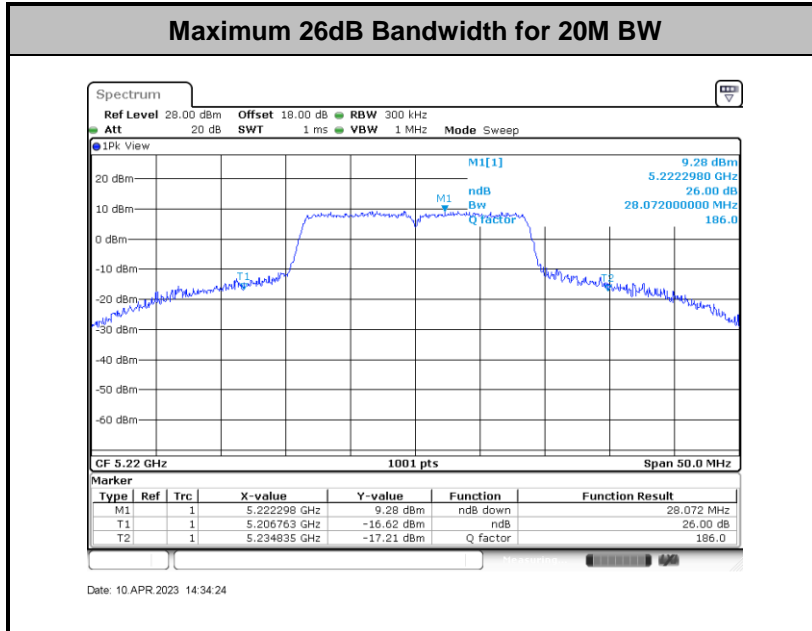

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log_{10} B$, where B is the 26 dB emission bandwidth in megahertz.

For the 5.47–5.6 GHz and 5.65–5.725 GHz band, the maximum conducted output power shall not exceed 250 mW or $11 + 10 \log_{10} B$, dBm, whichever power is less. The maximum e.i.r.p. shall not exceed 1.0 W or $17 + 10 \log_{10} B$, dBm, whichever is less. B is the 99% emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.


3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

3.2.4 Test Setup

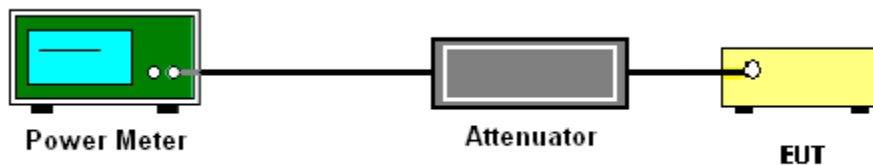

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).


- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW \geq 3 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

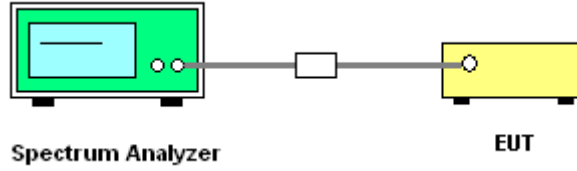

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

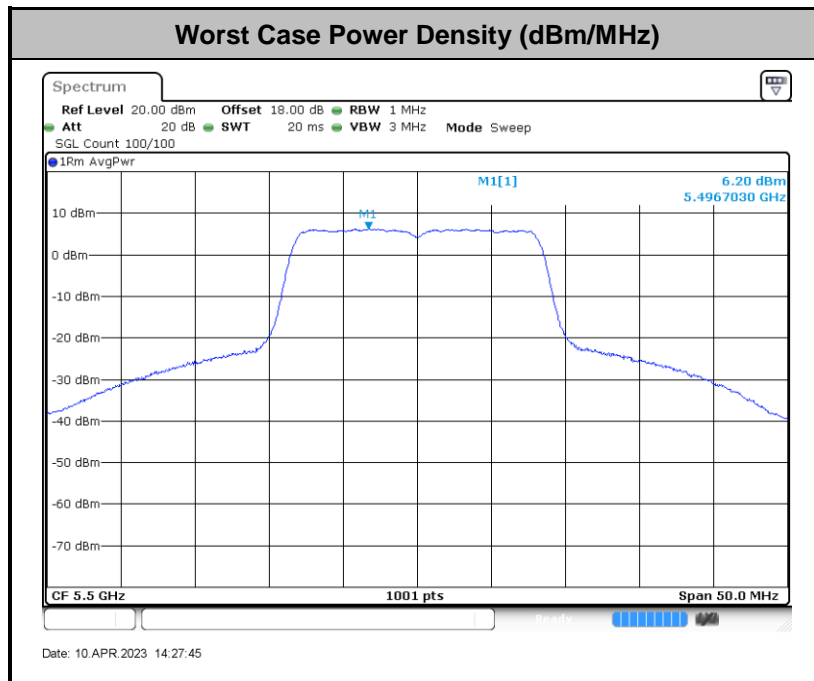

Note: Average Power Density (dB) = Measured value+ Duty Factor



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5725 MHz band: all emissions outside of the 5470-5725 MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log(d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

(3) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW \geq 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW \geq 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

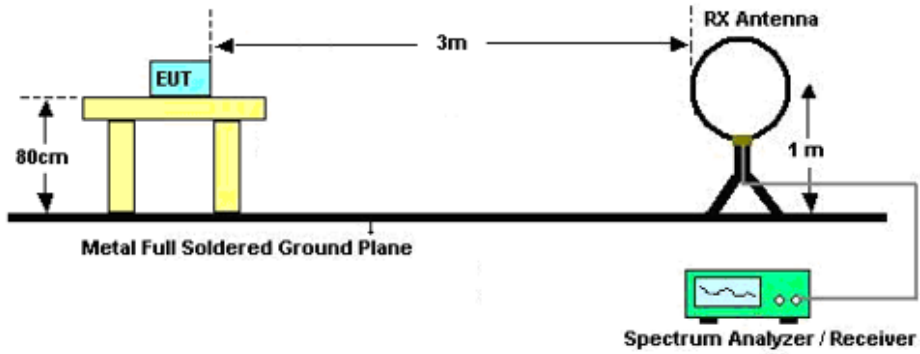

For radiated emissions from 30MHz to 1GHz

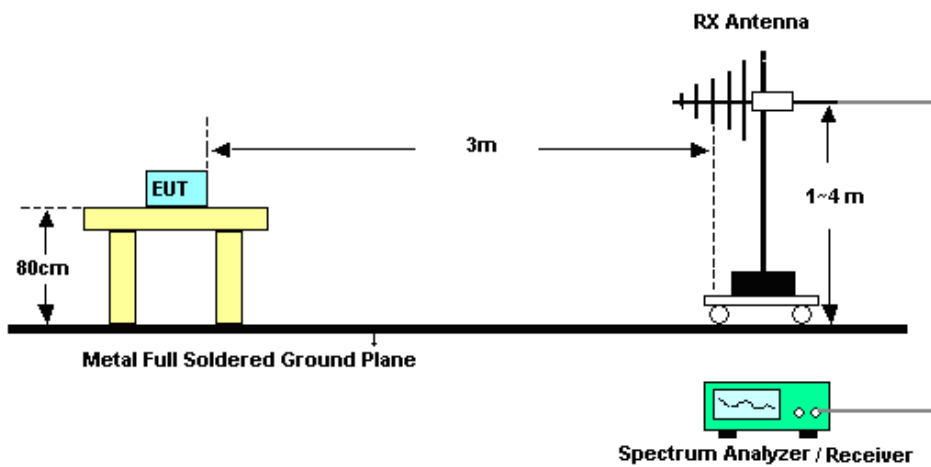

For radiated emissions above 1GHz

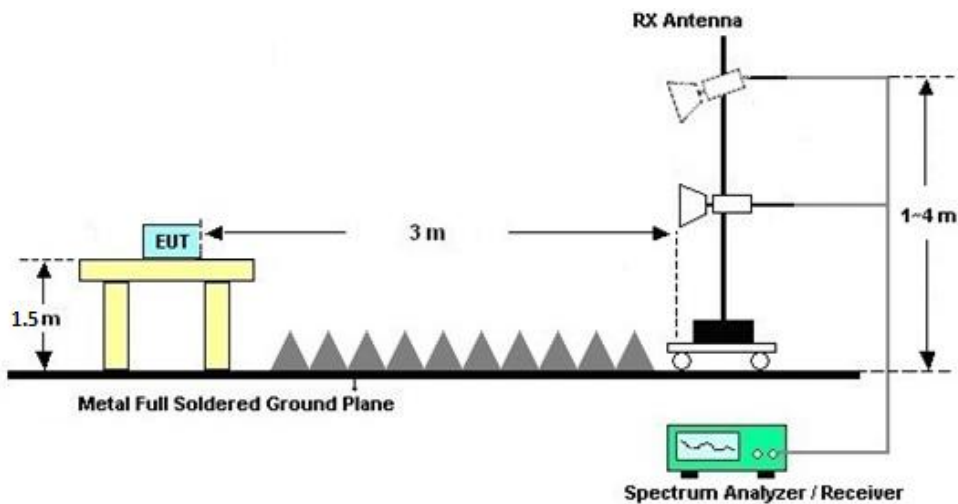



3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

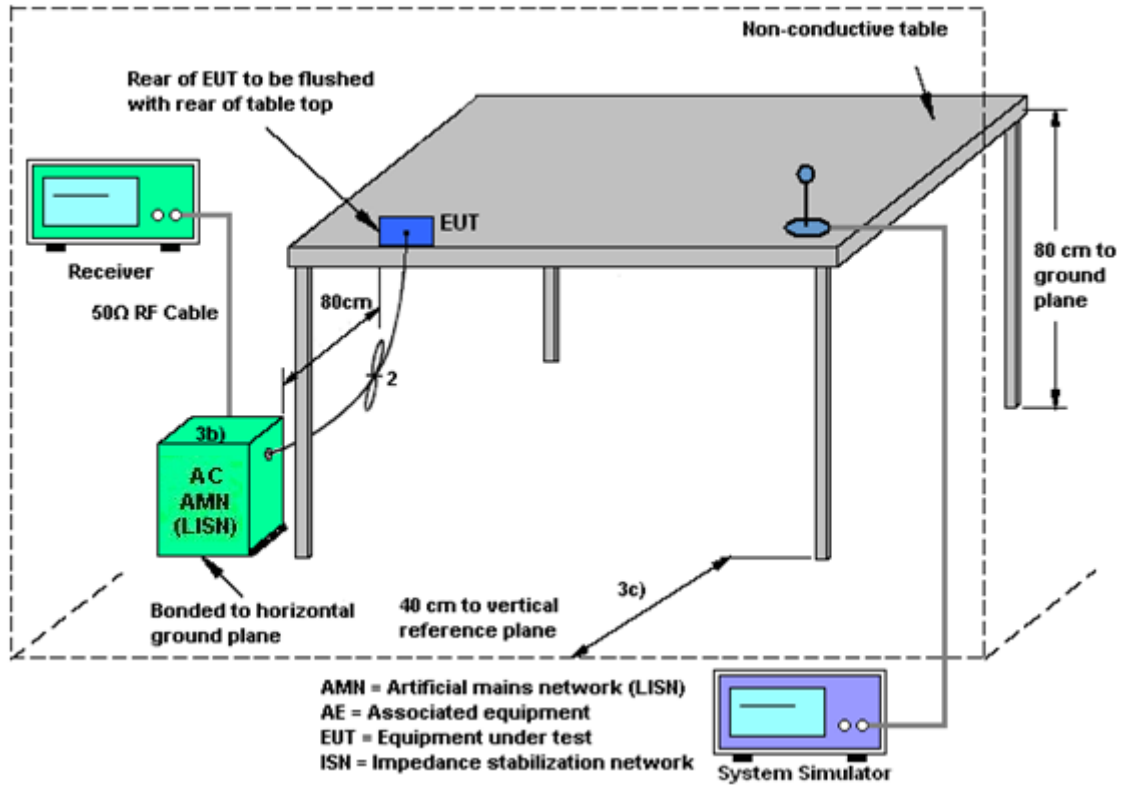

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 12, 2022	Apr. 10, 2023	Oct. 11, 2023	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2023	Apr. 10, 2023	Jan. 04, 2024	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2023	Apr. 10, 2023	Jan. 04, 2024	Conducted (TH01-KS)
EMI Receiver	R&S	ESC17	100768	9kHz~7GHz;	May 24, 2022	Apr. 19, 2023	May 23, 2023	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	May 24, 2022	Apr. 19, 2023	May 23, 2023	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP0000008 11	AC 0V~300V, 45Hz~1000Hz	Oct. 12, 2022	Apr. 19, 2023	Oct. 11, 2023	Conduction (CO01-KS)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 04, 2023	May 12, 2023	Apr. 03, 2024	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 04, 2023	May 12, 2023	Apr. 03, 2024	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	May 12, 2023	Jul. 27, 2024	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz-2GHz	Aug. 09, 2021	May 12, 2023	Aug. 08, 2023	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 08, 2023	May 12, 2023	Apr. 07, 2024	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 06, 2022	May 12, 2023	Jul.05, 2023	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz-40GHz	Apr. 08, 2023	May 12, 2023	Apr. 07, 2024	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz ~3000MHz	Oct. 19, 2022	May 12, 2023	Oct. 18, 2023	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 19, 2022	May 12, 2023	Oct. 18, 2023	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 26, 2022	May 12, 2023	Dec. 25, 2023	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	6160100027 29	1 N/A	Nov. 10, 2022	May 12, 2023	Nov. 09, 2023	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	May 12, 2023	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	May 12, 2023	NCR	Radiation (03CH03-SZ)
laser range finder	Dingxin Yi	D-40	#03	N/A	Oct. 09, 2022	May 12, 2023	Oct. 08, 2023	Radiation (03CH03-SZ)
Thermo meter	Anymetre	JR593	#11	- 10℃ ~ 50℃ 10%RH~99%RH	Oct. 20, 2022	May 12, 2023	Oct. 19, 2023	Radiation (03CH03-SZ)

NCR: No Calibration Required



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±0.46 dB
Conducted Emissions	±0.48 dB
Occupied Channel Bandwidth	±0.001 %
Conducted Power Spectral Density	±0.40 dB

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

A1. Conducted Test Results

Test Engineer:	Jacob Zhang	Temperature:	21~25	°C
Test Date:	2023/4/10	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 single antenna							
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth EIRP Limit (dBm)
					Ant 1	Ant 1	Ant 1
11a	6Mbps	1	36	5180	16.88	20.13	22.27
11a	6Mbps	1	44	5220	17.03	26.17	22.31
11a	6Mbps	1	48	5240	17.03	24.58	22.31
HT20	MCS0	1	36	5180	17.83	20.58	22.51
HT20	MCS0	1	44	5220	18.13	28.07	22.58
HT20	MCS0	1	48	5240	18.18	27.32	22.60

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 single antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	Pass/Fail
					Ant 1	Ant 1	Ant 1	Ant 1	
11a	6Mbps	1	36	5180	0.48	16.47	24.00	-2.50	Pass
11a	6Mbps	1	44	5220	0.48	17.79	24.00	-2.50	Pass
11a	6Mbps	1	48	5240	0.48	17.74	24.00	-2.50	Pass
HT20	MCS0	1	36	5180	0.56	16.44	24.00	-2.50	Pass
HT20	MCS0	1	44	5220	0.56	17.91	24.00	-2.50	Pass
HT20	MCS0	1	48	5240	0.56	17.87	24.00	-2.50	Pass
VHT20	MCS0	1	36	5180	0.58	16.53	24.00	-2.50	Pass
VHT20	MCS0	1	44	5220	0.58	17.83	24.00	-2.50	Pass
VHT20	MCS0	1	48	5240	0.58	17.86	24.00	-2.50	Pass

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1 single antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density with Duty Factor (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	Pass /Fail
					Ant 1	Ant 1	Ant 1	Ant 1	
11a	6Mbps	1	36	5180	0.48	4.79	11.00	-2.50	Pass
11a	6Mbps	1	44	5220	0.48	5.81	11.00	-2.50	Pass
11a	6Mbps	1	48	5240	0.48	5.83	11.00	-2.50	Pass
HT20	MCS0	1	36	5180	0.58	4.51	11.00	-2.50	Pass
HT20	MCS0	1	44	5220	0.58	6.06	11.00	-2.50	Pass
HT20	MCS0	1	48	5240	0.58	5.98	11.00	-2.50	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A single antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)
					Ant 1	Ant 1	Ant 1	Ant 1	Ant 1
11a	6Mbps	1	52	5260	17.08	25.43	23.33	29.33	23.98
11a	6Mbps	1	60	5300	17.08	24.63	23.33	29.33	23.98
11a	6Mbps	1	64	5320	17.08	23.53	23.33	29.33	23.98
VHT20	MCS0	1	52	5260	17.93	23.78	23.54	29.54	23.98
VHT20	MCS0	1	60	5300	17.98	24.23	23.55	29.55	23.98
VHT20	MCS0	1	64	5320	18.03	24.48	23.56	29.56	23.98

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A single antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 1	Ant 1	Ant 1		
11a	6Mbps	1	52	5260	0.48	17.75	23.98	-1.00	26.99	Pass
11a	6Mbps	1	60	5300	0.48	17.82	23.98	-1.00	26.99	Pass
11a	6Mbps	1	64	5320	0.48	18.29	23.98	-1.00	26.99	Pass
HT20	MCS0	1	52	5260	0.56	17.79	23.98	-1.00	26.99	Pass
HT20	MCS0	1	60	5300	0.56	17.81	23.98	-1.00	26.99	Pass
HT20	MCS0	1	64	5320	0.56	18.30	23.98	-1.00	26.99	Pass
VHT20	MCS0	1	52	5260	0.58	17.85	23.98	-1.00	26.99	Pass
VHT20	MCS0	1	60	5300	0.58	17.85	23.98	-1.00	26.99	Pass
VHT20	MCS0	1	64	5320	0.58	18.30	23.98	-1.00	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2A single antenna									
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density with Duty Factor (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	Pass /Fail
					Ant 1	Ant 1	Ant 1	Ant 1	
11a	6Mbps	1	52	5260	0.48	5.75	11.00	-1.00	Pass
11a	6Mbps	1	60	5300	0.48	5.85	11.00	-1.00	Pass
11a	6Mbps	1	64	5320	0.48	6.20	11.00	-1.00	Pass
VHT20	MCS0	1	52	5260	0.58	5.94	11.00	-1.00	Pass
VHT20	MCS0	1	60	5300	0.58	5.74	11.00	-1.00	Pass
VHT20	MCS0	1	64	5320	0.58	6.22	11.00	-1.00	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C single antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)	26 dB Bandwidth In U-NII 2C (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)
					Ant 1	Ant 1	Ant 1	Ant 1	Ant 1
11a	6Mbps	1	100	5500	17.08	23.88	23.33	29.33	23.98
11a	6Mbps	1	116	5580	17.13	23.48	23.34	29.34	23.98
11a	6Mbps	1	140	5700	17.03	21.78	23.31	29.31	23.98
VHT20	MCS0	1	100	5500	17.93	22.58	23.54	29.54	23.98
VHT20	MCS0	1	116	5580	18.03	25.13	23.56	29.56	23.98
VHT20	MCS0	1	140	5700	17.98	21.68	23.55	29.55	23.98

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C single antenna										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power with duty factor (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 1	Ant 1	Ant 1		
11a	6Mbps	1	100	5500	0.48	18.34	23.98	-0.70	26.99	Pass
11a	6Mbps	1	116	5580	0.48	18.35	23.98	-0.70	26.99	Pass
11a	6Mbps	1	140	5700	0.48	11.95	23.98	-0.70	26.99	Pass
HT20	MCS0	1	100	5500	0.56	17.11	23.98	-0.70	26.99	Pass
HT20	MCS0	1	116	5580	0.56	18.47	23.98	-0.70	26.99	Pass
HT20	MCS0	1	140	5700	0.56	10.88	23.98	-0.70	26.99	Pass
VHT20	MCS0	1	100	5500	0.58	17.15	23.98	-0.70	26.99	Pass
VHT20	MCS0	1	116	5580	0.58	18.85	23.98	-0.70	26.99	Pass
VHT20	MCS0	1	140	5700	0.58	10.96	23.98	-0.70	26.99	Pass


TEST RESULTS DATA
Power Spectral Density

U-NII-2C single antenna									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density with Duty Factor (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	Pass /Fail
					Ant 1	Ant 1	Ant 1	Ant 1	
11a	6Mbps	1	100	5500	0.48	6.68	11.00	-0.70	Pass
11a	6Mbps	1	116	5580	0.48	6.46	11.00	-0.70	Pass
11a	6Mbps	1	140	5700	0.48	-0.45	11.00	-0.70	Pass
VHT20	MCS0	1	100	5500	0.58	5.31	11.00	-0.70	Pass
VHT20	MCS0	1	116	5580	0.58	6.56	11.00	-0.70	Pass
VHT20	MCS0	1	140	5700	0.58	-1.53	11.00	-0.70	Pass



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

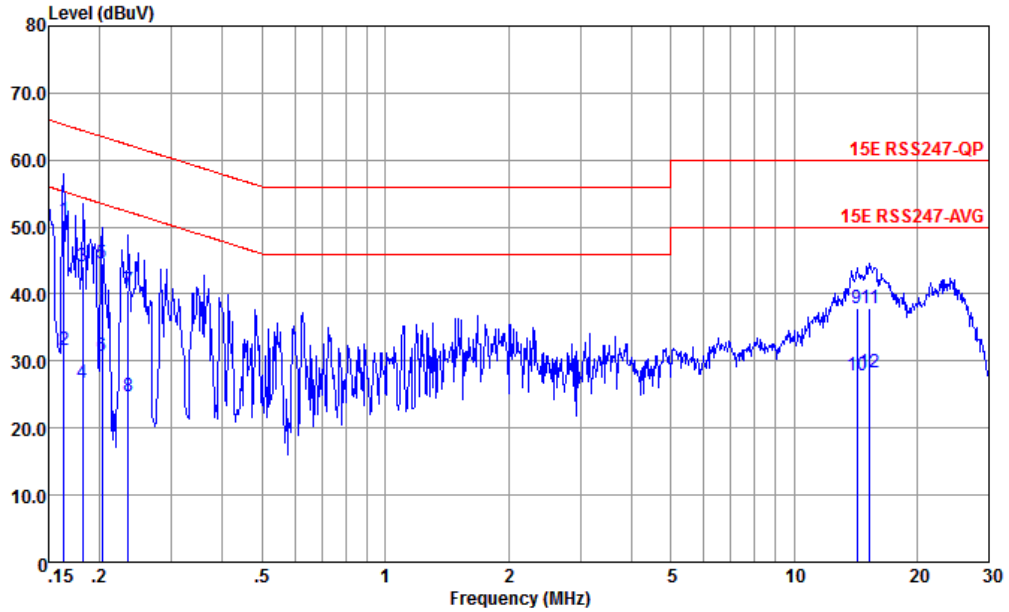


Site : CO01-KS
 Condition : 15E RSS247-QP LISN-060105-LINE LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.163	50.98	-14.32	65.30	40.49	0.06	10.43	QP
2	0.163	31.68	-23.62	55.30	21.19	0.06	10.43	Average
3	0.182	44.06	-20.36	64.42	33.60	0.04	10.42	QP
4	0.182	26.76	-27.66	54.42	16.30	0.04	10.42	Average
5	0.203	44.64	-18.85	63.49	34.20	0.02	10.42	QP
6	0.203	30.74	-22.75	53.49	20.30	0.02	10.42	Average
7	0.235	40.63	-21.63	62.26	30.20	0.04	10.39	QP
8	0.235	24.63	-27.63	52.26	14.20	0.04	10.39	Average
9	14.288	37.77	-22.23	60.00	26.80	-0.21	11.18	QP
10	14.288	27.87	-22.13	50.00	16.90	-0.21	11.18	Average
11	15.307	37.82	-22.18	60.00	26.80	-0.22	11.24	QP
12	15.307	28.22	-21.78	50.00	17.20	-0.22	11.24	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

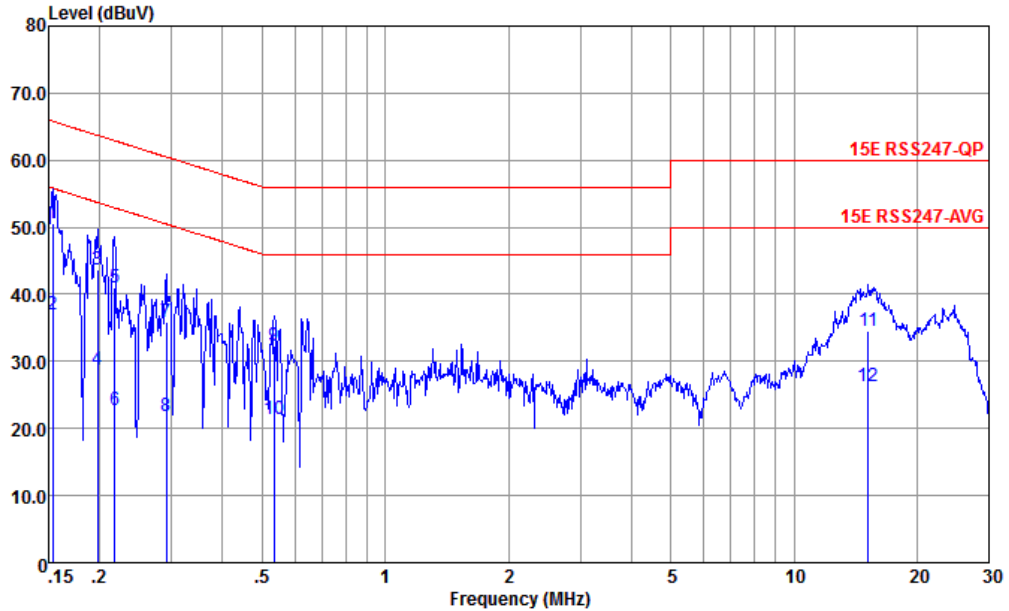

Site : CO01-KS
 Condition : 15E RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1 *	0.153	50.66	-15.16	65.82	40.20	0.03	10.43	QP
2	0.153	37.06	-18.76	55.82	26.60	0.03	10.43	Average
3	0.198	43.67	-20.04	63.71	33.20	0.05	10.42	QP
4	0.198	28.67	-25.04	53.71	18.20	0.05	10.42	Average
5	0.217	40.93	-21.99	62.92	30.49	0.03	10.41	QP
6	0.217	22.63	-30.29	52.92	12.19	0.03	10.41	Average
7	0.291	35.81	-24.69	60.50	25.50	-0.04	10.35	QP
8	0.291	21.91	-28.59	50.50	11.60	-0.04	10.35	Average
9	0.535	32.32	-23.68	56.00	22.20	-0.08	10.20	QP
10	0.535	21.42	-24.58	46.00	11.30	-0.08	10.20	Average
11	15.226	34.56	-25.44	60.00	23.50	-0.18	11.24	QP
12	15.226	26.36	-23.64	50.00	15.30	-0.18	11.24	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	Remark
Mode 1	U-NII-1	5.15-5.25	1	802.11a	36	5180	6Mbps	-
Mode 2	U-NII-1	5.15-5.25	1	802.11a	44	5220	6Mbps	-
Mode 3	U-NII-1	5.15-5.25	1	802.11a	48	5240	6Mbps	-
Mode 4	U-NII-2A	5.25-5.35	1	802.11a	52	5260	6Mbps	-
Mode 5	U-NII-2A	5.25-5.35	1	802.11a	60	5300	6Mbps	-
Mode 6	U-NII-2A	5.25-5.35	1	802.11a	64	5320	6Mbps	-
Mode 7	U-NII-2C	5.47-5.725	1	802.11a	100	5500	6Mbps	-
Mode 8	U-NII-2C	5.47-5.725	1	802.11a	116	5580	6Mbps	-
Mode 9	U-NII-2C	5.47-5.725	1	802.11a	140	5700	6Mbps	-
Mode 10	U-NII-1	5.15-5.25	1	802.11n HT20	36	5180	MCS0	-
Mode 11	U-NII-1	5.15-5.25	1	802.11n HT20	44	5220	MCS0	-
Mode 12	U-NII-1	5.15-5.25	1	802.11n HT20	48	5240	MCS0	-
Mode 13	U-NII-2A	5.25-5.35	1	802.11ac VHT20	52	5260	MCS0	-
Mode 14	U-NII-2A	5.25-5.35	1	802.11ac VHT20	60	5300	MCS0	-
Mode 15	U-NII-2A	5.25-5.35	1	802.11ac VHT20	64	5320	MCS0	-
Mode 16	U-NII-2C	5.47-5.725	1	802.11ac VHT20	100	5500	MCS0	-
Mode 17	U-NII-2C	5.47-5.725	1	802.11ac VHT20	116	5580	MCS0	-
Mode 18	U-NII-2C	5.47-5.725	1	802.11ac VHT20	140	5700	MCS0	-
Mode 19	U-NII-1	5.15-5.25	1	802.11n HT20	36	5180	MCS0	LF



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5149.76	50.70	54.00	-3.30	H	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.00	49.55	68.30	-18.75	V	Peak	Pass	Harmonic
2	802.11a	44	5143.00	40.82	54.00	-13.18	H	AVERAGE	Pass	Band Edge
2	802.11a	44	10440.00	49.52	68.30	-18.78	V	Peak	Pass	Harmonic
3	802.11a	48	5016.32	40.87	54.00	-13.13	V	AVERAGE	Pass	Band Edge
3	802.11a	48	10480.00	48.24	68.30	-20.06	H	Peak	Pass	Harmonic
4	802.11a	52	5045.50	40.74	54.00	-13.26	H	AVERAGE	Pass	Band Edge
4	802.11a	52	10480	49.08	68.3	-19.22	H	Peak	Pass	Harmonic
5	802.11a	60	5047.10	40.59	54.00	-13.41	H	AVERAGE	Pass	Band Edge
5	802.11a	60	15900.00	49.90	74.00	-24.10	H	Peak	Pass	Harmonic
6	802.11a	64	5350.10	47.13	54.00	-6.87	V	AVERAGE	Pass	Band Edge
6	802.11a	64	10640.00	49.41	74.00	-24.59	H	Peak	Pass	Harmonic
7	802.11a	100	5469.55	65.18	68.30	-3.12	H	PEAK	Pass	Band Edge
7	802.11a	100	16500.00	52.34	68.30	-15.96	H	Peak	Pass	Harmonic
8	802.11a	116	5429.58	39.26	54.00	-14.74	V	AVERAGE	Pass	Band Edge
8	802.11a	116	16740.00	51.78	68.30	-16.52	H	Peak	Pass	Harmonic
9	802.11a	140	5726.00	65.06	68.30	-3.24	V	PEAK	Pass	Band Edge
9	802.11a	140	17100.00	50.34	68.30	-17.96	H	Peak	Pass	Harmonic
10	802.11n HT20	36	5149.94	50.93	54.00	-3.07	V	AVERAGE	Pass	Band Edge
10	802.11n HT20	36	10360.00	49.53	68.30	-18.77	V	Peak	Pass	Harmonic
11	802.11n HT20	44	5042.02	40.47	54.00	-13.53	H	AVERAGE	Pass	Band Edge
11	802.11n HT20	44	10440.00	49.05	68.30	-19.25	V	Peak	Pass	Harmonic
12	802.11n HT20	48	5051.60	40.45	54.00	-13.55	V	AVERAGE	Pass	Band Edge
12	802.11n HT20	48	10480.00	49.29	68.30	-19.01	H	Peak	Pass	Harmonic
13	802.11ac VHT20	52	5066.56	40.43	54.00	-13.57	V	AVERAGE	Pass	Band Edge







13	802.11ac VHT20	52	10520.00	49.62	68.30	-18.68	H	Peak	Pass	Harmonic
14	802.11ac VHT20	60	5016.20	40.59	54.00	-13.41	H	AVERAGE	Pass	Band Edge
14	802.11ac VHT20	60	10600.00	49.44	74.00	-24.56	H	Peak	Pass	Harmonic
15	802.11ac VHT20	64	5350.94	47.22	54.00	-6.78	V	AVERAGE	Pass	Band Edge
15	802.11ac VHT20	64	10640.00	49.60	74.00	-24.40	V	Peak	Pass	Harmonic
16	802.11ac VHT20	100	5469.40	64.11	68.30	-4.19	H	PEAK	Pass	Band Edge
16	802.11ac VHT20	100	16500.00	51.30	68.30	-17.00	H	Peak	Pass	Harmonic
17	802.11ac VHT20	116	5374.61	39.38	54.00	-14.62	V	AVERAGE	Pass	Band Edge
17	802.11ac VHT20	116	16740.00	51.49	68.30	-16.81	H	Peak	Pass	Harmonic
18	802.11ac VHT20	140	5728.34	64.73	68.30	-3.57	H	PEAK	Pass	Band Edge
18	802.11ac VHT20	140	17100.00	50.64	68.30	-17.66	V	Peak	Pass	Harmonic
19	802.11n HT20	36	262.8	35.03	46.00	-10.97	H	Peak	Pass	LF



Mode	1																																																																																											
	Band Edge																																																																																											
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 1 Setting : 6M Power setting 17 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.42</td> <td>64.07</td> <td>74.00</td> <td>-9.93</td> <td>54.45</td> <td>34.54</td> <td>7.92</td> <td>32.84</td> <td>100</td> <td>301</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5147.42	64.07	74.00	-9.93	54.45	34.54	7.92	32.84	100	301	PEAK	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 1 Setting : 6M Power setting 17 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>106.48</td> <td>-----</td> <td>-----</td> <td>96.91</td> <td>34.53</td> <td>7.94</td> <td>32.90</td> <td>100</td> <td>301</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5180.00	106.48	-----	-----	96.91	34.53	7.94	32.90	100	301	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																					
							deg																																																																																					
1	5147.42	64.07	74.00	-9.93	54.45	34.54	7.92	32.84	100	301	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																					
							deg																																																																																					
1	5180.00	106.48	-----	-----	96.91	34.53	7.94	32.90	100	301	PEAK																																																																																	
Avg	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 1 Setting : 6M Power setting 17 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>50.70</td> <td>54.00</td> <td>-3.30</td> <td>41.09</td> <td>34.54</td> <td>7.92</td> <td>32.85</td> <td>100</td> <td>301</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5149.76	50.70	54.00	-3.30	41.09	34.54	7.92	32.85	100	301	AVERAGE	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 1 Setting : 6M Power setting 17 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>97.93</td> <td>-----</td> <td>-----</td> <td>88.36</td> <td>34.53</td> <td>7.94</td> <td>32.90</td> <td>100</td> <td>301</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5180.00	97.93	-----	-----	88.36	34.53	7.94	32.90	100	301	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																					
							deg																																																																																					
1	5149.76	50.70	54.00	-3.30	41.09	34.54	7.92	32.85	100	301	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																					
							deg																																																																																					
1	5180.00	97.93	-----	-----	88.36	34.53	7.94	32.90	100	301	AVERAGE																																																																																	

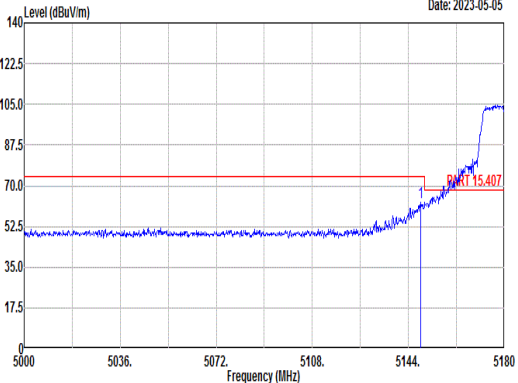
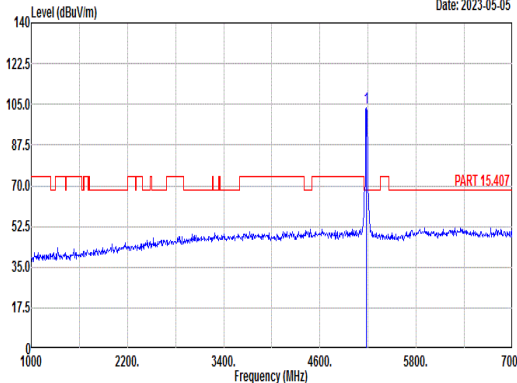
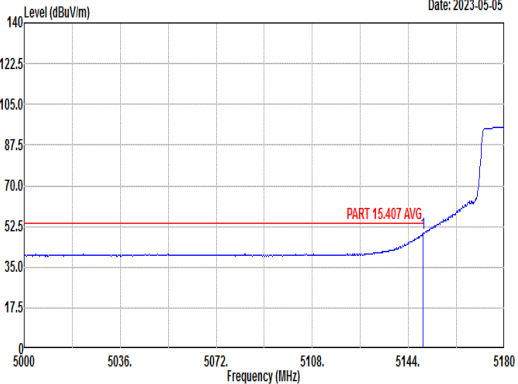
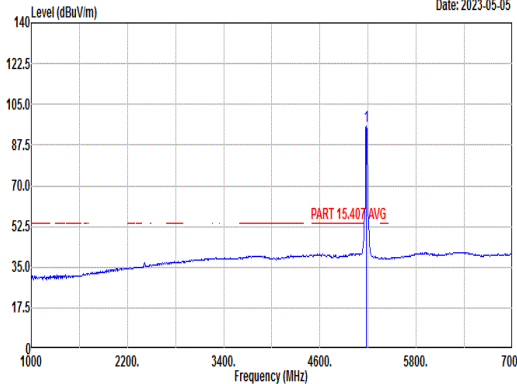


Mode	1																																																																										
	Band Edge																																																																										
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																										
ANT	1																																																																										
Pol.	Vertical	Fundamental																																																																									
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a signal level rising from approximately 50 dBuV/m at 5000 MHz to about 100 dBuV/m at 5180 MHz. A red horizontal line indicates a limit at 70.0 dBuV/m. A peak is labeled 'PART 15.407' at approximately 5144 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 1 Setting : 6W Power setting 17 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.68</td> <td>62.61</td> <td>74.00</td> <td>-11.39</td> <td>52.99</td> <td>34.54</td> <td>7.92</td> <td>32.84</td> <td>374</td> <td>283</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5148.68	62.61	74.00	-11.39	52.99	34.54	7.92	32.84	374	283	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level rising from approximately 40 dBuV/m at 1000 MHz to about 100 dBuV/m at 5180 MHz. A red horizontal line indicates a limit at 70.0 dBuV/m. A peak is labeled 'PART 15.407' at approximately 5144 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 1 Setting : 6W Power setting 17 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>103.63</td> <td>-----</td> <td>94.05</td> <td>34.53</td> <td>7.94</td> <td>32.89</td> <td>374</td> <td>283</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5180.00	103.63	-----	94.05	34.53	7.94	32.89	374	283	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																				
1	5148.68	62.61	74.00	-11.39	52.99	34.54	7.92	32.84	374	283	PEAK																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																				
1	5180.00	103.63	-----	94.05	34.53	7.94	32.89	374	283	PEAK																																																																	
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a signal level rising from approximately 40 dBuV/m at 5000 MHz to about 100 dBuV/m at 5180 MHz. A red horizontal line indicates a limit at 52.5 dBuV/m. A peak is labeled 'PART 15.407 AVG' at approximately 5144 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 1 Setting : 6W Power setting 17 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.58</td> <td>49.68</td> <td>54.00</td> <td>-4.32</td> <td>40.07</td> <td>34.54</td> <td>7.92</td> <td>32.85</td> <td>374</td> <td>283</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5149.58	49.68	54.00	-4.32	40.07	34.54	7.92	32.85	374	283	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level rising from approximately 40 dBuV/m at 1000 MHz to about 100 dBuV/m at 5180 MHz. A red horizontal line indicates a limit at 52.5 dBuV/m. A peak is labeled 'PART 15.407 AVG' at approximately 5144 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 1 Setting : 6W Power setting 17 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>95.38</td> <td>-----</td> <td>85.80</td> <td>34.53</td> <td>7.94</td> <td>32.89</td> <td>374</td> <td>283</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5180.00	95.38	-----	85.80	34.53	7.94	32.89	374	283	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																				
1	5149.58	49.68	54.00	-4.32	40.07	34.54	7.92	32.85	374	283	AVERAGE																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																				
1	5180.00	95.38	-----	85.80	34.53	7.94	32.89	374	283	AVERAGE																																																																	



Mode	1																																																																																								
	Harmonic																																																																																								
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																								
ANT	1																																																																																								
Pol.	Horizontal	Vertical																																																																																							
Peak Avg	<p style="text-align: right;">Date: 2023-05-11</p>	<p style="text-align: right;">Date: 2023-05-11</p>																																																																																							
	<p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL Mode : 1 Setting : 6W Power setting 17 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>48.68</td> <td>68.30</td> <td>-19.62</td> <td>51.41</td> <td>39.72</td> <td>10.73</td> <td>53.18</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>50.34</td> <td>74.00</td> <td>-23.66</td> <td>50.28</td> <td>41.74</td> <td>12.72</td> <td>54.40</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10360.00	48.68	68.30	-19.62	51.41	39.72	10.73	53.18	---	Peak	2	15540.00	50.34	74.00	-23.66	50.28	41.74	12.72	54.40	---	Peak	<p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL Mode : 1 Setting : 6W Power setting 17 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>49.55</td> <td>68.30</td> <td>-18.75</td> <td>52.28</td> <td>39.72</td> <td>10.73</td> <td>53.18</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>50.54</td> <td>74.00</td> <td>-23.46</td> <td>50.48</td> <td>41.74</td> <td>12.72</td> <td>54.40</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10360.00	49.55	68.30	-18.75	52.28	39.72	10.73	53.18	---	Peak	2	15540.00	50.54	74.00	-23.46	50.48	41.74	12.72	54.40	---
Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	10360.00	48.68	68.30	-19.62	51.41	39.72	10.73	53.18	---	Peak																																																																															
2	15540.00	50.34	74.00	-23.66	50.28	41.74	12.72	54.40	---	Peak																																																																															
Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	10360.00	49.55	68.30	-18.75	52.28	39.72	10.73	53.18	---	Peak																																																																															
2	15540.00	50.54	74.00	-23.46	50.48	41.74	12.72	54.40	---	Peak																																																																															

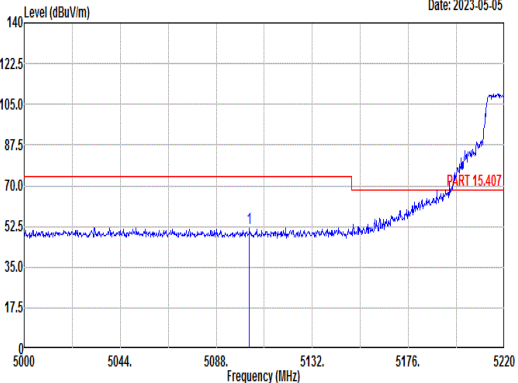
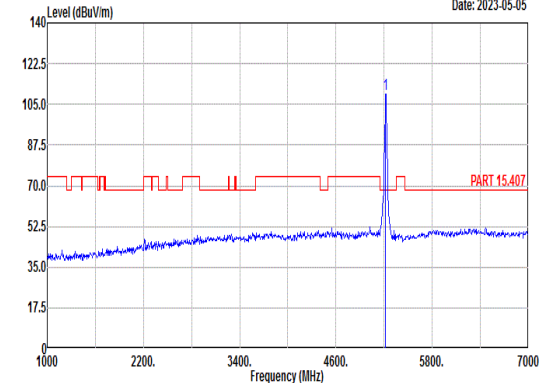
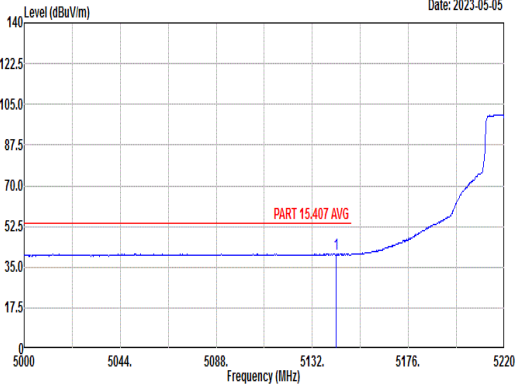
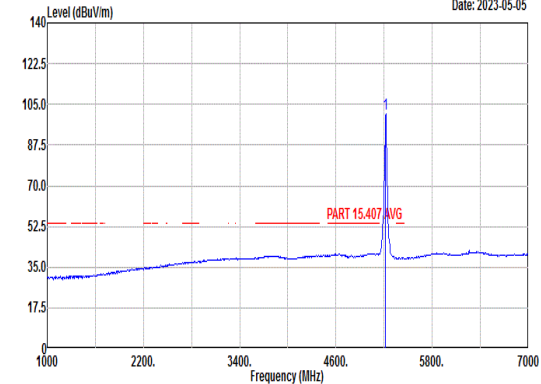


Mode	2																																																													
	Band Edge - L																																																													
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																													
ANT	1																																																													
Pol.	Horizontal	Fundamental																																																												
Peak	 <p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 2 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5103.18</td> <td>51.74</td> <td>74.00</td> <td>-22.26</td> <td>42.06</td> <td>34.56</td> <td>7.89</td> <td>32.77</td> <td>100</td> <td>298</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5103.18	51.74	74.00	-22.26	42.06	34.56	7.89	32.77	100	298	PEAK	 <p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 2 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5220.00</td> <td>109.53</td> <td>-----</td> <td>100.00</td> <td>34.51</td> <td>7.99</td> <td>32.97</td> <td>100</td> <td>298</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5220.00	109.53	-----	100.00	34.51	7.99	32.97	100	298	PEAK
	Limit	Read	Ant	Cable	APos	TPos	Remark																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg																																																				
1	5103.18	51.74	74.00	-22.26	42.06	34.56	7.89	32.77	100	298	PEAK																																																			
Limit	Margin	Read	Ant	Cable	APos	TPos	Remark																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg																																																				
1	5220.00	109.53	-----	100.00	34.51	7.99	32.97	100	298	PEAK																																																				
Avg	 <p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 2 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5143.00</td> <td>40.82</td> <td>54.00</td> <td>-13.18</td> <td>31.20</td> <td>34.54</td> <td>7.91</td> <td>32.83</td> <td>100</td> <td>298</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5143.00	40.82	54.00	-13.18	31.20	34.54	7.91	32.83	100	298	AVERAGE	 <p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 2 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5220.00</td> <td>100.81</td> <td>-----</td> <td>91.28</td> <td>34.51</td> <td>7.99</td> <td>32.97</td> <td>100</td> <td>298</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5220.00	100.81	-----	91.28	34.51	7.99	32.97	100	298	AVERAGE
Limit	Read	Ant	Cable	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg																																																				
1	5143.00	40.82	54.00	-13.18	31.20	34.54	7.91	32.83	100	298	AVERAGE																																																			
Limit	Margin	Read	Ant	Cable	APos	TPos	Remark																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg																																																				
1	5220.00	100.81	-----	91.28	34.51	7.99	32.97	100	298	AVERAGE																																																				



Mode	2																																					
	Band Edge - R																																					
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																					
ANT	1																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 2 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5389.44</td> <td>50.31</td> <td>74.00</td> <td>-23.69</td> <td>40.67</td> <td>34.44</td> <td>8.43</td> <td>33.23</td> <td>100</td> <td>298</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5389.44	50.31	74.00	-23.69	40.67	34.44	8.43	33.23	100	298	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5389.44	50.31	74.00	-23.69	40.67	34.44	8.43	33.23	100	298	PEAK																											
Avg	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 2 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5381.04</td> <td>39.14</td> <td>54.00</td> <td>-14.86</td> <td>29.50</td> <td>34.45</td> <td>8.41</td> <td>33.22</td> <td>100</td> <td>298</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5381.04	39.14	54.00	-14.86	29.50	34.45	8.41	33.22	100	298	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5381.04	39.14	54.00	-14.86	29.50	34.45	8.41	33.22	100	298	AVERAGE																											

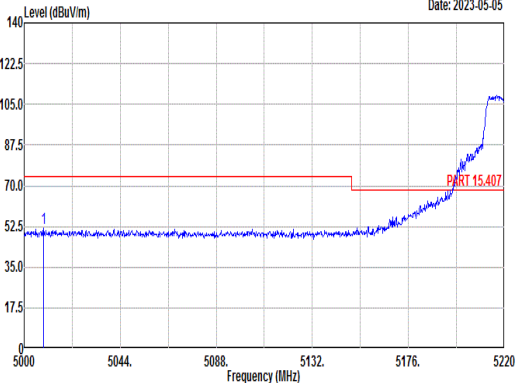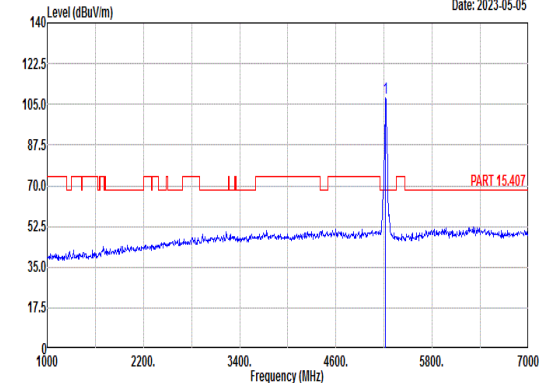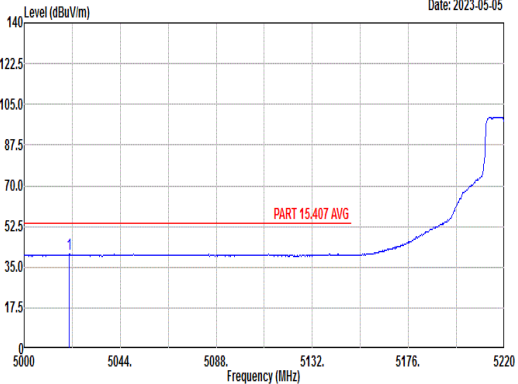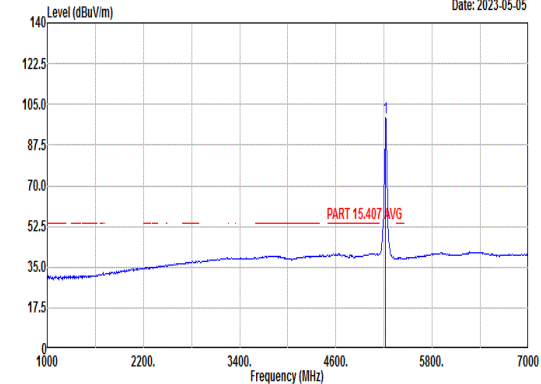

Mode	2																																																															
	Band Edge - L																																																															
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																															
ANT	1																																																															
Pol.	Vertical	Fundamental																																																														
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a signal level around 50 dBuV/m with a sharp peak at 5220 MHz reaching approximately 105 dBuV/m. A red horizontal line indicates the limit at 70.0 dBuV/m. The plot is dated 2023-05-05.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 2 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5009.02</td> <td>51.57</td> <td>74.00</td> <td>-22.43</td> <td>41.76</td> <td>34.60</td> <td>7.83</td> <td>32.62</td> <td>325</td> <td>268</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	PEAK	1	5009.02	51.57	74.00	-22.43	41.76	34.60	7.83	32.62	325	268	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level around 50 dBuV/m with a sharp peak at 5220 MHz reaching approximately 105 dBuV/m. A red horizontal line indicates the limit at 70.0 dBuV/m. The plot is dated 2023-05-05.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 2 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5220.00</td> <td>107.64</td> <td>-----</td> <td>98.11</td> <td>34.51</td> <td>7.98</td> <td>32.96</td> <td>325</td> <td>268</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	PEAK	1	5220.00	107.64	-----	98.11	34.51	7.98	32.96	325	268	PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	PEAK																																																					
1	5009.02	51.57	74.00	-22.43	41.76	34.60	7.83	32.62	325	268	PEAK																																																					
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	PEAK																																																					
1	5220.00	107.64	-----	98.11	34.51	7.98	32.96	325	268	PEAK																																																						
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a signal level around 50 dBuV/m with a sharp peak at 5220 MHz reaching approximately 105 dBuV/m. A red horizontal line indicates the limit at 52.5 dBuV/m. The plot is dated 2023-05-05.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 2 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5020.68</td> <td>40.65</td> <td>54.00</td> <td>-13.35</td> <td>30.87</td> <td>34.59</td> <td>7.83</td> <td>32.64</td> <td>325</td> <td>268</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	AVERAGE	1	5020.68	40.65	54.00	-13.35	30.87	34.59	7.83	32.64	325	268	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level around 50 dBuV/m with a sharp peak at 5220 MHz reaching approximately 105 dBuV/m. A red horizontal line indicates the limit at 52.5 dBuV/m. The plot is dated 2023-05-05.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 2 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5220.00</td> <td>99.46</td> <td>-----</td> <td>89.93</td> <td>34.51</td> <td>7.98</td> <td>32.96</td> <td>325</td> <td>268</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	AVERAGE	1	5220.00	99.46	-----	89.93	34.51	7.98	32.96	325	268	AVERAGE
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	AVERAGE																																																					
1	5020.68	40.65	54.00	-13.35	30.87	34.59	7.83	32.64	325	268	AVERAGE																																																					
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	AVERAGE																																																					
1	5220.00	99.46	-----	89.93	34.51	7.98	32.96	325	268	AVERAGE																																																						



Mode	2																																					
	Band Edge - R																																					
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																					
ANT	1																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 2 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5415.60</td> <td>51.18</td> <td>74.00</td> <td>-22.82</td> <td>41.56</td> <td>34.43</td> <td>8.47</td> <td>33.28</td> <td>325</td> <td>268</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5415.60	51.18	74.00	-22.82	41.56	34.43	8.47	33.28	325	268	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5415.60	51.18	74.00	-22.82	41.56	34.43	8.47	33.28	325	268	PEAK																											
Avg	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 2 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5382.96</td> <td>38.95</td> <td>54.00</td> <td>-15.05</td> <td>29.30</td> <td>34.45</td> <td>8.42</td> <td>33.22</td> <td>325</td> <td>268</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5382.96	38.95	54.00	-15.05	29.30	34.45	8.42	33.22	325	268	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5382.96	38.95	54.00	-15.05	29.30	34.45	8.42	33.22	325	268	AVERAGE																											



Mode	2																																																																																									
	Harmonic																																																																																									
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak Avg	<p style="text-align: right;">Date: 2023-05-11</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL Mode : 2 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>48.50</td> <td>68.30</td> <td>-19.80</td> <td>51.23</td> <td>39.76</td> <td>10.79</td> <td>53.28</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>50.24</td> <td>74.00</td> <td>-23.76</td> <td>50.22</td> <td>41.86</td> <td>12.72</td> <td>54.56</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10440.00	48.50	68.30	-19.80	51.23	39.76	10.79	53.28	---	Peak	2	15660.00	50.24	74.00	-23.76	50.22	41.86	12.72	54.56	---	Peak	<p style="text-align: right;">Date: 2023-05-11</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL Mode : 2 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>49.52</td> <td>68.30</td> <td>-18.78</td> <td>52.25</td> <td>39.76</td> <td>10.79</td> <td>53.28</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>50.87</td> <td>74.00</td> <td>-23.13</td> <td>50.85</td> <td>41.86</td> <td>12.72</td> <td>54.56</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10440.00	49.52	68.30	-18.78	52.25	39.76	10.79	53.28	---	Peak	2	15660.00	50.87	74.00	-23.13	50.85	41.86	12.72	54.56	---	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	10440.00	48.50	68.30	-19.80	51.23	39.76	10.79	53.28	---	Peak																																																																																
2	15660.00	50.24	74.00	-23.76	50.22	41.86	12.72	54.56	---	Peak																																																																																
Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	10440.00	49.52	68.30	-18.78	52.25	39.76	10.79	53.28	---	Peak																																																																																
2	15660.00	50.87	74.00	-23.13	50.85	41.86	12.72	54.56	---	Peak																																																																																







3																																																																					
Mode	Band Edge - L																																																																				
U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																					
ANT	1																																																																				
Pol.	Horizontal																																																																				
Peak	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 3 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5038.40</td> <td>51.69</td> <td>74.00</td> <td>-22.31</td> <td>41.94</td> <td>34.58</td> <td>7.84 32.67 100 299</td> <td>PEAK</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 3 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>107.89</td> <td>-----</td> <td>-----</td> <td>98.35</td> <td>34.50</td> <td>8.04 33.00 100 299</td> <td>PEAK</td> </tr> </tbody> </table> </div> </div>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg	1	5038.40	51.69	74.00	-22.31	41.94	34.58	7.84 32.67 100 299	PEAK	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg	1	5240.00	107.89	-----	-----	98.35	34.50	8.04 33.00 100 299	PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg																																																														
1	5038.40	51.69	74.00	-22.31	41.94	34.58	7.84 32.67 100 299	PEAK																																																													
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg																																																														
1	5240.00	107.89	-----	-----	98.35	34.50	8.04 33.00 100 299	PEAK																																																													
Avg	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 3 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5016.56</td> <td>40.68</td> <td>54.00</td> <td>-13.32</td> <td>30.89</td> <td>34.59</td> <td>7.83 32.63 100 299</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 3 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>99.21</td> <td>-----</td> <td>-----</td> <td>89.65</td> <td>34.50</td> <td>8.06 33.00 100 299</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> </div>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg	1	5016.56	40.68	54.00	-13.32	30.89	34.59	7.83 32.63 100 299	AVERAGE	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg	1	5240.00	99.21	-----	-----	89.65	34.50	8.06 33.00 100 299	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																														
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg																																																														
1	5016.56	40.68	54.00	-13.32	30.89	34.59	7.83 32.63 100 299	AVERAGE																																																													
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg																																																														
1	5240.00	99.21	-----	-----	89.65	34.50	8.06 33.00 100 299	AVERAGE																																																													



	3																																					
Mode	Band Edge - R																																					
ANT	1																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 3 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5396.86</td> <td>50.31</td> <td>74.00</td> <td>-23.69</td> <td>40.67</td> <td>34.44</td> <td>8.45</td> <td>33.25</td> <td>100</td> <td>299</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5396.86	50.31	74.00	-23.69	40.67	34.44	8.45	33.25	100	299	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																															
1	5396.86	50.31	74.00	-23.69	40.67	34.44	8.45	33.25	100	299	PEAK																											
Avg	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 3 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5399.94</td> <td>39.05</td> <td>54.00</td> <td>-14.95</td> <td>29.40</td> <td>34.44</td> <td>8.46</td> <td>33.25</td> <td>100</td> <td>299</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5399.94	39.05	54.00	-14.95	29.40	34.44	8.46	33.25	100	299	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																															
1	5399.94	39.05	54.00	-14.95	29.40	34.44	8.46	33.25	100	299	AVERAGE																											

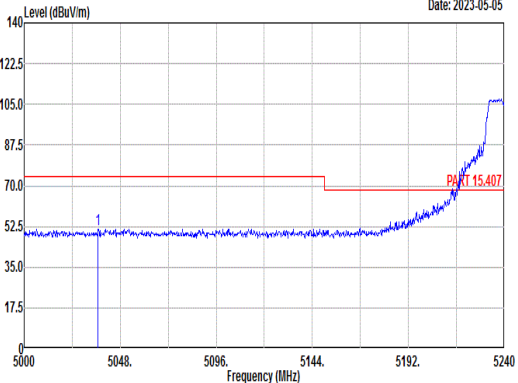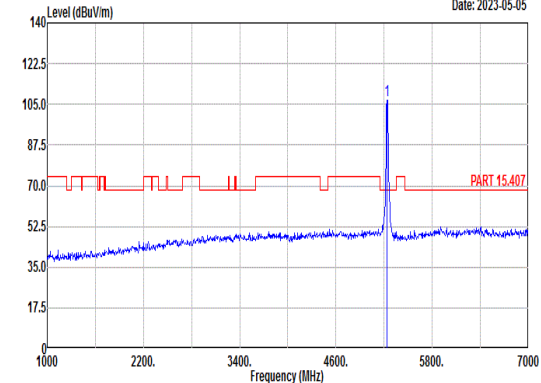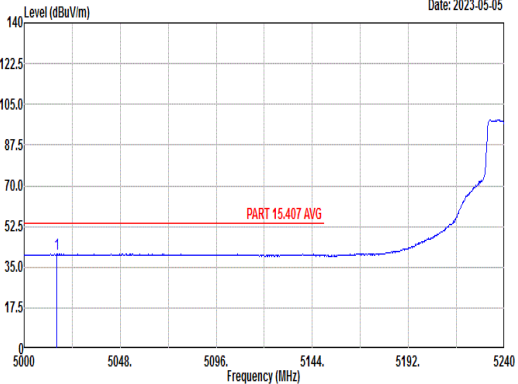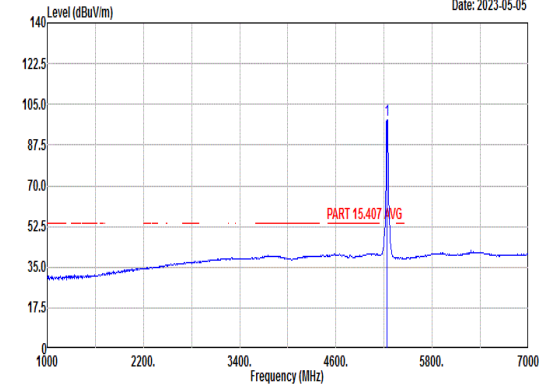

		3																																																								
Mode	Band Edge - L																																																									
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																									
ANT	1																																																									
Pol.	Vertical	Fundamental																																																								
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 5000 to 5240 MHz. A red horizontal line indicates the limit at 70.0 dBuV/m. A blue peak is labeled 'PART 15.407' at approximately 5235 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 3 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5036.96</td> <td>51.49</td> <td>74.00</td> <td>-22.51</td> <td>41.72</td> <td>34.59</td> <td>7.84</td> <td>32.66</td> <td>325</td> <td>268</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	1	5036.96	51.49	74.00	-22.51	41.72	34.59	7.84	32.66	325	268	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz. A red horizontal line indicates the limit at 70.0 dBuV/m. A blue peak is labeled 'PART 15.407' at approximately 5235 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 3 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>106.61</td> <td>-----</td> <td>97.07</td> <td>34.51</td> <td>8.02</td> <td>32.99</td> <td>325</td> <td>268</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	cm	deg	1	5240.00	106.61	-----	97.07	34.51	8.02	32.99	325	268	PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																		
1	5036.96	51.49	74.00	-22.51	41.72	34.59	7.84	32.66	325	268	PEAK																																															
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	cm	deg																																																		
1	5240.00	106.61	-----	97.07	34.51	8.02	32.99	325	268	PEAK																																																
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 5000 to 5240 MHz. A red horizontal line indicates the limit at 52.5 dBuV/m. A blue peak is labeled 'PART 15.407 AVG' at approximately 5235 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 3 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5016.32</td> <td>40.87</td> <td>54.00</td> <td>-13.13</td> <td>31.08</td> <td>34.59</td> <td>7.83</td> <td>32.63</td> <td>325</td> <td>268</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	1	5016.32	40.87	54.00	-13.13	31.08	34.59	7.83	32.63	325	268	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz. A red horizontal line indicates the limit at 52.5 dBuV/m. A blue peak is labeled 'PART 15.407 AVG' at approximately 5235 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 3 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>98.09</td> <td>-----</td> <td>88.55</td> <td>34.51</td> <td>8.02</td> <td>32.99</td> <td>325</td> <td>268</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	cm	deg	1	5240.00	98.09	-----	88.55	34.51	8.02	32.99	325	268	AVERAGE
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																		
1	5016.32	40.87	54.00	-13.13	31.08	34.59	7.83	32.63	325	268	AVERAGE																																															
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	cm	deg																																																		
1	5240.00	98.09	-----	88.55	34.51	8.02	32.99	325	268	AVERAGE																																																



Mode	3																																													
	Band Edge - R																																													
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																													
ANT	1																																													
Pol.	Vertical	Fundamental																																												
Peak	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 3 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5391.80</td> <td>51.01</td> <td>74.00</td> <td>-22.99</td> <td>41.37</td> <td>34.44</td> <td>8.44</td> <td>33.24</td> <td>325</td> <td>268</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB							cm	deg	1	5391.80	51.01	74.00	-22.99	41.37	34.44	8.44	33.24	325	268	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																							
						cm	deg																																							
1	5391.80	51.01	74.00	-22.99	41.37	34.44	8.44	33.24	325	268	PEAK																																			
Avg	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 3 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5404.34</td> <td>39.09</td> <td>54.00</td> <td>-14.91</td> <td>29.44</td> <td>34.44</td> <td>8.47</td> <td>33.26</td> <td>325</td> <td>268</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB							cm	deg	1	5404.34	39.09	54.00	-14.91	29.44	34.44	8.47	33.26	325	268	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																							
						cm	deg																																							
1	5404.34	39.09	54.00	-14.91	29.44	34.44	8.47	33.26	325	268	AVERAGE																																			



Mode	3																																																																																									
	Harmonic																																																																																									
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak Avg	<p style="text-align: right;">Date: 2023-05-11</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL Mode : 3 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>48.24</td> <td>68.30</td> <td>-20.06</td> <td>50.96</td> <td>39.79</td> <td>10.82</td> <td>53.33</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>49.88</td> <td>74.00</td> <td>-24.12</td> <td>49.89</td> <td>41.92</td> <td>12.71</td> <td>54.64</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10480.00	48.24	68.30	-20.06	50.96	39.79	10.82	53.33	---	Peak	2	15720.00	49.88	74.00	-24.12	49.89	41.92	12.71	54.64	---	Peak	<p style="text-align: right;">Date: 2023-05-11</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL Mode : 3 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>47.84</td> <td>68.30</td> <td>-20.46</td> <td>50.56</td> <td>39.79</td> <td>10.82</td> <td>53.33</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>49.88</td> <td>74.00</td> <td>-24.12</td> <td>49.89</td> <td>41.92</td> <td>12.71</td> <td>54.64</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10480.00	47.84	68.30	-20.46	50.56	39.79	10.82	53.33	---	Peak	2	15720.00	49.88	74.00	-24.12	49.89	41.92	12.71	54.64	---	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	10480.00	48.24	68.30	-20.06	50.96	39.79	10.82	53.33	---	Peak																																																																																
2	15720.00	49.88	74.00	-24.12	49.89	41.92	12.71	54.64	---	Peak																																																																																
Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	10480.00	47.84	68.30	-20.46	50.56	39.79	10.82	53.33	---	Peak																																																																																
2	15720.00	49.88	74.00	-24.12	49.89	41.92	12.71	54.64	---	Peak																																																																																







Mode	4																																																																																										
	Band Edge - L																																																																																										
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																										
ANT	1																																																																																										
Pol.	Horizontal	Fundamental																																																																																									
Peak	<p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 4 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5041.60</td> <td>51.58</td> <td>74.00</td> <td>-22.42</td> <td>41.82</td> <td>34.58</td> <td>7.85</td> <td>32.67</td> <td>358</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5041.60	51.58	74.00	-22.42	41.82	34.58	7.85	32.67	358	360	PEAK	<p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 4 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>104.00</td> <td>-----</td> <td>94.44</td> <td>34.50</td> <td>8.07</td> <td>33.01</td> <td>358</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5260.00	104.00	-----	94.44	34.50	8.07	33.01	358	360	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																				
							deg																																																																																				
1	5041.60	51.58	74.00	-22.42	41.82	34.58	7.85	32.67	358	360	PEAK																																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																				
							deg																																																																																				
1	5260.00	104.00	-----	94.44	34.50	8.07	33.01	358	360	PEAK																																																																																	
Avg	<p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 4 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5045.50</td> <td>40.74</td> <td>54.00</td> <td>-13.26</td> <td>30.99</td> <td>34.58</td> <td>7.85</td> <td>32.68</td> <td>358</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5045.50	40.74	54.00	-13.26	30.99	34.58	7.85	32.68	358	360	AVERAGE	<p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 4 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>95.98</td> <td>-----</td> <td>86.42</td> <td>34.49</td> <td>8.10</td> <td>33.03</td> <td>358</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5260.00	95.98	-----	86.42	34.49	8.10	33.03	358	360	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																				
							deg																																																																																				
1	5045.50	40.74	54.00	-13.26	30.99	34.58	7.85	32.68	358	360	AVERAGE																																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																				
							deg																																																																																				
1	5260.00	95.98	-----	86.42	34.49	8.10	33.03	358	360	AVERAGE																																																																																	



Mode	4																																					
	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																					
ANT	1																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 4 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5373.60</td> <td>50.14</td> <td>74.00</td> <td>-23.86</td> <td>40.51</td> <td>34.45</td> <td>8.39</td> <td>33.21</td> <td>358</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5373.60	50.14	74.00	-23.86	40.51	34.45	8.39	33.21	358	360	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5373.60	50.14	74.00	-23.86	40.51	34.45	8.39	33.21	358	360	PEAK																											
Avg	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 4 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5406.40</td> <td>38.93</td> <td>54.00</td> <td>-15.07</td> <td>29.27</td> <td>34.44</td> <td>8.48</td> <td>33.26</td> <td>358</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5406.40	38.93	54.00	-15.07	29.27	34.44	8.48	33.26	358	360	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5406.40	38.93	54.00	-15.07	29.27	34.44	8.48	33.26	358	360	AVERAGE																											

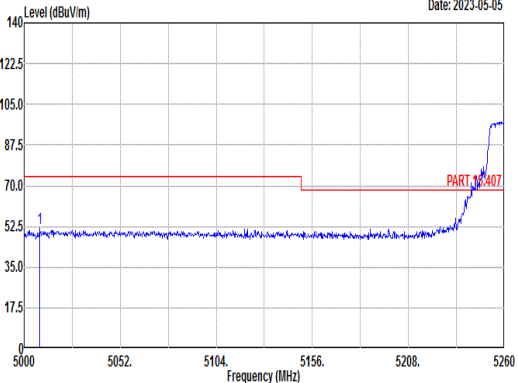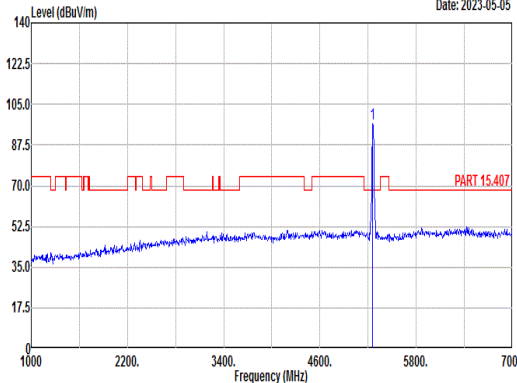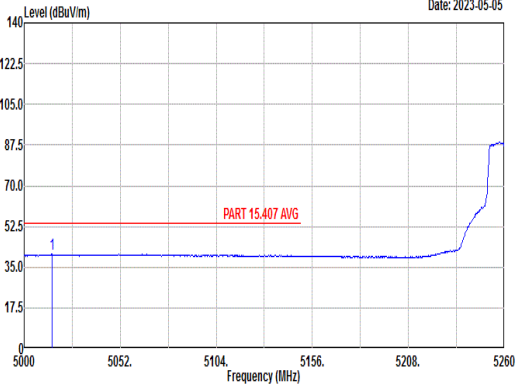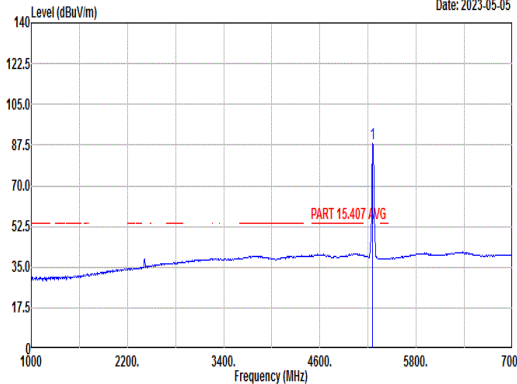

Mode	4																																																																																												
	Band Edge - L																																																																																												
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																												
ANT	1																																																																																												
Pol.	Vertical	Fundamental																																																																																											
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical mode. The plot shows a signal level around 52.5 dBuV/m with a sharp peak at 5260 MHz reaching approximately 90 dBuV/m. A red limit line is shown at 70 dBuV/m. The plot is dated 2023-05-05.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 4 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5008.58</td> <td>51.78</td> <td>74.00</td> <td>-22.22</td> <td>41.97</td> <td>34.60</td> <td>7.83</td> <td>32.62</td> <td>100</td> <td>331</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5008.58	51.78	74.00	-22.22	41.97	34.60	7.83	32.62	100	331	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental mode. The plot shows a signal level around 52.5 dBuV/m with a sharp peak at 5260 MHz reaching approximately 90 dBuV/m. A red limit line is shown at 70 dBuV/m. The plot is dated 2023-05-05.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 4 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>96.83</td> <td>-----</td> <td>87.26</td> <td>34.50</td> <td>8.09</td> <td>33.02</td> <td>100</td> <td>331</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg										1	5260.00	96.83	-----	87.26	34.50	8.09	33.02	100	331	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																						
							deg																																																																																						
1	5008.58	51.78	74.00	-22.22	41.97	34.60	7.83	32.62	100	331	PEAK																																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																					
1	5260.00	96.83	-----	87.26	34.50	8.09	33.02	100	331	PEAK																																																																																			
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical mode, Average. The plot shows a signal level around 52.5 dBuV/m with a sharp peak at 5260 MHz reaching approximately 90 dBuV/m. A red limit line is shown at 70 dBuV/m. The plot is dated 2023-05-05.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 4 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5015.08</td> <td>40.70</td> <td>54.00</td> <td>-13.30</td> <td>30.91</td> <td>34.59</td> <td>7.83</td> <td>32.63</td> <td>100</td> <td>331</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5015.08	40.70	54.00	-13.30	30.91	34.59	7.83	32.63	100	331	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental mode, Average. The plot shows a signal level around 52.5 dBuV/m with a sharp peak at 5260 MHz reaching approximately 90 dBuV/m. A red limit line is shown at 70 dBuV/m. The plot is dated 2023-05-05.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 4 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>88.31</td> <td>-----</td> <td>78.75</td> <td>34.50</td> <td>8.07</td> <td>33.01</td> <td>100</td> <td>331</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg										1	5260.00	88.31	-----	78.75	34.50	8.07	33.01	100	331	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																						
							deg																																																																																						
1	5015.08	40.70	54.00	-13.30	30.91	34.59	7.83	32.63	100	331	AVERAGE																																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																					
1	5260.00	88.31	-----	78.75	34.50	8.07	33.01	100	331	AVERAGE																																																																																			



Mode	4																																					
	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																					
ANT	1																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 4 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5372.80</td> <td>50.26</td> <td>74.00</td> <td>-23.74</td> <td>40.63</td> <td>34.45</td> <td>8.39</td> <td>33.21</td> <td>100</td> <td>331</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5372.80	50.26	74.00	-23.74	40.63	34.45	8.39	33.21	100	331	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5372.80	50.26	74.00	-23.74	40.63	34.45	8.39	33.21	100	331	PEAK																											
Avg	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 4 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5405.40</td> <td>38.90</td> <td>54.00</td> <td>-15.10</td> <td>29.24</td> <td>34.44</td> <td>8.48</td> <td>33.26</td> <td>100</td> <td>331</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5405.40	38.90	54.00	-15.10	29.24	34.44	8.48	33.26	100	331	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5405.40	38.90	54.00	-15.10	29.24	34.44	8.48	33.26	100	331	AVERAGE																											





Mode	4																																																																																																			
	Harmonic																																																																																																			
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal	Vertical																																																																																																		
Peak Avg	<p style="text-align: right;">Date: 2023-05-11</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL Mode : 4 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>49.08</td> <td>68.30</td> <td>-19.22</td> <td>51.80</td> <td>39.79</td> <td>10.82</td> <td>53.33</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>49.35</td> <td>74.00</td> <td>-24.65</td> <td>49.36</td> <td>41.92</td> <td>12.71</td> <td>54.64</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10480.00	49.08	68.30	-19.22	51.80	39.79	10.82	53.33	---	---	Peak	2	15720.00	49.35	74.00	-24.65	49.36	41.92	12.71	54.64	---	---	Peak	<p style="text-align: right;">Date: 2023-05-11</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL Mode : 4 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>48.37</td> <td>68.30</td> <td>-19.93</td> <td>51.09</td> <td>39.79</td> <td>10.82</td> <td>53.33</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>50.26</td> <td>74.00</td> <td>-23.74</td> <td>50.27</td> <td>41.92</td> <td>12.71</td> <td>54.64</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10480.00	48.37	68.30	-19.93	51.09	39.79	10.82	53.33	---	---	Peak	2	15720.00	50.26	74.00	-23.74	50.27	41.92	12.71	54.64	---	---	Peak
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																																													
Freq Level Line Margin	Level Factor	Loss Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	10480.00	49.08	68.30	-19.22	51.80	39.79	10.82	53.33	---	---	Peak																																																																																									
2	15720.00	49.35	74.00	-24.65	49.36	41.92	12.71	54.64	---	---	Peak																																																																																									
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																																														
Freq Level Line Margin	Level Factor	Loss Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	10480.00	48.37	68.30	-19.93	51.09	39.79	10.82	53.33	---	---	Peak																																																																																									
2	15720.00	50.26	74.00	-23.74	50.27	41.92	12.71	54.64	---	---	Peak																																																																																									







5																																																																																													
Mode	Band Edge - L																																																																																												
U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																													
ANT	1																																																																																												
Pol.	Horizontal																																																																																												
Peak	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 5 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5063.60</td> <td>51.56</td> <td>74.00</td> <td>-22.44</td> <td>41.84</td> <td>34.57</td> <td>7.86</td> <td>32.71</td> <td>239</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 5 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5300.00</td> <td>105.98</td> <td>-----</td> <td>-----</td> <td>96.38</td> <td>34.48</td> <td>8.22</td> <td>33.10</td> <td>239</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table> </div> </div>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5063.60	51.56	74.00	-22.44	41.84	34.57	7.86	32.71	239	360	PEAK	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg										1	5300.00	105.98	-----	-----	96.38	34.48	8.22	33.10	239	360	PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																						
							deg																																																																																						
1	5063.60	51.56	74.00	-22.44	41.84	34.57	7.86	32.71	239	360	PEAK																																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																					
1	5300.00	105.98	-----	-----	96.38	34.48	8.22	33.10	239	360	PEAK																																																																																		
Avg	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 5 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5047.10</td> <td>40.59</td> <td>54.00</td> <td>-13.41</td> <td>30.84</td> <td>34.58</td> <td>7.85</td> <td>32.68</td> <td>239</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 5 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5300.00</td> <td>97.54</td> <td>-----</td> <td>-----</td> <td>87.96</td> <td>34.48</td> <td>8.18</td> <td>33.08</td> <td>239</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> </div>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5047.10	40.59	54.00	-13.41	30.84	34.58	7.85	32.68	239	360	AVERAGE	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg										1	5300.00	97.54	-----	-----	87.96	34.48	8.18	33.08	239	360	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																						
							deg																																																																																						
1	5047.10	40.59	54.00	-13.41	30.84	34.58	7.85	32.68	239	360	AVERAGE																																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																					
1	5300.00	97.54	-----	-----	87.96	34.48	8.18	33.08	239	360	AVERAGE																																																																																		

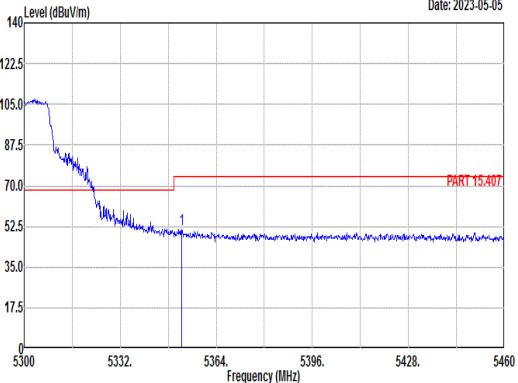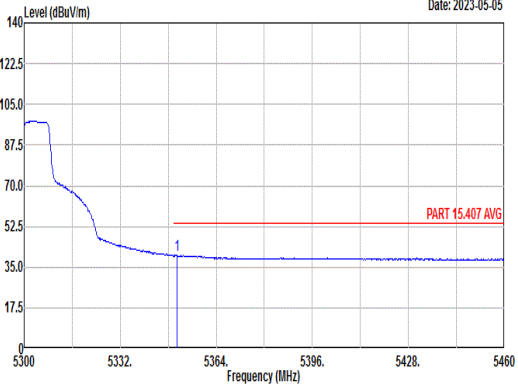

	5																																	
Mode	Band Edge - R																																	
ANT	1																																	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																	
Pol.	Horizontal	Fundamental																																
Peak	 <p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 5 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.48</td> <td>51.34</td> <td>74.00</td> <td>-22.66</td> <td>41.72</td> <td>34.46</td> <td>8.33 33.17 239 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5352.48	51.34	74.00	-22.66	41.72	34.46	8.33 33.17 239 360 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																											
1	5352.48	51.34	74.00	-22.66	41.72	34.46	8.33 33.17 239 360 PEAK																											
Avg	 <p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 5 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.88</td> <td>40.35</td> <td>54.00</td> <td>-13.65</td> <td>30.73</td> <td>34.46</td> <td>8.33 33.17 239 360 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5350.88	40.35	54.00	-13.65	30.73	34.46	8.33 33.17 239 360 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																											
1	5350.88	40.35	54.00	-13.65	30.73	34.46	8.33 33.17 239 360 AVERAGE																											

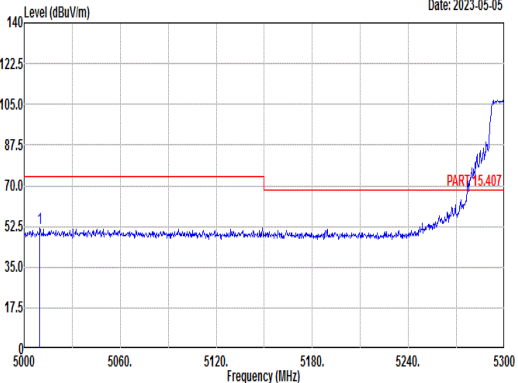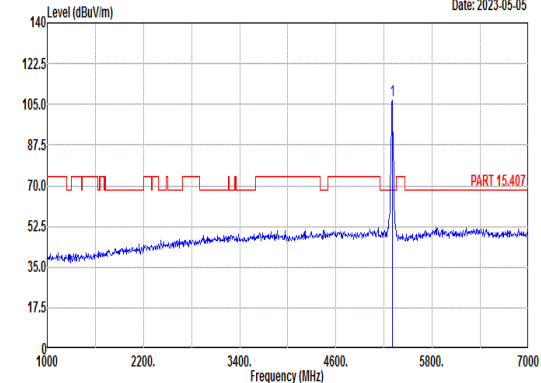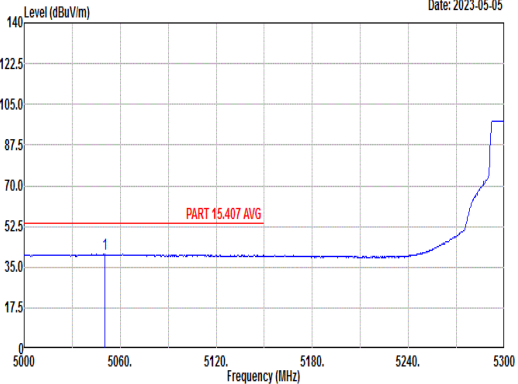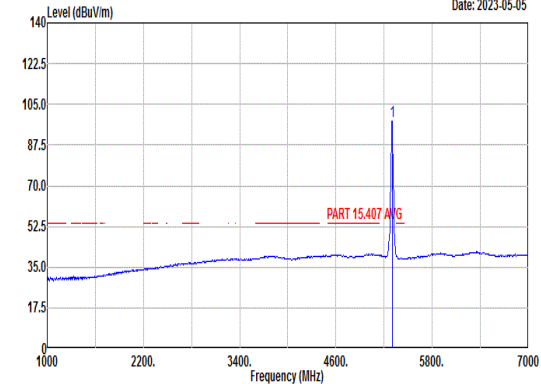

		5																																																																																												
Mode	Band Edge - L																																																																																													
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																													
ANT	1																																																																																													
Pol.	Vertical	Fundamental																																																																																												
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. The plot shows a rising signal at the band edge, with a red horizontal line at 70.0 dBuV/m labeled 'PART 15.407'. The x-axis ranges from 5000 to 5300 MHz, and the y-axis ranges from 0 to 140 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 5 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5009.90</td> <td>51.89</td> <td>74.00</td> <td>-22.11</td> <td>42.08</td> <td>34.60</td> <td>7.83</td> <td>32.62</td> <td>200</td> <td>280</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5009.90	51.89	74.00	-22.11	42.08	34.60	7.83	32.62	200	280	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a sharp peak at approximately 5300 MHz, with a red horizontal line at 70.0 dBuV/m labeled 'PART 15.407'. The x-axis ranges from 1000 to 7000 MHz, and the y-axis ranges from 0 to 140 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 5 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5300.00</td> <td>106.52</td> <td>-----</td> <td>-----</td> <td>96.93</td> <td>34.48</td> <td>8.20</td> <td>33.09</td> <td>200</td> <td>280</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm									deg	1	5300.00	106.52	-----	-----	96.93	34.48	8.20	33.09	200	280	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																							
							deg																																																																																							
1	5009.90	51.89	74.00	-22.11	42.08	34.60	7.83	32.62	200	280	PEAK																																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm																																																																																						
								deg																																																																																						
1	5300.00	106.52	-----	-----	96.93	34.48	8.20	33.09	200	280	PEAK																																																																																			
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization, averaged. The plot shows a rising signal at the band edge, with a red horizontal line at 52.5 dBuV/m labeled 'PART 15.407 AVG'. The x-axis ranges from 5000 to 5300 MHz, and the y-axis ranges from 0 to 140 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 5 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5050.40</td> <td>40.54</td> <td>54.00</td> <td>-13.46</td> <td>30.79</td> <td>34.58</td> <td>7.85</td> <td>32.68</td> <td>200</td> <td>280</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5050.40	40.54	54.00	-13.46	30.79	34.58	7.85	32.68	200	280	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization, averaged. The plot shows a sharp peak at approximately 5300 MHz, with a red horizontal line at 52.5 dBuV/m labeled 'PART 15.407 AVG'. The x-axis ranges from 1000 to 7000 MHz, and the y-axis ranges from 0 to 140 dBuV/m.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 5 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5300.00</td> <td>97.96</td> <td>-----</td> <td>-----</td> <td>88.38</td> <td>34.48</td> <td>8.18</td> <td>33.08</td> <td>200</td> <td>280</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm									deg	1	5300.00	97.96	-----	-----	88.38	34.48	8.18	33.08	200	280	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																							
							deg																																																																																							
1	5050.40	40.54	54.00	-13.46	30.79	34.58	7.85	32.68	200	280	AVERAGE																																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dB	dB/m	dB	dB	cm																																																																																						
								deg																																																																																						
1	5300.00	97.96	-----	-----	88.38	34.48	8.18	33.08	200	280	AVERAGE																																																																																			



Mode	5																																													
	Band Edge - R																																													
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																													
ANT	1																																													
Pol.	Vertical	Fundamental																																												
Peak	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 5 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5352.64</td> <td>50.54</td> <td>74.00</td> <td>-23.46</td> <td>40.91</td> <td>34.46</td> <td>8.34</td> <td>33.17</td> <td>200</td> <td>280</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB							cm	deg	1	5352.64	50.54	74.00	-23.46	40.91	34.46	8.34	33.17	200	280	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																							
						cm	deg																																							
1	5352.64	50.54	74.00	-23.46	40.91	34.46	8.34	33.17	200	280	PEAK																																			
Avg	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 5 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.72</td> <td>39.92</td> <td>54.00</td> <td>-14.08</td> <td>30.30</td> <td>34.46</td> <td>8.33</td> <td>33.17</td> <td>200</td> <td>280</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB							cm	deg	1	5350.72	39.92	54.00	-14.08	30.30	34.46	8.33	33.17	200	280	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																							
						cm	deg																																							
1	5350.72	39.92	54.00	-14.08	30.30	34.46	8.33	33.17	200	280	AVERAGE																																			







Mode	5																																																																																									
	Harmonic																																																																																									
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak Avg	<p style="text-align: right;">Date: 2023-05-11</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL Mode : 5 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>48.41</td> <td>74.00</td> <td>-25.59</td> <td>51.25</td> <td>39.74</td> <td>10.91</td> <td>53.49</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>49.90</td> <td>74.00</td> <td>-24.10</td> <td>49.97</td> <td>42.10</td> <td>12.71</td> <td>54.88</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10600.00	48.41	74.00	-25.59	51.25	39.74	10.91	53.49	---	Peak	2	15900.00	49.90	74.00	-24.10	49.97	42.10	12.71	54.88	---	Peak	<p style="text-align: right;">Date: 2023-05-11</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL Mode : 5 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>48.04</td> <td>74.00</td> <td>-25.96</td> <td>50.88</td> <td>39.74</td> <td>10.91</td> <td>53.49</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>49.55</td> <td>74.00</td> <td>-24.45</td> <td>49.62</td> <td>42.10</td> <td>12.71</td> <td>54.88</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10600.00	48.04	74.00	-25.96	50.88	39.74	10.91	53.49	---	Peak	2	15900.00	49.55	74.00	-24.45	49.62	42.10	12.71	54.88	---	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	APos	TPos	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	10600.00	48.41	74.00	-25.59	51.25	39.74	10.91	53.49	---	Peak																																																																																
2	15900.00	49.90	74.00	-24.10	49.97	42.10	12.71	54.88	---	Peak																																																																																
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	APos	TPos	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	10600.00	48.04	74.00	-25.96	50.88	39.74	10.91	53.49	---	Peak																																																																																
2	15900.00	49.55	74.00	-24.45	49.62	42.10	12.71	54.88	---	Peak																																																																																



Mode	6																																																																			
	Band Edge																																																																			
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																			
ANT	1																																																																			
Pol.	Horizontal	Fundamental																																																																		
Peak	<p style="text-align: right;">Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 6 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.92</td> <td>59.97</td> <td>74.00</td> <td>-14.03</td> <td>50.35</td> <td>34.46</td> <td>8.33 33.17 300 326</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg	1	5351.92	59.97	74.00	-14.03	50.35	34.46	8.33 33.17 300 326	PEAK	<p style="text-align: right;">Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 6 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>106.21</td> <td>-----</td> <td>-----</td> <td>96.62</td> <td>34.47 8.23 33.11</td> <td>300 326</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg	1	5320.00	106.21	-----	-----	96.62	34.47 8.23 33.11	300 326	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg																																																													
1	5351.92	59.97	74.00	-14.03	50.35	34.46	8.33 33.17 300 326	PEAK																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg																																																													
1	5320.00	106.21	-----	-----	96.62	34.47 8.23 33.11	300 326	PEAK																																																												
Avg	<p style="text-align: right;">Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 6 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.10</td> <td>46.45</td> <td>54.00</td> <td>-7.55</td> <td>36.83</td> <td>34.46</td> <td>8.33 33.17 300 326</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg	1	5350.10	46.45	54.00	-7.55	36.83	34.46	8.33 33.17 300 326	AVERAGE	<p style="text-align: right;">Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 6 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>96.90</td> <td>-----</td> <td>-----</td> <td>87.31</td> <td>34.47 8.23 33.11</td> <td>300 326</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg	1	5320.00	96.90	-----	-----	87.31	34.47 8.23 33.11	300 326	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg																																																													
1	5350.10	46.45	54.00	-7.55	36.83	34.46	8.33 33.17 300 326	AVERAGE																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg																																																													
1	5320.00	96.90	-----	-----	87.31	34.47 8.23 33.11	300 326	AVERAGE																																																												

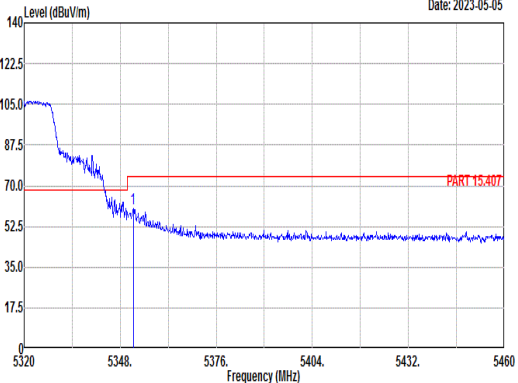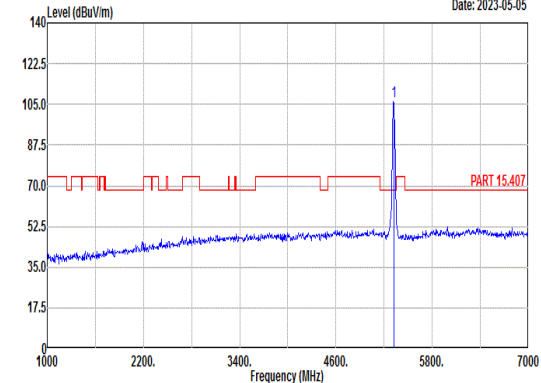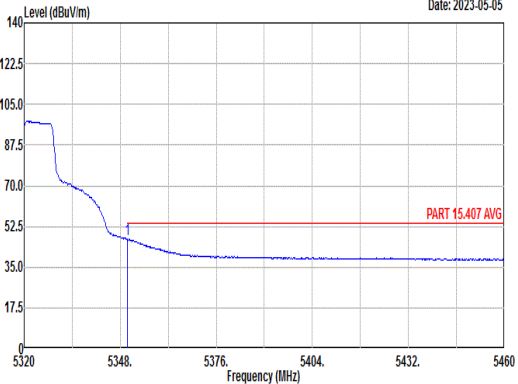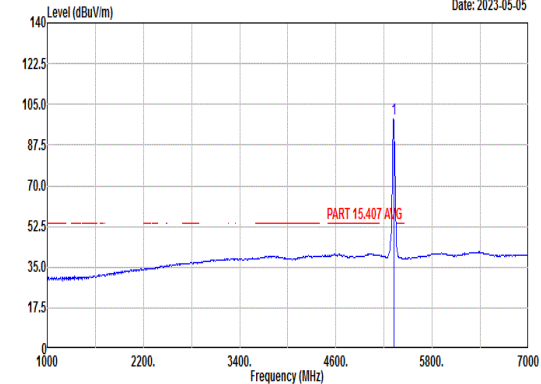

		6																																																																																												
Mode	Band Edge																																																																																													
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																													
ANT	1																																																																																													
Pol.	Vertical	Fundamental																																																																																												
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical mode. Peak at 5351.78 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 6 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.78</td> <td>60.14</td> <td>74.00</td> <td>-13.86</td> <td>50.52</td> <td>34.46</td> <td>8.33</td> <td>33.17</td> <td>251</td> <td>270</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5351.78	60.14	74.00	-13.86	50.52	34.46	8.33	33.17	251	270	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental mode. Peak at 5320.00 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 6 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>106.32</td> <td>-----</td> <td>-----</td> <td>96.73</td> <td>34.47</td> <td>8.23</td> <td>33.11</td> <td>251</td> <td>270</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg										1	5320.00	106.32	-----	-----	96.73	34.47	8.23	33.11	251	270	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																							
							deg																																																																																							
1	5351.78	60.14	74.00	-13.86	50.52	34.46	8.33	33.17	251	270	PEAK																																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																						
1	5320.00	106.32	-----	-----	96.73	34.47	8.23	33.11	251	270	PEAK																																																																																			
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical mode. Peak at 5350.10 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 6 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.10</td> <td>47.13</td> <td>54.00</td> <td>-6.87</td> <td>37.51</td> <td>34.46</td> <td>8.33</td> <td>33.17</td> <td>251</td> <td>270</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5350.10	47.13	54.00	-6.87	37.51	34.46	8.33	33.17	251	270	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental mode. Peak at 5320.00 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 6 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>98.56</td> <td>-----</td> <td>-----</td> <td>88.97</td> <td>34.47</td> <td>8.23</td> <td>33.11</td> <td>251</td> <td>270</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg										1	5320.00	98.56	-----	-----	88.97	34.47	8.23	33.11	251	270	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																							
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																							
							deg																																																																																							
1	5350.10	47.13	54.00	-6.87	37.51	34.46	8.33	33.17	251	270	AVERAGE																																																																																			
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																						
1	5320.00	98.56	-----	-----	88.97	34.47	8.23	33.11	251	270	AVERAGE																																																																																			







Mode	6																																																																																																	
	Harmonic																																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p style="text-align: right;">Date: 2023-05-11</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL Mode : 6 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>49.41</td> <td>74.00</td> <td>-24.59</td> <td>52.29</td> <td>39.72</td> <td>10.94</td> <td>53.54</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>49.17</td> <td>74.00</td> <td>-24.83</td> <td>49.27</td> <td>42.16</td> <td>12.70</td> <td>54.96</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10640.00	49.41	74.00	-24.59	52.29	39.72	10.94	53.54	---	---	Peak	2	15960.00	49.17	74.00	-24.83	49.27	42.16	12.70	54.96	---	---	Peak	<p style="text-align: right;">Date: 2023-05-11</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL Mode : 6 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>49.05</td> <td>74.00</td> <td>-24.95</td> <td>51.93</td> <td>39.72</td> <td>10.94</td> <td>53.54</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>49.02</td> <td>74.00</td> <td>-24.98</td> <td>49.12</td> <td>42.16</td> <td>12.70</td> <td>54.96</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10640.00	49.05	74.00	-24.95	51.93	39.72	10.94	53.54	---	---	Peak	2	15960.00	49.02	74.00	-24.98	49.12	42.16	12.70	54.96	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10640.00	49.41	74.00	-24.59	52.29	39.72	10.94	53.54	---	---	Peak																																																																																							
2	15960.00	49.17	74.00	-24.83	49.27	42.16	12.70	54.96	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10640.00	49.05	74.00	-24.95	51.93	39.72	10.94	53.54	---	---	Peak																																																																																							
2	15960.00	49.02	74.00	-24.98	49.12	42.16	12.70	54.96	---	---	Peak																																																																																							



Mode	7																																																		
	Band Edge																																																		
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																		
ANT	1																																																		
Pol.	Horizontal	Fundamental																																																	
Peak	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 7 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5457.85 60.14 74.00 -13.86</td> <td>50.65</td> <td>34.42</td> <td>8.41</td> <td>33.34</td> <td>102</td> <td>298 PEAK</td> </tr> <tr> <td>2 5469.55 65.18 68.30 -3.12</td> <td>55.73</td> <td>34.41</td> <td>8.40</td> <td>33.36</td> <td>102</td> <td>298 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	dB	dB	cm	deg	1 5457.85 60.14 74.00 -13.86	50.65	34.42	8.41	33.34	102	298 PEAK	2 5469.55 65.18 68.30 -3.12	55.73	34.41	8.40	33.36	102	298 PEAK	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 7 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5500.00 105.69</td> <td>96.33</td> <td>34.40</td> <td>8.36</td> <td>33.40</td> <td>102</td> <td>298 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	dB	dB	cm	deg	1 5500.00 105.69	96.33	34.40	8.36	33.40	102	298 PEAK
	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																												
Freq Level Line (dB)	Level Factor	Loss Factor	dB	dB	cm	deg																																													
1 5457.85 60.14 74.00 -13.86	50.65	34.42	8.41	33.34	102	298 PEAK																																													
2 5469.55 65.18 68.30 -3.12	55.73	34.41	8.40	33.36	102	298 PEAK																																													
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																													
Freq Level Line (dB)	Level Factor	Loss Factor	dB	dB	cm	deg																																													
1 5500.00 105.69	96.33	34.40	8.36	33.40	102	298 PEAK																																													
Avg	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 7 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5459.80 45.58 54.00 -8.42</td> <td>36.10</td> <td>34.42</td> <td>8.41</td> <td>33.35</td> <td>102</td> <td>298 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	dB	dB	cm	deg	1 5459.80 45.58 54.00 -8.42	36.10	34.42	8.41	33.35	102	298 AVERAGE	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 7 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5500.00 96.68</td> <td>87.32</td> <td>34.40</td> <td>8.36</td> <td>33.40</td> <td>102</td> <td>298 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	dB	dB	cm	deg	1 5500.00 96.68	87.32	34.40	8.36	33.40	102	298 AVERAGE							
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																													
Freq Level Line (dB)	Level Factor	Loss Factor	dB	dB	cm	deg																																													
1 5459.80 45.58 54.00 -8.42	36.10	34.42	8.41	33.35	102	298 AVERAGE																																													
Limit Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																													
Freq Level Line (dB)	Level Factor	Loss Factor	dB	dB	cm	deg																																													
1 5500.00 96.68	87.32	34.40	8.36	33.40	102	298 AVERAGE																																													

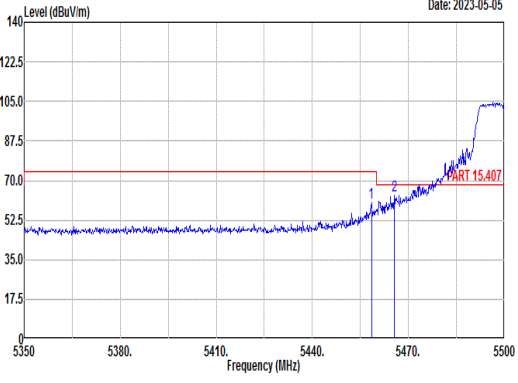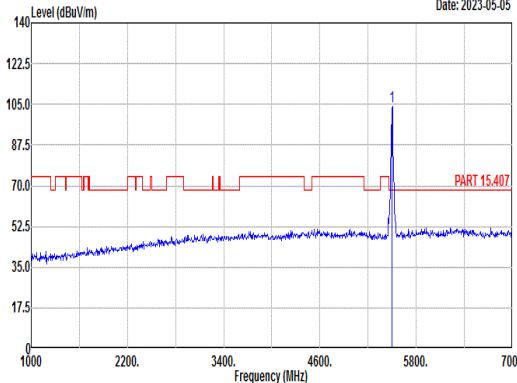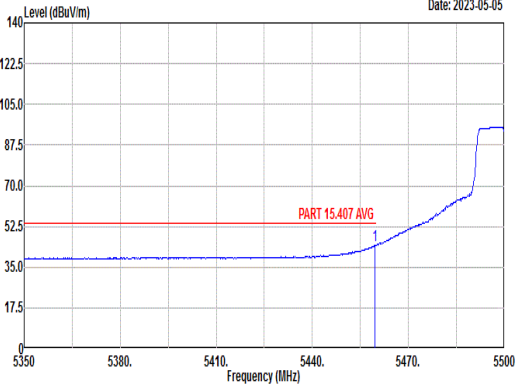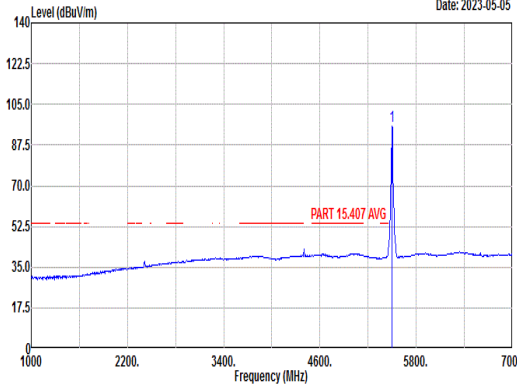

Mode	7																																																																									
	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																									
ANT	1																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 7 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.45</td> <td>60.07</td> <td>74.00</td> <td>-13.93</td> <td>50.59</td> <td>34.42</td> <td>8.41</td> <td>33.35</td> <td>199</td> <td>282</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5465.50</td> <td>63.19</td> <td>68.30</td> <td>-5.11</td> <td>53.74</td> <td>34.41</td> <td>8.40</td> <td>33.36</td> <td>199</td> <td>282</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	1	5458.45	60.07	74.00	-13.93	50.59	34.42	8.41	33.35	199	282	PEAK	2	5465.50	63.19	68.30	-5.11	53.74	34.41	8.40	33.36	199	282	PEAK	 <p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 7 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>103.99</td> <td>-----</td> <td>-----</td> <td>94.63</td> <td>34.41</td> <td>8.35</td> <td>33.40</td> <td>199</td> <td>282</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	1	5500.00	103.99	-----	-----	94.63	34.41	8.35	33.40	199	282	PEAK
	Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark																																																																			
Freq Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg																																																																
1	5458.45	60.07	74.00	-13.93	50.59	34.42	8.41	33.35	199	282	PEAK																																																															
2	5465.50	63.19	68.30	-5.11	53.74	34.41	8.40	33.36	199	282	PEAK																																																															
Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark																																																																				
Freq Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg																																																																
1	5500.00	103.99	-----	-----	94.63	34.41	8.35	33.40	199	282	PEAK																																																															
Avg	 <p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 7 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.65</td> <td>44.48</td> <td>54.00</td> <td>-9.52</td> <td>35.00</td> <td>34.42</td> <td>8.41</td> <td>33.35</td> <td>199</td> <td>282</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	1	5459.65	44.48	54.00	-9.52	35.00	34.42	8.41	33.35	199	282	AVERAGE	 <p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 7 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>95.41</td> <td>-----</td> <td>-----</td> <td>86.05</td> <td>34.40</td> <td>8.36</td> <td>33.40</td> <td>199</td> <td>282</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	1	5500.00	95.41	-----	-----	86.05	34.40	8.36	33.40	199	282	AVERAGE												
Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark																																																																				
Freq Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg																																																																
1	5459.65	44.48	54.00	-9.52	35.00	34.42	8.41	33.35	199	282	AVERAGE																																																															
Limit	Read	Ant	Cable Preamp	Apos	TPos	Remark																																																																				
Freq Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg																																																																
1	5500.00	95.41	-----	-----	86.05	34.40	8.36	33.40	199	282	AVERAGE																																																															



Mode	7																																																																																									
	Harmonic																																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak Avg	<p style="text-align: right;">Date: 2023-05-11</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL Mode : 7 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>48.43</td> <td>74.00</td> <td>-25.57</td> <td>51.72</td> <td>39.50</td> <td>11.21</td> <td>54.00</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>52.34</td> <td>68.30</td> <td>-15.96</td> <td>50.52</td> <td>42.50</td> <td>12.91</td> <td>53.59</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11000.00	48.43	74.00	-25.57	51.72	39.50	11.21	54.00	---	Peak	2	16500.00	52.34	68.30	-15.96	50.52	42.50	12.91	53.59	---	Peak	<p style="text-align: right;">Date: 2023-05-11</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL Mode : 7 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>48.37</td> <td>74.00</td> <td>-25.63</td> <td>51.66</td> <td>39.50</td> <td>11.21</td> <td>54.00</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>51.80</td> <td>68.30</td> <td>-16.50</td> <td>49.98</td> <td>42.50</td> <td>12.91</td> <td>53.59</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11000.00	48.37	74.00	-25.63	51.66	39.50	11.21	54.00	---	Peak	2	16500.00	51.80	68.30	-16.50	49.98	42.50	12.91	53.59	---	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	11000.00	48.43	74.00	-25.57	51.72	39.50	11.21	54.00	---	Peak																																																																																
2	16500.00	52.34	68.30	-15.96	50.52	42.50	12.91	53.59	---	Peak																																																																																
Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	11000.00	48.37	74.00	-25.63	51.66	39.50	11.21	54.00	---	Peak																																																																																
2	16500.00	51.80	68.30	-16.50	49.98	42.50	12.91	53.59	---	Peak																																																																																







Mode	8																																																		
	Band Edge - L																																																		
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																		
ANT	1																																																		
Pol.	Horizontal	Fundamental																																																	
Peak	<p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 8 Setting : GM Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1 5389.79 50.38 74.00 -23.62</td> <td>40.74</td> <td>34.44</td> <td>8.43</td> <td>33.23</td> <td>100</td> <td>299 PEAK</td> </tr> <tr> <td>2 5469.60 50.70 68.30 -17.60</td> <td>41.25</td> <td>34.41</td> <td>8.40</td> <td>33.36</td> <td>100</td> <td>299 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line Margin	Level	Factor	Loss Factor	dB	dB	cm deg	1 5389.79 50.38 74.00 -23.62	40.74	34.44	8.43	33.23	100	299 PEAK	2 5469.60 50.70 68.30 -17.60	41.25	34.41	8.40	33.36	100	299 PEAK	<p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 8 Setting : GM Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB) Level Factor Loss Factor</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1 5580.00 105.78</td> <td>96.34</td> <td>34.57</td> <td>8.25</td> <td>33.38</td> <td>100</td> <td>299 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB) Level Factor Loss Factor	Level	Factor	Loss Factor	dB	dB	cm deg	1 5580.00 105.78	96.34	34.57	8.25	33.38	100	299 PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																												
Freq Level Line Margin	Level	Factor	Loss Factor	dB	dB	cm deg																																													
1 5389.79 50.38 74.00 -23.62	40.74	34.44	8.43	33.23	100	299 PEAK																																													
2 5469.60 50.70 68.30 -17.60	41.25	34.41	8.40	33.36	100	299 PEAK																																													
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																													
Freq Level Line (dB) Level Factor Loss Factor	Level	Factor	Loss Factor	dB	dB	cm deg																																													
1 5580.00 105.78	96.34	34.57	8.25	33.38	100	299 PEAK																																													
Avg	<p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 8 Setting : GM Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1 5450.74 39.26 54.00 -14.74</td> <td>29.75</td> <td>34.42</td> <td>8.42</td> <td>33.33</td> <td>100</td> <td>299 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line Margin	Level	Factor	Loss Factor	dB	dB	cm deg	1 5450.74 39.26 54.00 -14.74	29.75	34.42	8.42	33.33	100	299 AVERAGE	<p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 8 Setting : GM Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB) Level Factor Loss Factor</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1 5580.00 97.24</td> <td>87.80</td> <td>34.58</td> <td>8.24</td> <td>33.38</td> <td>100</td> <td>299 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB) Level Factor Loss Factor	Level	Factor	Loss Factor	dB	dB	cm deg	1 5580.00 97.24	87.80	34.58	8.24	33.38	100	299 AVERAGE							
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																													
Freq Level Line Margin	Level	Factor	Loss Factor	dB	dB	cm deg																																													
1 5450.74 39.26 54.00 -14.74	29.75	34.42	8.42	33.33	100	299 AVERAGE																																													
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																													
Freq Level Line (dB) Level Factor Loss Factor	Level	Factor	Loss Factor	dB	dB	cm deg																																													
1 5580.00 97.24	87.80	34.58	8.24	33.38	100	299 AVERAGE																																													



Mode	8																																													
	Band Edge - R																																													
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																													
ANT	1																																													
Pol.	Horizontal	Fundamental																																												
Peak	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 8 Setting : 6H Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5751.31</td> <td>52.14</td> <td>68.30</td> <td>-16.16</td> <td>41.77</td> <td>34.95</td> <td>8.77</td> <td>33.35</td> <td>100</td> <td>299</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB							cm	deg	1	5751.31	52.14	68.30	-16.16	41.77	34.95	8.77	33.35	100	299	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																							
						cm	deg																																							
1	5751.31	52.14	68.30	-16.16	41.77	34.95	8.77	33.35	100	299	PEAK																																			

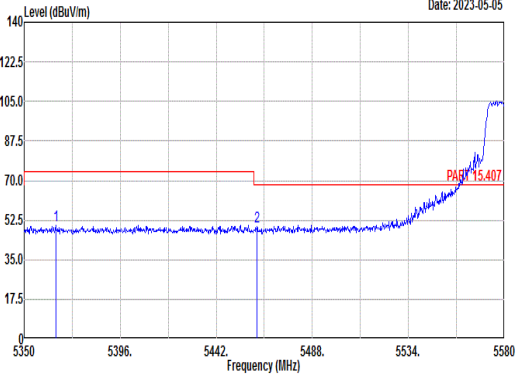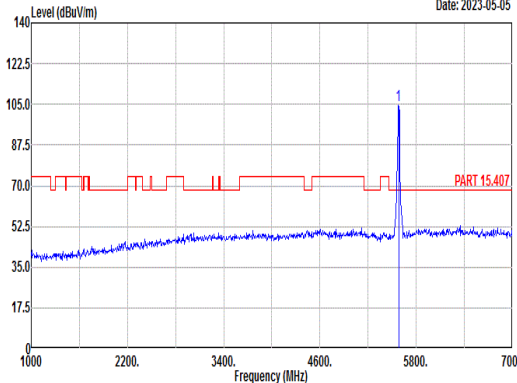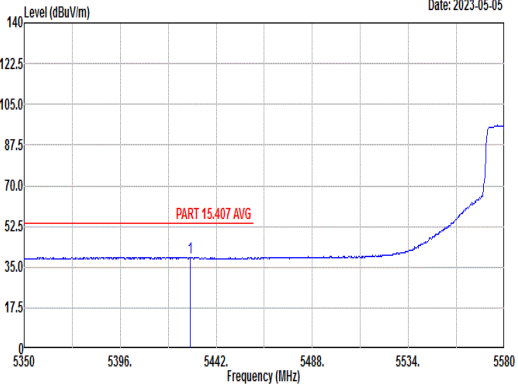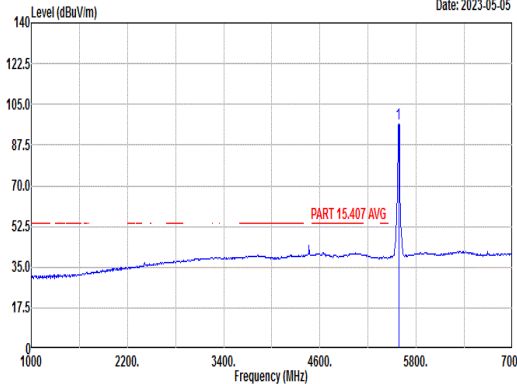

Mode	8																																																																														
	Band Edge - L																																																																														
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																														
ANT	1																																																																														
Pol.	Vertical	Fundamental																																																																													
Peak	 <p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 8 Setting : 0M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5365.18</td> <td>50.40</td> <td>74.00</td> <td>-23.60</td> <td>40.77</td> <td>34.45</td> <td>8.37</td> <td>33.19</td> <td>241</td> <td>286 PEAK</td> </tr> <tr> <td>2</td> <td>5461.55</td> <td>49.91</td> <td>68.30</td> <td>-18.39</td> <td>40.43</td> <td>34.42</td> <td>8.41</td> <td>33.35</td> <td>241</td> <td>286 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBm	dB	dB	cm	deg		1	5365.18	50.40	74.00	-23.60	40.77	34.45	8.37	33.19	241	286 PEAK	2	5461.55	49.91	68.30	-18.39	40.43	34.42	8.41	33.35	241	286 PEAK	 <p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 8 Setting : 0M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>104.40</td> <td>104.40</td> <td>0.00</td> <td>94.96</td> <td>34.57</td> <td>8.25</td> <td>33.38</td> <td>241</td> <td>286 PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBm	dB	dB	cm	deg		1	5580.00	104.40	104.40	0.00	94.96	34.57	8.25	33.38	241	286 PEAK
	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBm	dB	dB	cm	deg																																																																						
1	5365.18	50.40	74.00	-23.60	40.77	34.45	8.37	33.19	241	286 PEAK																																																																					
2	5461.55	49.91	68.30	-18.39	40.43	34.42	8.41	33.35	241	286 PEAK																																																																					
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBm	dB	dB	cm	deg																																																																						
1	5580.00	104.40	104.40	0.00	94.96	34.57	8.25	33.38	241	286 PEAK																																																																					
Avg	 <p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 8 Setting : 0M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5429.58</td> <td>39.26</td> <td>54.00</td> <td>-14.74</td> <td>29.68</td> <td>34.43</td> <td>8.45</td> <td>33.30</td> <td>241</td> <td>286 AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBm	dB	dB	cm	deg		1	5429.58	39.26	54.00	-14.74	29.68	34.43	8.45	33.30	241	286 AVERAGE	 <p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 8 Setting : 0M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5580.00</td> <td>96.48</td> <td>96.48</td> <td>0.00</td> <td>87.04</td> <td>34.58</td> <td>8.24</td> <td>33.38</td> <td>241</td> <td>286 AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBm	dB	dB	cm	deg		1	5580.00	96.48	96.48	0.00	87.04	34.58	8.24	33.38	241	286 AVERAGE											
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBm	dB	dB	cm	deg																																																																						
1	5429.58	39.26	54.00	-14.74	29.68	34.43	8.45	33.30	241	286 AVERAGE																																																																					
Peak	Freq	Level	Limit	Line Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBm	dB	dB	cm	deg																																																																						
1	5580.00	96.48	96.48	0.00	87.04	34.58	8.24	33.38	241	286 AVERAGE																																																																					



Mode	8																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																					
ANT	1																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 8 Setting : 6W Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5737.81</td> <td>51.57</td> <td>68.30</td> <td>-16.73</td> <td>41.28</td> <td>34.92</td> <td>8.72</td> <td>33.35</td> <td>241</td> <td>286</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5737.81	51.57	68.30	-16.73	41.28	34.92	8.72	33.35	241	286	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5737.81	51.57	68.30	-16.73	41.28	34.92	8.72	33.35	241	286	PEAK																											
Avg	Blank	Blank																																				






Mode	8																																																																																									
	Harmonic																																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak Avg	<p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL Mode : 8 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>48.42</td> <td>74.00</td> <td>-25.58</td> <td>51.56</td> <td>39.47</td> <td>11.29</td> <td>53.90</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>51.78</td> <td>68.30</td> <td>-16.52</td> <td>49.24</td> <td>42.45</td> <td>13.01</td> <td>52.92</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11160.00	48.42	74.00	-25.58	51.56	39.47	11.29	53.90	---	Peak	2	16740.00	51.78	68.30	-16.52	49.24	42.45	13.01	52.92	---	Peak	<p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL Mode : 8 Setting : 6M Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Level Factor</th> <th>Cable Loss Factor</th> <th>Preamp Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>48.00</td> <td>74.00</td> <td>-26.00</td> <td>51.14</td> <td>39.47</td> <td>11.29</td> <td>53.90</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>50.46</td> <td>68.30</td> <td>-17.84</td> <td>47.92</td> <td>42.45</td> <td>13.01</td> <td>52.92</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11160.00	48.00	74.00	-26.00	51.14	39.47	11.29	53.90	---	Peak	2	16740.00	50.46	68.30	-17.84	47.92	42.45	13.01	52.92	---	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	11160.00	48.42	74.00	-25.58	51.56	39.47	11.29	53.90	---	Peak																																																																																
2	16740.00	51.78	68.30	-16.52	49.24	42.45	13.01	52.92	---	Peak																																																																																
Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Loss Factor	APos	TPos	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	11160.00	48.00	74.00	-26.00	51.14	39.47	11.29	53.90	---	Peak																																																																																
2	16740.00	50.46	68.30	-17.84	47.92	42.45	13.01	52.92	---	Peak																																																																																



Mode	9																																																																																
	Band Edge																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																
ANT	1																																																																																
Pol.	Horizontal	Fundamental																																																																															
Peak	<p style="text-align: right;">Date: 2023-05-05</p> <p style="text-align: right;">PART 15.407</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 9 Setting : 6H Power setting 12 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.16</td> <td>64.18</td> <td>68.30</td> <td>-4.12</td> <td>53.97</td> <td>34.90</td> <td>8.67</td> <td>33.36</td> <td>100</td> <td>301</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5725.16	64.18	68.30	-4.12	53.97	34.90	8.67	33.36	100	301	PEAK	<p style="text-align: right;">Date: 2023-05-05</p> <p style="text-align: right;">PART 15.407</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 9 Setting : 6H Power setting 12 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>100.38</td> <td>-----</td> <td>90.29</td> <td>34.85</td> <td>8.60</td> <td>33.36</td> <td>100</td> <td>301</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	100.38	-----	90.29	34.85	8.60	33.36	100	301	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5725.16	64.18	68.30	-4.12	53.97	34.90	8.67	33.36	100	301	PEAK																																																																						
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5700.00	100.38	-----	90.29	34.85	8.60	33.36	100	301	PEAK																																																																							
Avg	Blank	<p style="text-align: right;">Date: 2023-05-05</p> <p style="text-align: right;">PART 15.407 AVG</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 9 Setting : 6H Power setting 12 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>91.61</td> <td>-----</td> <td>81.52</td> <td>34.85</td> <td>8.60</td> <td>33.36</td> <td>100</td> <td>301</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	91.61	-----	81.52	34.85	8.60	33.36	100	301	AVERAGE																																								
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																								
1	5700.00	91.61	-----	81.52	34.85	8.60	33.36	100	301	AVERAGE																																																																							

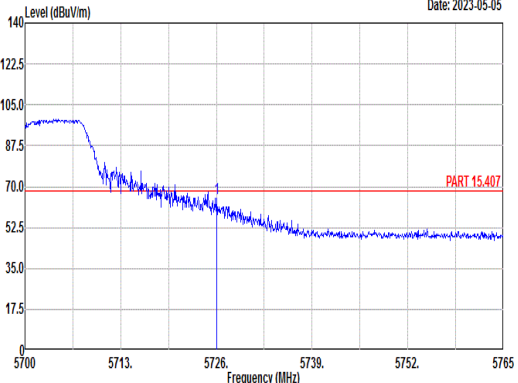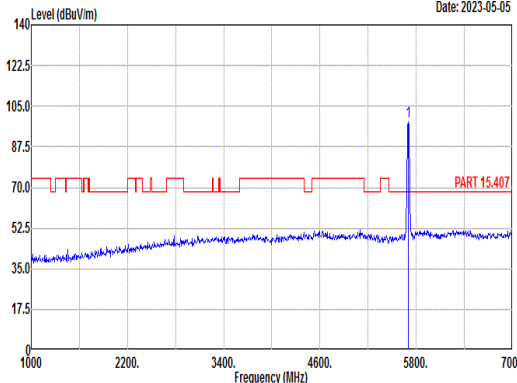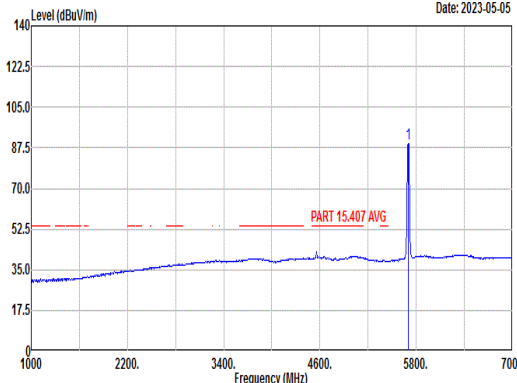

Mode	9																																																																													
	Band Edge																																																																													
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																													
ANT	1																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	 <p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 9 Setting : 6M Power setting 12 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.00</td> <td>65.06</td> <td>68.30</td> <td>-3.24</td> <td>54.83</td> <td>34.90</td> <td>8.68</td> <td>33.35</td> <td>334</td> <td>276 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg		1	5726.00	65.06	68.30	-3.24	54.83	34.90	8.68	33.35	334	276 PEAK	 <p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 9 Setting : 6M Power setting 12 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>98.35</td> <td>-----</td> <td>-----</td> <td>88.26</td> <td>34.85</td> <td>8.60</td> <td>33.36</td> <td>334</td> <td>276 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg		1	5700.00	98.35	-----	-----	88.26	34.85	8.60	33.36	334	276 PEAK
	Limit	Read	Ant	Cable	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																						
1	5726.00	65.06	68.30	-3.24	54.83	34.90	8.68	33.35	334	276 PEAK																																																																				
Limit	Read	Ant	Cable	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																						
1	5700.00	98.35	-----	-----	88.26	34.85	8.60	33.36	334	276 PEAK																																																																				
Avg	Blank	 <p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 9 Setting : 6M Power setting 12 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>89.53</td> <td>-----</td> <td>-----</td> <td>79.44</td> <td>34.85</td> <td>8.60</td> <td>33.36</td> <td>334</td> <td>276 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg		1	5700.00	89.53	-----	-----	79.44	34.85	8.60	33.36	334	276 AVERAGE																																						
Limit	Read	Ant	Cable	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																						
1	5700.00	89.53	-----	-----	79.44	34.85	8.60	33.36	334	276 AVERAGE																																																																				







Mode	9																																																																																	
	Harmonic																																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL Mode : 9 Setting : 6W Power setting 12 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>47.72</td> <td>74.00</td> <td>-26.28</td> <td>50.65</td> <td>39.42</td> <td>11.41</td> <td>53.76</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>50.34</td> <td>68.30</td> <td>-17.96</td> <td>47.09</td> <td>42.38</td> <td>13.14</td> <td>52.27</td> <td>--- Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	47.72	74.00	-26.28	50.65	39.42	11.41	53.76	--- Peak	2	17100.00	50.34	68.30	-17.96	47.09	42.38	13.14	52.27	--- Peak	<p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL Mode : 9 Setting : 6W Power setting 12 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>48.74</td> <td>74.00</td> <td>-25.26</td> <td>51.67</td> <td>39.42</td> <td>11.41</td> <td>53.76</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>50.18</td> <td>68.30</td> <td>-18.12</td> <td>46.93</td> <td>42.38</td> <td>13.14</td> <td>52.27</td> <td>--- Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11400.00	48.74	74.00	-25.26	51.67	39.42	11.41	53.76	--- Peak	2	17100.00	50.18	68.30	-18.12	46.93	42.38	13.14	52.27	--- Peak
	Freq	Level	Limit	Line Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	11400.00	47.72	74.00	-26.28	50.65	39.42	11.41	53.76	--- Peak																																																																									
2	17100.00	50.34	68.30	-17.96	47.09	42.38	13.14	52.27	--- Peak																																																																									
Freq	Level	Limit	Line Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	11400.00	48.74	74.00	-25.26	51.67	39.42	11.41	53.76	--- Peak																																																																									
2	17100.00	50.18	68.30	-18.12	46.93	42.38	13.14	52.27	--- Peak																																																																									



		10																																																																																										
Mode	Band Edge																																																																																											
	U-NII-1_5.15-5.25_802.11n_HT20_CH36_5180MHz																																																																																											
ANT	1																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 10 Setting : MCS0 Power setting 17 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.22</td> <td>62.96</td> <td>74.00</td> <td>-11.04</td> <td>53.34</td> <td>34.54</td> <td>7.92</td> <td>32.84</td> <td>260</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5149.22	62.96	74.00	-11.04	53.34	34.54	7.92	32.84	260	360	PEAK	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 10 Setting : MCS0 Power setting 17 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>104.86</td> <td>-----</td> <td>-----</td> <td>95.31</td> <td>34.52</td> <td>7.94</td> <td>32.91</td> <td>260</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5180.00	104.86	-----	-----	95.31	34.52	7.94	32.91	260	360	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																					
							deg																																																																																					
1	5149.22	62.96	74.00	-11.04	53.34	34.54	7.92	32.84	260	360	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																					
							deg																																																																																					
1	5180.00	104.86	-----	-----	95.31	34.52	7.94	32.91	260	360	PEAK																																																																																	
Avg	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 10 Setting : MCS0 Power setting 17 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.94</td> <td>50.92</td> <td>54.00</td> <td>-3.08</td> <td>41.31</td> <td>34.54</td> <td>7.92</td> <td>32.85</td> <td>260</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5149.94	50.92	54.00	-3.08	41.31	34.54	7.92	32.85	260	360	AVERAGE	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 10 Setting : MCS0 Power setting 17 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>95.83</td> <td>-----</td> <td>-----</td> <td>86.26</td> <td>34.53</td> <td>7.94</td> <td>32.90</td> <td>260</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5180.00	95.83	-----	-----	86.26	34.53	7.94	32.90	260	360	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																					
							deg																																																																																					
1	5149.94	50.92	54.00	-3.08	41.31	34.54	7.92	32.85	260	360	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																					
							deg																																																																																					
1	5180.00	95.83	-----	-----	86.26	34.53	7.94	32.90	260	360	AVERAGE																																																																																	

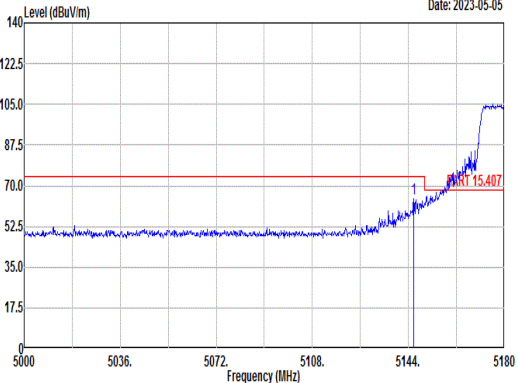
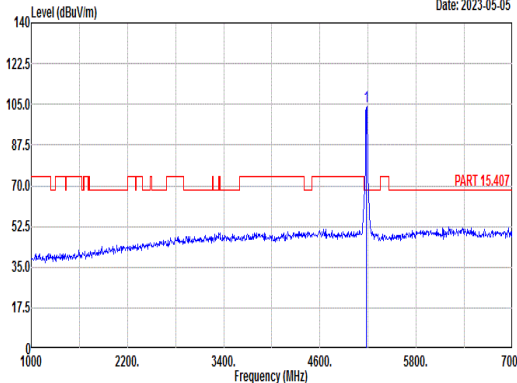
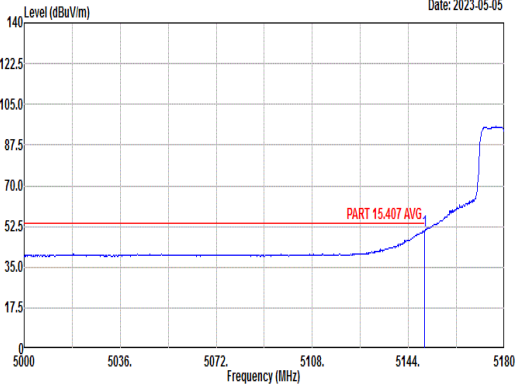
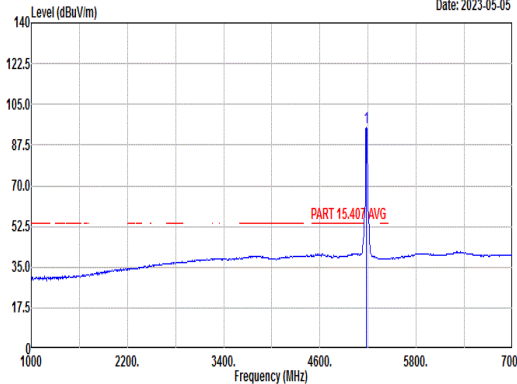


		10																																																																																											
Mode	Band Edge																																																																																												
	U-NII-1_5.15-5.25_802.11n_HT20_CH36_5180MHz																																																																																												
ANT	1																																																																																												
Pol.	Vertical	Fundamental																																																																																											
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical mode. The plot shows a sharp peak at 5144 MHz. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 5000 to 5180 MHz. A red horizontal line indicates the limit at approximately 70 dBuV/m. The peak is labeled 'PART 15.407'.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 10 Setting : MCS0 Power setting 17 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.98</td> <td>64.31</td> <td>74.00</td> <td>-9.69</td> <td>54.69</td> <td>34.54</td> <td>7.92</td> <td>32.84</td> <td>298</td> <td>284</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5145.98	64.31	74.00	-9.69	54.69	34.54	7.92	32.84	298	284	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental mode. The plot shows a sharp peak at 5180 MHz. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz. A red horizontal line indicates the limit at approximately 70 dBuV/m. The peak is labeled 'PART 15.407'.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 10 Setting : MCS0 Power setting 17 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>103.88</td> <td>-----</td> <td>94.33</td> <td>34.52</td> <td>7.94</td> <td>32.91</td> <td>298</td> <td>284</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg										1	5180.00	103.88	-----	94.33	34.52	7.94	32.91	298	284	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																						
							deg																																																																																						
1	5145.98	64.31	74.00	-9.69	54.69	34.54	7.92	32.84	298	284	PEAK																																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																					
1	5180.00	103.88	-----	94.33	34.52	7.94	32.91	298	284	PEAK																																																																																			
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical mode showing the average spectrum. The plot shows a peak at 5144 MHz. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 5000 to 5180 MHz. A red horizontal line indicates the limit at approximately 52.5 dBuV/m. The peak is labeled 'PART 15.407 AVG'.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 10 Setting : MCS0 Power setting 17 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.94</td> <td>50.93</td> <td>54.00</td> <td>-3.07</td> <td>41.32</td> <td>34.54</td> <td>7.92</td> <td>32.85</td> <td>298</td> <td>284</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5149.94	50.93	54.00	-3.07	41.32	34.54	7.92	32.85	298	284	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental mode showing the average spectrum. The plot shows a peak at 5180 MHz. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz. A red horizontal line indicates the limit at approximately 52.5 dBuV/m. The peak is labeled 'PART 15.407 AVG'.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 10 Setting : MCS0 Power setting 17 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>95.21</td> <td>-----</td> <td>85.63</td> <td>34.53</td> <td>7.94</td> <td>32.89</td> <td>298</td> <td>284</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg										1	5180.00	95.21	-----	85.63	34.53	7.94	32.89	298	284	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																						
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																						
							deg																																																																																						
1	5149.94	50.93	54.00	-3.07	41.32	34.54	7.92	32.85	298	284	AVERAGE																																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																																					
1	5180.00	95.21	-----	85.63	34.53	7.94	32.89	298	284	AVERAGE																																																																																			



Mode	10																																																																																	
	Harmonic																																																																																	
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<p>Data: 5 Date: 2023-05-11</p> <p>Site : 03CH03-SZ Condition : PART 15.407 3m ANT3117_0057 HORIZONTAL Mode : 10 Setting : MCS0 Power setting 17 Plane : Z with accessories 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>49.04</td> <td>-19.26</td> <td>68.30</td> <td>51.77</td> <td>39.72</td> <td>10.73</td> <td>53.18</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>50.47</td> <td>-23.53</td> <td>74.00</td> <td>50.40</td> <td>41.74</td> <td>12.72</td> <td>54.39</td> <td>--- Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	49.04	-19.26	68.30	51.77	39.72	10.73	53.18	--- Peak	2	15540.00	50.47	-23.53	74.00	50.40	41.74	12.72	54.39	--- Peak	<p>Data: 6 Date: 2023-05-11</p> <p>Site : 03CH03-SZ Condition : PART 15.407 3m ANT3117_0057 VERTICAL Mode : 10 Setting : MCS0 Power setting 17 Plane : Z with accessories 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>49.53</td> <td>-18.77</td> <td>68.30</td> <td>52.26</td> <td>39.72</td> <td>10.73</td> <td>53.18</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>50.14</td> <td>-23.86</td> <td>74.00</td> <td>50.07</td> <td>41.74</td> <td>12.72</td> <td>54.39</td> <td>--- Peak</td> </tr> </tbody> </table>	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	49.53	-18.77	68.30	52.26	39.72	10.73	53.18	--- Peak	2	15540.00	50.14	-23.86	74.00	50.07	41.74	12.72	54.39	--- Peak
	Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																								
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	10360.00	49.04	-19.26	68.30	51.77	39.72	10.73	53.18	--- Peak																																																																									
2	15540.00	50.47	-23.53	74.00	50.40	41.74	12.72	54.39	--- Peak																																																																									
Freq	Level	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																									
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	10360.00	49.53	-18.77	68.30	52.26	39.72	10.73	53.18	--- Peak																																																																									
2	15540.00	50.14	-23.86	74.00	50.07	41.74	12.72	54.39	--- Peak																																																																									

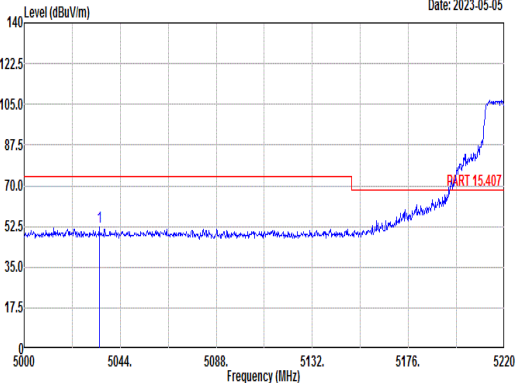
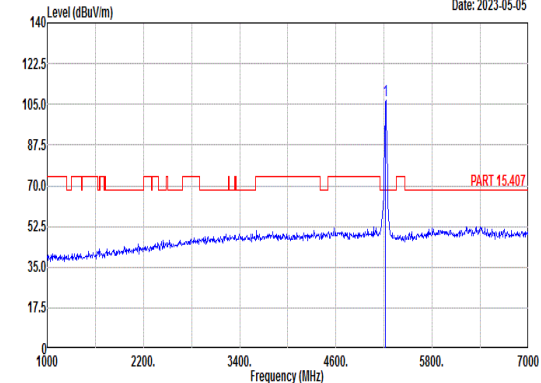
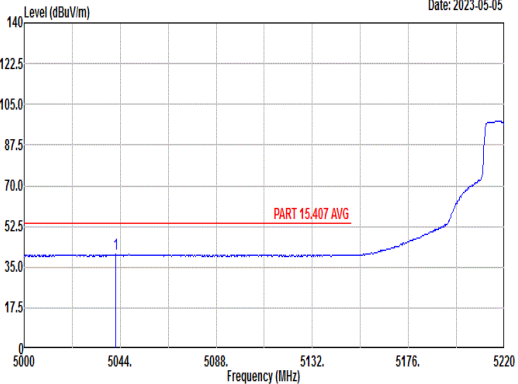
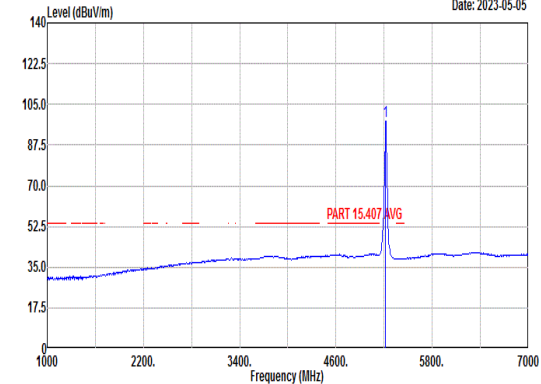


11																																																									
Mode	Band Edge - L																																																								
U-NII-1_5.15-5.25_802.11n_HT20_CH44_5220MHz																																																									
ANT	1																																																								
Pol.	Horizontal																																																								
Peak	Fundamental																																																								
 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization, Peak mode. The plot shows a signal level rising from approximately 50 dBuV/m at 5000 MHz to over 100 dBuV/m at 5220 MHz. A red horizontal line indicates a limit at 70.0 dBuV/m. A peak is labeled 'PART 15.407' at approximately 5176 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 11 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5034.32</td> <td>52.17</td> <td>74.00</td> <td>-21.83</td> <td>42.40</td> <td>34.59</td> <td>7.84</td> <td>32.66</td> <td>247</td> <td>48</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	1	5034.32	52.17	74.00	-21.83	42.40	34.59	7.84	32.66	247	48	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental mode. The plot shows a signal level rising from approximately 40 dBuV/m at 1000 MHz to over 100 dBuV/m at 5220 MHz. A red horizontal line indicates a limit at 70.0 dBuV/m. A peak is labeled 'PART 15.407' at approximately 5176 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 11 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5220.00</td> <td>106.80</td> <td>-----</td> <td>97.27</td> <td>34.51</td> <td>7.99</td> <td>32.97</td> <td>247</td> <td>48</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	cm	deg	1	5220.00	106.80	-----	97.27	34.51	7.99	32.97	247	48	PEAK
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																	
1	5034.32	52.17	74.00	-21.83	42.40	34.59	7.84	32.66	247	48	PEAK																																														
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	cm	deg																																																	
1	5220.00	106.80	-----	97.27	34.51	7.99	32.97	247	48	PEAK																																															
Avg	Fundamental																																																								
 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization, Average mode. The plot shows a signal level rising from approximately 40 dBuV/m at 5000 MHz to over 100 dBuV/m at 5220 MHz. A red horizontal line indicates a limit at 52.5 dBuV/m. A peak is labeled 'PART 15.407 AVG' at approximately 5176 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 11 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5042.02</td> <td>40.47</td> <td>54.00</td> <td>-13.53</td> <td>30.71</td> <td>34.58</td> <td>7.85</td> <td>32.67</td> <td>247</td> <td>48</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	1	5042.02	40.47	54.00	-13.53	30.71	34.58	7.85	32.67	247	48	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental mode, Average mode. The plot shows a signal level rising from approximately 40 dBuV/m at 1000 MHz to over 100 dBuV/m at 5220 MHz. A red horizontal line indicates a limit at 52.5 dBuV/m. A peak is labeled 'PART 15.407 AVG' at approximately 5176 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 11 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5220.00</td> <td>97.75</td> <td>-----</td> <td>88.22</td> <td>34.51</td> <td>7.99</td> <td>32.97</td> <td>247</td> <td>48</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	cm	deg	1	5220.00	97.75	-----	88.22	34.51	7.99	32.97	247	48	AVERAGE
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																	
1	5042.02	40.47	54.00	-13.53	30.71	34.58	7.85	32.67	247	48	AVERAGE																																														
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	cm	deg																																																	
1	5220.00	97.75	-----	88.22	34.51	7.99	32.97	247	48	AVERAGE																																															





	11																																					
Mode	Band Edge - R																																					
ANT	1																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 11 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5442.72</td> <td>50.04</td> <td>74.00</td> <td>-23.96</td> <td>40.51</td> <td>34.42</td> <td>8.43</td> <td>33.32</td> <td>247</td> <td>48</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5442.72	50.04	74.00	-23.96	40.51	34.42	8.43	33.32	247	48	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																															
1	5442.72	50.04	74.00	-23.96	40.51	34.42	8.43	33.32	247	48	PEAK																											
Avg	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 11 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5416.32</td> <td>38.85</td> <td>54.00</td> <td>-15.15</td> <td>29.23</td> <td>34.43</td> <td>8.47</td> <td>33.28</td> <td>247</td> <td>48</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5416.32	38.85	54.00	-15.15	29.23	34.43	8.47	33.28	247	48	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																															
1	5416.32	38.85	54.00	-15.15	29.23	34.43	8.47	33.28	247	48	AVERAGE																											

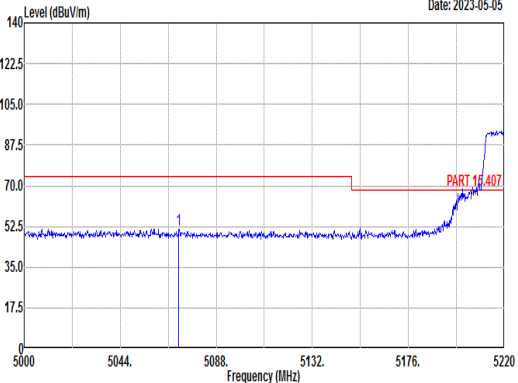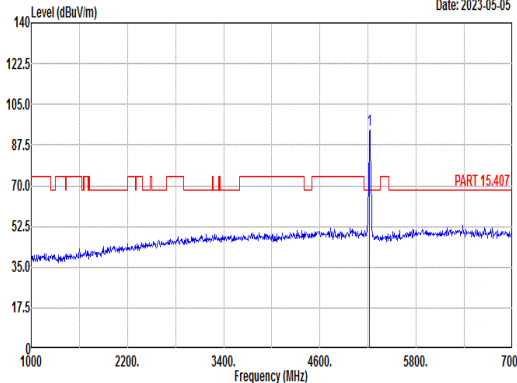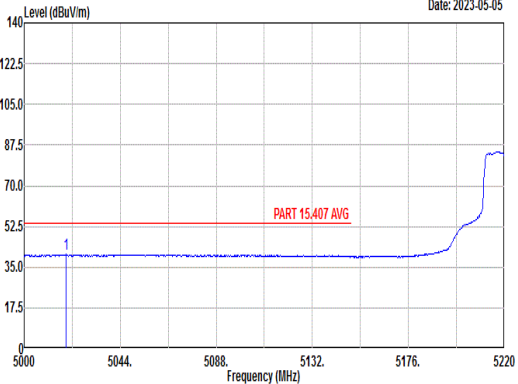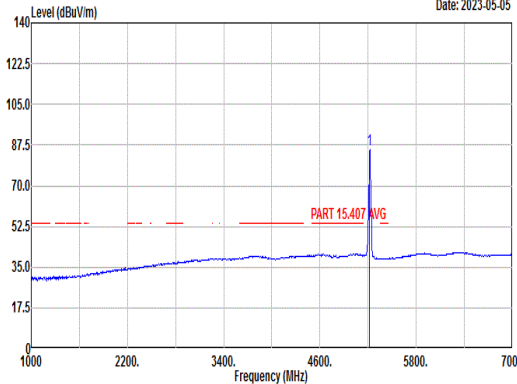

		11																																																														
Mode	Band Edge - L																																																															
	U-NII-1_5.15-5.25_802.11n_HT20_CH44_5220MHz																																																															
ANT	1																																																															
Pol.	Vertical	Fundamental																																																														
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical mode. Peak at 5220 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 11 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5070.84</td> <td>51.25</td> <td>74.00</td> <td>-22.75</td> <td>41.53</td> <td>34.57</td> <td>7.87</td> <td>32.72</td> <td>279</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	PEAK	1	5070.84	51.25	74.00	-22.75	41.53	34.57	7.87	32.72	279	360	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental mode. Peak at 5220 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 11 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5220.00</td> <td>94.02</td> <td>-----</td> <td>84.49</td> <td>34.51</td> <td>7.99</td> <td>32.97</td> <td>279</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	PEAK	1	5220.00	94.02	-----	84.49	34.51	7.99	32.97	279	360	PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	PEAK																																																					
1	5070.84	51.25	74.00	-22.75	41.53	34.57	7.87	32.72	279	360	PEAK																																																					
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	PEAK																																																					
1	5220.00	94.02	-----	84.49	34.51	7.99	32.97	279	360	PEAK																																																						
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical mode. Average level at 5220 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 11 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5019.14</td> <td>40.42</td> <td>54.00</td> <td>-13.58</td> <td>30.63</td> <td>34.59</td> <td>7.83</td> <td>32.63</td> <td>279</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	AVERAGE	1	5019.14	40.42	54.00	-13.58	30.63	34.59	7.83	32.63	279	360	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental mode. Average level at 5220 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 11 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5220.00</td> <td>85.33</td> <td>-----</td> <td>75.79</td> <td>34.51</td> <td>8.01</td> <td>32.98</td> <td>279</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	AVERAGE	1	5220.00	85.33	-----	75.79	34.51	8.01	32.98	279	360	AVERAGE
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	AVERAGE																																																					
1	5019.14	40.42	54.00	-13.58	30.63	34.59	7.83	32.63	279	360	AVERAGE																																																					
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	AVERAGE																																																					
1	5220.00	85.33	-----	75.79	34.51	8.01	32.98	279	360	AVERAGE																																																						



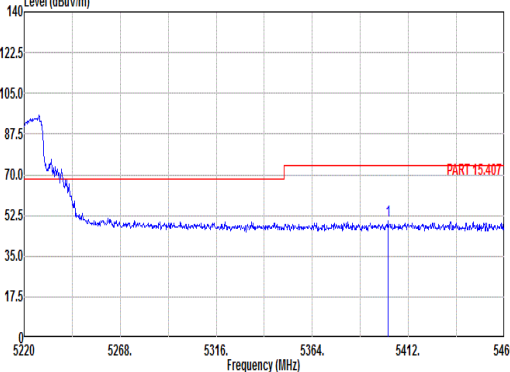
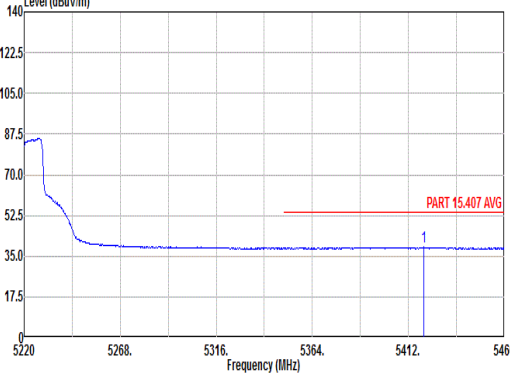


	11																																					
Mode	Band Edge - R																																					
ANT	1																																					
Pol.	Vertical	Fundamental																																				
Peak	<p style="text-align: right;">Date: 2023-05-05</p>  <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 11 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5401.68</td> <td>49.99</td> <td>74.00</td> <td>-24.01</td> <td>40.33</td> <td>34.44</td> <td>8.47</td> <td>33.25</td> <td>279</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5401.68	49.99	74.00	-24.01	40.33	34.44	8.47	33.25	279	360	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5401.68	49.99	74.00	-24.01	40.33	34.44	8.47	33.25	279	360	PEAK																											
Avg	<p style="text-align: right;">Date: 2023-05-05</p>  <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 11 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5419.68</td> <td>38.90</td> <td>54.00</td> <td>-15.10</td> <td>29.29</td> <td>34.43</td> <td>8.46</td> <td>33.28</td> <td>279</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5419.68	38.90	54.00	-15.10	29.29	34.43	8.46	33.28	279	360	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5419.68	38.90	54.00	-15.10	29.29	34.43	8.46	33.28	279	360	AVERAGE																											



Mode	11																																																																																									
	Harmonic																																																																																									
	U-NII-1_5.15-5.25_802.11n_HT20_CH44_5220MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal	Vertical																																																																																								
Peak Avg	<p style="text-align: right;">Date: 2023-05-11</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL Mode : 11 Setting : NCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>49.03</td> <td>68.30</td> <td>-19.27</td> <td>51.76</td> <td>39.76</td> <td>10.79</td> <td>53.28</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>50.57</td> <td>74.00</td> <td>-23.43</td> <td>50.55</td> <td>41.86</td> <td>12.72</td> <td>54.56</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10440.00	49.03	68.30	-19.27	51.76	39.76	10.79	53.28	---	Peak	2	15660.00	50.57	74.00	-23.43	50.55	41.86	12.72	54.56	---	Peak	<p style="text-align: right;">Date: 2023-05-11</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL Mode : 11 Setting : NCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>49.05</td> <td>68.30</td> <td>-19.25</td> <td>51.78</td> <td>39.76</td> <td>10.79</td> <td>53.28</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>50.69</td> <td>74.00</td> <td>-23.31</td> <td>50.67</td> <td>41.86</td> <td>12.72</td> <td>54.56</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10440.00	49.05	68.30	-19.25	51.78	39.76	10.79	53.28	---	Peak	2	15660.00	50.69	74.00	-23.31	50.67	41.86	12.72	54.56	---	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	APos	TPos	Remark																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	10440.00	49.03	68.30	-19.27	51.76	39.76	10.79	53.28	---	Peak																																																																																
2	15660.00	50.57	74.00	-23.43	50.55	41.86	12.72	54.56	---	Peak																																																																																
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	APos	TPos	Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	10440.00	49.05	68.30	-19.25	51.78	39.76	10.79	53.28	---	Peak																																																																																
2	15660.00	50.69	74.00	-23.31	50.67	41.86	12.72	54.56	---	Peak																																																																																

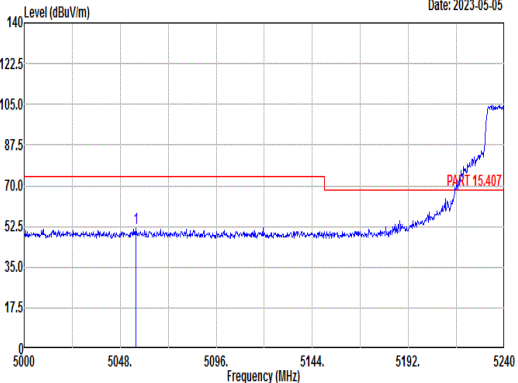
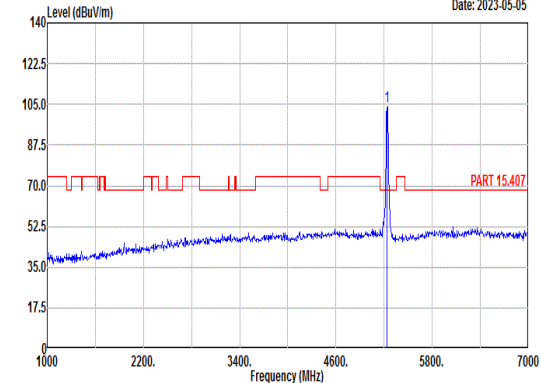
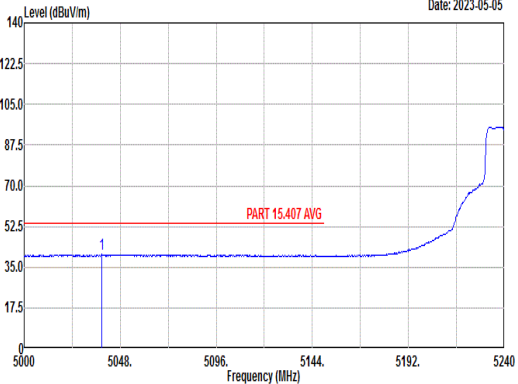
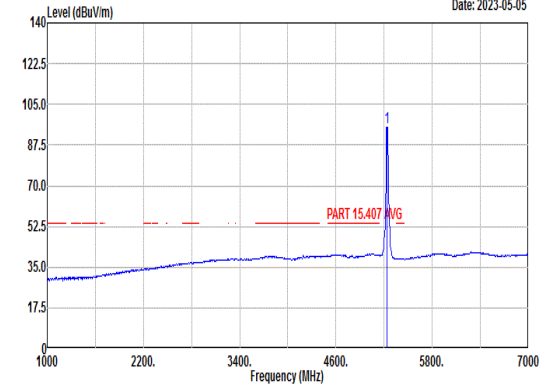


12																																															
Mode	Band Edge - L																																														
U-NII-1_5.15-5.25_802.11n_HT20_CH48_5240MHz																																															
ANT	1																																														
Pol.	Horizontal																																														
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal level rising from approximately 50 dBuV/m at 5000 MHz to about 100 dBuV/m at 5240 MHz. A red horizontal line indicates a limit at 70.0 dBuV/m. A peak is labeled 'PART 15.407' at approximately 5240 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5055.92</td> <td>51.92</td> <td>74.00</td> <td>-22.08</td> <td>42.17</td> <td>34.58</td> <td>7.86</td> <td>32.69</td> <td>171</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5055.92	51.92	74.00	-22.08	42.17	34.58	7.86	32.69	171	360	PEAK		
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																								
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																								
							deg																																								
1	5055.92	51.92	74.00	-22.08	42.17	34.58	7.86	32.69	171	360	PEAK																																				
 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level rising from approximately 50 dBuV/m at 1000 MHz to about 100 dBuV/m at 5240 MHz. A red horizontal line indicates a limit at 70.0 dBuV/m. A peak is labeled 'PART 15.407' at approximately 5240 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>104.11</td> <td>-----</td> <td>94.55</td> <td>34.50</td> <td>8.06</td> <td>33.00</td> <td>171</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg										1	5240.00	104.11	-----	94.55	34.50	8.06	33.00	171	360	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																							
1	5240.00	104.11	-----	94.55	34.50	8.06	33.00	171	360	PEAK																																					
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows an averaged signal level rising from approximately 50 dBuV/m at 5000 MHz to about 100 dBuV/m at 5240 MHz. A red horizontal line indicates a limit at 70.0 dBuV/m. A peak is labeled 'PART 15.407 AVG' at approximately 5240 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 12 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5038.88</td> <td>40.42</td> <td>54.00</td> <td>-13.58</td> <td>30.67</td> <td>34.58</td> <td>7.84</td> <td>32.67</td> <td>171</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm								deg	1	5038.88	40.42	54.00	-13.58	30.67	34.58	7.84	32.67	171	360	AVERAGE		
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																								
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																								
							deg																																								
1	5038.88	40.42	54.00	-13.58	30.67	34.58	7.84	32.67	171	360	AVERAGE																																				
 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows an averaged signal level rising from approximately 50 dBuV/m at 1000 MHz to about 100 dBuV/m at 5240 MHz. A red horizontal line indicates a limit at 70.0 dBuV/m. A peak is labeled 'PART 15.407 AVG' at approximately 5240 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 12 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>95.30</td> <td>-----</td> <td>85.76</td> <td>34.50</td> <td>8.04</td> <td>33.00</td> <td>171</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg										1	5240.00	95.30	-----	85.76	34.50	8.04	33.00	171	360	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor																																							
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																							
1	5240.00	95.30	-----	85.76	34.50	8.04	33.00	171	360	AVERAGE																																					





		12																																	
Mode	Band Edge - R																																		
	U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz																																		
ANT	1																																		
Pol.	Horizontal	Fundamental																																	
Peak	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1 5447.24</td> <td>49.70</td> <td>74.00</td> <td>-24.30</td> <td>40.18</td> <td>34.42</td> <td>8.43</td> <td>33.33 171 360 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg	1 5447.24	49.70	74.00	-24.30	40.18	34.42	8.43	33.33 171 360 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg																												
1 5447.24	49.70	74.00	-24.30	40.18	34.42	8.43	33.33 171 360 PEAK																												
Avg	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 12 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1 5405.88</td> <td>38.80</td> <td>54.00</td> <td>-15.20</td> <td>29.14</td> <td>34.44</td> <td>8.48</td> <td>33.26 171 360 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg	1 5405.88	38.80	54.00	-15.20	29.14	34.44	8.48	33.26 171 360 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg																												
1 5405.88	38.80	54.00	-15.20	29.14	34.44	8.48	33.26 171 360 AVERAGE																												

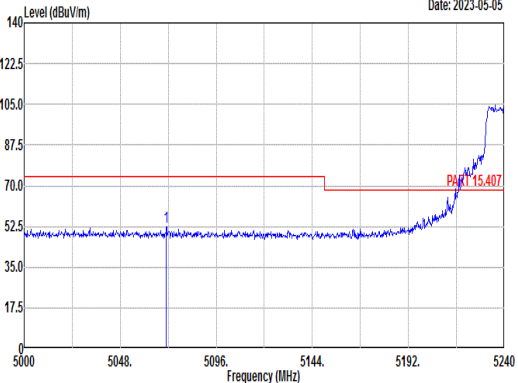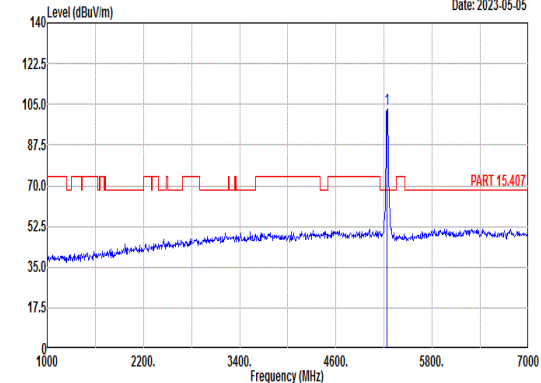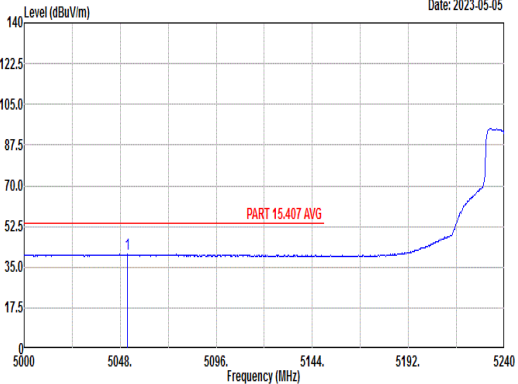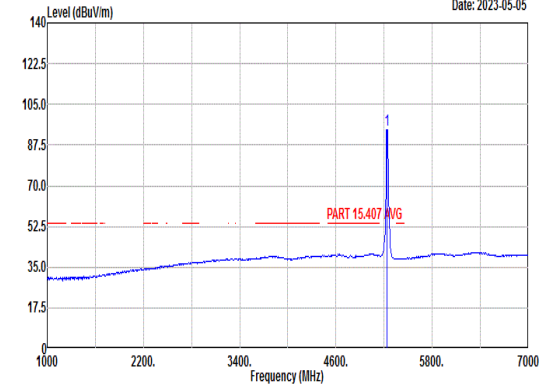

		12																																																																																
Mode		Band Edge - L																																																																																
		U-NII-1_5.15-5.25_802.11n_HT20_CH48_5240MHz																																																																																
ANT		1																																																																																
Pol.		Vertical	Fundamental																																																																															
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) - Vertical Peak</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5071.04</td> <td>52.45</td> <td>74.00</td> <td>-21.55</td> <td>42.73</td> <td>34.57</td> <td>7.87</td> <td>32.72</td> <td>100</td> <td>274</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB					cm	deg		1	5071.04	52.45	74.00	-21.55	42.73	34.57	7.87	32.72	100	274	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) - Fundamental Peak</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>103.01</td> <td>-----</td> <td>93.47</td> <td>34.50</td> <td>8.04</td> <td>33.00</td> <td>100</td> <td>274</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB					cm	deg		1	5240.00	103.01	-----	93.47	34.50	8.04	33.00	100	274	PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																												
				cm	deg																																																																													
1	5071.04	52.45	74.00	-21.55	42.73	34.57	7.87	32.72	100	274	PEAK																																																																							
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																												
				cm	deg																																																																													
1	5240.00	103.01	-----	93.47	34.50	8.04	33.00	100	274	PEAK																																																																								
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) - Vertical Average</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 12 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5051.60</td> <td>40.45</td> <td>54.00</td> <td>-13.55</td> <td>30.71</td> <td>34.58</td> <td>7.85</td> <td>32.69</td> <td>100</td> <td>274</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB					cm	deg		1	5051.60	40.45	54.00	-13.55	30.71	34.58	7.85	32.69	100	274	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) - Fundamental Average</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 12 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5240.00</td> <td>94.28</td> <td>-----</td> <td>84.74</td> <td>34.51</td> <td>8.01</td> <td>32.98</td> <td>100</td> <td>274</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB					cm	deg		1	5240.00	94.28	-----	84.74	34.51	8.01	32.98	100	274	AVERAGE
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																												
				cm	deg																																																																													
1	5051.60	40.45	54.00	-13.55	30.71	34.58	7.85	32.69	100	274	AVERAGE																																																																							
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB																																																																												
				cm	deg																																																																													
1	5240.00	94.28	-----	84.74	34.51	8.01	32.98	100	274	AVERAGE																																																																								

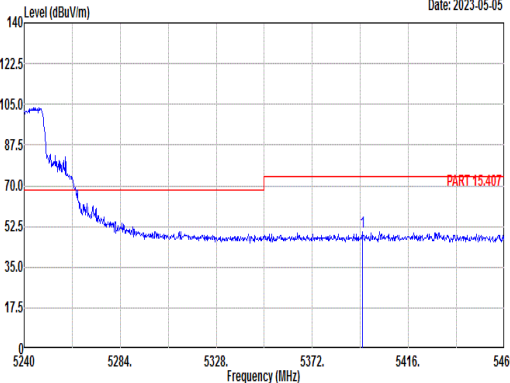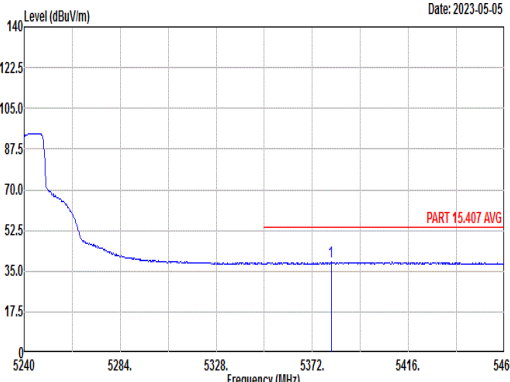

	12																																					
Mode	Band Edge - R																																					
	U-NII-1_5.15-5.25_802.11n_HT20_CH48_5240MHz																																					
ANT	1																																					
Pol.	Vertical	Fundamental																																				
Peak	 <p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 12 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5394.88</td> <td>50.00</td> <td>74.00</td> <td>-24.00</td> <td>40.35</td> <td>34.44</td> <td>8.45</td> <td>33.24</td> <td>100</td> <td>274</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5394.88	50.00	74.00	-24.00	40.35	34.44	8.45	33.24	100	274	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																															
1	5394.88	50.00	74.00	-24.00	40.35	34.44	8.45	33.24	100	274	PEAK																											
Avg	 <p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 12 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5380.58</td> <td>38.92</td> <td>54.00</td> <td>-15.08</td> <td>29.28</td> <td>34.45</td> <td>8.41</td> <td>33.22</td> <td>100</td> <td>274</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5380.58	38.92	54.00	-15.08	29.28	34.45	8.41	33.22	100	274	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																															
1	5380.58	38.92	54.00	-15.08	29.28	34.45	8.41	33.22	100	274	AVERAGE																											



Mode	12																																																																							
	Harmonic																																																																							
	U-NII-1_5.15-5.25_802.11n_HT20_CH48_5240MHz																																																																							
ANT	1																																																																							
Pol.	Horizontal	Vertical																																																																						
Peak Avg	<p style="text-align: right;">Date: 2023-05-11</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL Mode : 12 Setting : NCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>cm deg</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 10480.00 49.29 68.30 -19.01</td> <td>52.01 39.79</td> <td>10.82 53.33</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2 15720.00 49.79 74.00 -24.21</td> <td>49.80 41.92</td> <td>12.71 54.64</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	Apos	Tpos	Remark	Freq Level Line Margin	Level Factor	Loss Factor					MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	cm deg				1 10480.00 49.29 68.30 -19.01	52.01 39.79	10.82 53.33	---	---	---	Peak	2 15720.00 49.79 74.00 -24.21	49.80 41.92	12.71 54.64	---	---	---	Peak	<p style="text-align: right;">Date: 2023-05-11</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL Mode : 12 Setting : NCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>dB</th> <th>cm deg</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 10480.00 49.26 68.30 -19.04</td> <td>51.98 39.79</td> <td>10.82 53.33</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2 15720.00 50.45 74.00 -23.55</td> <td>50.46 41.92</td> <td>12.71 54.64</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	Apos	Tpos	Remark	Freq Level Line Margin	Level Factor	Loss Factor					MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	cm deg				1 10480.00 49.26 68.30 -19.04	51.98 39.79	10.82 53.33	---	---	---	Peak	2 15720.00 50.45 74.00 -23.55	50.46 41.92	12.71 54.64	---	---	---	Peak
	Limit	Read	Ant	Cable Preamp	Apos	Tpos	Remark																																																																	
Freq Level Line Margin	Level Factor	Loss Factor																																																																						
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	cm deg																																																																					
1 10480.00 49.29 68.30 -19.01	52.01 39.79	10.82 53.33	---	---	---	Peak																																																																		
2 15720.00 49.79 74.00 -24.21	49.80 41.92	12.71 54.64	---	---	---	Peak																																																																		
Limit	Read	Ant	Cable Preamp	Apos	Tpos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor																																																																						
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	dB	cm deg																																																																					
1 10480.00 49.26 68.30 -19.04	51.98 39.79	10.82 53.33	---	---	---	Peak																																																																		
2 15720.00 50.45 74.00 -23.55	50.46 41.92	12.71 54.64	---	---	---	Peak																																																																		







13																																																													
Mode	Band Edge - L																																																												
U-NII-2A_5.25-5.35_802.11ac_VHT20_CH52_5260MHz																																																													
ANT	1																																																												
Pol.	Horizontal																																																												
Peak	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 13 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5005.98</td> <td>51.79</td> <td>74.00</td> <td>-22.21</td> <td>41.97</td> <td>34.60</td> <td>7.83</td> <td>32.61</td> <td>200</td> <td>287</td> <td>PEAK</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 13 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>103.31</td> <td>-----</td> <td>93.75</td> <td>34.50</td> <td>8.07</td> <td>33.01</td> <td>200</td> <td>287</td> <td>PEAK</td> </tr> </tbody> </table> </div> </div>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5005.98	51.79	74.00	-22.21	41.97	34.60	7.83	32.61	200	287	PEAK	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5260.00	103.31	-----	93.75	34.50	8.07	33.01	200	287	PEAK
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg																																																			
1	5005.98	51.79	74.00	-22.21	41.97	34.60	7.83	32.61	200	287	PEAK																																																		
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg																																																			
1	5260.00	103.31	-----	93.75	34.50	8.07	33.01	200	287	PEAK																																																			
Avg	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 13 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5051.48</td> <td>40.41</td> <td>54.00</td> <td>-13.59</td> <td>30.67</td> <td>34.58</td> <td>7.85</td> <td>32.69</td> <td>200</td> <td>287</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 13 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>94.77</td> <td>-----</td> <td>85.21</td> <td>34.50</td> <td>8.07</td> <td>33.01</td> <td>200</td> <td>287</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> </div>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5051.48	40.41	54.00	-13.59	30.67	34.58	7.85	32.69	200	287	AVERAGE	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5260.00	94.77	-----	85.21	34.50	8.07	33.01	200	287	AVERAGE
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg																																																			
1	5051.48	40.41	54.00	-13.59	30.67	34.58	7.85	32.69	200	287	AVERAGE																																																		
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg																																																			
1	5260.00	94.77	-----	85.21	34.50	8.07	33.01	200	287	AVERAGE																																																			



Mode	13																																													
	Band Edge - R																																													
	U-NII-2A_5.25-5.35_802.11ac VHT20_CH52_5260MHz																																													
ANT	1																																													
Pol.	Horizontal	Fundamental																																												
Peak	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 13 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5420.40</td> <td>50.09</td> <td>74.00</td> <td>-23.91</td> <td>40.48</td> <td>34.43</td> <td>8.46</td> <td>33.28</td> <td>200</td> <td>287</td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB							cm	deg	1	5420.40	50.09	74.00	-23.91	40.48	34.43	8.46	33.28	200	287		Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																							
						cm	deg																																							
1	5420.40	50.09	74.00	-23.91	40.48	34.43	8.46	33.28	200	287																																				
Avg	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 13 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5365.40</td> <td>38.75</td> <td>54.00</td> <td>-15.25</td> <td>29.12</td> <td>34.45</td> <td>8.37</td> <td>33.19</td> <td>200</td> <td>287</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB							cm	deg	1	5365.40	38.75	54.00	-15.25	29.12	34.45	8.37	33.19	200	287	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																							
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																							
						cm	deg																																							
1	5365.40	38.75	54.00	-15.25	29.12	34.45	8.37	33.19	200	287	AVERAGE																																			

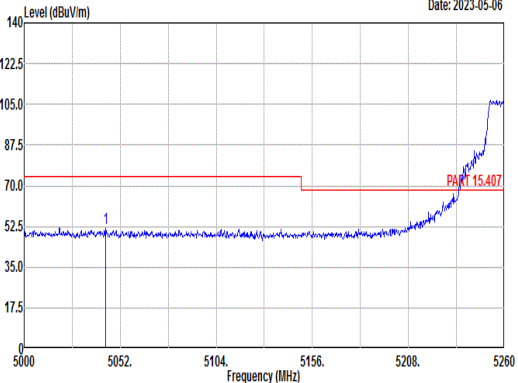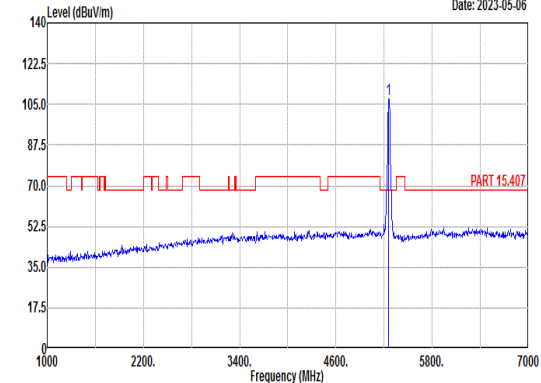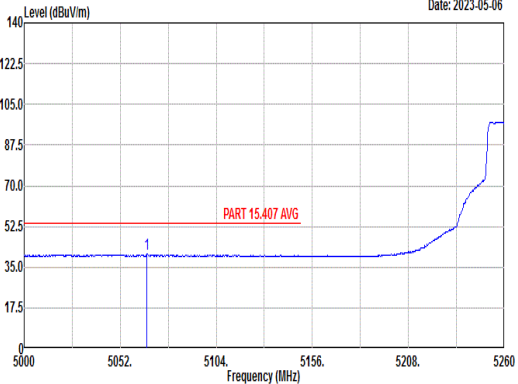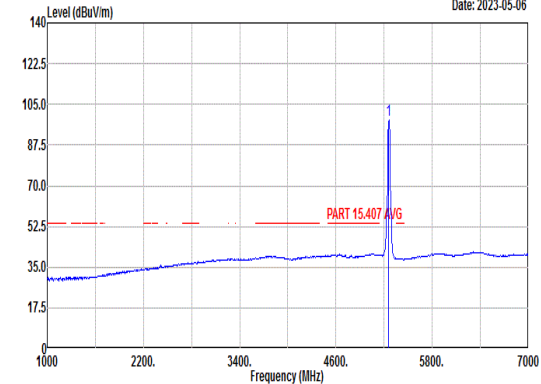

Mode	13																																																													
	Band Edge - L																																																													
	U-NII-2A_5.25-5.35_802.11ac_VHT20_CH52_5260MHz																																																													
ANT	1																																																													
Pol.	Vertical	Fundamental																																																												
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical mode. Peak at 5043.94 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 13 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5043.94</td> <td>51.96</td> <td>74.00</td> <td>-22.04</td> <td>42.20</td> <td>34.58</td> <td>7.85</td> <td>32.67</td> <td>300</td> <td>269</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5043.94	51.96	74.00	-22.04	42.20	34.58	7.85	32.67	300	269	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental mode. Peak at 5260.00 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 13 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>107.44</td> <td>-----</td> <td>97.88</td> <td>34.49</td> <td>8.10</td> <td>33.03</td> <td>300</td> <td>269</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5260.00	107.44	-----	97.88	34.49	8.10	33.03	300	269	PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg																																																				
1	5043.94	51.96	74.00	-22.04	42.20	34.58	7.85	32.67	300	269	PEAK																																																			
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg																																																				
1	5260.00	107.44	-----	97.88	34.49	8.10	33.03	300	269	PEAK																																																				
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical mode, Average. Peak at 5066.56 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 13 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5066.56</td> <td>40.43</td> <td>54.00</td> <td>-13.57</td> <td>30.71</td> <td>34.57</td> <td>7.86</td> <td>32.71</td> <td>300</td> <td>269</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5066.56	40.43	54.00	-13.57	30.71	34.57	7.86	32.71	300	269	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental mode, Average. Peak at 5260.00 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 13 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5260.00</td> <td>98.12</td> <td>-----</td> <td>88.56</td> <td>34.49</td> <td>8.10</td> <td>33.03</td> <td>300</td> <td>269</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5260.00	98.12	-----	88.56	34.49	8.10	33.03	300	269	AVERAGE
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg																																																				
1	5066.56	40.43	54.00	-13.57	30.71	34.57	7.86	32.71	300	269	AVERAGE																																																			
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg																																																				
1	5260.00	98.12	-----	88.56	34.49	8.10	33.03	300	269	AVERAGE																																																				







Mode	13																																						
	Band Edge - R																																						
	U-NII-2A_5.25-5.35_802.11ac_VHT20_CH52_5260MHz																																						
ANT	1																																						
Pol.	Vertical	Fundamental																																					
Peak	<p>Date: 2023-05-06</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 13 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.40</td> <td>50.65</td> <td>74.00</td> <td>-23.35</td> <td>41.15</td> <td>34.42</td> <td>8.42</td> <td>33.34</td> <td>300</td> <td>269</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5455.40	50.65	74.00	-23.35	41.15	34.42	8.42	33.34	300	269	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																
1	5455.40	50.65	74.00	-23.35	41.15	34.42	8.42	33.34	300	269	PEAK																												
Avg	<p>Date: 2023-05-06</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 13 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5359.60</td> <td>38.85</td> <td>54.00</td> <td>-15.15</td> <td>29.23</td> <td>34.46</td> <td>8.35</td> <td>33.19</td> <td>300</td> <td>269</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5359.60	38.85	54.00	-15.15	29.23	34.46	8.35	33.19	300	269	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																
1	5359.60	38.85	54.00	-15.15	29.23	34.46	8.35	33.19	300	269	AVERAGE																												



Mode	13																																																																							
	Harmonic																																																																							
	U-NII-2A_5.25-5.35_802.11ac VHT20_CH52_5260MHz																																																																							
ANT	1																																																																							
Pol.	Horizontal	Vertical																																																																						
Peak Avg	<p style="text-align: right;">Date: 2023-05-12</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL Mode : 13 Setting : NCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dB</th> <th>dBuV dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 10520.00 49.62 68.30 -18.68</td> <td>52.36 39.79</td> <td>10.85 53.38</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2 15780.00 50.84 74.00 -23.16</td> <td>50.87 41.98</td> <td>12.71 54.72</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor					MHz dBuV/m dB	dBuV dB/m	dB	dB	cm	deg		1 10520.00 49.62 68.30 -18.68	52.36 39.79	10.85 53.38	---	---	---	Peak	2 15780.00 50.84 74.00 -23.16	50.87 41.98	12.71 54.72	---	---	---	Peak	<p style="text-align: right;">Date: 2023-05-12</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL Mode : 13 Setting : NCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dB</th> <th>dBuV dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 10520.00 49.02 68.30 -19.28</td> <td>51.76 39.79</td> <td>10.85 53.38</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2 15780.00 49.75 74.00 -24.25</td> <td>49.78 41.98</td> <td>12.71 54.72</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor					MHz dBuV/m dB	dBuV dB/m	dB	dB	cm	deg		1 10520.00 49.02 68.30 -19.28	51.76 39.79	10.85 53.38	---	---	---	Peak	2 15780.00 49.75 74.00 -24.25	49.78 41.98	12.71 54.72	---	---	---	Peak
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																	
Freq Level Line Margin	Level Factor	Loss Factor																																																																						
MHz dBuV/m dB	dBuV dB/m	dB	dB	cm	deg																																																																			
1 10520.00 49.62 68.30 -18.68	52.36 39.79	10.85 53.38	---	---	---	Peak																																																																		
2 15780.00 50.84 74.00 -23.16	50.87 41.98	12.71 54.72	---	---	---	Peak																																																																		
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor																																																																						
MHz dBuV/m dB	dBuV dB/m	dB	dB	cm	deg																																																																			
1 10520.00 49.02 68.30 -19.28	51.76 39.79	10.85 53.38	---	---	---	Peak																																																																		
2 15780.00 49.75 74.00 -24.25	49.78 41.98	12.71 54.72	---	---	---	Peak																																																																		

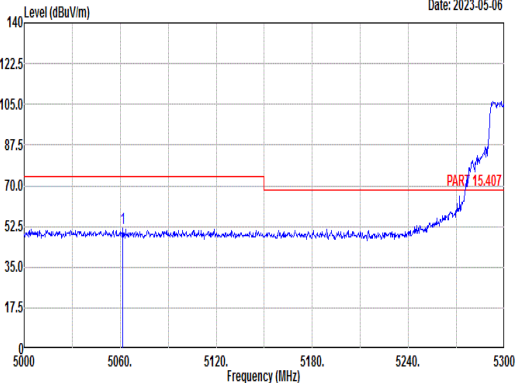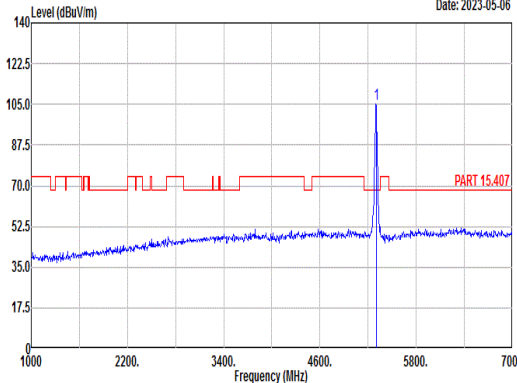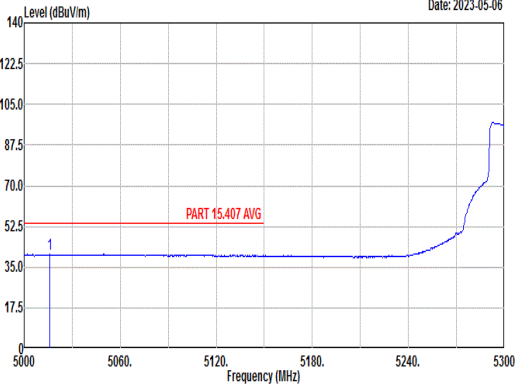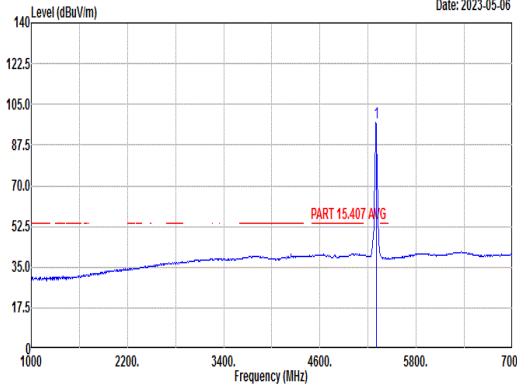

14																																																																																																																		
Mode	Band Edge - L																																																																																																																	
U-NII-2A_5.25-5.35_802.11ac_VHT20_CH60_5300MHz																																																																																																																		
ANT	1																																																																																																																	
Pol.	Horizontal																																																																																																																	
Peak	Fundamental																																																																																																																	
 <p>Level (dBuV/m) vs Frequency (MHz) plot for Peak Horizontal. The plot shows a signal level rising from approximately 50 dBuV/m at 5000 MHz to about 105 dBuV/m at 5300 MHz. A red horizontal line indicates a limit at 70.0 dBuV/m. A peak is labeled 'PART 15.407' at approximately 5280 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 14 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5061.50</td> <td>51.86</td> <td>74.00</td> <td>-22.14</td> <td>42.12</td> <td>34.58</td> <td>7.86</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>250</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5061.50	51.86	74.00	-22.14	42.12	34.58	7.86								250								0								PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Peak Fundamental. The plot shows a signal level rising from approximately 50 dBuV/m at 1000 MHz to about 105 dBuV/m at 5300 MHz. A red horizontal line indicates a limit at 70.0 dBuV/m. A peak is labeled 'PART 15.407' at approximately 5280 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 14 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5300.00</td> <td>105.20</td> <td>-----</td> <td>95.62</td> <td>34.48</td> <td>8.18</td> <td>33.08</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>250</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5300.00	105.20	-----	95.62	34.48	8.18	33.08								250								0								PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																																											
1	5061.50	51.86	74.00	-22.14	42.12	34.58	7.86																																																																																																											
							250																																																																																																											
							0																																																																																																											
							PEAK																																																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																																											
1	5300.00	105.20	-----	95.62	34.48	8.18	33.08																																																																																																											
							250																																																																																																											
							0																																																																																																											
							PEAK																																																																																																											
Avg	Fundamental																																																																																																																	
 <p>Level (dBuV/m) vs Frequency (MHz) plot for Avg Horizontal. The plot shows a signal level rising from approximately 50 dBuV/m at 5000 MHz to about 105 dBuV/m at 5300 MHz. A red horizontal line indicates a limit at 52.5 dBuV/m. A peak is labeled 'PART 15.407 AVG' at approximately 5280 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 14 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5016.20</td> <td>40.59</td> <td>54.00</td> <td>-13.41</td> <td>30.80</td> <td>34.59</td> <td>7.83</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>250</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5016.20	40.59	54.00	-13.41	30.80	34.59	7.83								250								0								AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Avg Fundamental. The plot shows a signal level rising from approximately 50 dBuV/m at 1000 MHz to about 105 dBuV/m at 5300 MHz. A red horizontal line indicates a limit at 52.5 dBuV/m. A peak is labeled 'PART 15.407 AVG' at approximately 5280 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 14 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5300.00</td> <td>97.04</td> <td>-----</td> <td>87.46</td> <td>34.48</td> <td>8.17</td> <td>33.07</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>250</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5300.00	97.04	-----	87.46	34.48	8.17	33.07								250								0								AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																																											
1	5016.20	40.59	54.00	-13.41	30.80	34.59	7.83																																																																																																											
							250																																																																																																											
							0																																																																																																											
							AVERAGE																																																																																																											
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																																											
1	5300.00	97.04	-----	87.46	34.48	8.17	33.07																																																																																																											
							250																																																																																																											
							0																																																																																																											
							AVERAGE																																																																																																											



Mode	14																																			
	Band Edge - R																																			
	U-NII-2A_5.25-5.35_802.11ac_VHT20_CH60_5300MHz																																			
ANT	1																																			
Pol.	Horizontal	Fundamental																																		
Peak	<p>Date: 2023-05-06</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 14 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5356.96</td> <td>50.93</td> <td>74.00</td> <td>-23.07</td> <td>41.30</td> <td>34.46</td> <td>8.35 33.18</td> <td>250</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5356.96	50.93	74.00	-23.07	41.30	34.46	8.35 33.18	250	0 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																													
1	5356.96	50.93	74.00	-23.07	41.30	34.46	8.35 33.18	250	0 PEAK																											
Avg	<p>Date: 2023-05-06</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 14 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.72</td> <td>40.54</td> <td>54.00</td> <td>-13.46</td> <td>30.92</td> <td>34.46</td> <td>8.33 33.17</td> <td>250</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5350.72	40.54	54.00	-13.46	30.92	34.46	8.33 33.17	250	0 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																													
1	5350.72	40.54	54.00	-13.46	30.92	34.46	8.33 33.17	250	0 AVERAGE																											



14																																																													
Mode	Band Edge - L																																																												
U-NII-2A_5.25-5.35_802.11ac_VHT20_CH60_5300MHz																																																													
ANT	1																																																												
Pol.	Vertical																																																												
Peak	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-05-06</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 14 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5018.30</td> <td>52.29</td> <td>74.00</td> <td>-21.71</td> <td>42.50</td> <td>34.59</td> <td>7.83</td> <td>32.63</td> <td>200</td> <td>279</td> <td>PEAK</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-05-06</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 14 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5300.00</td> <td>107.02</td> <td>-----</td> <td>97.44</td> <td>34.48</td> <td>8.18</td> <td>33.08</td> <td>200</td> <td>279</td> <td>PEAK</td> </tr> </tbody> </table> </div> </div>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5018.30	52.29	74.00	-21.71	42.50	34.59	7.83	32.63	200	279	PEAK	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5300.00	107.02	-----	97.44	34.48	8.18	33.08	200	279	PEAK
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg																																																			
1	5018.30	52.29	74.00	-21.71	42.50	34.59	7.83	32.63	200	279	PEAK																																																		
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg																																																			
1	5300.00	107.02	-----	97.44	34.48	8.18	33.08	200	279	PEAK																																																			
Avg	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-05-06</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 14 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5048.30</td> <td>40.56</td> <td>54.00</td> <td>-13.44</td> <td>30.81</td> <td>34.58</td> <td>7.85</td> <td>32.68</td> <td>200</td> <td>279</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-05-06</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 14 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5300.00</td> <td>97.99</td> <td>-----</td> <td>88.41</td> <td>34.48</td> <td>8.18</td> <td>33.08</td> <td>200</td> <td>279</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> </div>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5048.30	40.56	54.00	-13.44	30.81	34.58	7.85	32.68	200	279	AVERAGE	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5300.00	97.99	-----	88.41	34.48	8.18	33.08	200	279	AVERAGE
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg																																																			
1	5048.30	40.56	54.00	-13.44	30.81	34.58	7.85	32.68	200	279	AVERAGE																																																		
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg																																																			
1	5300.00	97.99	-----	88.41	34.48	8.18	33.08	200	279	AVERAGE																																																			



Mode	14																																			
	Band Edge - R																																			
	U-NII-2A_5.25-5.35_802.11ac_VHT20_CH60_5300MHz																																			
ANT	1																																			
Pol.	Vertical	Fundamental																																		
Peak	<p>Date: 2023-05-06</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 14 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5354.24</td> <td>51.40</td> <td>74.00</td> <td>-22.60</td> <td>41.78</td> <td>34.46</td> <td>8.34 33.18</td> <td>200 279 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5354.24	51.40	74.00	-22.60	41.78	34.46	8.34 33.18	200 279 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																													
1	5354.24	51.40	74.00	-22.60	41.78	34.46	8.34 33.18	200 279 PEAK																												
Avg	<p>Date: 2023-05-06</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 14 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.36</td> <td>40.39</td> <td>54.00</td> <td>-13.61</td> <td>30.77</td> <td>34.46</td> <td>8.33 33.17</td> <td>200 279 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5351.36	40.39	54.00	-13.61	30.77	34.46	8.33 33.17	200 279 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																													
1	5351.36	40.39	54.00	-13.61	30.77	34.46	8.33 33.17	200 279 AVERAGE																												







Mode	14																																																																																																
	Harmonic																																																																																																
	U-NII-2A_5.25-5.35_802.11ac_VHT20_CH60_5300MHz																																																																																																
ANT	1																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p style="text-align: right;">Date: 2023-05-12</p>	<p style="text-align: right;">Date: 2023-05-12</p>																																																																																															
	<p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL Mode : 14 Setting : NCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>49.44</td> <td>74.00</td> <td>-24.56</td> <td>52.28</td> <td>39.74</td> <td>10.91</td> <td>53.49</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>48.66</td> <td>74.00</td> <td>-25.34</td> <td>48.73</td> <td>42.10</td> <td>12.71</td> <td>54.88</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10600.00	49.44	74.00	-24.56	52.28	39.74	10.91	53.49	---	---	Peak	2	15900.00	48.66	74.00	-25.34	48.73	42.10	12.71	54.88	---	---	Peak	<p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL Mode : 14 Setting : NCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>48.66</td> <td>74.00</td> <td>-25.34</td> <td>51.50</td> <td>39.74</td> <td>10.91</td> <td>53.49</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>49.27</td> <td>74.00</td> <td>-24.73</td> <td>49.34</td> <td>42.10</td> <td>12.71</td> <td>54.88</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10600.00	48.66	74.00	-25.34	51.50	39.74	10.91	53.49	---	---	Peak	2	15900.00	49.27	74.00	-24.73	49.34	42.10	12.71	54.88	---	---
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10600.00	49.44	74.00	-24.56	52.28	39.74	10.91	53.49	---	---	Peak																																																																																						
2	15900.00	48.66	74.00	-25.34	48.73	42.10	12.71	54.88	---	---	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10600.00	48.66	74.00	-25.34	51.50	39.74	10.91	53.49	---	---	Peak																																																																																						
2	15900.00	49.27	74.00	-24.73	49.34	42.10	12.71	54.88	---	---	Peak																																																																																						



		15																																																												
Mode	Band Edge																																																													
	U-NII-2A_5.25-5.35_802.11ac_VHT20_CH64_5320MHz																																																													
ANT	1																																																													
Pol.	Horizontal	Fundamental																																																												
Peak	<p>Date: 2023-05-06</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 15 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.32</td> <td>62.36</td> <td>74.00</td> <td>-11.64</td> <td>52.74</td> <td>34.46</td> <td>8.34</td> <td>33.18</td> <td>253</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5353.32	62.36	74.00	-11.64	52.74	34.46	8.34	33.18	253	360	PEAK	<p>Date: 2023-05-06</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 15 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>106.11</td> <td>-----</td> <td>96.51</td> <td>34.47</td> <td>8.25</td> <td>33.12</td> <td>253</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5320.00	106.11	-----	96.51	34.47	8.25	33.12	253	360	PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg																																																				
1	5353.32	62.36	74.00	-11.64	52.74	34.46	8.34	33.18	253	360	PEAK																																																			
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg																																																				
1	5320.00	106.11	-----	96.51	34.47	8.25	33.12	253	360	PEAK																																																				
Avg	<p>Date: 2023-05-06</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 15 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.24</td> <td>46.37</td> <td>54.00</td> <td>-7.63</td> <td>36.75</td> <td>34.46</td> <td>8.33</td> <td>33.17</td> <td>253</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5350.24	46.37	54.00	-7.63	36.75	34.46	8.33	33.17	253	360	AVERAGE	<p>Date: 2023-05-06</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 15 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>97.04</td> <td>-----</td> <td>87.44</td> <td>34.47</td> <td>8.26</td> <td>33.13</td> <td>253</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	1	5320.00	97.04	-----	87.44	34.47	8.26	33.13	253	360	AVERAGE
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	dB	cm	deg																																																				
1	5350.24	46.37	54.00	-7.63	36.75	34.46	8.33	33.17	253	360	AVERAGE																																																			
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	dB	cm	deg																																																				
1	5320.00	97.04	-----	87.44	34.47	8.26	33.13	253	360	AVERAGE																																																				

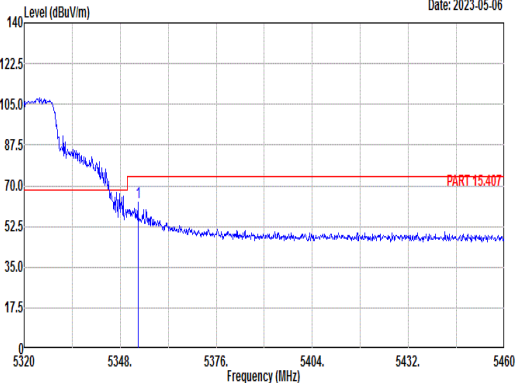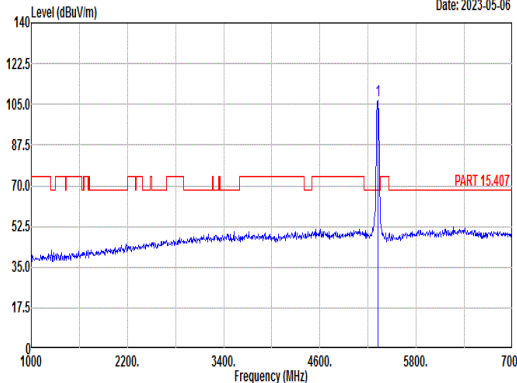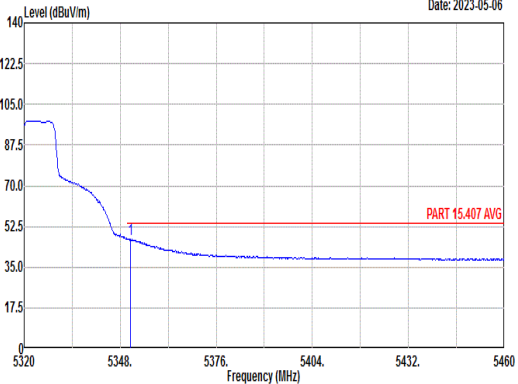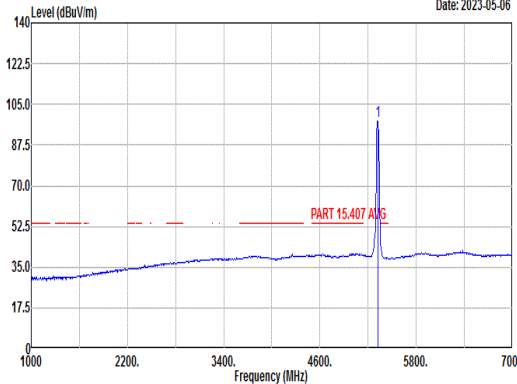

		15																																																																						
Mode	Band Edge																																																																							
	U-NII-2A_5.25-5.35_802.11ac_VHT20_CH64_5320MHz																																																																							
ANT	1																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical Peak. Date: 2023-05-06. Peak at 5353.18 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 15 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.18</td> <td>62.81</td> <td>74.00</td> <td>-11.19</td> <td>53.19</td> <td>34.46</td> <td>8.34</td> <td>33.18</td> <td>231</td> <td>270</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5353.18	62.81	74.00	-11.19	53.19	34.46	8.34	33.18	231	270	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental Peak. Date: 2023-05-06. Peak at 5320.00 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 15 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>106.36</td> <td>-----</td> <td>96.96</td> <td>34.47</td> <td>8.25</td> <td>33.12</td> <td>231</td> <td>270</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	106.36	-----	96.96	34.47	8.25	33.12	231	270	PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																
1	5353.18	62.81	74.00	-11.19	53.19	34.46	8.34	33.18	231	270	PEAK																																																													
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																
1	5320.00	106.36	-----	96.96	34.47	8.25	33.12	231	270	PEAK																																																														
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical Avg. Date: 2023-05-06. Avg at 5350.94 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 15 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.94</td> <td>47.22</td> <td>54.00</td> <td>-6.78</td> <td>37.60</td> <td>34.46</td> <td>8.33</td> <td>33.17</td> <td>231</td> <td>270</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.94	47.22	54.00	-6.78	37.60	34.46	8.33	33.17	231	270	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental Avg. Date: 2023-05-06. Avg at 5320.00 MHz.</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 15 Setting : MCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>97.87</td> <td>-----</td> <td>88.28</td> <td>34.47</td> <td>8.23</td> <td>33.11</td> <td>231</td> <td>270</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	97.87	-----	88.28	34.47	8.23	33.11	231	270	AVERAGE
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																
1	5350.94	47.22	54.00	-6.78	37.60	34.46	8.33	33.17	231	270	AVERAGE																																																													
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																
1	5320.00	97.87	-----	88.28	34.47	8.23	33.11	231	270	AVERAGE																																																														



Mode	15																																																																							
	Harmonic																																																																							
	U-NII-2A_5.25-5.35_802.11ac_VHT20_CH64_5320MHz																																																																							
ANT	1																																																																							
Pol.	Horizontal	Vertical																																																																						
Peak Avg	<p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL Mode : 15 Setting : NCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>cm deg</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 10640.00 49.04 74.00 -24.96</td> <td>51.92 39.72</td> <td>10.94 53.54</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2 15960.00 49.57 74.00 -24.43</td> <td>49.67 42.16</td> <td>12.70 54.96</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor					MHz dBuV/m dBuV/m dB	dBuV dB/m dB	cm deg					1 10640.00 49.04 74.00 -24.96	51.92 39.72	10.94 53.54	---	---	---	Peak	2 15960.00 49.57 74.00 -24.43	49.67 42.16	12.70 54.96	---	---	---	Peak	<p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 VERTICAL Mode : 15 Setting : NCS0 Power setting 19 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB</th> <th>dBuV dB/m dB</th> <th>cm deg</th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 10640.00 49.60 74.00 -24.40</td> <td>52.48 39.72</td> <td>10.94 53.54</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2 15960.00 49.54 74.00 -24.46</td> <td>49.64 42.16</td> <td>12.70 54.96</td> <td>---</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor					MHz dBuV/m dBuV/m dB	dBuV dB/m dB	cm deg					1 10640.00 49.60 74.00 -24.40	52.48 39.72	10.94 53.54	---	---	---	Peak	2 15960.00 49.54 74.00 -24.46	49.64 42.16	12.70 54.96	---	---	---	Peak
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																	
Freq Level Line Margin	Level Factor	Loss Factor																																																																						
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	cm deg																																																																						
1 10640.00 49.04 74.00 -24.96	51.92 39.72	10.94 53.54	---	---	---	Peak																																																																		
2 15960.00 49.57 74.00 -24.43	49.67 42.16	12.70 54.96	---	---	---	Peak																																																																		
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																		
Freq Level Line Margin	Level Factor	Loss Factor																																																																						
MHz dBuV/m dBuV/m dB	dBuV dB/m dB	cm deg																																																																						
1 10640.00 49.60 74.00 -24.40	52.48 39.72	10.94 53.54	---	---	---	Peak																																																																		
2 15960.00 49.54 74.00 -24.46	49.64 42.16	12.70 54.96	---	---	---	Peak																																																																		



		16																																																																																	
Mode		Band Edge																																																																																	
		U-NII-2C_5.47-5.725_802.11ac VHT20_CH100_5500MHz																																																																																	
ANT		1																																																																																	
Pol.	Horizontal	Fundamental																																																																																	
Peak	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : MCS0 Power setting 18 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.50</td> <td>58.29</td> <td>74.00</td> <td>-15.71</td> <td>48.81</td> <td>34.42</td> <td>8.41</td> <td>33.35</td> <td>100</td> <td>298</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.40</td> <td>64.11</td> <td>68.30</td> <td>-4.19</td> <td>54.66</td> <td>34.41</td> <td>8.40</td> <td>33.36</td> <td>100</td> <td>298</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.50	58.29	74.00	-15.71	48.81	34.42	8.41	33.35	100	298	PEAK	2	5469.40	64.11	68.30	-4.19	54.66	34.41	8.40	33.36	100	298	PEAK	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : MCS0 Power setting 18 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>104.07</td> <td>-----</td> <td>94.71</td> <td>34.40</td> <td>8.36</td> <td>33.40</td> <td>100</td> <td>298</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	104.07	-----	94.71	34.40	8.36	33.40	100	298	PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																												
Freq Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5459.50	58.29	74.00	-15.71	48.81	34.42	8.41	33.35	100	298	PEAK																																																																								
2	5469.40	64.11	68.30	-4.19	54.66	34.41	8.40	33.36	100	298	PEAK																																																																								
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																													
Freq Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5500.00	104.07	-----	94.71	34.40	8.36	33.40	100	298	PEAK																																																																									
Avg	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 16 Setting : MCS0 Power setting 18 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.80</td> <td>44.81</td> <td>54.00</td> <td>-9.19</td> <td>35.33</td> <td>34.42</td> <td>8.41</td> <td>33.35</td> <td>100</td> <td>298</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.80	44.81	54.00	-9.19	35.33	34.42	8.41	33.35	100	298	AVERAGE	<p>Date: 2023-05-05</p> <p>Site : 03CH03-SZ Condition: PART 15.407 AVG 3m ANT3117_0057 HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 16 Setting : MCS0 Power setting 18 Plane : Z with accessories : 352000530016413/352000530016421</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>96.21</td> <td>-----</td> <td>86.85</td> <td>34.40</td> <td>8.36</td> <td>33.40</td> <td>100</td> <td>298</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	96.21	-----	86.85	34.40	8.36	33.40	100	298	AVERAGE												
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																													
Freq Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5459.80	44.81	54.00	-9.19	35.33	34.42	8.41	33.35	100	298	AVERAGE																																																																								
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																													
Freq Level	Line	Margin	Level	Factor	Loss	Factor																																																																													
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5500.00	96.21	-----	86.85	34.40	8.36	33.40	100	298	AVERAGE																																																																									