


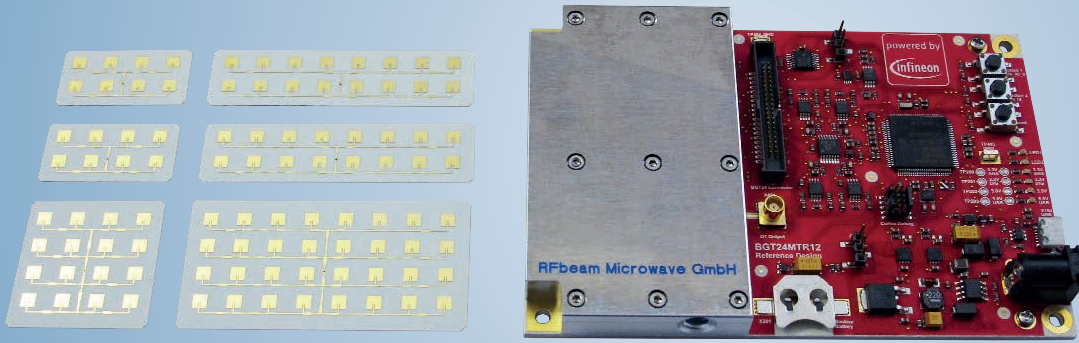

Product Brief

24GHz Radar Development Kit

Based on Infineon's RF-Transceiver BGT24MTR12 and Microcontroller XMC4400

This development kit allows a customer to implement and test 24GHz Radar applications as Doppler movement detectors, FSK or FMCW range/position measurement. It consists of BGT24MTR12 transceiver MMIC and a XMC4400 32-bit CPU for Signal processing.

The CPU is already preprogrammed with a Sample application what samples up to 4 IF channels of the Transceiver chip and sends it via a USB interface to a connected PC. An included PC application (Windows XP/Vista/7/8) can be used to display acquired data in time- and frequency domain. Using Infineon's DAVE™ development tool own applications can be written and tested (e.g. FMCW sweeps and signal processing). So this platform is a good starting point for own applications.

The development kit includes 12° x 25° Patch Antennas what can be exchanged by SMA connectors, so the user is free to use own antennas.

Reference Design Features


- BGT24MTR12 RF frontend chip
- Fixed patch antenna or SMA connector
- Dual analog amplifier stage for each Rx channel with a total gain of 55dB
- Transparent header with all signals from the BGT24MTR12 for external signal processing
- 50Ω MCX connector with Q1 signal from the RF frontend
- Jumper to disconnect the XMC4400 from the BGT24MTR12
- XMC4400 Microcontroller for sampling and signal processing of the analog signals onboard
- USB On the Go Host/Device support via micro USB connector
- Debug over Cortex 10-pin debug connector
- Reset push button
- 4 Power LEDs
- 2 User LEDs
- Power Supply via USB or external connector

Contents of the Kit Includes

- AN380 - Users Manual for the BGT24-RFB2412
- SW GUI Folder to Operate Kit
- Additional patch antennas
- Micro USB to USB Cable (3')

Available through www.MyInfineon.com

- SW environment for basic motion detection containing firmware code for motion detection processing
- Schematics and BOM of the BGT24-RFB2412

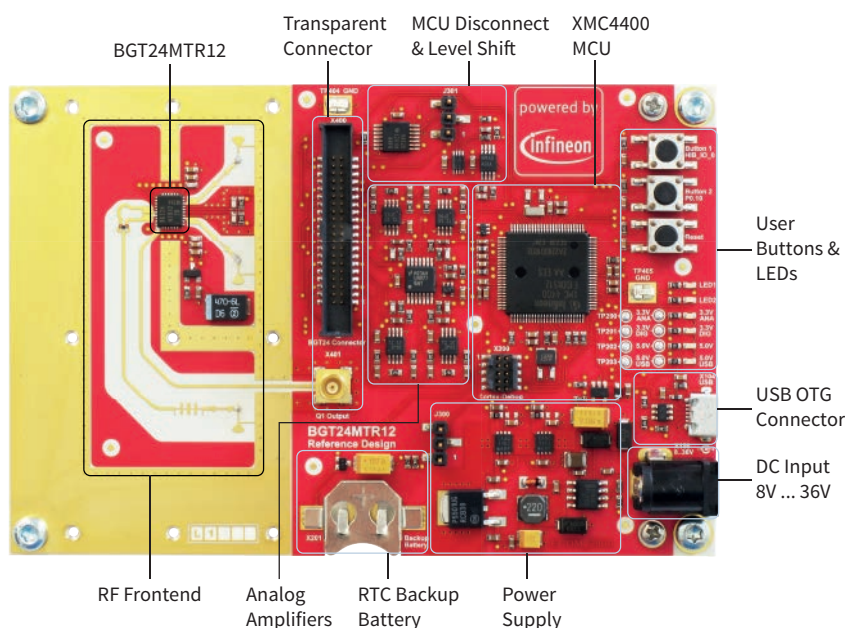


Patched antennas are on the backside of the RF Frontend PCB (not shown in the picture).

24GHz Radar Development Kit

Based on Infineon's RF-Transceiver BGT24MTR12 and Microcontroller XMC4400

Block Diagram

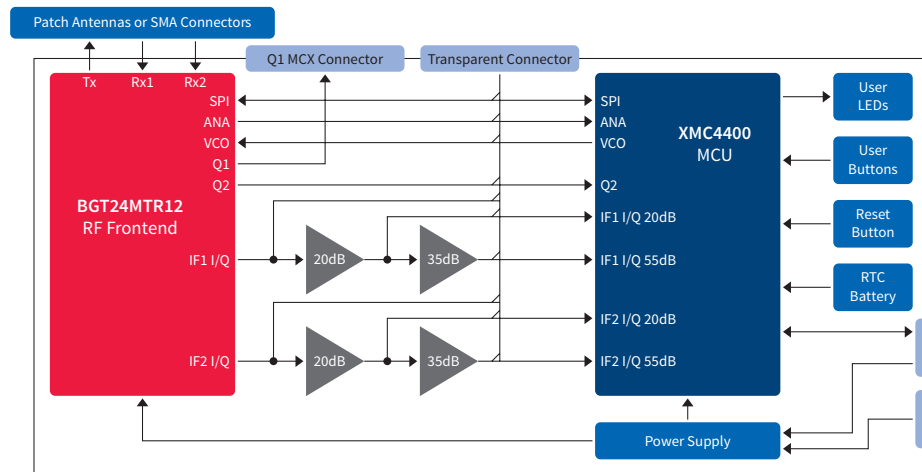

BGT24MTR12

Infineon's BGT24MTR12 SiGe MMIC is located below a metallic encapsulation to reduce unwanted radiation. Every pin of this MMIC is accessible on a transparent connector and also from the XMC4400 CPU. RF input/output are fed to vias that go to the other side of the PCB where an antenna or an SMA connector can be attached.

XMC4400 MCU

This CPU contains an ARM® Cortex™-M4 core. Applications can be stored into internal 512KB Flash memory. All analog signals from the RF frontend are sampled by internal ADC converters. BGT24MTR12 frequency control is done over 2 DAC channels.

External Antenna

This kit contains integrated Patch Antennas with an opening angle of 12° x 25°. These antennas also allow angle of arrival measurement. If an application needs higher RF bandwidth (e.g. for Tank Level applications) the antennas can be removed and replaced by SMA connectors, what allow the use of any custom 24GHz antenna.

Q1 MCX Connector

This connector outputs the divided down 24GHz carrier and allow the connection of an external PLL.

Transparent Connector

Every pin of the BGT24MTR12 chip is available on this connector and can be controlled by external user hardware.

IF Amplifier

This amplifier increases IF signal levels from BGT24MTR12 chip so they can be sampled from the XMC4400 AD converters. Two different gain stages allow processing of close and far Radar objects.

Power Supply

This Reference Design can be supplied over the USB connector or also by an external power supply (not included).

USB

This port is used to control the demo software or to transfer data to a PC application (a demo version of a USB stack is included).

User LEDs/Button

Different LEDs and Buttons can be used from User's application to create stand-alone applications.

Software/Firmware

Basic Doppler motion sensing capability comes by default with kit. DAVE™ SW environment can be downloaded via Infineon website link. Upgrading to FMCW capability for range/distance measurements can also be updated from the Infineon website link.

Orderable Part Number

BGT24RFB2412EVALKITTOBO1

Published by
Infineon Technologies AG
85579 Neubiberg, Germany

© 2015 Infineon Technologies AG.
All Rights Reserved.

Visit us:
www.infineon.com

Order Number: B132-I0070-V1-7600-EU-EC-P
Date: 02 / 2015

Attention please!

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

Warnings

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office. Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.