

CERTIFICATION

VHF-FM Tone and Voice Paging Receiver

UNDER CFR 47, PART 15.109

GRANTEE: SCA, INC.

FCC ID: JCA-CPAV03LL

FCC ID: JCA-CPAV03L

FCC ID: JCA-CPAV03M

FCC ID: JCA-CPAV03H

FCC ID: JCA-CPAV03HH

November 4, 1999

Prepared By:

Spectrum Technology, Inc.
209 Dayton Street
Edmonds, WA 98020
425 771-4482

CERTIFICATION
TABLE OF CONTENTS

Field Strength of Radiated Emissions Discussion Part 15.109(a)	1 - 2
Antenna Factors and Sample Calculations	3 - 5
Test Equipment List	6

TEST: FIELD STRENGTH OF RADIATED EMISSIONS

Grantee: SCA, Inc. Model: Low Band VHF-FM
Tone and Voice Monitor Pager

FCC ID's:	JCA-CPAV02LL	LL band	30 – 33 MHz
	JCA-CPAV02L	L band	33 – 37 MHz
	JCA-CPAV02M	M band	37 – 41 MHz
	JCA-CPAV02H	H band	41 – 45 MHz
	JCA-CPAV02HH	HH band	45 – 50 MHz

Setup:

The equipment under test (EUT) was configured and operated in accordance with the applicable provisions of ANSI C63.4-1992, Section 6, 12. Measurements were made in accordance with applicable paragraphs of Section 8.2.3, Section 12.1.1.1 Appendix D, Section 12.1.4 and Appendix H3 and H4.

The EUT was placed on a 1 by 1.5 meter table located 40 cm above a 2 meter diameter non-metallic turntable that sits 40 cm above the 15 X 30 meter ground plane at Spectrum's Open Area Test Site. The bi-conical or log-periodic antenna was mounted on a tower spaced at a three meters distance, and arranged for adjustment in height (1-4 meters) and vertical/horizontal polarization to maximize the emissions levels when combined with turntable rotation of the EUT. HP 8562A spectrum analyzer with a HP 8447F, Option H64 amplifier or a HP 83006A pre-amplifier were used for the peak measuring instrumentation.

Discussion:

The EUT is a Low Band VHF-FM Tone and Voice Monitor paging receiver. The receiver was powered with a single new AAA 1.5 Volt battery during measurements.

Two sets of measurements were made for each of the five sample receivers tested covering each of the bands of operation as shown below. Measurements of the field strength of radiated emissions were made on ten different frequencies. The test samples were each measured individually while operating on one of the following channels:

LL band	30 - 33 MHz	CH 1	30.500 and	CH 2	32.500 MHz
L band	33 - 37 MHz	CH 1	33.500 and	CH 2	36.500 MHz
M band	37 - 41 MHz	CH 1	37.500 and	CH 2	40.500 MHz
H band	41 - 45 MHz	CH 1	41.500 and	CH 2	44.500 MHz
HH band	45 - 50 MHz	CH 1	45.500 and	CH 2	49.500 MHz

Preliminary measurements were made as described in Section 8.3.11 and 12.1.4.1 with the receiver operating as described. The receiver was observed while positioned in three

Page 1

mutually orthogonal planes. Levels were low in all three planes with little difference observed between positions. No one position was clearly "worst case". During preliminary measurements numerous low level emissions were detected from the five EUT's over the spectrum up to 682 MHz with the use of an HP 8447F amplifier and placing the receive

antenna in immediately adjacent to the EUT. The EUT orthogonal placement on the table is detailed in the photographs of the test setup.

The final set of measurements as detailed in Section 8.3.1.2 and 12.1.4.2 were made as specified. RBW and VBW of 100 kHz were used for measurements below 1 GHz. We also endeavored to maximize emission levels of the EUT as appropriate, with rotation of the table and adjustment of antenna height and polarization.

Measurements were made over the frequency range of 30 - 1000 MHz in great detail in accordance with Section 15.33. No emissions were measurable at three meters during the final detailed radiated emissions measurements from any of the five samples tested

**FCC Part 15.109(b) Field Strength of Radiated Spurious Emissions
Final Data**

Grantee: SCA, Inc. 9/29/99

FCC ID's: JCA-CPAV03LL, JCA-CPAV03L, JCA-CPAV03M, JCA-CPAV03H,
JCA-CPAV03HH

Freq MHz	Vert dBm	Horz dBm	Ant-F	dBuV/m	uV/m	dB +/- Limit	Limit uV/m @ 3 Meters
-------------	-------------	-------------	-------	--------	------	-----------------	-----------------------------

No measurable emissions at three meters

The antenna is a permanently attached telescoping whip antenna. Emission were checked with antenna in both positions In and Out. No receiver antenna conducted spurious emissions measurements were made due to attached antenna.

Conclusion:


The SCA, Inc., FCC ID's: JCA-CPAV03LL, JCA-CPAV03L, JCA-CPAV03M, JCA-CPAV03H, and JCA-CPAV03HH, when operated and measured as discussed above, meet the receiver radiated spurious emissions requirements under Title 47, CFR Part 15.109(a). **This receiver is not subject to the transition provisions of Part 15.37.**

Antenna Factor and Field Strength Formula

level as measured with Spectrum Analyzer

converts to dBuV @ 50 ohms

converts to dBuV/m

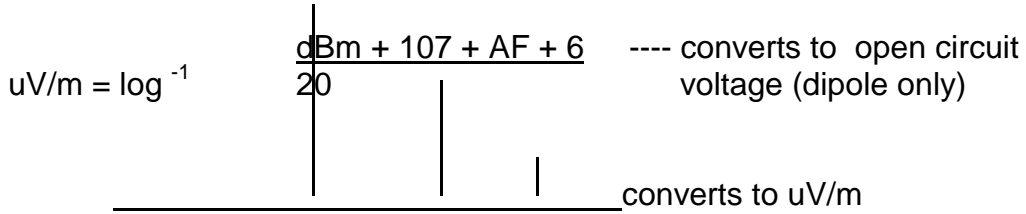

IF FREQ => 20	AND	FREQ <= 26.5	THEN ANTF = 12.5
IF FREQ => 26.6	AND	FREQ <= 28	THEN ANTF = 13.5
IF FREQ => 28.1	AND	FREQ <= 33	THEN ANTF = 14.5
IF FREQ => 33.1	AND	FREQ <= 35	THEN ANTF = 13.5
IF FREQ => 35.1	AND	FREQ <= 45	THEN ANTF = 13
IF FREQ => 45.	AND	FREQ <= 57	THEN ANTF = 12
IF FREQ => 57.1	AND	FREQ <= 63	THEN ANTF = 11
IF FREQ => 63.1	AND	FREQ <= 66	THEN ANTF = 10
IF FREQ => 66.1	AND	FREQ <= 75	THEN ANTF = 9
IF FREQ => 75.1	AND	FREQ <= 83	THEN ANTF = 8
IF FREQ => 83.1	AND	FREQ <= 86	THEN ANTF = 9
IF FREQ => 86.1	AND	FREQ <= 90	THEN ANTF = 10
IF FREQ => 90.1	AND	FREQ <= 95	THEN ANTF = 11
IF FREQ => 95.1	AND	FREQ <= 97.5	THEN ANTF = 12.5
IF FREQ => 97.6	AND	FREQ <= 101	THEN ANTF = 13.5
IF FREQ => 101.1	AND	FREQ <= 105	THEN ANTF = 14.5
IF FREQ => 105.1	AND	FREQ <= 108	THEN ANTF = 15.5
IF FREQ => 108.1	AND	FREQ <= 115	THEN ANTF = 16.5
IF FREQ => 115.1	AND	FREQ <= 123	THEN ANTF = 15.5
IF FREQ => 123.1	AND	FREQ <= 148	THEN ANTF = 14.5
IF FREQ => 148.1	AND	FREQ <= 151.5	THEN ANTF = 15.5
IF FREQ => 151.6	AND	FREQ <= 167.5	THEN ANTF = 17
IF FREQ => 167.6	AND	FREQ <= 182.5	THEN ANTF = 18
IF FREQ => 182.6	AND	FREQ <= 200	THEN ANTF = 19
IF FREQ => 200.1	AND	FREQ <= 202	THEN ANTF = 14.7
IF FREQ => 202	AND	FREQ <= 205	THEN ANTF = 14.5
IF FREQ => 205	AND	FREQ <= 215	THEN ANTF = 14.6
IF FREQ => 215	AND	FREQ <= 230	THEN ANTF = 14.55
IF FREQ => 230	AND	FREQ <= 235	THEN ANTF = 14.5
IF FREQ => 235	AND	FREQ <= 240	THEN ANTF = 14.8
IF FREQ => 240	AND	FREQ <= 242.5	THEN ANTF = 14.9

IF FREQ => 242.5	AND	FREQ <= 245	THEN ANTF = 15.1
IF FREQ => 245	AND	FREQ <= 247.5	THEN ANTF = 15.5
IF FREQ => 247.5	AND	FREQ <= 250	THEN ANTF = 15.7
IF FREQ => 250	AND	FREQ <= 252	THEN ANTF = 15.9
IF FREQ => 252	AND	FREQ <= 254	THEN ANTF = 16
IF FREQ => 254	AND	FREQ <= 256	THEN ANTF = 16.1
IF FREQ => 256	AND	FREQ <= 258	THEN ANTF = 16.2
IF FREQ => 258	AND	FREQ <= 260	THEN ANTF = 16.3
IF FREQ => 260	AND	FREQ <= 263.5	THEN ANTF = 16.4
IF FREQ => 263.5	AND	FREQ <= 265	THEN ANTF = 16.4

IF FREQ => 265	AND	FREQ <= 267.5	THEN ANTF = 16.6
IF FREQ => 267.5	AND	FREQ <= 271	THEN ANTF = 16.7
IF FREQ => 271	AND	FREQ <= 274	THEN ANTF = 16.8
IF FREQ => 274	AND	FREQ <= 276	THEN ANTF = 16.9
IF FREQ => 276	AND	FREQ <= 278	THEN ANTF = 17
IF FREQ => 278	AND	FREQ <= 280	THEN ANTF = 17.1
IF FREQ => 280	AND	FREQ <= 282	THEN ANTF = 17.3
IF FREQ => 282	AND	FREQ <= 284	THEN ANTF = 17.6
IF FREQ => 284	AND	FREQ <= 286	THEN ANTF = 18
IF FREQ => 286	AND	FREQ <= 288	THEN ANTF = 18.2
IF FREQ => 288	AND	FREQ <= 295	THEN ANTF = 18.4
IF FREQ => 290	AND	FREQ <= 295	THEN ANTF = 15.8
IF FREQ => 295	AND	FREQ <= 305	THEN ANTF = 18.6
IF FREQ => 305	AND	FREQ <= 310	THEN ANTF = 18.4
IF FREQ => 310	AND	FREQ <= 311	THEN ANTF = 18.3
IF FREQ => 311	AND	FREQ <= 312	THEN ANTF = 18.1
IF FREQ => 312	AND	FREQ <= 313	THEN ANTF = 18
IF FREQ => 313	AND	FREQ <= 340	THEN ANTF = 17.9
IF FREQ => 340	AND	FREQ <= 343	THEN ANTF = 18.1
IF FREQ => 343	AND	FREQ <= 350	THEN ANTF = 18.2
IF FREQ => 350	AND	FREQ <= 357	THEN ANTF = 18.3
IF FREQ => 357	AND	FREQ <= 360	THEN ANTF = 18.5
IF FREQ => 360	AND	FREQ <= 365	THEN ANTF = 18.6
IF FREQ => 365	AND	FREQ <= 375	THEN ANTF = 18.7
IF FREQ => 375	AND	FREQ <= 378	THEN ANTF = 19
IF FREQ => 378	AND	FREQ <= 381	THEN ANTF = 19.1
IF FREQ => 381	AND	FREQ <= 383	THEN ANTF = 19.2
IF FREQ => 383	AND	FREQ <= 385	THEN ANTF = 19.3
IF FREQ => 385	AND	FREQ <= 387.5	THEN ANTF = 19.4
IF FREQ => 387.5	AND	FREQ <= 390	THEN ANTF = 19.5
IF FREQ => 390	AND	FREQ <= 392	THEN ANTF = 19.7
IF FREQ => 392	AND	FREQ <= 394	THEN ANTF = 18.8
IF FREQ => 394	AND	FREQ <= 396	THEN ANTF = 19.9
IF FREQ => 396	AND	FREQ <= 398	THEN ANTF = 20
IF FREQ => 398	AND	FREQ <= 402	THEN ANTF = 20.1
IF FREQ => 402	AND	FREQ <= 405	THEN ANTF = 20.2
IF FREQ => 405	AND	FREQ <= 410	THEN ANTF = 20.3
IF FREQ => 410	AND	FREQ <= 415	THEN ANTF = 20.4
IF FREQ => 415	AND	FREQ <= 420	THEN ANTF = 20.6
IF FREQ => 420	AND	FREQ <= 425	THEN ANTF = 20.8
IF FREQ => 425	AND	FREQ <= 430	THEN ANTF = 21
IF FREQ => 430	AND	FREQ <= 435	THEN ANTF = 21.2
IF FREQ => 435	AND	FREQ <= 440	THEN ANTF = 21.3
IF FREQ => 440	AND	FREQ <= 445	THEN ANTF = 21.4
IF FREQ => 445	AND	FREQ <= 450	THEN ANTF = 21.5
IF FREQ => 450	AND	FREQ <= 455	THEN ANTF = 21.6
IF FREQ => 455	AND	FREQ <= 460	THEN ANTF = 21.8
IF FREQ => 460	AND	FREQ <= 465	THEN ANTF = 21.9
IF FREQ => 465	AND	FREQ <= 470	THEN ANTF = 22
IF FREQ => 470	AND	FREQ <= 472.5	THEN ANTF = 22.1
IF FREQ => 472.5	AND	FREQ <= 475	THEN ANTF = 22.2
IF FREQ => 475	AND	FREQ <= 477	THEN ANTF = 22.4
IF FREQ => 477	AND	FREQ <= 478	THEN ANTF = 22.5
IF FREQ => 478	AND	FREQ <= 481	THEN ANTF = 22.6

IF FREQ => 481	AND	FREQ <= 482.5	THEN ANTF = 22.7
IF FREQ => 482.5	AND	FREQ <= 485	THEN ANTF = 22.8
IF FREQ => 485	AND	FREQ <= 488	THEN ANTF = 22.9
IF FREQ => 488	AND	FREQ <= 515	THEN ANTF = 23.1
IF FREQ => 515	AND	FREQ <= 540	THEN ANTF = 23.3
IF FREQ => 540	AND	FREQ <= 560	THEN ANTF = 23.6
IF FREQ => 560	AND	FREQ <= 570	THEN ANTF = 23.7
IF FREQ => 570	AND	FREQ <= 580	THEN ANTF = 23.9
IF FREQ => 580	AND	FREQ <= 590	THEN ANTF = 24
IF FREQ => 590	AND	FREQ <= 610	THEN ANTF = 24.2
IF FREQ => 610	AND	FREQ <= 615	THEN ANTF = 24.4
IF FREQ => 615	AND	FREQ <= 620	THEN ANTF = 24.5
IF FREQ => 620	AND	FREQ <= 625	THEN ANTF = 24.6

IF FREQ => 625	AND	FREQ =< 630	THEN ANTF = 24.8
IF FREQ => 630	AND	FREQ =< 635	THEN ANTF = 24.9
IF FREQ => 635	AND	FREQ =< 640	THEN ANTF = 25
IF FREQ => 640	AND	FREQ =< 645	THEN ANTF = 25.1
IF FREQ => 645	AND	FREQ =< 647.5	THEN ANTF = 25.3
IF FREQ => 647.5	AND	FREQ =< 650	THEN ANTF = 25.4
IF FREQ => 650	AND	FREQ =< 652.5	THEN ANTF = 25.6
IF FREQ => 652.5	AND	FREQ =< 655	THEN ANTF = 25.7
IF FREQ => 655	AND	FREQ =< 660	THEN ANTF = 25.8
IF FREQ => 660	AND	FREQ =< 665	THEN ANTF = 26.1
IF FREQ => 665	AND	FREQ =< 670	THEN ANTF = 26.3
IF FREQ => 670	AND	FREQ =< 680	THEN ANTF = 26.6
IF FREQ => 680	AND	FREQ =< 690	THEN ANTF = 26.7
IF FREQ => 690	AND	FREQ =< 720	THEN ANTF = 26.9
IF FREQ => 720	AND	FREQ =< 760	THEN ANTF = 26.8
IF FREQ => 760	AND	FREQ =< 800	THEN ANTF = 27
IF FREQ => 800	AND	FREQ =< 802.5	THEN ANTF = 27.3
IF FREQ => 802.5	AND	FREQ =< 805	THEN ANTF = 27.5
IF FREQ => 805	AND	FREQ =< 807.5	THEN ANTF = 27.6
IF FREQ => 807.5	AND	FREQ =< 810	THEN ANTF = 27.7
IF FREQ => 810	AND	FREQ =< 815	THEN ANTF = 27.8
IF FREQ => 815	AND	FREQ =< 820	THEN ANTF = 27.9
IF FREQ => 820	AND	FREQ =< 840	THEN ANTF = 28.2
IF FREQ => 840	AND	FREQ =< 860	THEN ANTF = 28.4
IF FREQ => 860	AND	FREQ =< 870	THEN ANTF = 28.8
IF FREQ => 870	AND	FREQ =< 880	THEN ANTF = 29.3
IF FREQ => 880	AND	FREQ =< 890	THEN ANTF = 29.4
IF FREQ => 890	AND	FREQ =< 910	THEN ANTF = 29.6
IF FREQ => 910	AND	FREQ =< 920	THEN ANTF = 29.7
IF FREQ => 920	AND	FREQ =< 930	THEN ANTF = 29.9
IF FREQ => 930	AND	FREQ =< 940	THEN ANTF = 30
IF FREQ => 940	AND	FREQ =< 960	THEN ANTF = 30.2
IF FREQ => 960	AND	FREQ =< 970	THEN ANTF = 30.6
IF FREQ => 970	AND	FREQ =< 975	THEN ANTF = 30.8
IF FREQ => 975	AND	FREQ =< 980	THEN ANTF = 31
IF FREQ => 980	AND	FREQ =< 985	THEN ANTF = 31.1
IF FREQ => 985	AND	FREQ =< 990	THEN ANTF = 31.3
IF FREQ => 990	AND	FREQ =< 1000	THEN ANTF = 31.4

**TEST EQUIPMENT LIST A
SPECTRUM TECHNOLOGY, INC.**

<u>Equipment</u>	<u>Manufacturer</u>	<u>Serial Number</u>	<u>Cal Date/Due Date</u>	<u>Cal Date/Due Date</u>
Spectrum Analyzer	Hewlett-Packard 8562A	08562-60062	11/04/98	11/04/99
Amplifier 9 kHz-1300 MHz	Hewlett-Packard 8447F OPT H64	2727A02208	11/04/98	11/04/99
RF Signal Gen.	Fluke 6071A	2915016	5/14/99	4/14/00

Service Monitor	IFR FM/AM 500A	4103		---
Oscilloscope	Kikusui C055060	6132295		---
Power Supply	Astron VS35	8601266		---
Voltmeter	Fluke 8020A	N2420658		---
Multimeter	Fluke 25	3710310		---
Wattmeter	Bird 43	56227		---
RF Termination	Bird 8135	10004		---
Dual Phase LISN 50 ohm/50 uH	STI per MP-4	02	1/8/99	1/9/00
Dual Phase LISN 50 ohm/50 uH	Compliance Design	8012-50R-24-BNC	1/8/99	1/9/00
Audio Generator	Hewlett-Packard 205-AG	8689		---
Thermometer	Fluke 52	3965185		---
Test Line	Simulator, Teltone TLS-2	none		---
Turn Table, RC	EMCO 1060-2M	8912-1415		---
Antenna Mast, RC	Compliance Design, Inc.	M100		---
Antennas:				
Dipole Set	EMCO Model: 3121C	1335		reference only
Dipole Set	EMCO Model: 3121C	1336		reference only
Bi-Conical	EMCO 3104	3763		reference only
Bi-Conical	EMCO 3104C	9401-4635	01/24/99	1/24/00
Log-Periodic	EMCO 3146	1754	06/10/99	6/10/00
BiConiLog	EMCO 3141	1125	10/10/98	04/28/00
Active Loop	EMCO 6502	9107-2645		reference only