

# **Logitech**

## **Antenna Under Test (AUT)**

### **Report**

**Report No.:** EVT-700-006275

**Model Name:** CU0025

**Equipment Type:** Dongle

**Manufacturer:** Logitech Far East LTD.

**Test Location:** E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park,  
Hsinchu City, Taiwan

**Tested by:** Jeff Hsieh

**Report Date:** 2023/01/06

## Report Release History

| Report version    | Description      | Date Issued |
|-------------------|------------------|-------------|
| CU0025 AUT Report | Original release | 2023/01/06  |

## Table of Contents

|   |   |
|---|---|
| 1. EUT Antenna Information                          | 3 |
| 2. Measured Values and Calculation of Antenna Gains | 3 |
| 3. RF Conducted Power Measurement                   | 4 |
| 3.1 Test Setup                                      | 4 |
| 3.2 Test Instruments                                | 4 |
| 3.3 Test Procedure                                  | 5 |
| 3.4 Test Result of RF conducted Power               | 5 |
| 4. 2D Radiation Pattern Measurement                 | 6 |
| 4.1 Test Location                                   | 6 |
| 4.2 Description of the anechoic chamber             | 6 |
| 4.3 Test Instruments                                | 7 |
| 4.4 Test Procedure                                  | 8 |
| 4.5 Test Setup photos                               | 9 |
| 4.6 2D Pattern Test Plot                            | 9 |

## 1. EUT Antenna Information

- 1) Antenna Material : PCB on board
- 2) Antenna Type : Monopole
- 3) Antenna Dimension: 11.5 x 7.6 mm
- 4) Operating Frequency : 2.4 GHz - 2.4835 GHz
- 5) Input Impedance : 50  $\Omega$
- 6) Standing-Wave Ratio : 2:1

## 2. Measured Values and Calculation of Antenna Gains

Measure peak horizontal/vertical EIRP on each x-y, y-z, x-z plane. The highest measured values will be used to calculate the antenna peak gain.


$$\text{Antenna Peak Gain (dBi)} = \text{Max EIRP(dBm)} - \text{Conducted Power (dBm)}$$

| Frequency | X-Y Plane<br>( $\Phi=90^\circ$ ) |                                | X-Z Plane<br>( $\Phi=0^\circ$ ) |                                | Y-Z Plane<br>( $\Phi=-90^\circ$ ) |                                | Max Peak<br>EIRP<br>(dBm) | Conducted<br>Power<br>(dBm) | Antenna<br>Peak<br>Gain<br>(dBi) |
|-----------|----------------------------------|--------------------------------|---------------------------------|--------------------------------|-----------------------------------|--------------------------------|---------------------------|-----------------------------|----------------------------------|
|           | Ver.<br>Peak<br>EIRP<br>(dBm)    | Hori.<br>Peak<br>EIRP<br>(dBm) | Ver.<br>Peak<br>EIRP<br>(dBm)   | Hori.<br>Peak<br>EIRP<br>(dBm) | Ver.<br>Peak<br>EIRP<br>(dBm)     | Hori.<br>Peak<br>EIRP<br>(dBm) |                           |                             |                                  |
| 2403      | 1.20                             | 7.90                           | 3.27                            | -5.65                          | 1.47                              | 7.54                           | 7.90                      | 5.12                        | 2.78                             |
| 2442      | 1.01                             | 6.93                           | 2.53                            | 0.56                           | 2.00                              | 7.20                           | 7.20                      | 4.92                        | 2.28                             |
| 2479      | 0.96                             | 7.15                           | 1.77                            | -1.57                          | 1.25                              | 7.01                           | 7.15                      | 4.74                        | 2.41                             |

**Test Date: 2022/12/15**

### 3. RF Conducted Power Measurement

#### 3.1 Test Setup

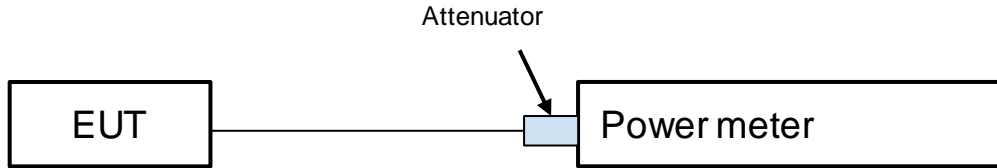

#### 3.2 Test Instruments

| Description                      | Model No.  | Serial No.    | Last Calibration |
|----------------------------------|------------|---------------|------------------|
| Power Meter<br>Anritsu           | ML2495A    | 1529002       | 2022/6/22        |
| Pulse Power<br>Sensor<br>Anritsu | MA2411B    | 1339443       | 2022/5/29        |
| Attenuator<br>Keysight           | MDCS18N-10 | MDCS18N-10-01 | 2022/4/5         |

Note: The calibration interval of the above test instruments is 12 months

### 3.3 Test Procedure

A spectrum analyzer or Power meter was used to perform output power measurement, setting the detector to average and configuring EUT continuously transmitting power(100% duty cycle).

### 3.4 Test Result of RF conducted Power

| Frequency (MHz) | Measured Power (dBm) |
|-----------------|----------------------|
| 2403            | 5.12                 |
| 2442            | 4.92                 |
| 2479            | 4.74                 |

**Test Date: 2022/12/26**

## 4. 2D Radiation Pattern Measurement

### 4.1 Test Location


2D radiation pattern measurement in the anechoic chamber

### 4.2 Description of the anechoic chamber

Anechoic Chamber

- Length: 10m
- Width: 5m
- Height: 5m
- Turntable height: 1.5m
- Measurement Antenna height: 1.5m

.

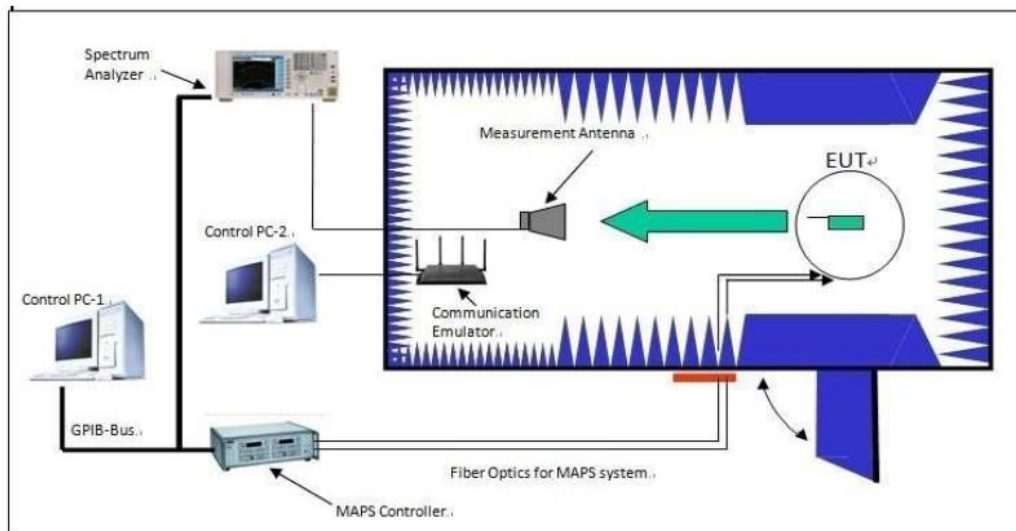

### 4.3 Test Instruments

| Description  | Model No.                      | Serial No.  | Last Calibration |
|--|--------------------------------|-------------|------------------|
| Spectrum Analyzer<br>Keysight  | N9030A                         | MY54490520  | 2022/8/5         |
| Horn Antenna<br>ETS  | BBHA 9120 D                    | 9120D-1479  | 2022/11/13       |
| Software   | Antenna Pattern<br>V6.2-210118 | N/A         | N/A              |
| Antenna Tower/<br>Turntable  | MF-7802                        | MF780208542 | N/A              |
| PSG analog signal<br>generator (from 250<br>kHz to 50 GHz)<br>Keysight | E8257D                         | MY53401987  | 2022/6/21        |
| RF Coaxial Cable   | SUCOFLEX104                    | RF104-215   | 2022/11/04       |

Note: The calibration interval of the above test instruments is \_\_12\_\_ months

## 4.4 Test Procedure

- i. Connect the EUT to power meter and record the power setting of EUT and the measured conducted power.
- ii. Fasten the EUT in the center of the turntable, record the coordinates and take pictures.
- iii. Configuring EUT continuously transmitting (100% duty cycle).
- iv. Make sure the transmit signal is stable and at the maximum RF power level.
- v. Setup the channel power function by spectrum analyzer.
- vi. Read the power level on the spectrum analyzer and record in the following positions.
  1. The turntable is then stepped between 0 to 360 degrees along the horizontal plane in 1-degree increments.
  2. Data is recorded using the spectrum analyzer for both theta and phi polarizations at each position.
- vii. Rotate the EUT with 90 degrees and repeat step f.1 and step f.2 until all 3 planes(X-Y,X-Z,Y-Z) were measured.
- viii. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Raw Value". Record the power level of S.G.  
$$\text{EIRP} = P_{\text{SigGen}} + G_{\text{T}} - L_{\text{C}}$$

where:

$P_{\text{SigGen}}$  = power setting of the signal generator that produces the same received power reading as the DUT, in dBm;  
 $G_{\text{T}}$  = gain of the substitute antenna, in dBd (ERP) or dBi (EIRP);  
 $L_{\text{C}}$  = signal loss in the cable connecting the signal generator to the substitute antenna, in dB
- ix. Antenna Peak Gain (dBi) = Max EIRP(dBm) - Conducted Power (dBm)








## 4.5 Test Setup photos

(confidential, please see another document)





Please post at least three photos to show the test setup for each plane.



## 4.6 2D Pattern Test Plot

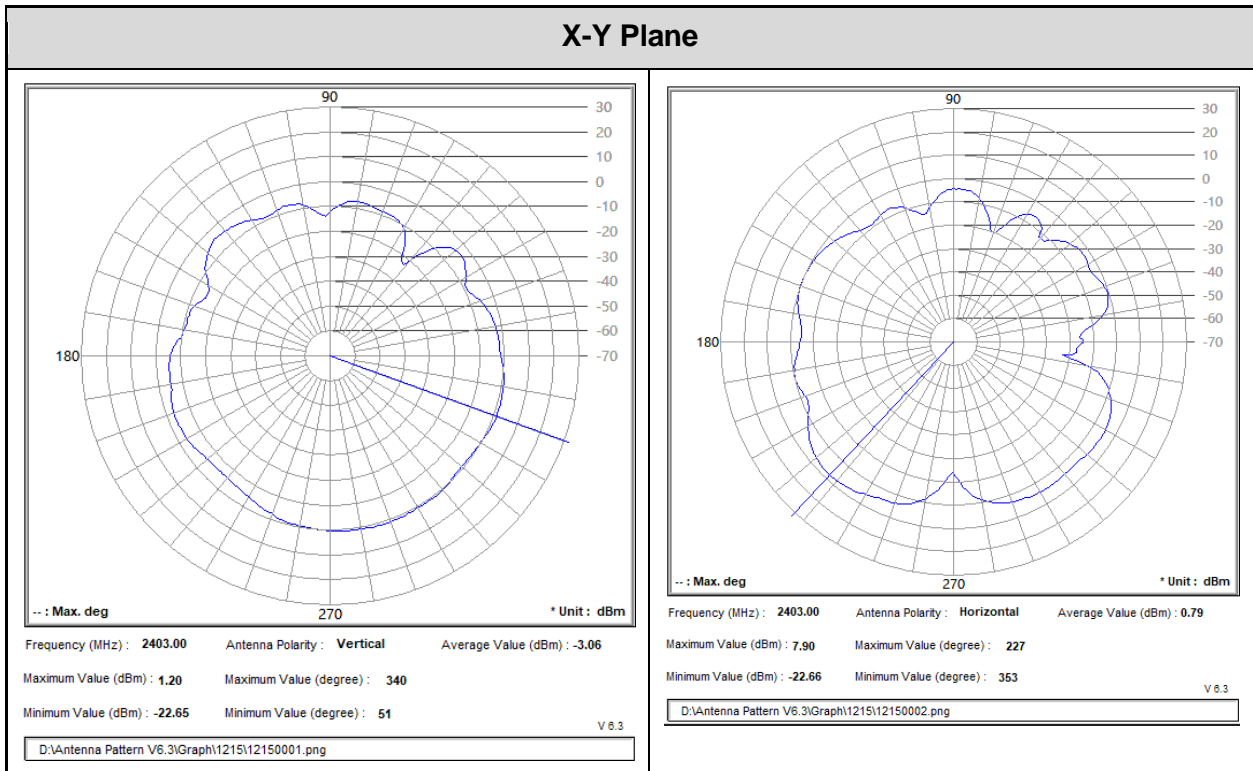

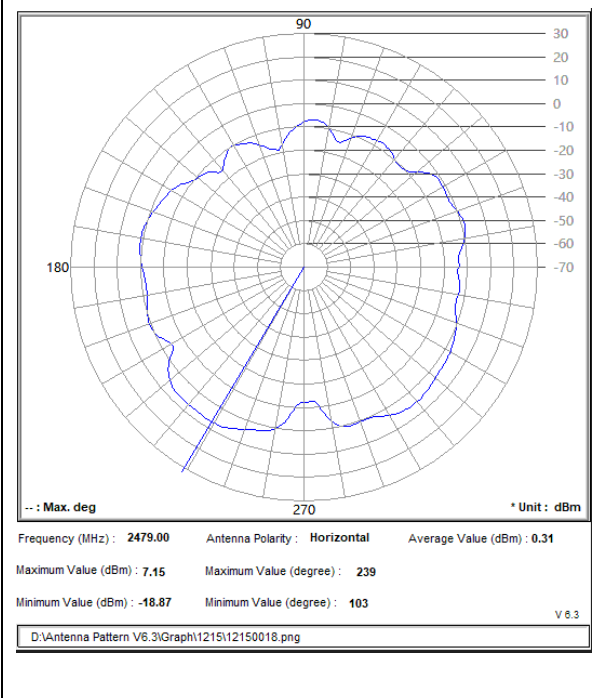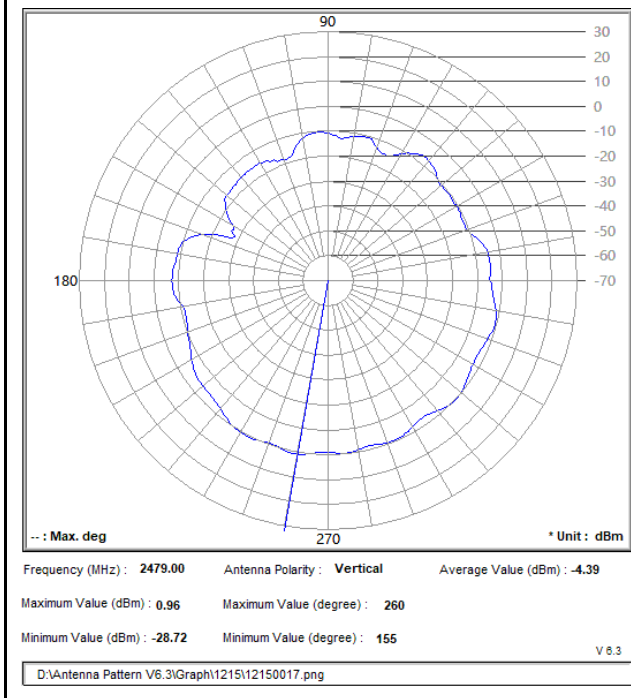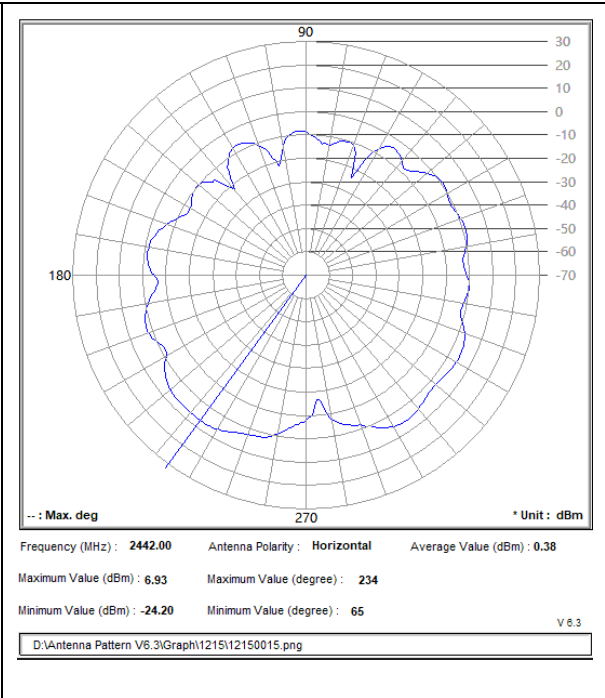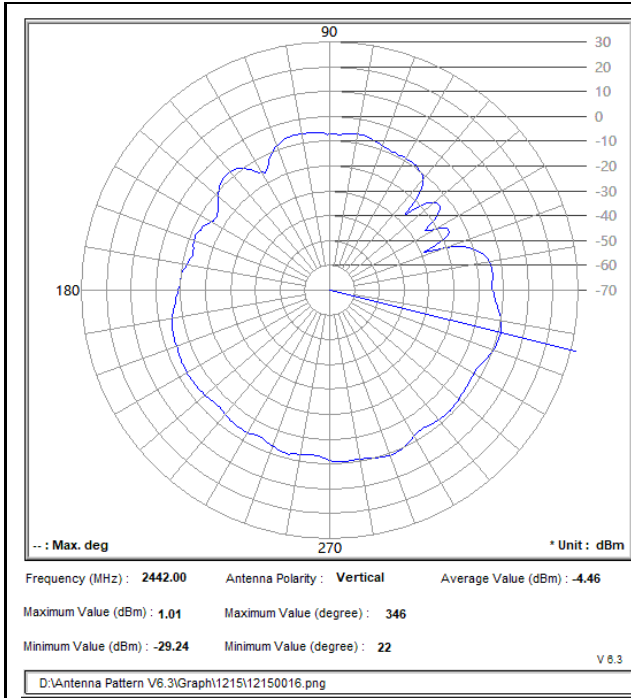

**X-Z Plane**

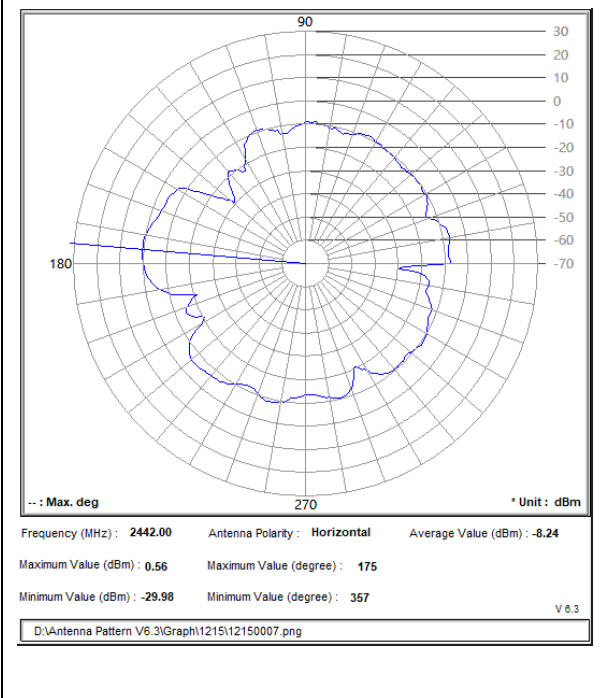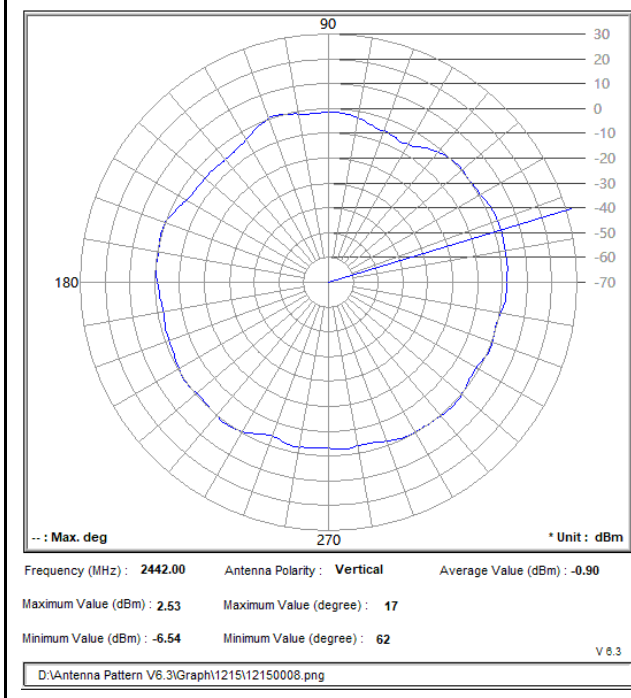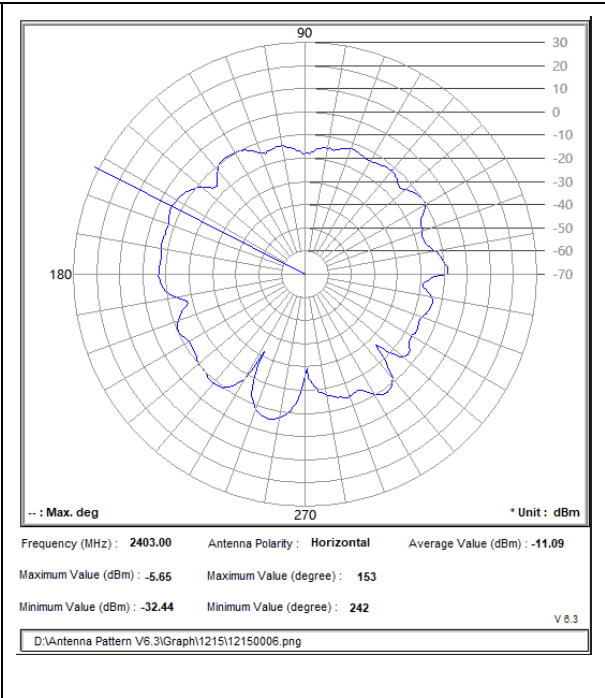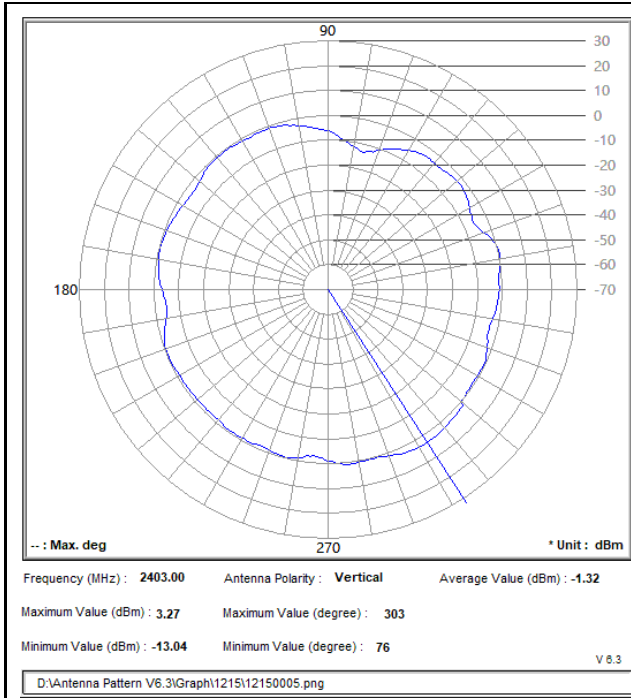

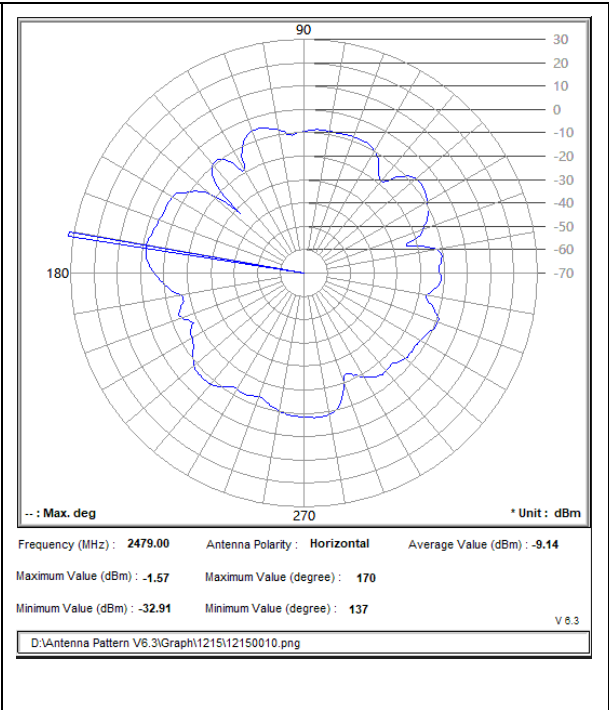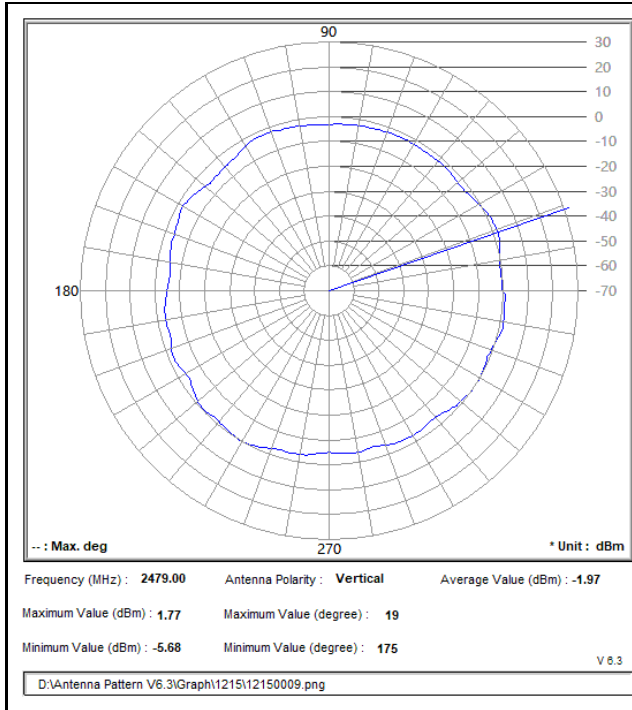

**Y-Z Plane**

