

TABLE OF CONTENTS LIST

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66VX-110

TEST REPORT CONTAINING:

PAGE 1.....TEST PROCEDURE
PAGE 2.....TEST PROCEDURE & CIRCUIT DESCRIPTION
PAGE 3.....RADIATION INTERFERENCE TEST DATA
PAGE 4.....38 dB Rejection Ratio

EXHIBITS CONTAINING:

EXHIBIT 1.....POWER OF ATTORNEY LETTER
EXHIBIT 2.....STATEMENT PER 15.121(a)
EXHIBIT 3.....BLOCK DIAGRAM
EXHIBIT 4A.....SCHEMATIC - MAIN
EXHIBIT 4B.....SCHEMATIC - VR UNIT
EXHIBIT 4C.....SCHEMATIC - SW UNIT
EXHIBIT 5.....INSTRUCTION MANUAL
EXHIBIT 6.....SAMPLE OF FCC ID LABEL AND SKETCH OF
LOCATION
EXHIBIT 7.....RADIATED TEST SETUP PHOTOGRAPH
EXHIBIT 8.....EXTERNAL PHOTO - FRONT SIDE OF 16 BUTTON
EXHIBIT 9.....EXTERNAL PHOTO - FRONT SIDE OF 8 BUTTON
EXHIBIT 10.....EXTERNAL PHOTO - TOP SIDE OF 16 BUTTON
EXHIBIT 11.....EXTERNAL PHOTO - TOP SIDE OF 8 BUTTON
EXHIBIT 12.....EXTERNAL PHOTO - BACK SIDE
EXHIBIT 13.....EXTERNAL PHOTO - BACK SIDE WITH BATTERY COVER OFF
EXHIBIT 14.....INTERNAL PHOTO - COMPONENT SIDE
EXHIBIT 15.....INTERNAL PHOTO - COPPER SIDE

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66VX-110

REPORT #: T:\CUS\Y\YAE\YAE470A9\YAE470A9.RPT

PAGE: TABLE OF CONTENTS LIST

APPLICANT: YAESU MUSEN CO., LTD.

FCC ID: K66VX-110

TEST EQUIPMENT LIST

1. Spectrum Analyzer: Hewlett Packard 8566B - Opt 462, w/ preselector 85685A, & Quasi-Peak Adapter HP 85650A, & HP 8449B - OPT H02 Cal. 10/17/99
2. Signal Generator, Hewlett Packard 8640B, cal. 9/23/99
3. Signal Generator, HP 8614A Serial No.2015A07428 cal. 5/27/99
4. EMCO Model No. 6512 Passive Loop 9KHz to 30MHz
5. Eaton Biconnical Antenna Model 94455-1 20-200 MHz Serial No. 0997 Cal. 9/30/99
6. Electro-Metric Log-Periodic Model No. EM-6950 Ser#632 9/18/99
7. Electro-Metric Dipole Kit, 20-1000 MHz, Model TDA-30 10/31/98
8. Electro-Metric Horn 1-18 GHz, Model RGA-180, Cal. 4/27/99
9. Systron Donner Horn 18-26.3GHz Model DBE-520-20 7/14/99
10. Systron Donner Horn 26.5-40.2GHz Model DBD-520-20 7/14/99
11. ATM Horn 40-60GHz Part #19-443-6R 9/15/99
12. Electro-Metric Antennas Model TDA-30/1-4, Cal. 10/15/98
13. Electro-Metric Line Impedance Stabilization Network Model No. EM-7821, Serial No. 101; 100KHz-30MHz 50uH. Cal.11/19/98
14. Electro-Metric Line Impedance Stabilization Network Model No. EM-7820, Serial No. 2682; 10KHz-30MHz 50uH. Cal. 11/19/98
15. Special low loss cable was used above 1 GHz
16. Tenney Temperature Chamber
17. AC Voltmeter, HP 400FL, Serial No 2213A14499. Cal. 9/21/99
18. Digital Multimeter, Fluke 8010A/12A, Serial No. 4810047. Cal 9/21/99
19. Digital Multimeter, Fluke 77, Serial No. 43850817. Cal 9/21/99
20. Oscilloscope, Tektronix 2230, Serial No. 300572. Cal 9/23/99
21. Frequency Counter, HP 5385A, Serial No. 3242A07460. Cal 10/6/99

TEST PROCEDURE

GENERAL: This report shall NOT be reproduced except in full without the written approval of TIMCO ENGINEERING, INC.

RADIATION INTERFERENCE: The test procedure used was ANSI STANDARD C63.4-1992 using a HEWLETT PACKARD spectrum analyzer with a preselector. The bandwidth of the spectrum analyzer was 100 kHz with an appropriate sweep speed. The analyzer was calibrated in dB above a microvolt at the output of the antenna. The resolution bandwidth was 100KHz and the video bandwidth was 300KHz. The ambient temperature of the UUT was 80oC with a humidity of 76%.

FORMULA OF CONVERSION FACTORS: The Field Strength at 3m was established by adding the meter reading of the spectrum analyzer (which is set to read in units of dBuV) to the antenna correction factor supplied by the antenna manufacturer. The antenna correction factors are stated in terms of dB. The gain of the Preselector was accounted for in the Spectrum Analyzer Meter Reading.

Example: Freq (MHz) METER READING + ACF = FS
33 20 dBuV + 10.36 dB = 30.36 dBuV/m @ 3m

REPORT #: T:\CUS\Y\YAE\YAE470A9\YAE470A9.RPT

PAGE #: 1

TEST PROCEDURES CONTINUED

APPLICANT: YAESU MUSEN CO., LTD.
FCC ID: K66VX-110

ANSI STANDARD C63.4-1992 10.1.7 MEASUREMENT PROCEDURES: The unit under test was placed on a table 80 cm high and with dimensions of 1m by 1.5m. The table used for radiated measurements is capable of continuous rotation.

When an emission was found, the table was rotated to produce the maximum signal strength. At this point, the antenna was raised and lowered from 1m to 4m. The antenna was placed in both the horizontal and vertical planes.

The situation was similar for the conducted measurement except that the table did not rotate. The EUT was setup as described in ANSIC63.4-1992 with the EUT 40 cm from the vertical ground wall.

CIRCUIT DESCRIPTION:

In the receive mode the signal comes in on the receive antenna to the double tuned circuit to the super-regenerative detector Q-3, where the audio is detected. From Q-3 the audio goes to the volume resistor R15 to the input to the three(3) stage audio amplification, Q1, Q4 & Q5. Q5 drives the audio output transformer T3 which is connected to the speaker.

ANTENNA AND GROUND CIRCUITRY

This unit makes use of a external 5 inch antenna. The antenna is inductively coupled. This unit is powered from a 9.0V battery.

No ground connection is provided. The unit relies on the ground tract of the printed circuit board.

APPLICANT: YAESU MUSEN CO., LTD.
FCC ID: K66VX-110
REPORT #: T:\CUS\Y\YAE\YAE470A9\YAE470A9.RPT
PAGE #: 2

APPLICANT: YAESU MUSEN CO., LTD.
 FCC ID: K66VX-110
 NAME OF TEST: RADIATION INTERFERENCE
 RULES PART NUMBER: 15.109
 REQUIREMENTS: 30 to 80 MHz: 40.0 dBuV/M @ 3 METERS
 88 to 216 MHz: 43.5 dBuV/M
 216 to 960 MHz: 46.0 dBuV/M
 ABOVE 960 MHz: 54.0 dBuV/M

TEST RESULTS: A search was made of the spectrum from 30 to 1000 MHz and the measurements indicate that the unit DOES meet the FCC requirements.

TEST DATA:

TUNED FREQ. MHz	EMISSION FREQUENCY MHz	METER READING @ 3m dBuV	COAX LOSS dB	A.C.F. dB	FIELD STRENGTH dBuV/m@3m	MARGIN dB	ANT.
140.02	118.39	11.50	0.80	9.32	21.62	21.88	H
153.52	131.88	10.50	0.80	13.90	25.20	18.30	V
162.48	141.00	10.00	0.80	16.90	27.70	15.80	H
173.98	152.33	6.00	0.90	16.83	23.73	19.77	V

SAMPLE CALCULATION: FSdBuV/m = MR(dBuV) + ACFdB.

TEST PROCEDURE: ANSI STANDARD C63.4-1992 using a Hewlett Packard Model 8566B spectrum analyzer, a Hewlett Packard Model 85685A Preselector, a Hewlett Packard Model 85650A Quasi-Peak adapter, an Electro-Metric Dipole Kit, and an Eaton Model 94455-1 Biconical Antenna. The bandwidth of spectrum analyzer was 100 kHz with an appropriate sweep speed. When an emission was found, the table was rotated to produce the maximum signal strength. The antenna was placed in both the horizontal and vertical planes and the worse case emissions were reported. The receiver was put into the coherent mode by placing an antenna driven by a signal generator off site. The UUT was tested in 3 orthogonal planes.


PERFORMED BY: S. S. SANDERS

DATE: NOVEMBER 16, 1999

APPLICANT: YAESU MUSEN CO., LTD.
 FCC ID: K66VX-110
 REPORT #: T:\CUS\Y\YAE\YAE470A9\YAE470A9.RPT
 PAGE #: 3

APPLICANT: YAESU MUSEN CO., LTD.
 FCC ID: K66VX-110
 NAME OF TEST: 38dB REJECTION RATIO
 RULES PART NUMBER: 15.121(b)
 REQUIREMENTS: 38dB REJECTION RATIO TO SENSITIVITY OF
 OF THE RECEIVER.

TEST SET-UP

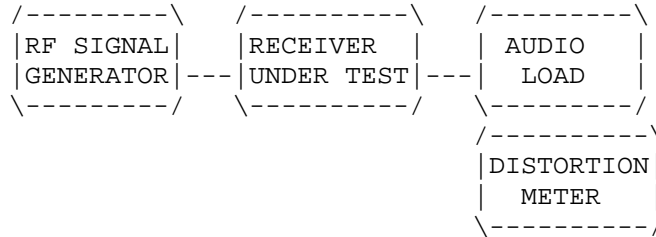

TEST PROCEDURE: The reference sensitivity was measured in accordance with TIA/EIA-603;

- a. Equipment connected as illustrated
- b. A standard signal was applied to the receiver input terminals.
- c. Receiver output audio output was adjusted for rated output.
- d. The RF Signal generator was adjusted to the lowest level to produce a 12dB SINAD without the audio output dropping more than 3dB. Make note of sensitivity level.
- e. This was done across the different bands to establish a reference level. The reference taken was the worse case sensitivity.
- f. The output of the signal generator was then adjusted to a level of 60dB above the reference level at a frequency of 824.5MHz.
- g. With the level set 60dB above the level measured in step e,
- h. Set squelch on receiver to threshold, The signal level required to open the squelch must be lower than the level measured in step
- d.
- i. Cause the receiver to scan or step-it through its complete range of frequencies.
- j. If receiver stops or unsquelches on any frequency, record the frequency and then adjust the level until a 12dB SINAD is produced. This level must be greater than 38dB above the level in step e.
- k. Repeat steps f thorough j for frequencies 836.0, 848.5, 869.1, 881.0, & 893.5MHz.

TEST RESULTS: The UUT meet the 38dB REJECTION RATIO.

PERFORMED BY: S. S. SANDERS

DATE: NOVEMBER 16, 1999

APPLICANT: YAESU MUSEN CO., LTD.
 FCC ID: K66VX-110
 REPORT #: T:\CUS\Y\YAE\YAE470A9\YAE470A9.RPT
 PAGE #: 3