


Orthogonal Axis	X
Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz

Vertical

130 dBuV/m

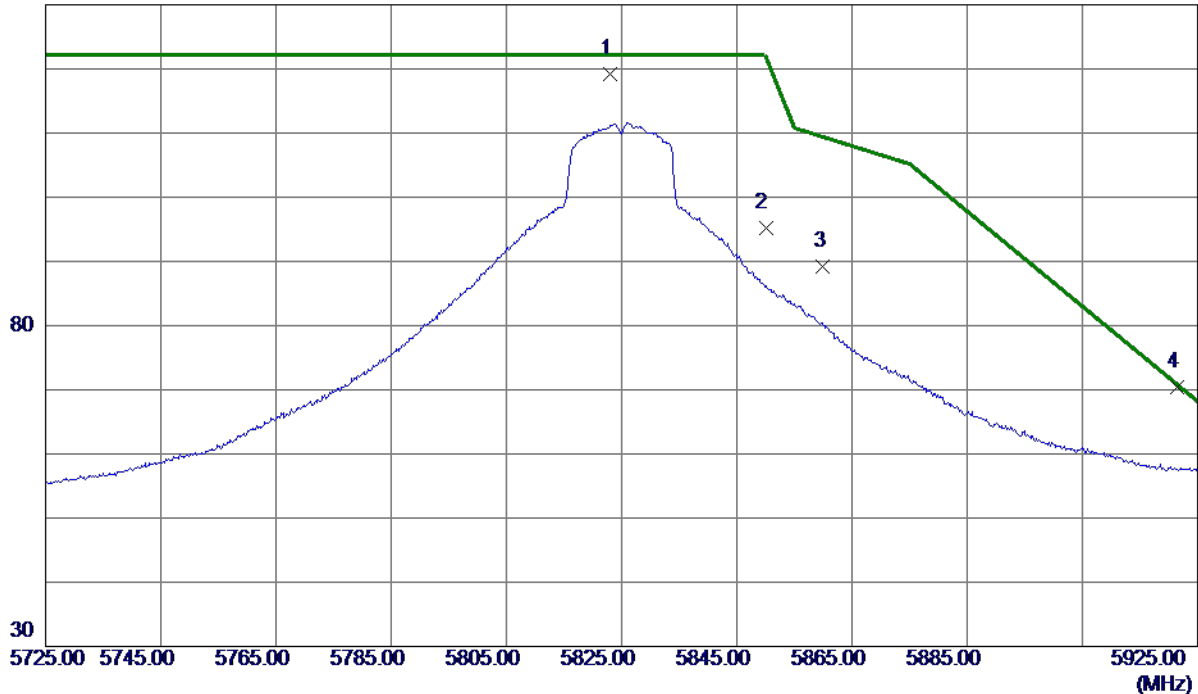

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5823.1000	102.57	16.71	119.28	122.20	-2.92	Peak	No Limit
2	5850.0000	78.53	16.76	95.29	122.20	-26.91	Peak	
3	5860.0000	72.50	16.78	89.28	109.40	-20.12	Peak	
4 *	5921.5000	53.52	16.90	70.42	70.79	-0.37	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz

Vertical

80 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11648.8900	48.47	13.25	61.72	74.00	-12.28	Peak	
2 *	11653.0900	38.93	13.25	52.18	54.00	-1.82	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz

Horizontal

130 dBuV/m

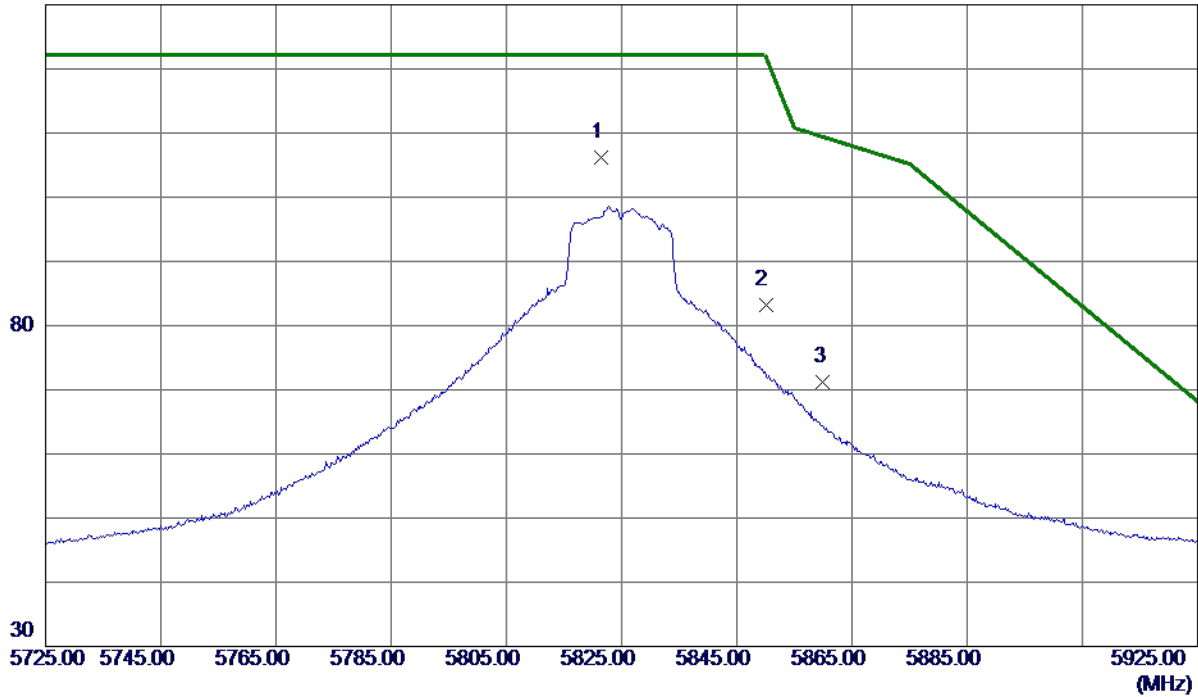

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5821.4000	89.57	16.70	106.27	122.20	-15.93	Peak	No Limit
2	5850.0000	66.40	16.76	83.16	122.20	-39.04	Peak	
3	5860.0000	54.34	16.78	71.12	109.40	-38.28	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC(VHT20) Mode 5825 MHz

Horizontal

80 dBuV/m

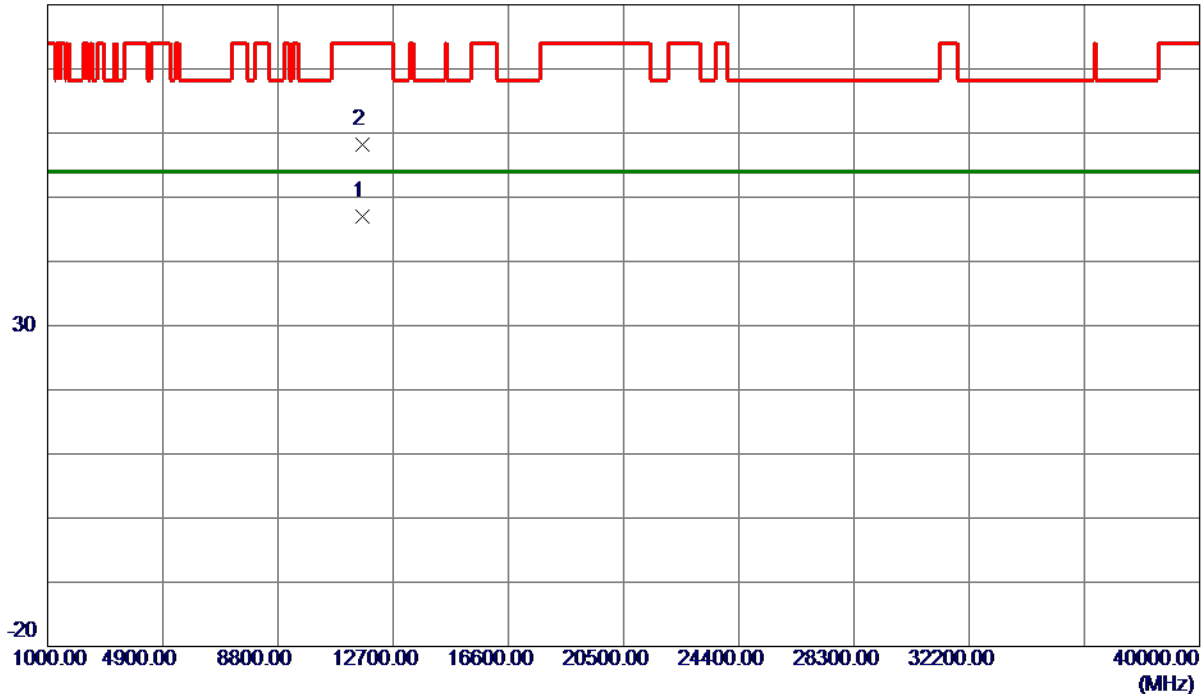

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11648.8000	33.79	13.25	47.04	54.00	-6.96	AVG	
2	11651.0199	45.03	13.25	58.28	74.00	-15.72	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz

Vertical

130 dBuV/m

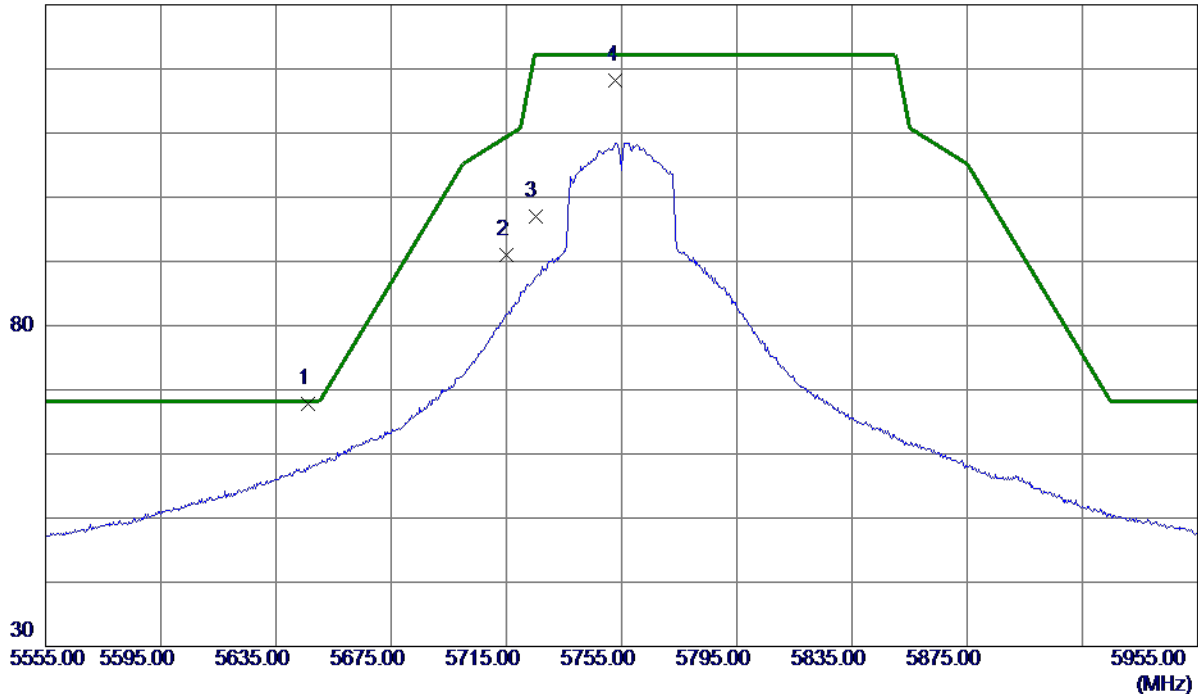

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5646.2000	51.49	16.36	67.85	68.20	-0.35	Peak	
2	5715.0000	74.57	16.49	91.06	109.40	-18.34	Peak	
3	5725.0000	80.43	16.51	96.94	122.20	-25.26	Peak	
4	5753.0000	101.71	16.57	118.28	122.20	-3.92	Peak	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz

Vertical

80 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11506.6000	49.58	13.16	62.74	74.00	-11.26	Peak	
2 *	11511.2500	38.02	13.16	51.18	54.00	-2.82	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz

Horizontal

130 dBuV/m

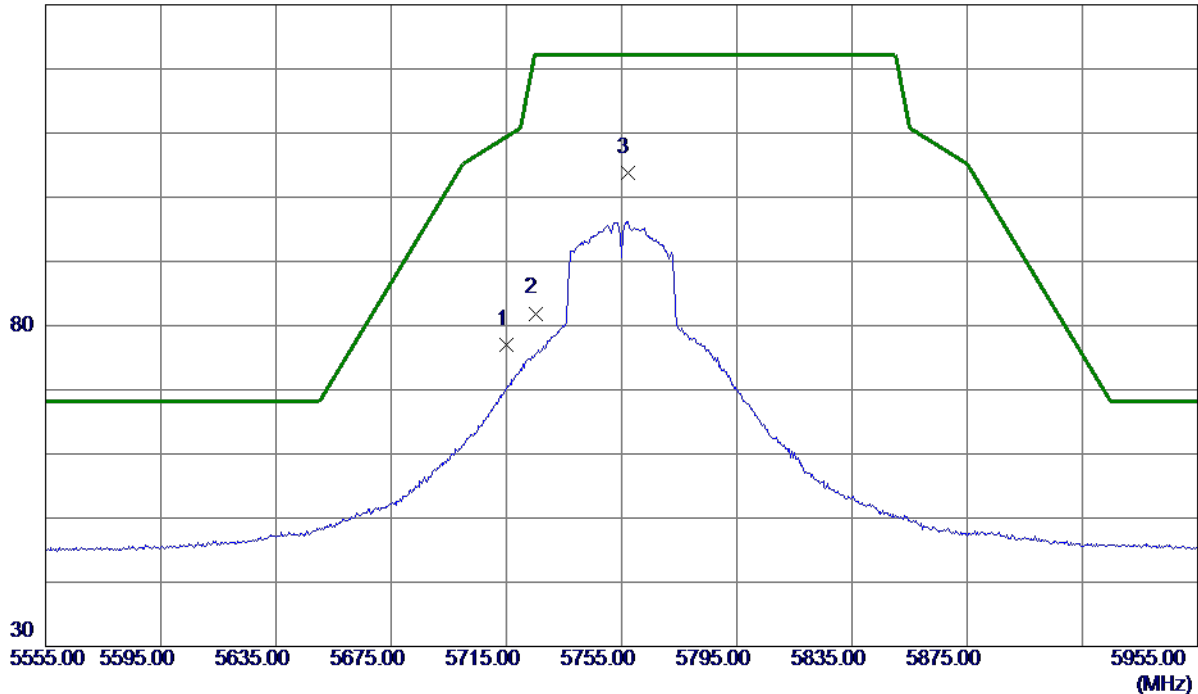

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	60.52	16.49	77.01	109.40	-32.39	Peak	
2	5725.0000	65.39	16.51	81.90	122.20	-40.30	Peak	
3 *	5757.0000	87.30	16.58	103.88	122.20	-18.32	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC(VHT40) Mode 5755 MHz

Horizontal

80 dBuV/m

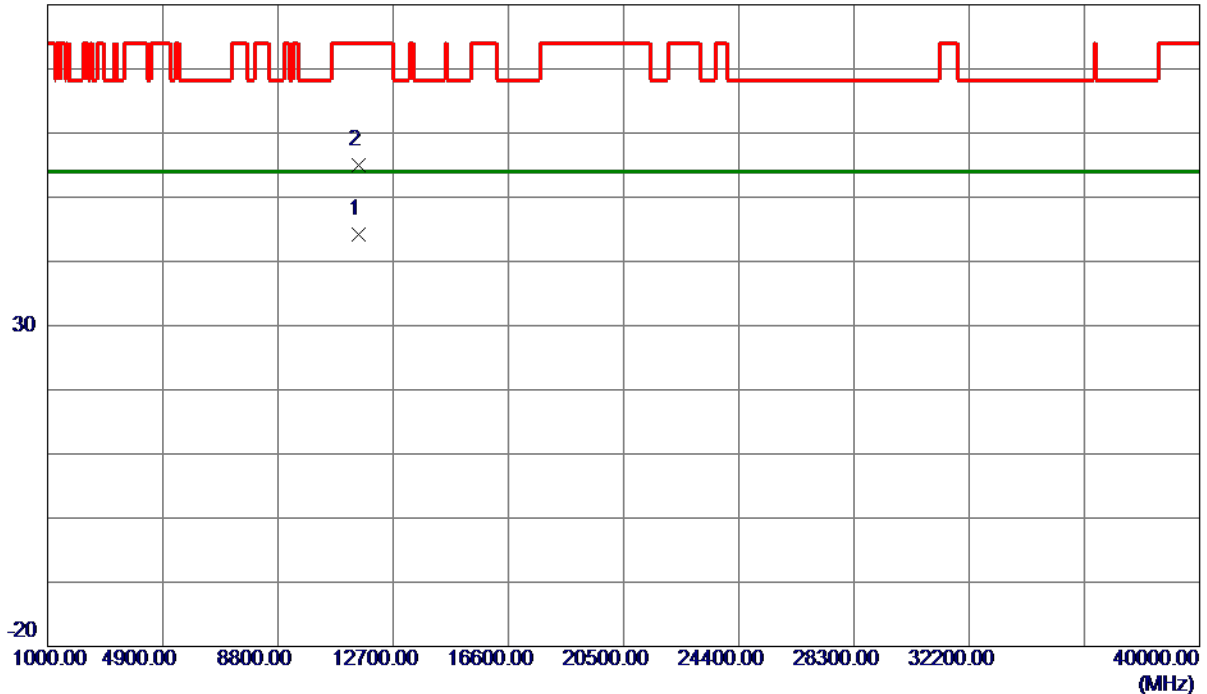

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11509.4000	31.08	13.16	44.24	54.00	-9.76	AVG	
2	11511.0000	41.85	13.16	55.01	74.00	-18.99	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz

Vertical

130 dBuV/m

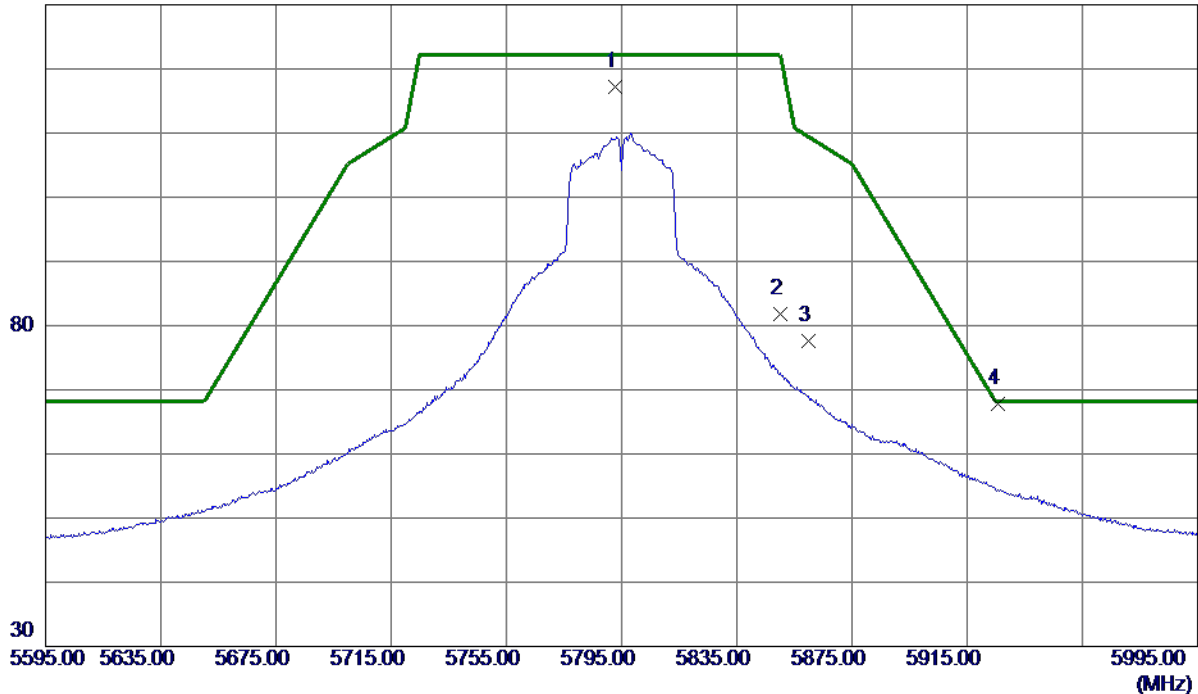

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5792.6000	100.59	16.65	117.24	122.20	-4.96	Peak	No Limit
2	5850.0000	65.13	16.76	81.89	122.20	-40.31	Peak	
3	5860.0000	60.75	16.78	77.53	109.40	-31.87	Peak	
4 *	5925.8000	50.98	16.91	67.89	68.20	-0.31	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz

Vertical

80 dBuV/m

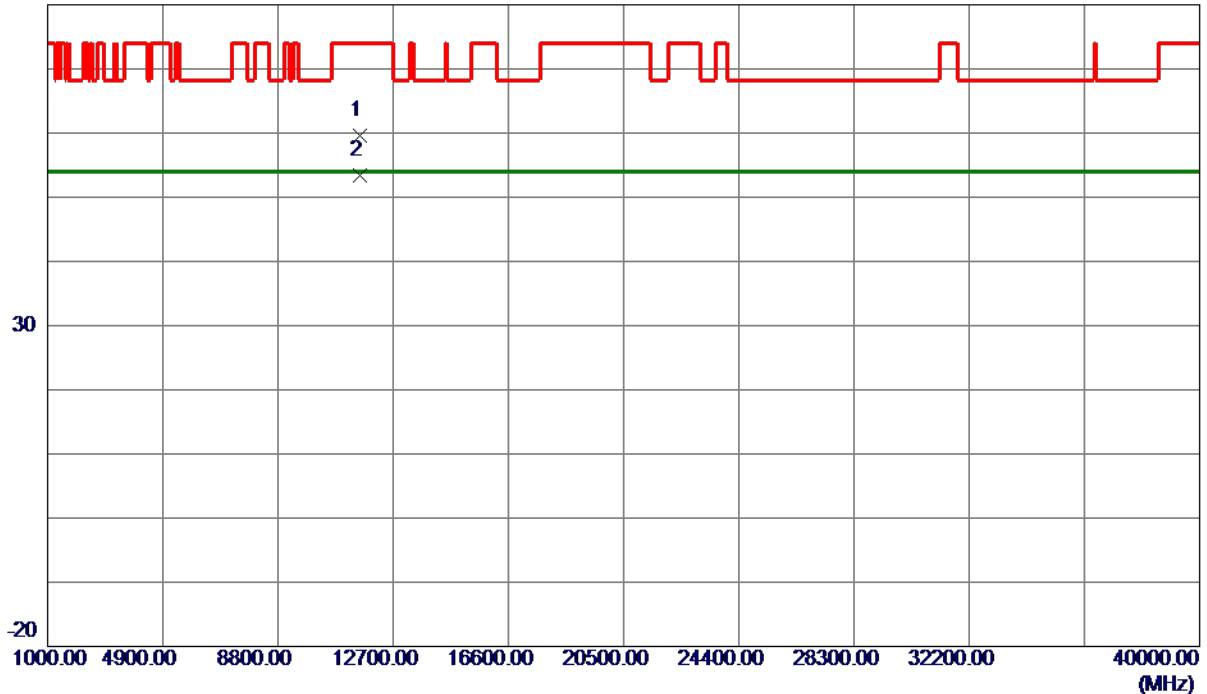

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.8500	46.35	13.21	59.56	74.00	-14.44	Peak	
2 *	11591.0000	40.18	13.21	53.39	54.00	-0.61	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz

Horizontal

130 dBuV/m

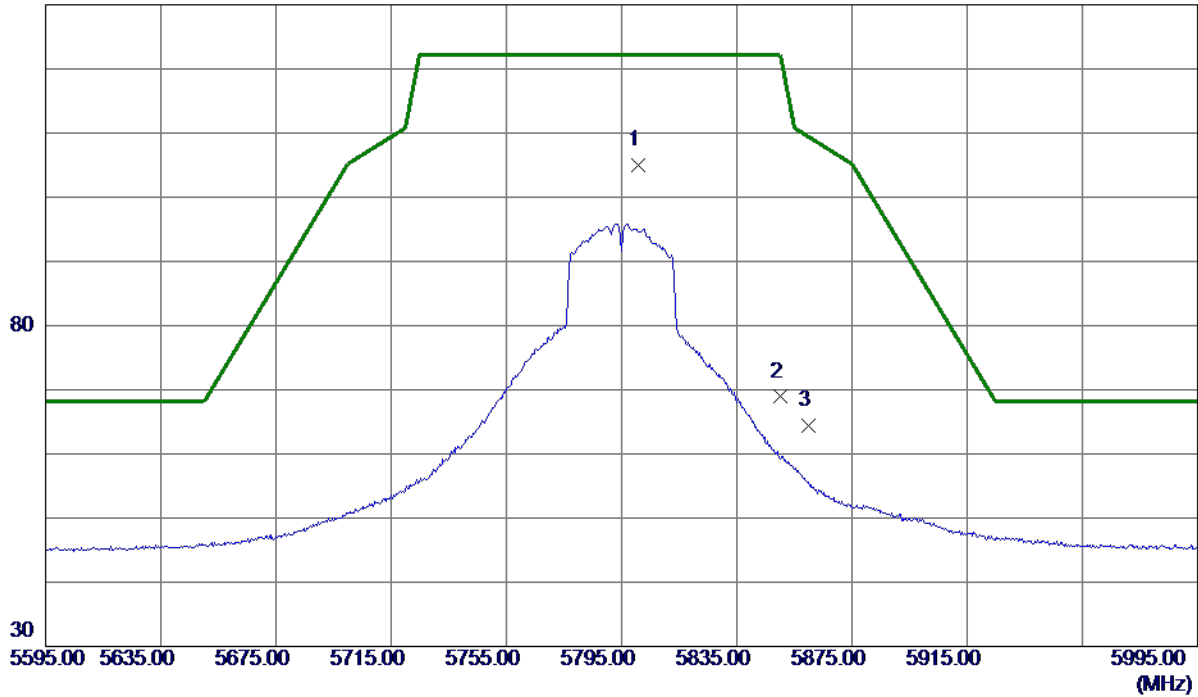

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5800.6000	88.43	16.66	105.09	122.20	-17.11	Peak	No Limit
2	5850.0000	52.14	16.76	68.90	122.20	-53.30	Peak	
3	5860.0000	47.65	16.78	64.43	109.40	-44.97	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC(VHT40) Mode 5795 MHz

Horizontal

80 dBuV/m

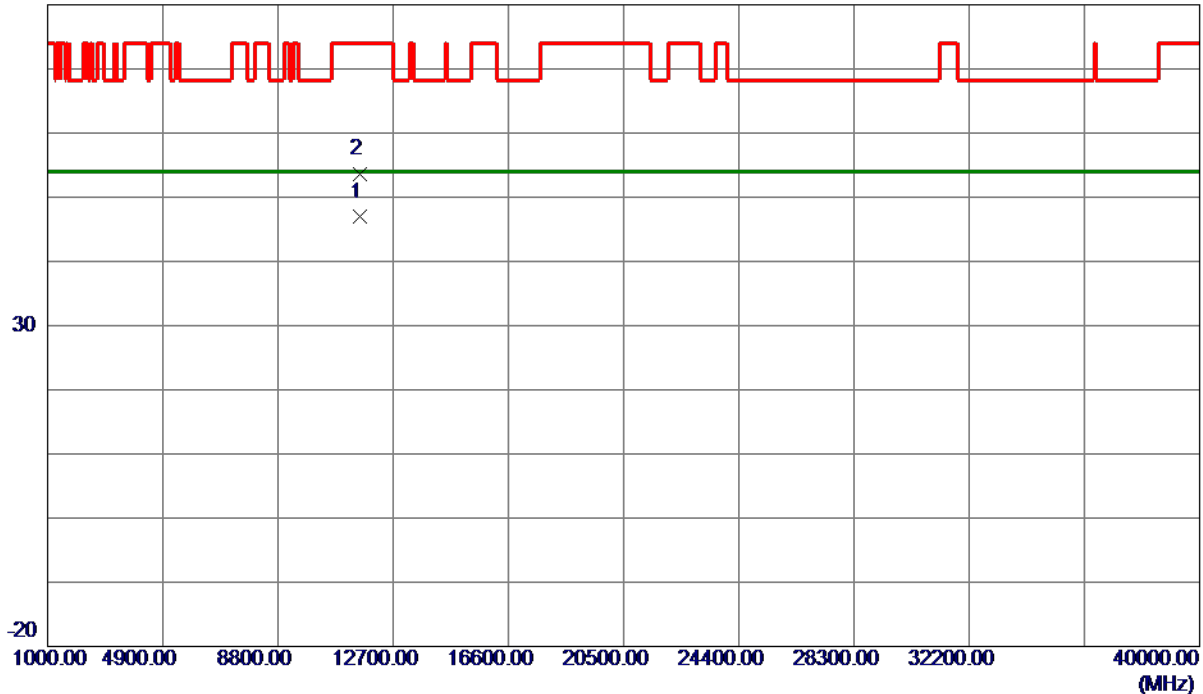

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11581.0000	33.69	13.21	46.90	54.00	-7.10	AVG	
2	11590.5500	40.37	13.21	53.58	74.00	-20.42	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz

Vertical

130 dBuV/m

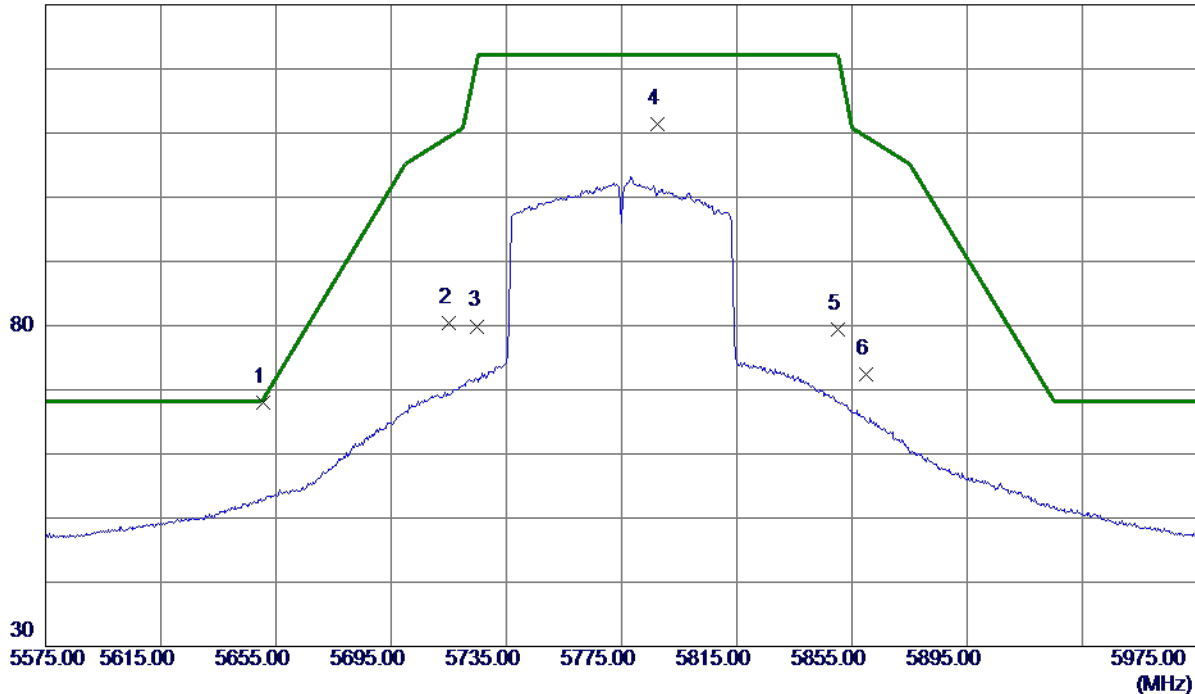

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5650.4000	51.66	16.36	68.02	68.50	-0.48	Peak	
2	5715.0000	63.85	16.49	80.34	109.40	-29.06	Peak	
3	5725.0000	63.39	16.51	79.90	122.20	-42.30	Peak	
4	5787.4000	94.72	16.64	111.36	122.20	-10.84	Peak	No Limit
5	5850.0000	62.58	16.76	79.34	122.20	-42.86	Peak	
6	5860.0000	55.69	16.78	72.47	109.40	-36.93	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz

Vertical

80 dBuV/m

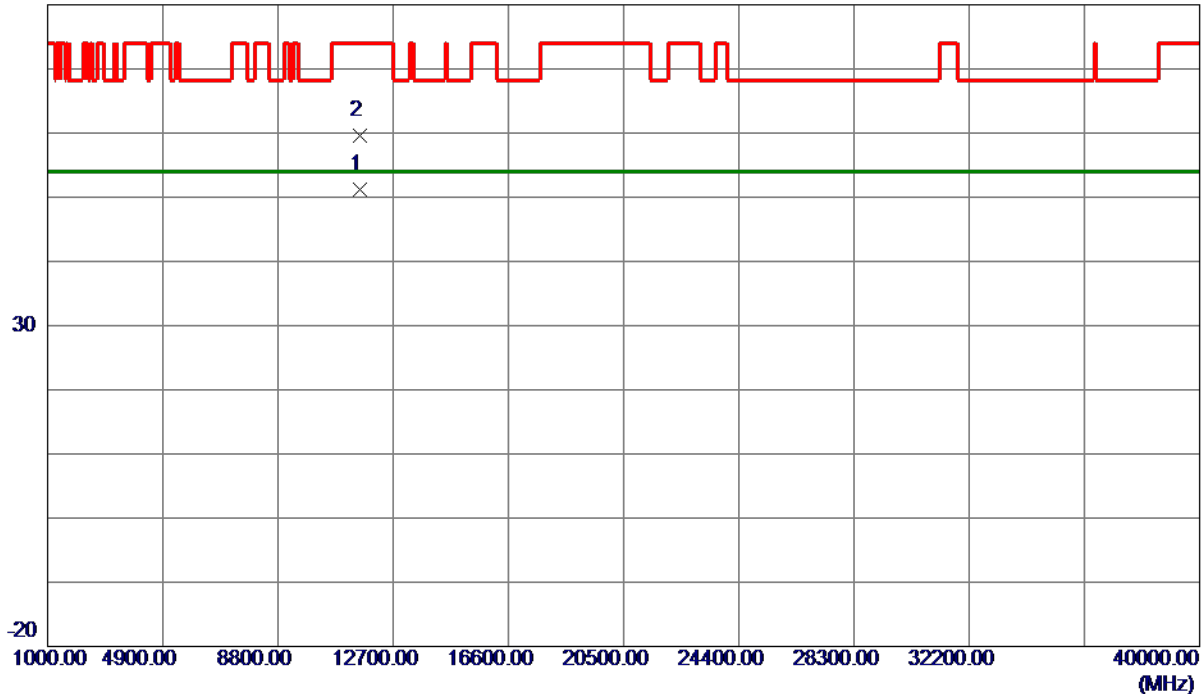

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11571.1200	37.97	13.20	51.17	54.00	-2.83	AVG	
2	11571.2000	46.40	13.20	59.60	74.00	-14.40	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz

Horizontal

130 dBuV/m

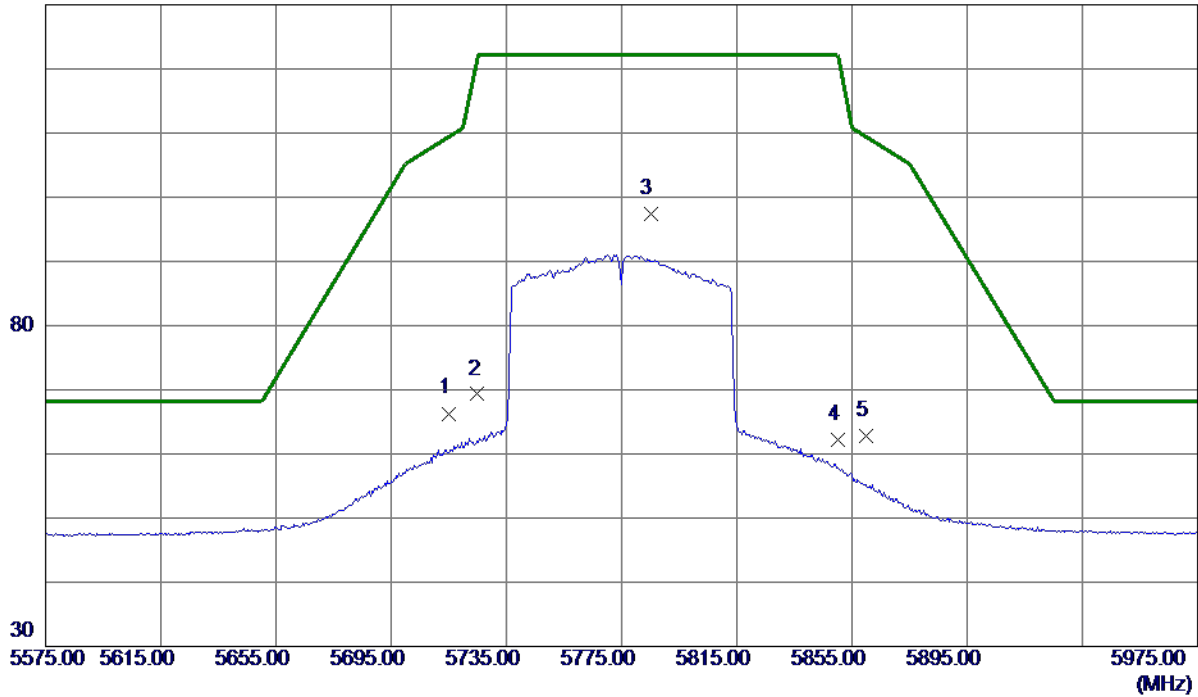

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	49.81	16.49	66.30	109.40	-43.10	Peak	
2	5725.0000	52.79	16.51	69.30	122.20	-52.90	Peak	
3 *	5785.0000	80.82	16.63	97.45	122.20	-24.75	Peak	No Limit
4	5850.0000	45.48	16.76	62.24	122.20	-59.96	Peak	
5	5860.0000	45.96	16.78	62.74	109.40	-46.66	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC(VHT80) Mode 5775 MHz

Horizontal

80 dBuV/m

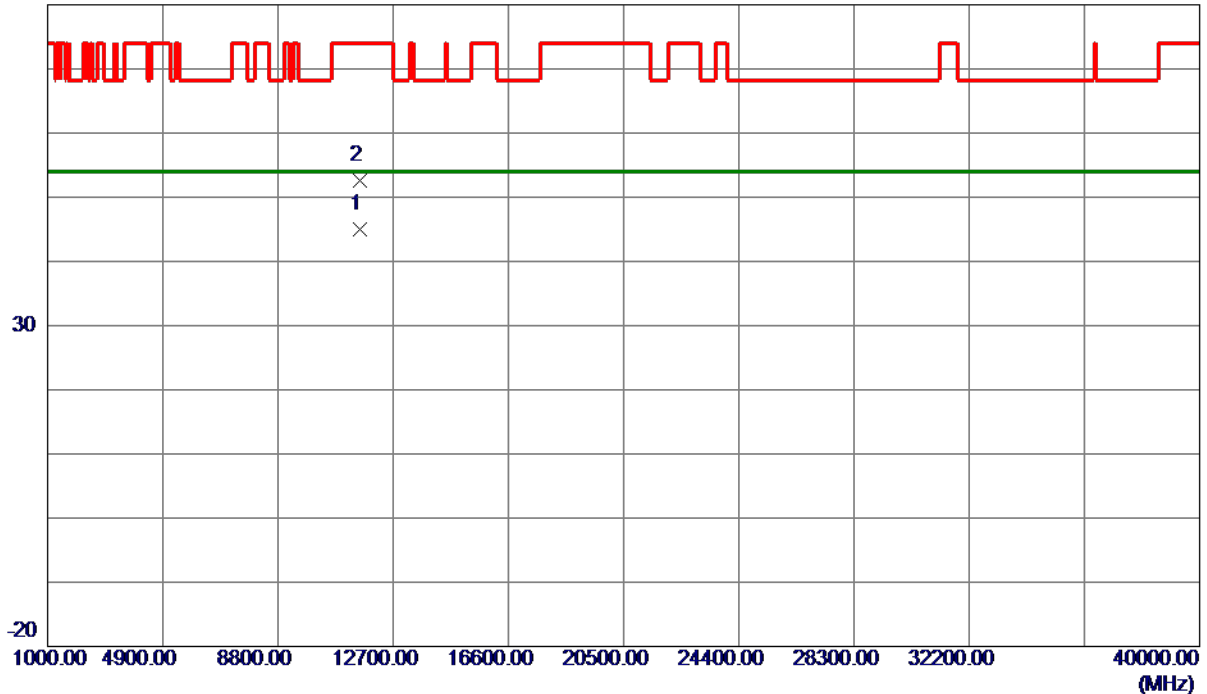

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11571.1200	31.71	13.20	44.91	54.00	-9.09	AVG	
2	11577.2800	39.43	13.20	52.63	74.00	-21.37	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE20) Mode 5180 MHz

Vertical

130 dBuV/m

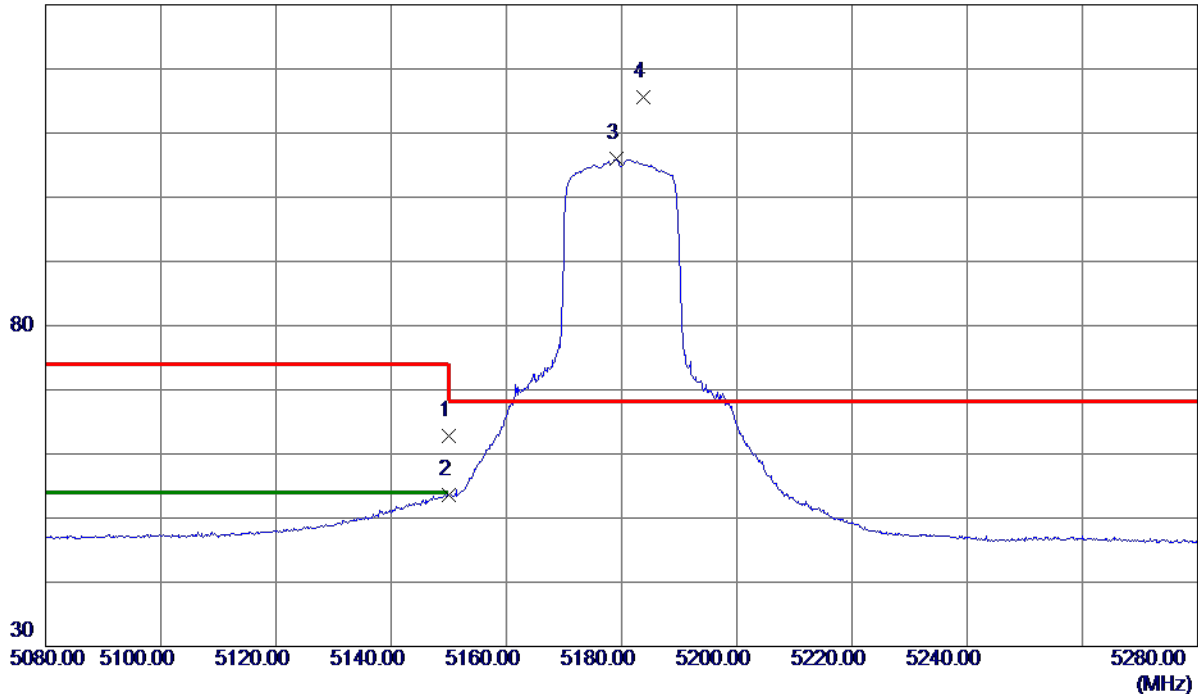

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	47.54	15.26	62.80	74.00	-11.20	Peak	
2	5150.0000	38.30	15.26	53.56	54.00	-0.44	AVG	
3	5179.2000	90.58	15.33	105.91	999.00	-893.09	AVG	No Limit
4 *	5183.7000	100.18	15.34	115.52	68.30	47.22	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE20) Mode 5180 MHz

Vertical

80 dBuV/m

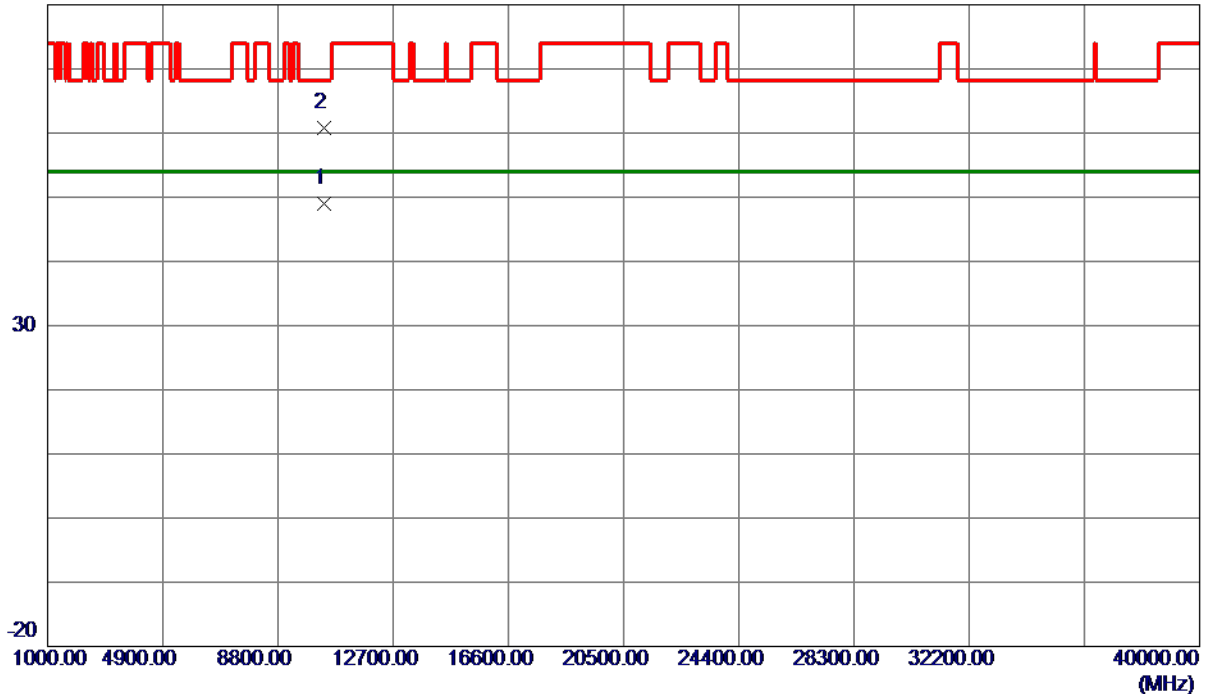

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10356.7600	36.79	12.28	49.07	54.00	-4.93	AVG	
2	10357.2699	48.61	12.28	60.89	68.30	-7.41	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE20) Mode 5180 MHz

Horizontal

130 dBuV/m

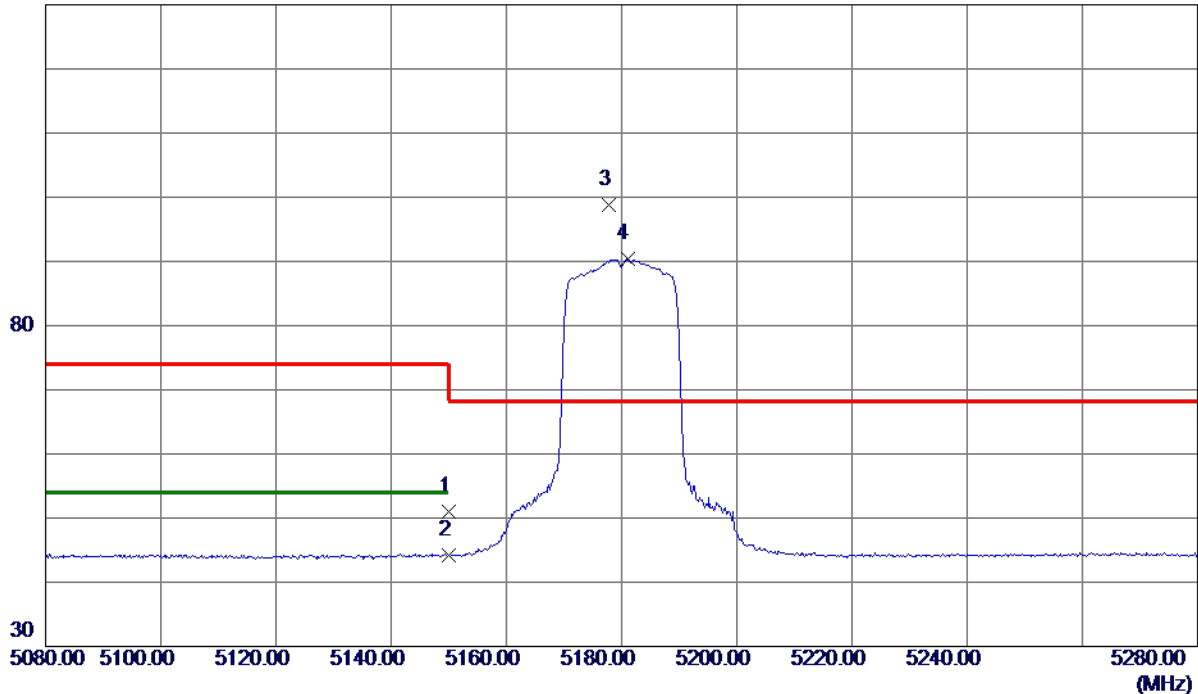

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	35.78	15.26	51.04	74.00	-22.96	Peak	
2	5150.0000	28.88	15.26	44.14	54.00	-9.86	AVG	
3 *	5177.8000	83.49	15.33	98.82	68.30	30.52	Peak	No Limit
4	5181.0000	75.02	15.33	90.35	999.00	-908.65	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE20) Mode 5180 MHz

Horizontal

80 dBuV/m

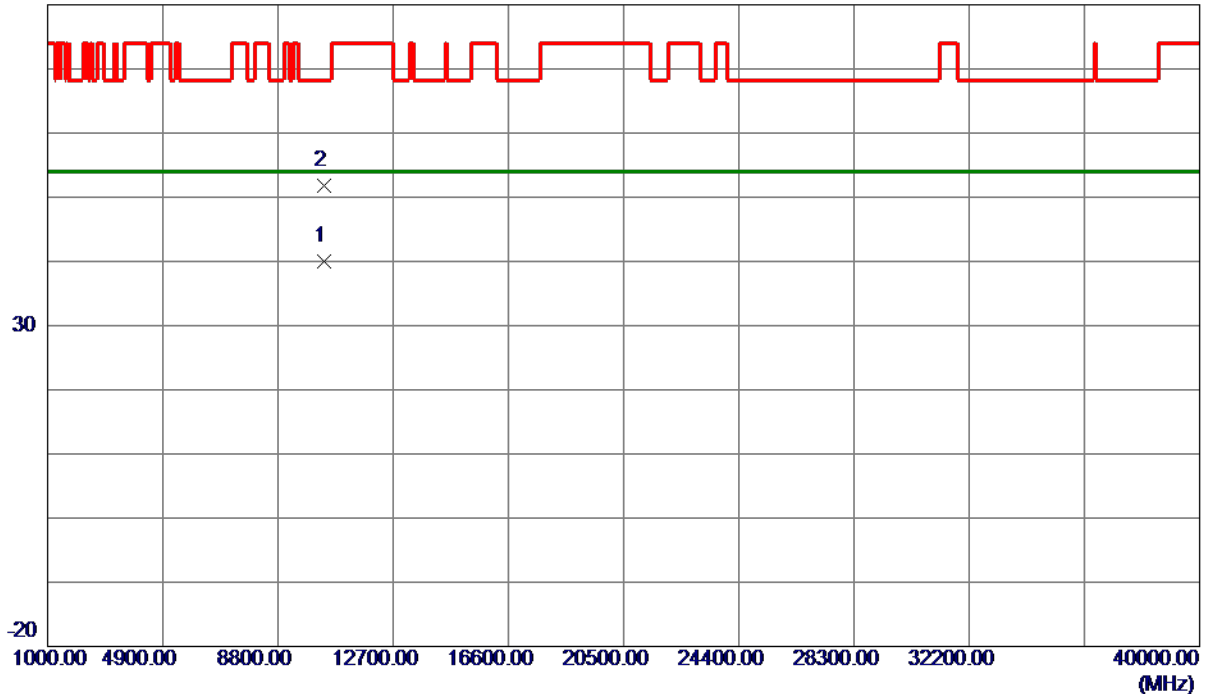

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10359.2500	27.80	12.29	40.09	54.00	-13.91	AVG	
2	10363.0000	39.48	12.29	51.77	68.30	-16.53	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE20) Mode 5200 MHz

Vertical

130 dBuV/m

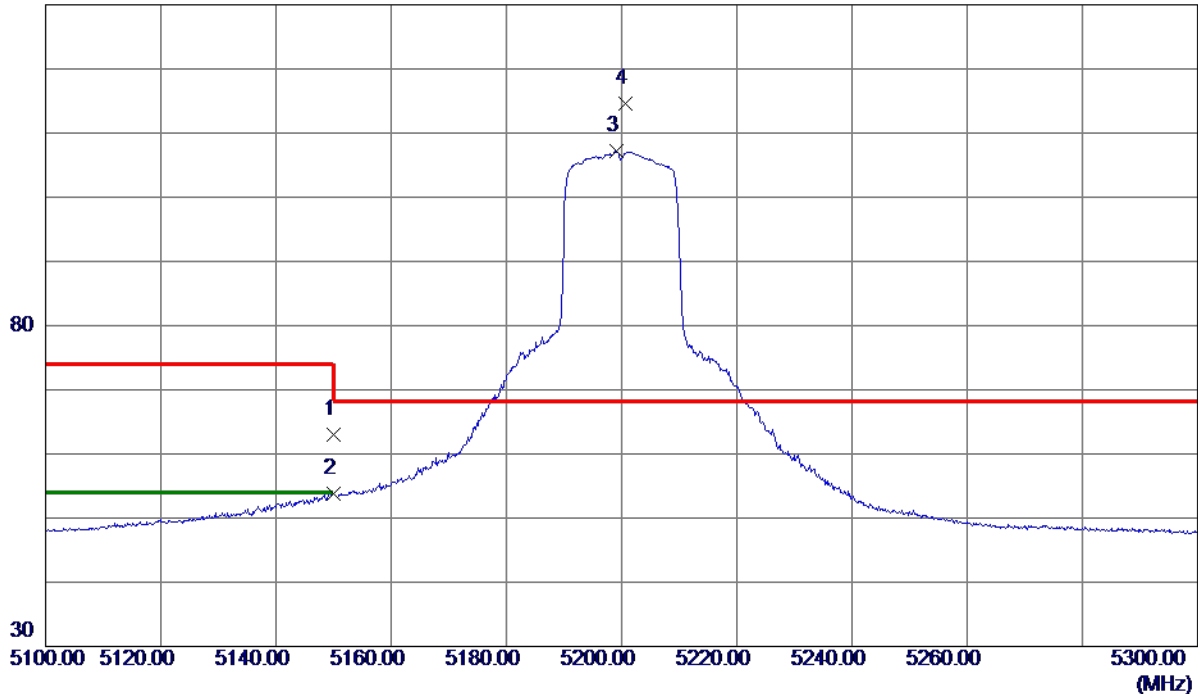

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	47.83	15.26	63.09	74.00	-10.91	Peak	
2	5150.0000	38.56	15.26	53.82	54.00	-0.18	AVG	
3	5199.1000	91.88	15.38	107.26	999.00	-891.74	AVG	No Limit
4 *	5200.7000	99.25	15.38	114.63	68.30	46.33	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE20) Mode 5200 MHz

Vertical

80 dBuV/m

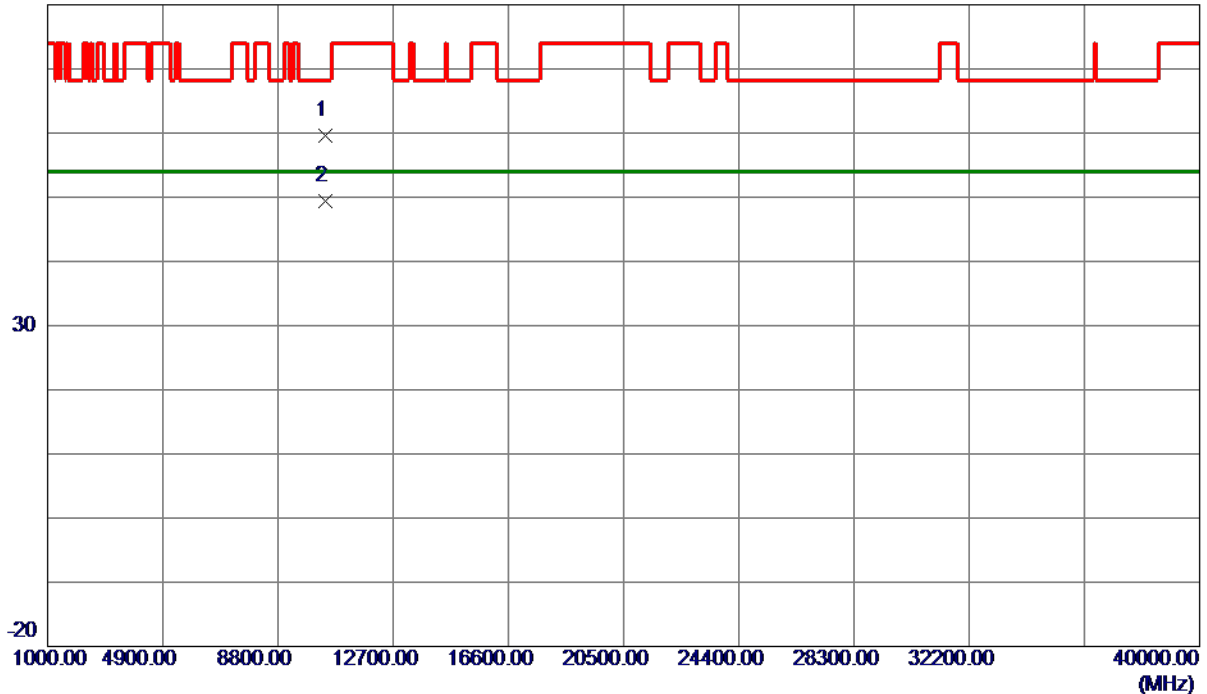

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10392.7400	47.28	12.31	59.59	68.30	-8.71	Peak	
2 *	10401.1100	37.11	12.31	49.42	54.00	-4.58	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE20) Mode 5200 MHz

Horizontal

130 dBuV/m

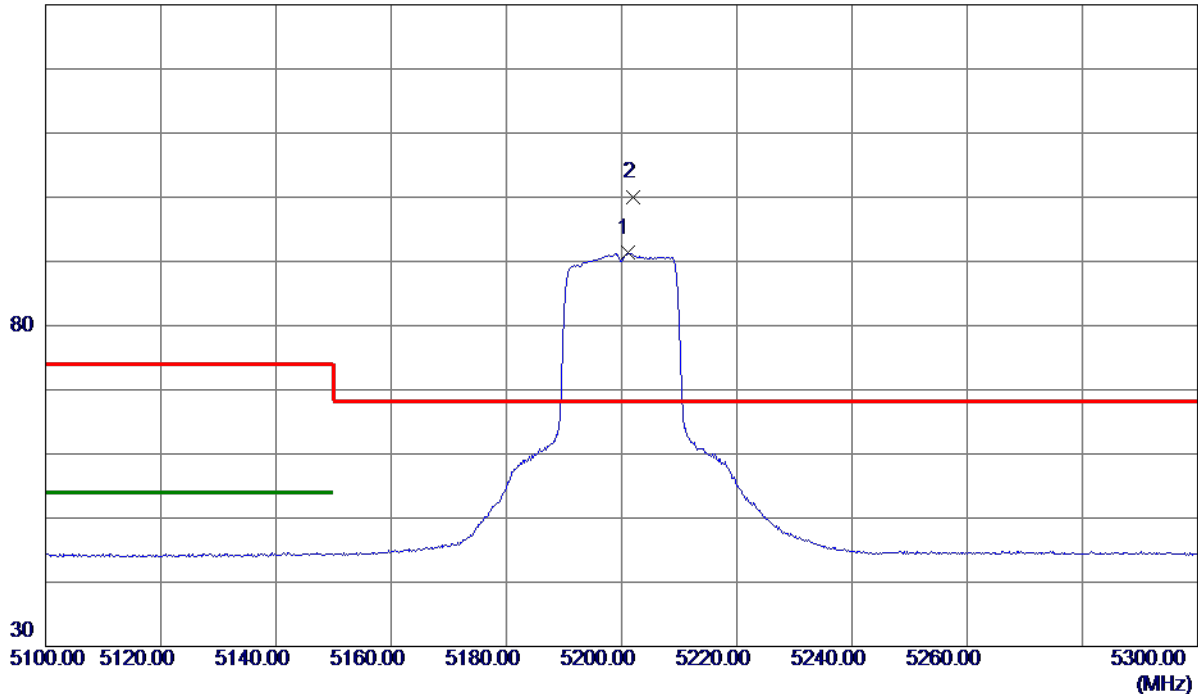

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5201.0000	75.92	15.38	91.30	999.00	-907.70	AVG	No Limit
2 *	5202.0000	84.60	15.38	99.98	68.30	31.68	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE20) Mode 5200 MHz

Horizontal

80 dBuV/m

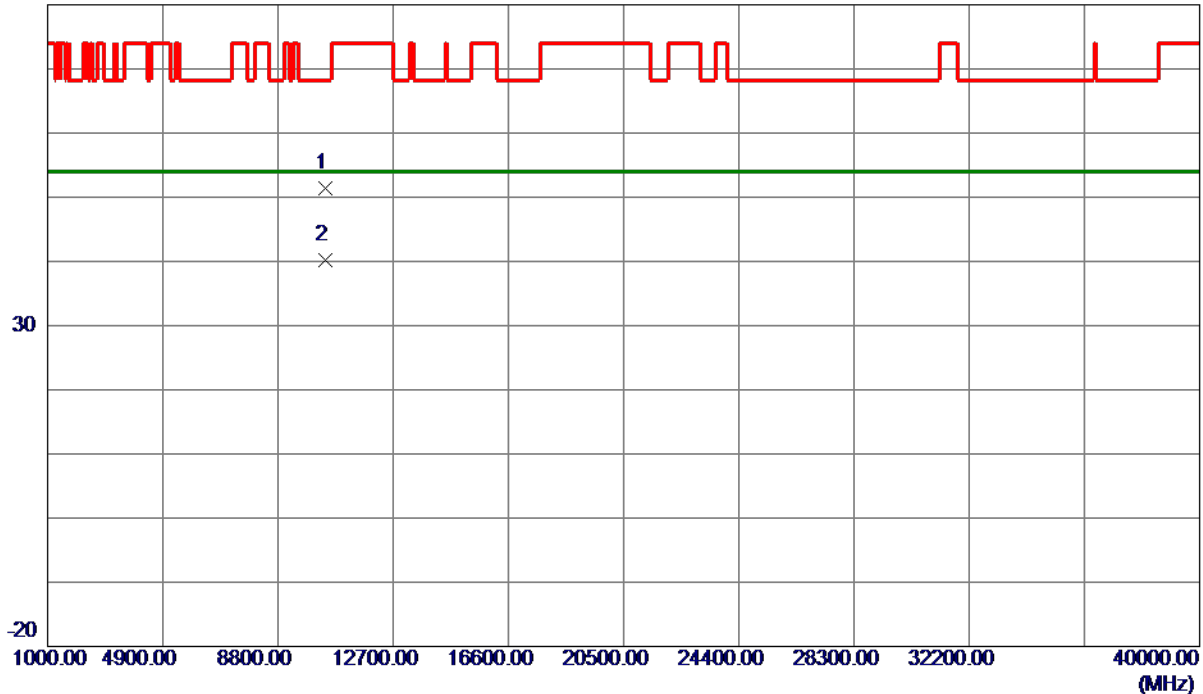

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10392.2300	39.17	12.31	51.48	68.30	-16.82	Peak	
2 *	10396.2800	27.98	12.31	40.29	54.00	-13.71	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE20) Mode 5240 MHz

Vertical

130 dBuV/m

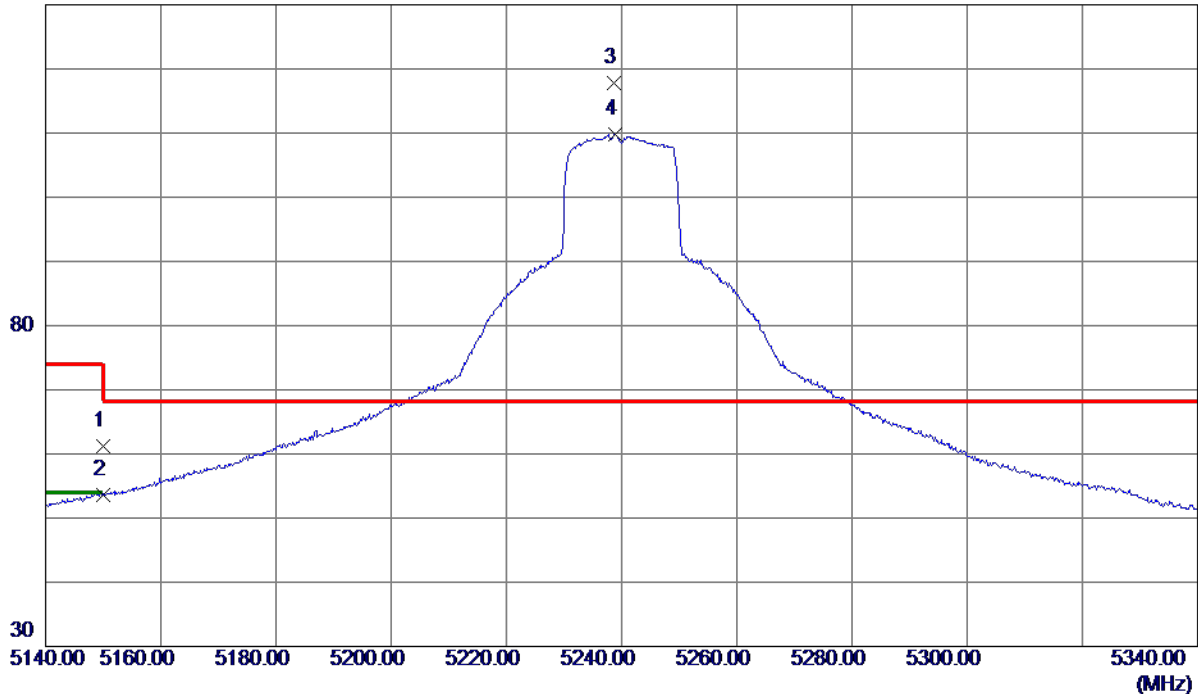

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	45.98	15.26	61.24	74.00	-12.76	Peak	
2	5150.0000	38.42	15.26	53.68	54.00	-0.32	AVG	
3 *	5238.6000	102.27	15.47	117.74	68.30	49.44	Peak	No Limit
4	5238.8000	94.34	15.47	109.81	999.00	-889.19	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE20) Mode 5240 MHz

Vertical

80 dBuV/m

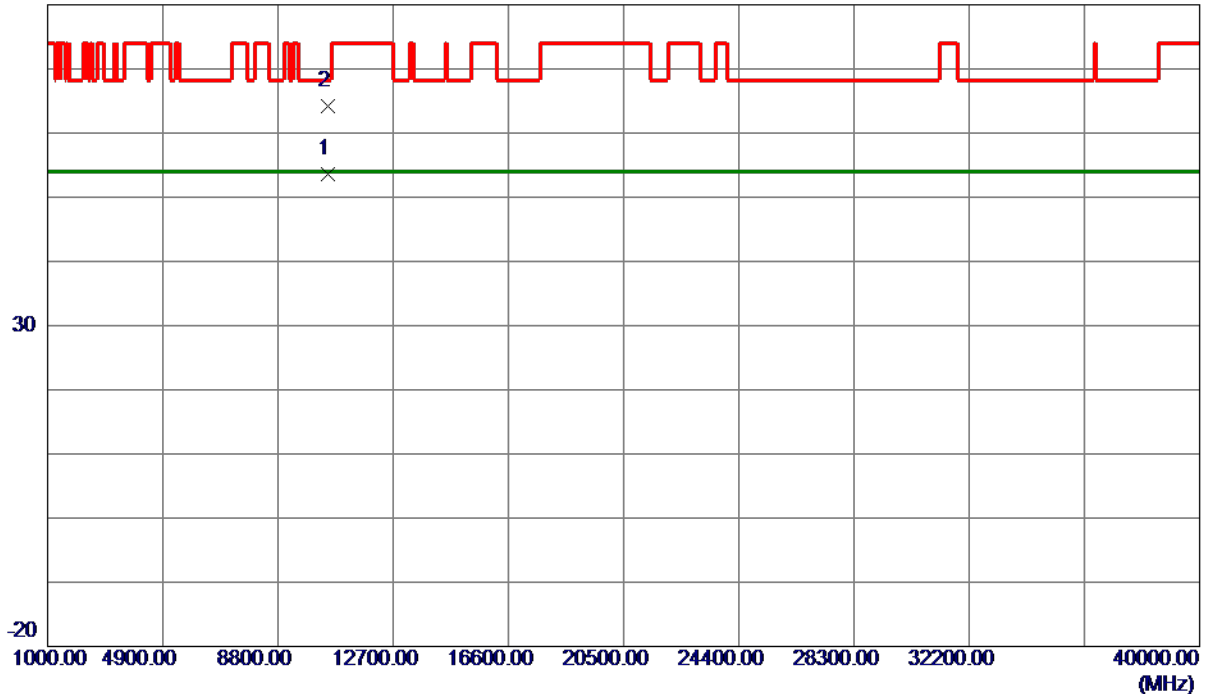

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10478.7400	41.23	12.36	53.59	54.00	-0.41	AVG	
2	10482.1000	51.77	12.36	64.13	68.30	-4.17	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE20) Mode 5240 MHz

Horizontal

130 dBuV/m

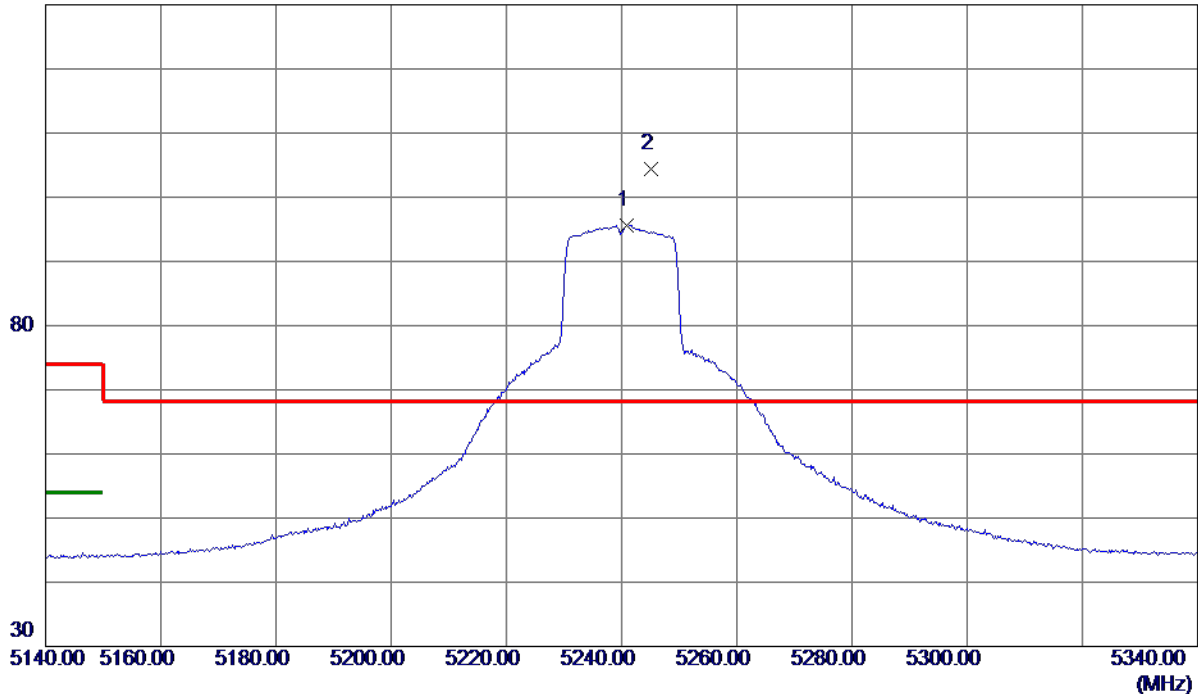

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5240.8000	80.21	15.47	95.68	999.00	-903.32	AVG	No Limit
2 *	5245.2000	88.89	15.48	104.37	68.30	36.07	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE20) Mode 5240 MHz

Horizontal

80 dBuV/m

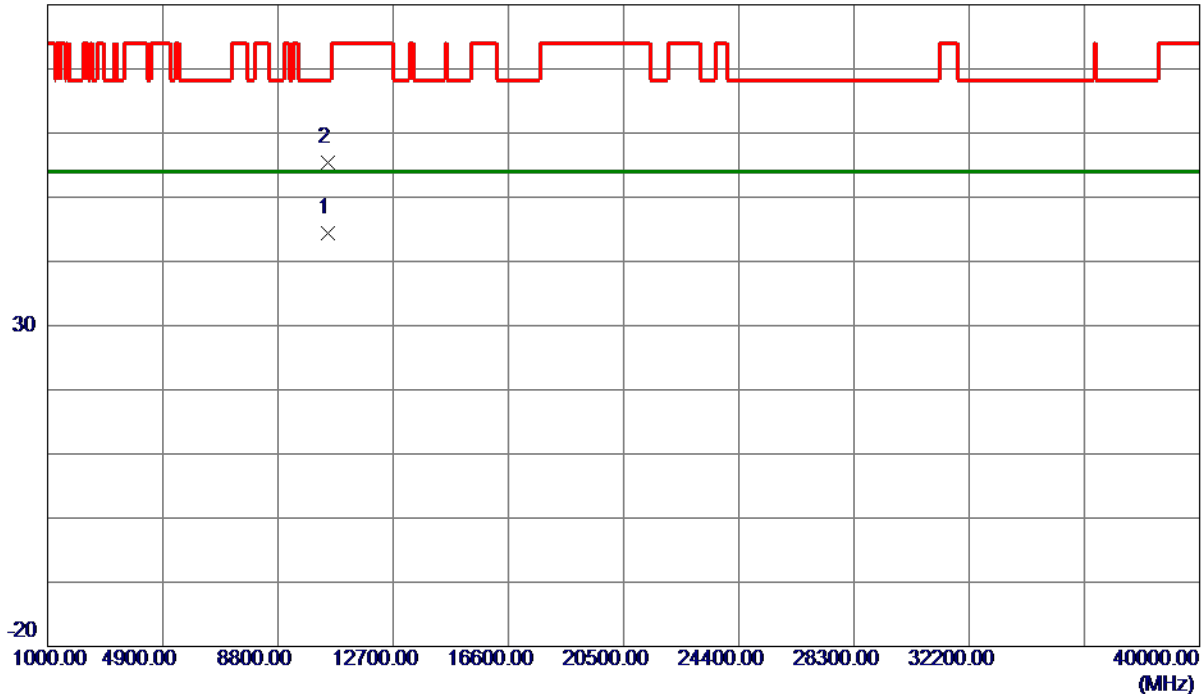

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10481.0800	31.99	12.36	44.35	54.00	-9.65	AVG	
2	10484.8900	43.11	12.37	55.48	68.30	-12.82	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE40) Mode 5190 MHz

Vertical

130 dBuV/m

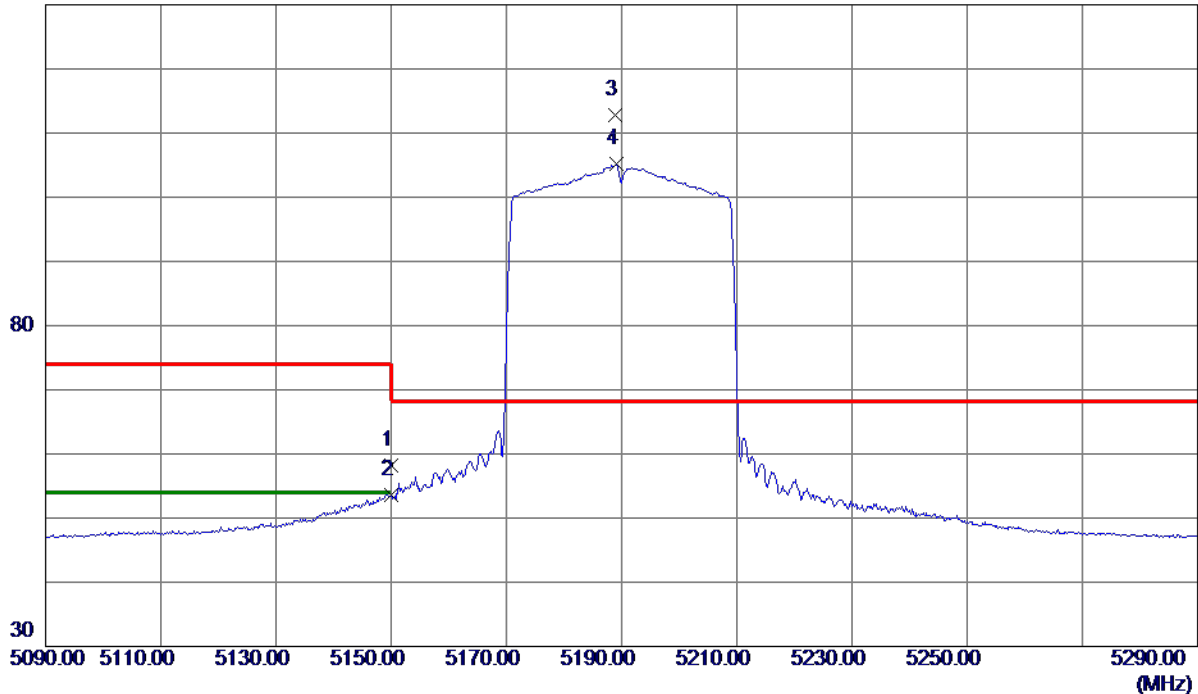

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	43.03	15.26	58.29	74.00	-15.71	Peak	
2	5150.0000	38.32	15.26	53.58	54.00	-0.42	AVG	
3 *	5188.8000	97.52	15.35	112.87	68.30	44.57	Peak	No Limit
4	5189.2000	89.86	15.35	105.21	999.00	-893.79	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE40) Mode 5190 MHz

Vertical

80 dBuV/m

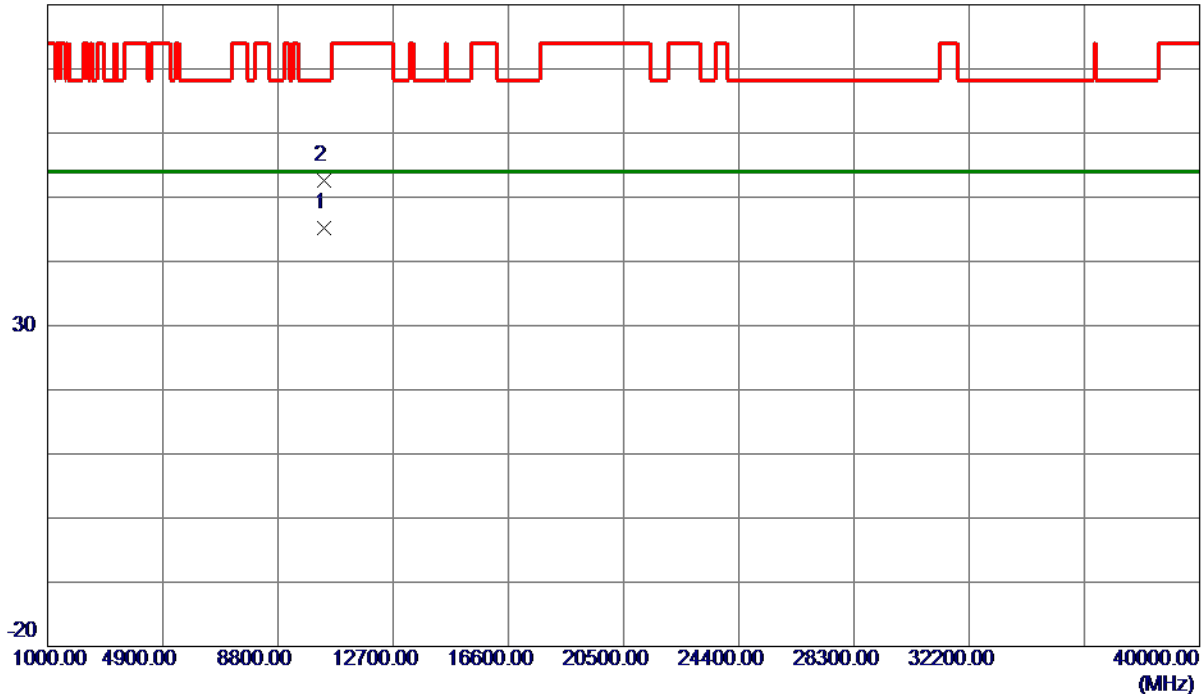

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10374.0000	32.94	12.30	45.24	54.00	-8.76	AVG	
2	10381.3600	40.26	12.30	52.56	68.30	-15.74	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE40) Mode 5190 MHz

Horizontal

130 dBuV/m

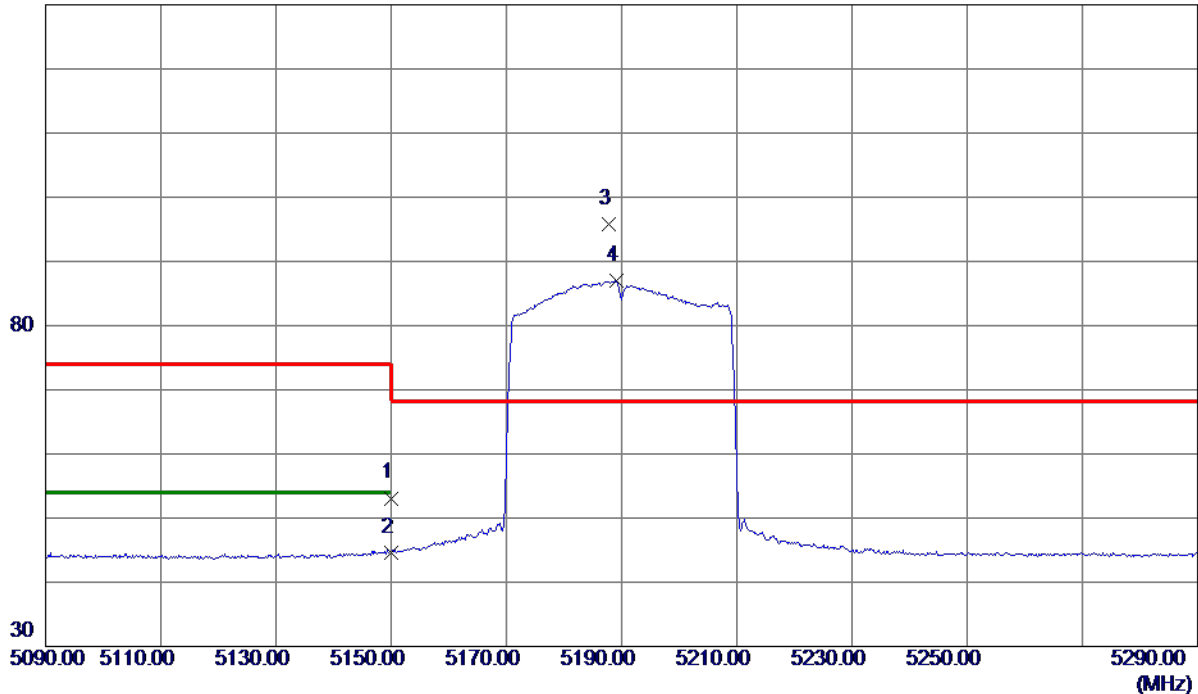

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	37.84	15.26	53.10	74.00	-20.90	Peak	
2	5150.0000	29.26	15.26	44.52	54.00	-9.48	AVG	
3 *	5187.8000	80.40	15.35	95.75	68.30	27.45	Peak	No Limit
4	5189.2000	71.68	15.35	87.03	999.00	-911.97	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE40) Mode 5190 MHz

Horizontal

80 dBuV/m

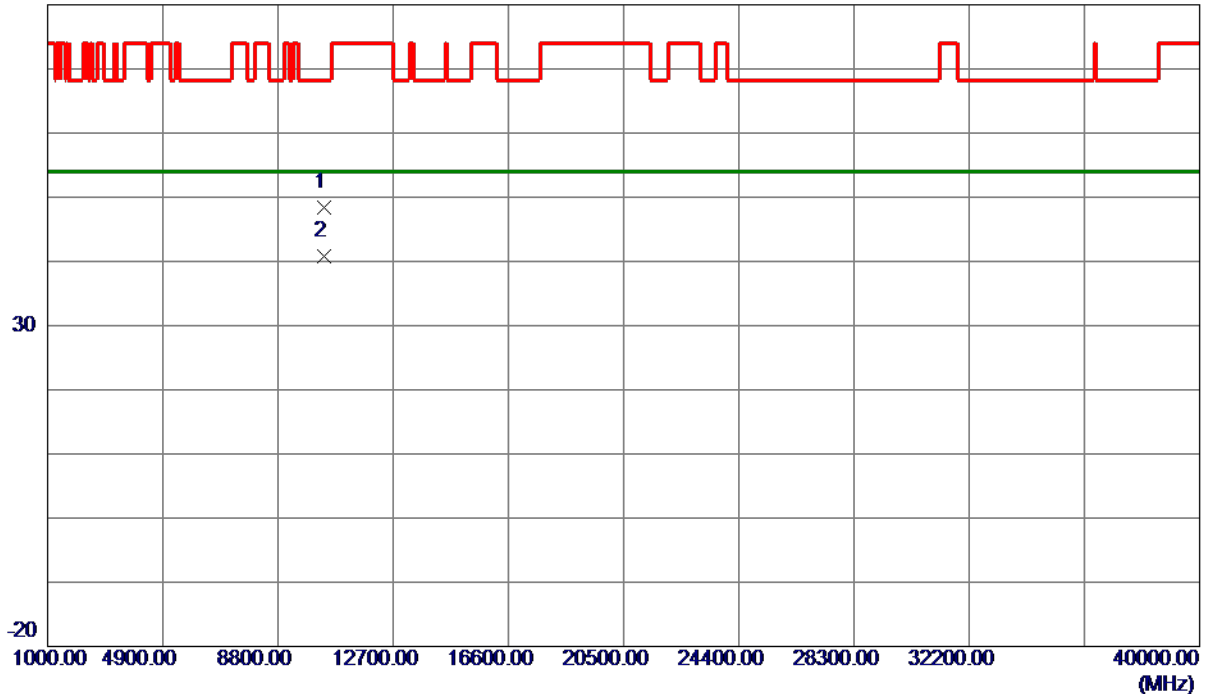

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10371.0400	36.18	12.29	48.47	68.30	-19.83	Peak	
2 *	10375.2800	28.42	12.30	40.72	54.00	-13.28	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE40) Mode 5230 MHz

Vertical

130 dBuV/m

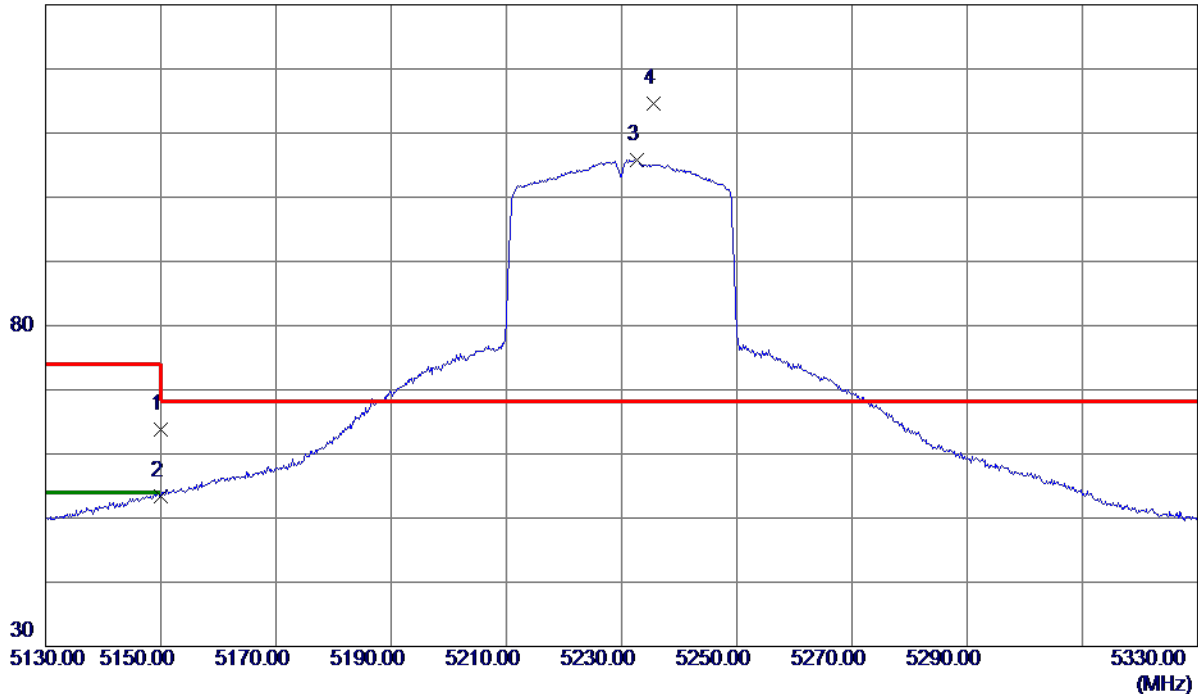

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	48.46	15.26	63.72	74.00	-10.28	Peak	
2	5150.0000	38.20	15.26	53.46	54.00	-0.54	AVG	
3	5232.6000	90.41	15.45	105.86	999.00	-893.14	AVG	No Limit
4 *	5235.6000	99.13	15.46	114.59	68.30	46.29	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE40) Mode 5230 MHz

Vertical

80 dBuV/m

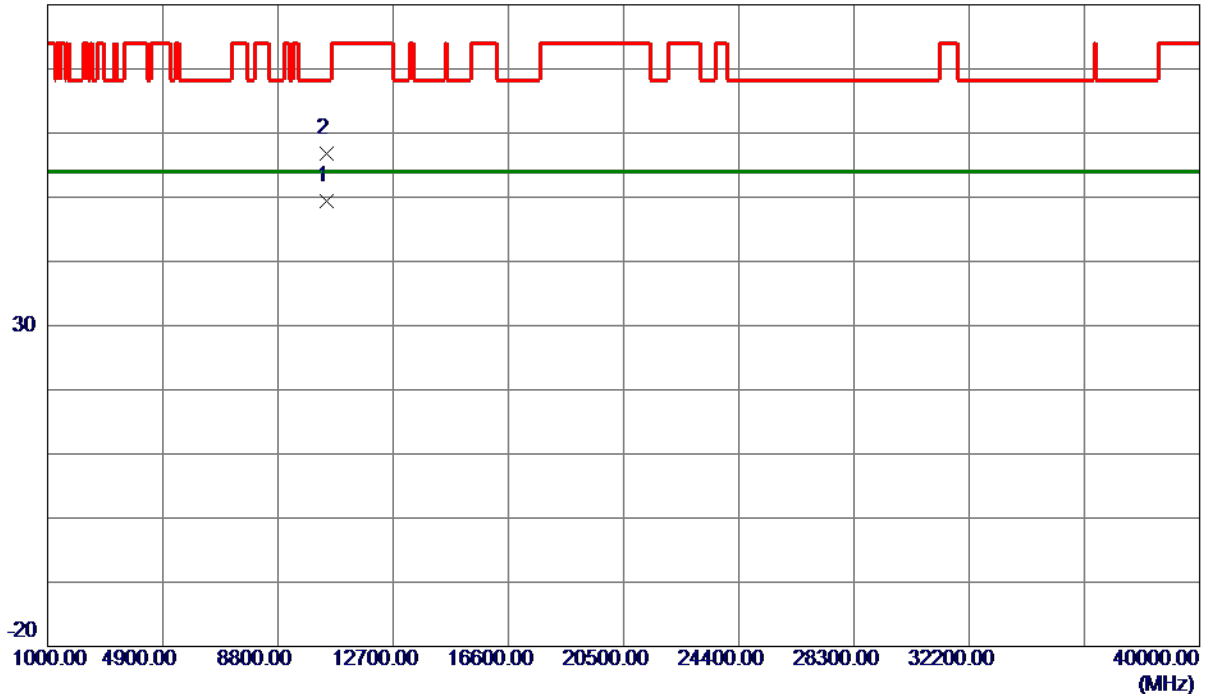

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10458.8000	37.11	12.35	49.46	54.00	-4.54	AVG	
2	10468.2400	44.40	12.35	56.75	68.30	-11.55	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE40) Mode 5230 MHz

Horizontal

130 dBuV/m

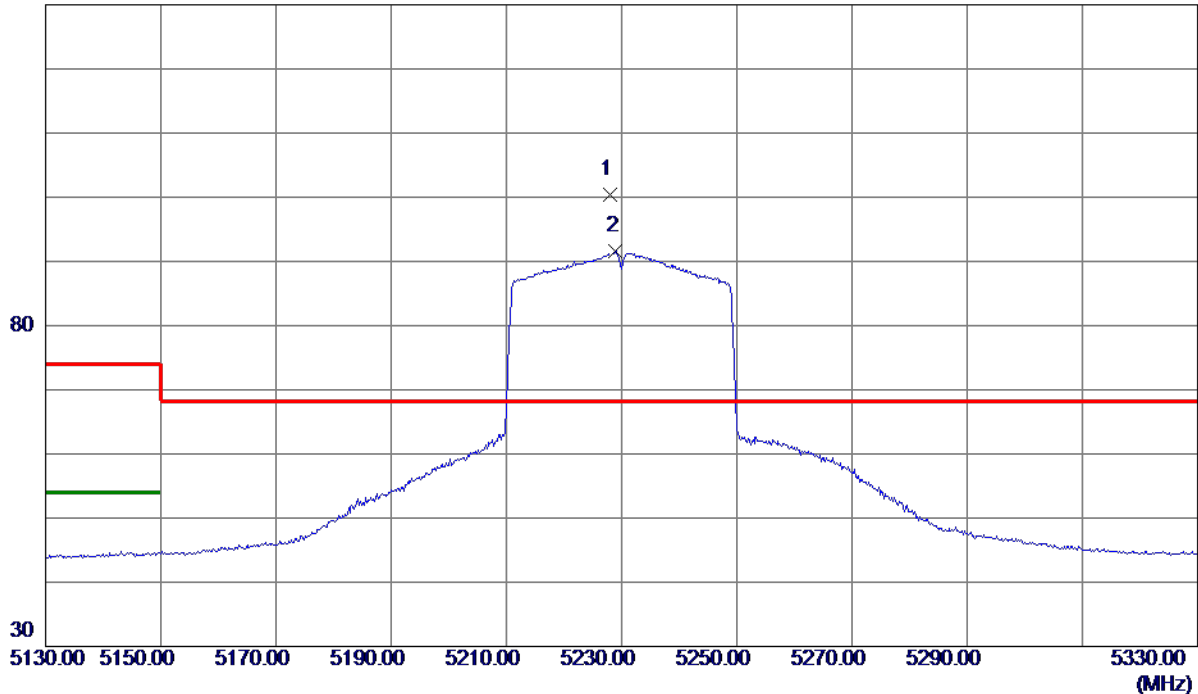

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5228.0000	84.95	15.44	100.39	68.30	32.09	Peak	No Limit
2	5229.0000	76.21	15.44	91.65	999.00	-907.35	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE40) Mode 5230 MHz

Horizontal

80 dBuV/m

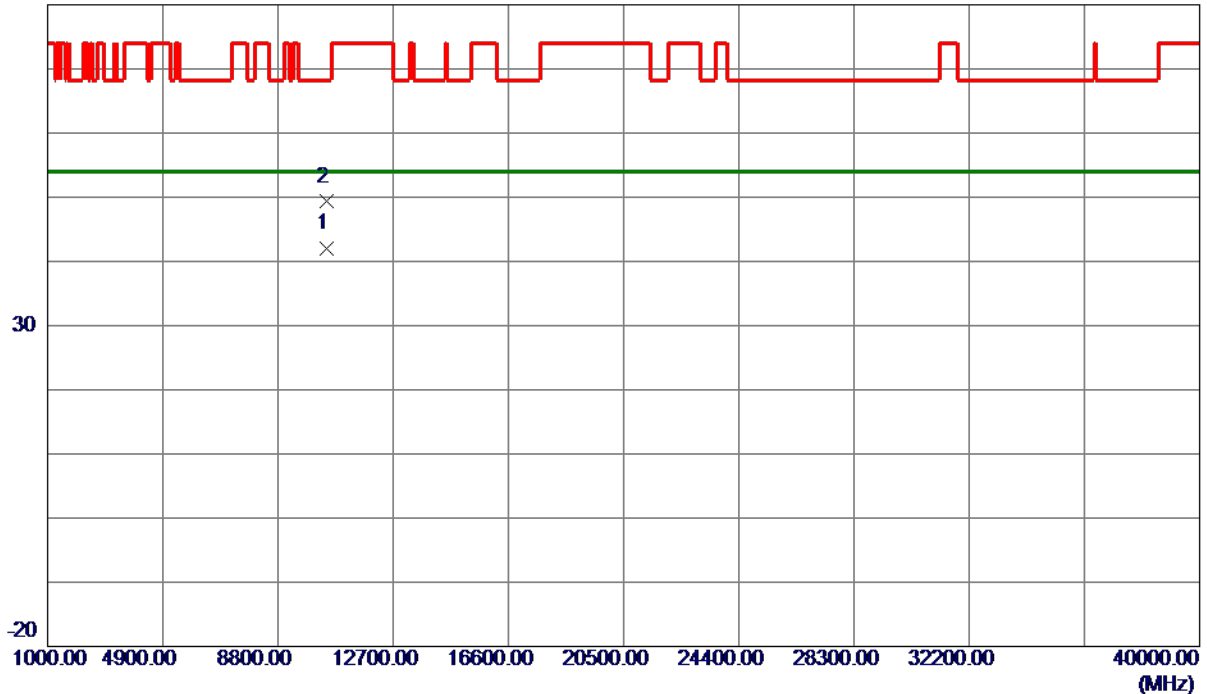

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10452.8800	29.67	12.35	42.02	54.00	-11.98	AVG	
2	10461.1200	36.95	12.35	49.30	68.30	-19.00	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE80) Mode 5210 MHz

Vertical

130 dBuV/m

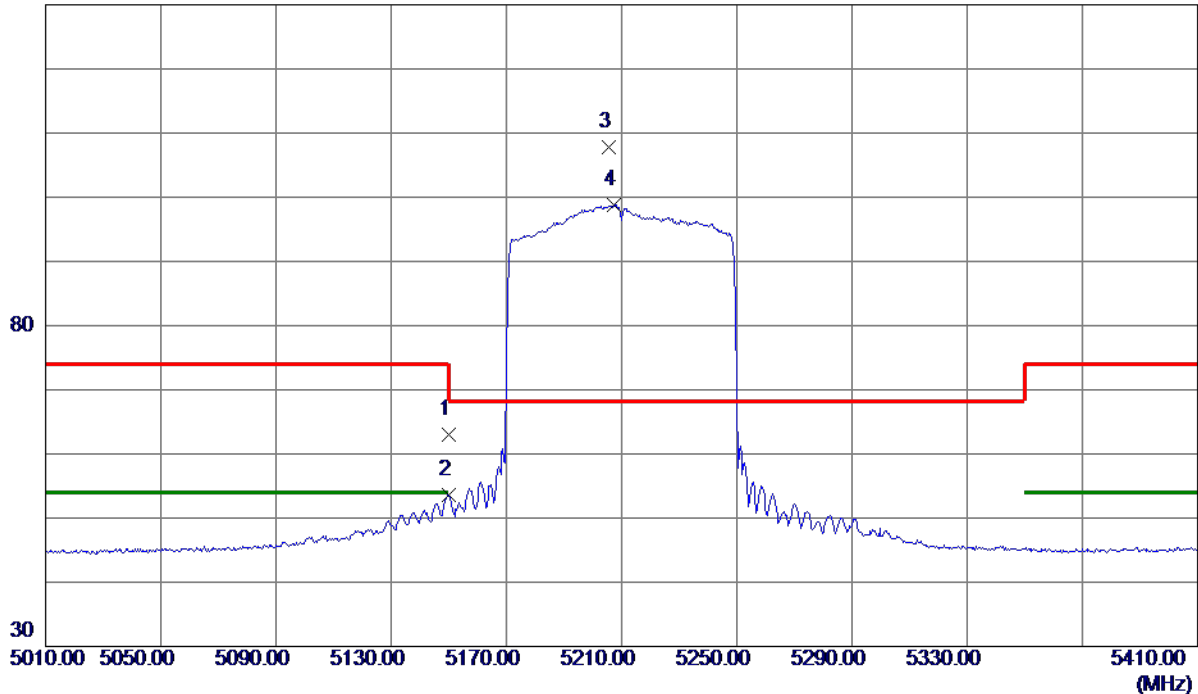

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	47.80	15.26	63.06	74.00	-10.94	Peak	
2	5150.0000	38.30	15.26	53.56	54.00	-0.44	AVG	
3 *	5205.6000	92.39	15.39	107.78	68.30	39.48	Peak	No Limit
4	5207.2000	83.46	15.39	98.85	999.00	-900.15	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE80) Mode 5210 MHz

Vertical

80 dBuV/m

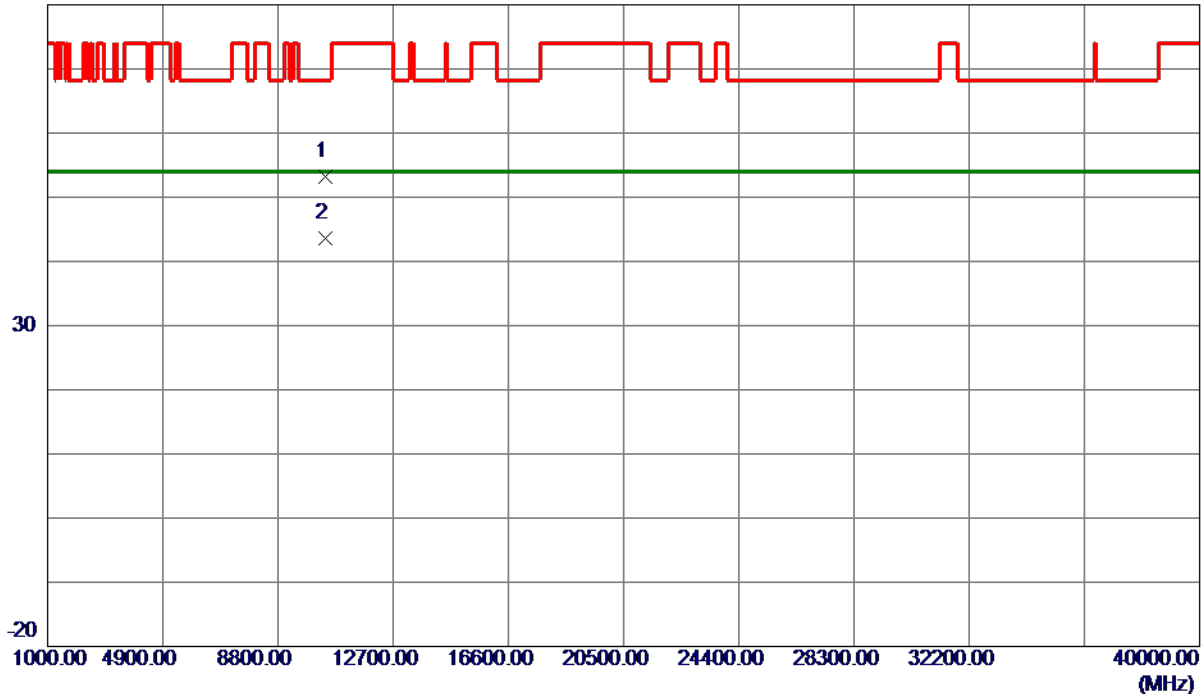

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10398.5599	40.83	12.31	53.14	68.30	-15.16	Peak	
2 *	10398.8000	31.33	12.31	43.64	54.00	-10.36	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE80) Mode 5210 MHz

Horizontal

130 dBuV/m

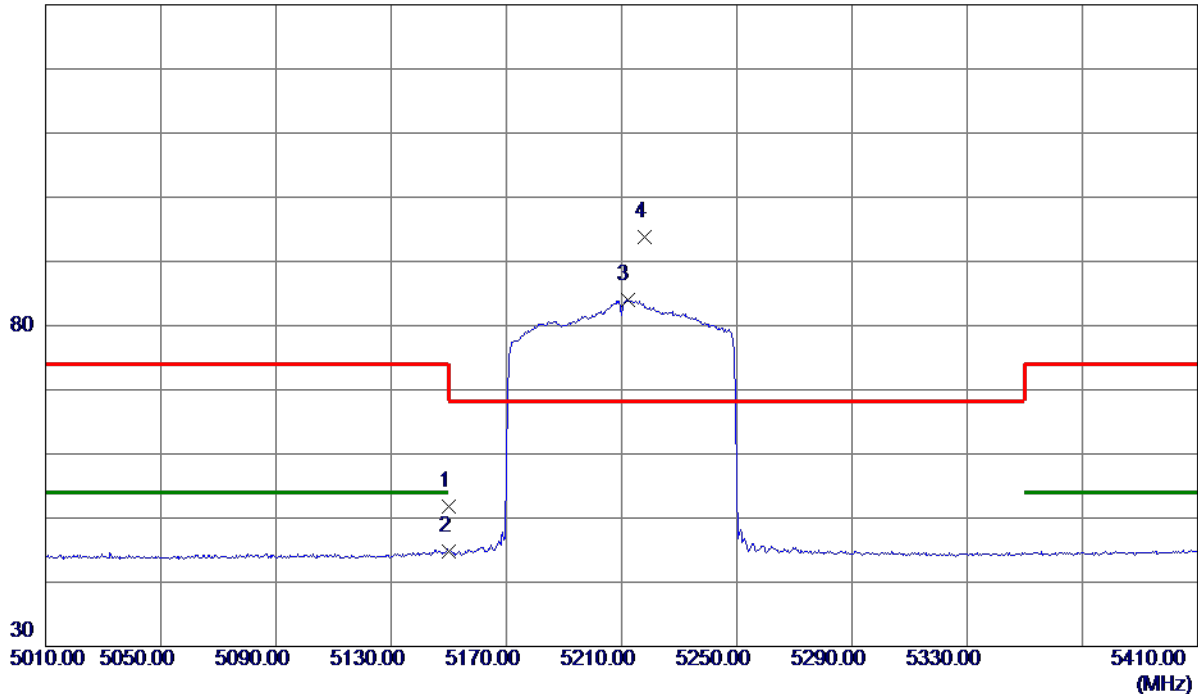

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	36.56	15.26	51.82	74.00	-22.18	Peak	
2	5150.0000	29.58	15.26	44.84	54.00	-9.16	AVG	
3	5212.0000	68.54	15.41	83.95	999.00	-915.05	AVG	No Limit
4 *	5218.0000	78.34	15.42	93.76	68.30	25.46	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AX(HE80) Mode 5210 MHz

Horizontal

80 dBuV/m

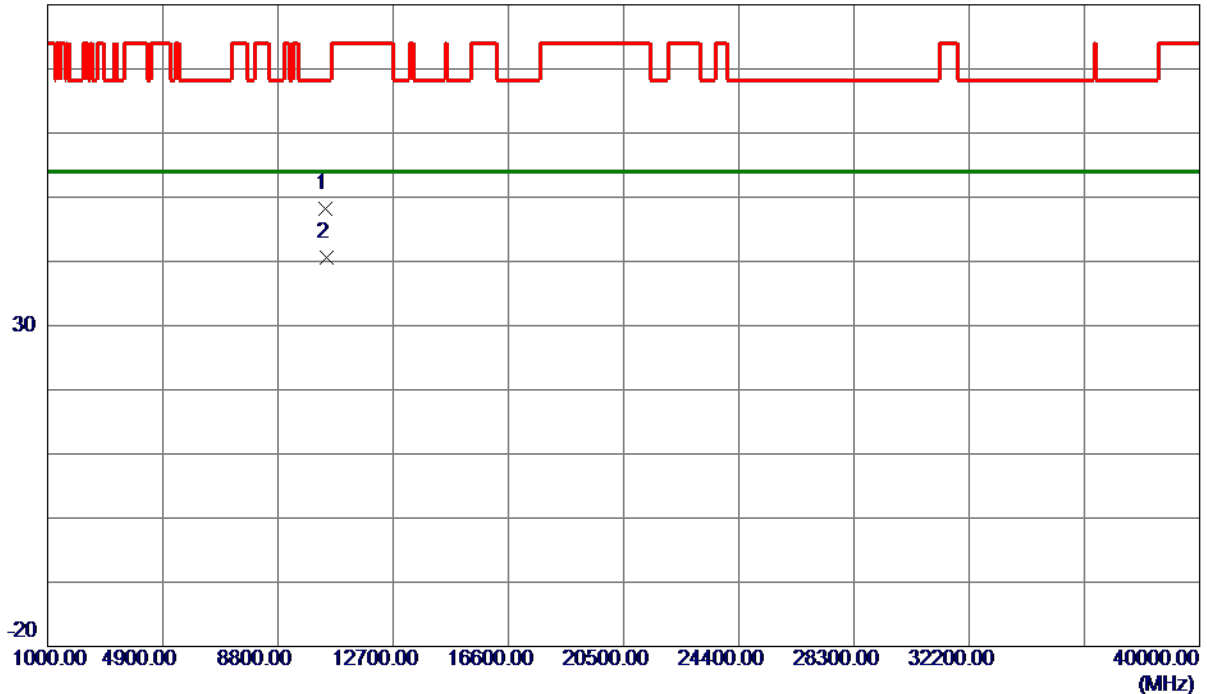

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10416.3200	35.79	12.32	48.11	68.30	-20.19	Peak	
2 *	10426.0800	28.35	12.33	40.68	54.00	-13.32	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE20) Mode 5260 MHz

Vertical

130 dBuV/m

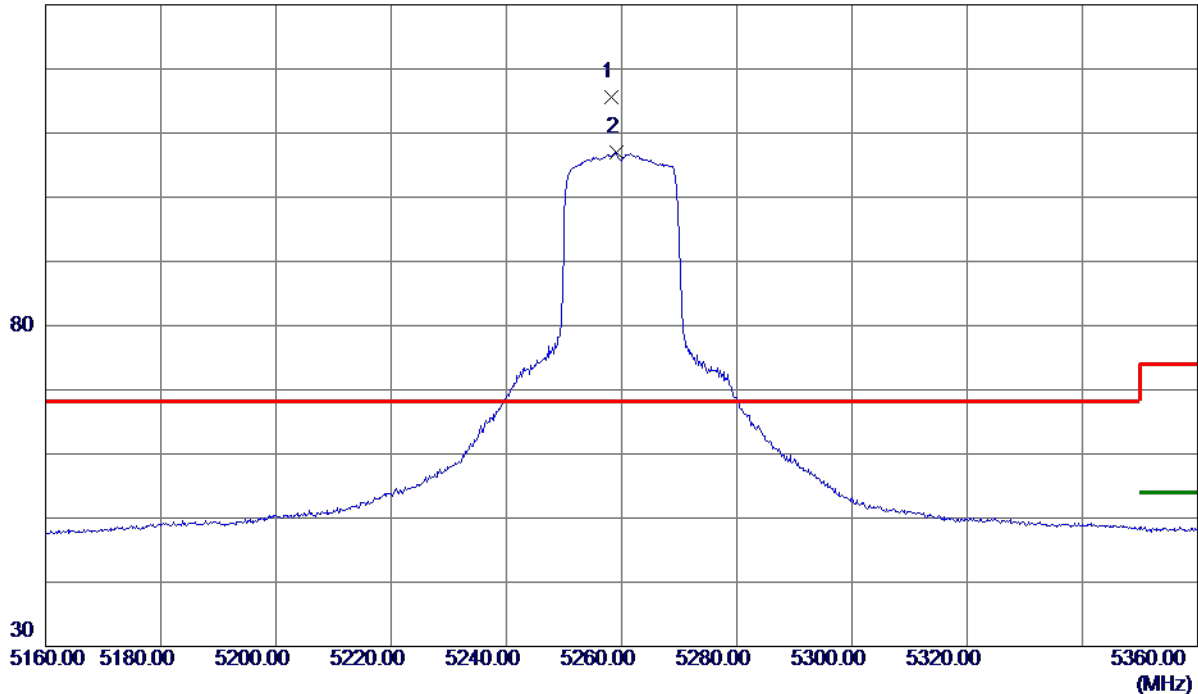

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5258.3000	100.07	15.51	115.58	68.30	47.28	Peak	No Limit
2	5259.1000	91.47	15.51	106.98	999.00	-892.02	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE20) Mode 5260 MHz

Vertical

80 dBuV/m

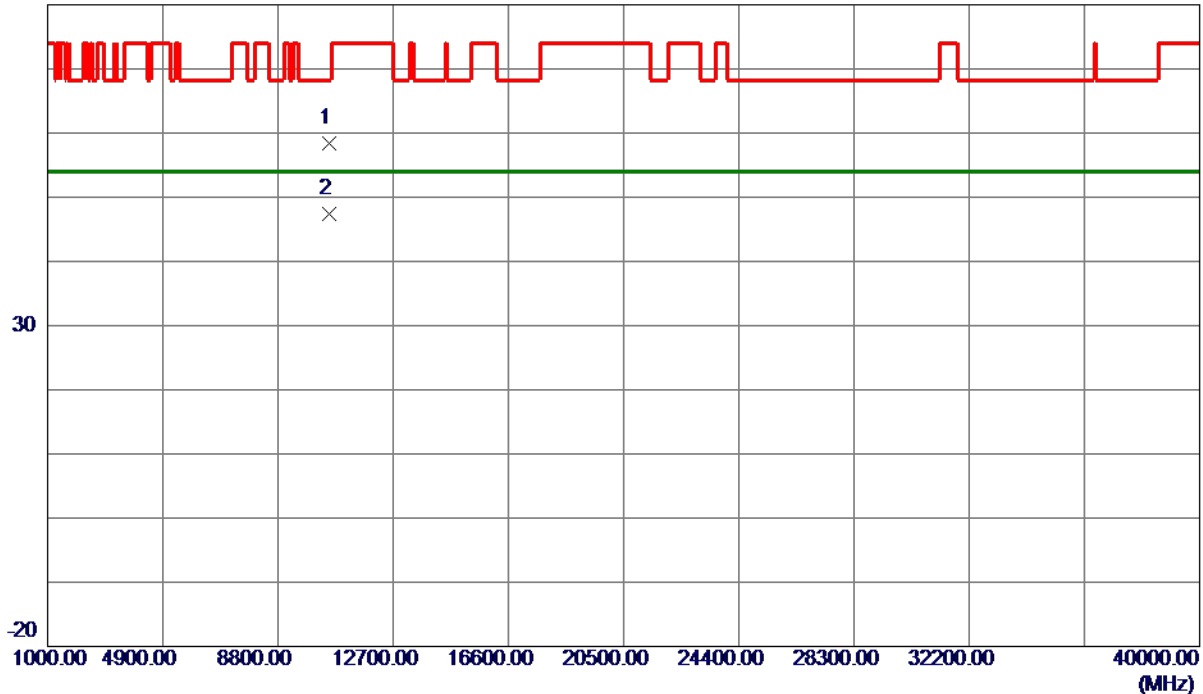

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10515.6200	46.10	12.39	58.49	68.30	-9.81	Peak	
2 *	10517.4500	35.01	12.39	47.40	54.00	-6.60	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE20) Mode 5260 MHz

Horizontal

130 dBuV/m

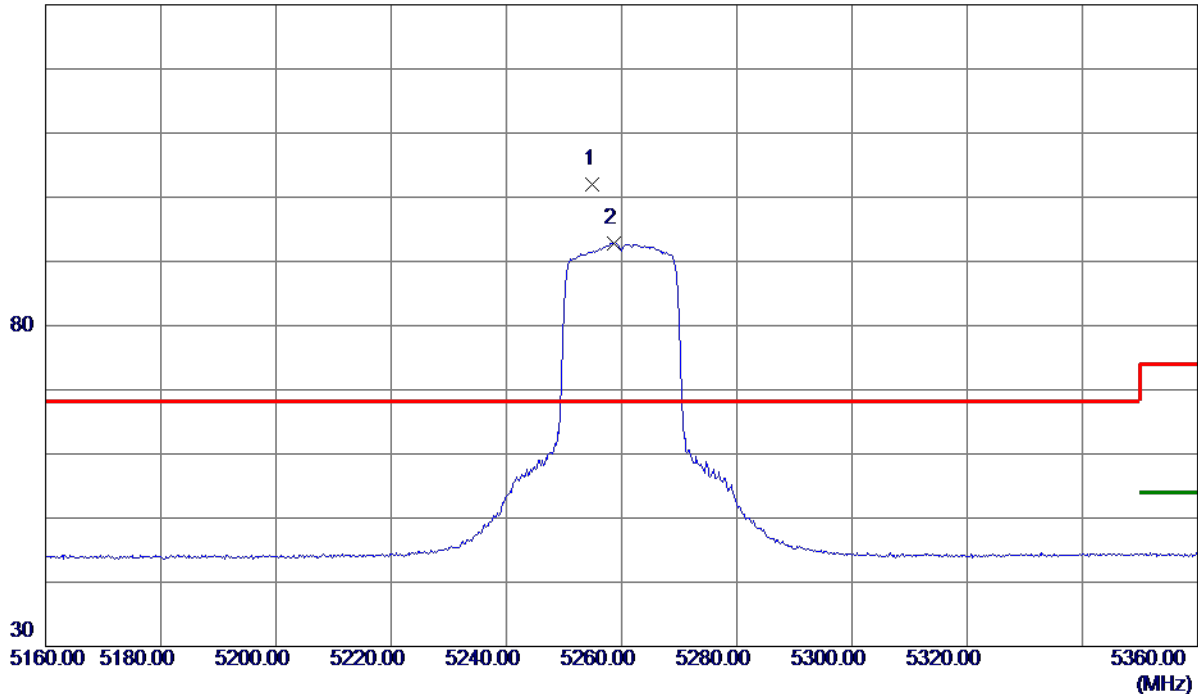

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5255.0000	86.41	15.50	101.91	68.30	33.61	Peak	No Limit
2	5258.6000	77.34	15.51	92.85	999.00	-906.15	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE20) Mode 5260 MHz

Horizontal

80 dBuV/m

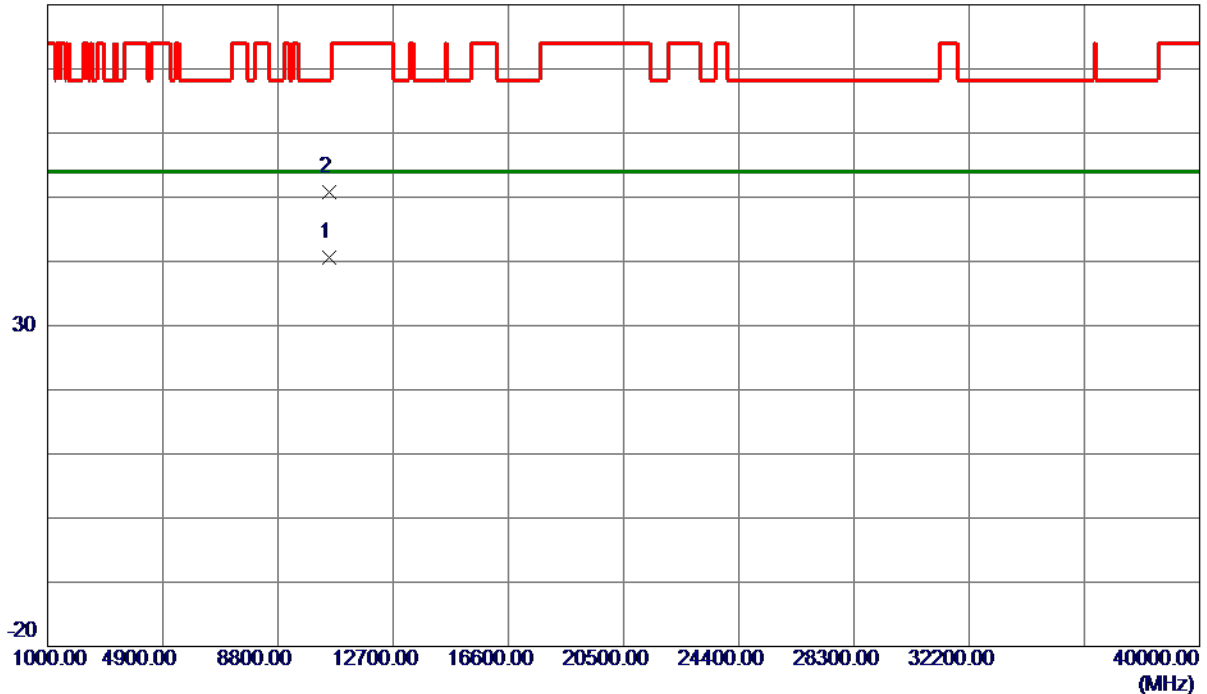

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10515.9500	28.18	12.39	40.57	54.00	-13.43	AVG	
2	10525.3099	38.33	12.40	50.73	68.30	-17.57	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE20) Mode 5300 MHz

Vertical

130 dBuV/m

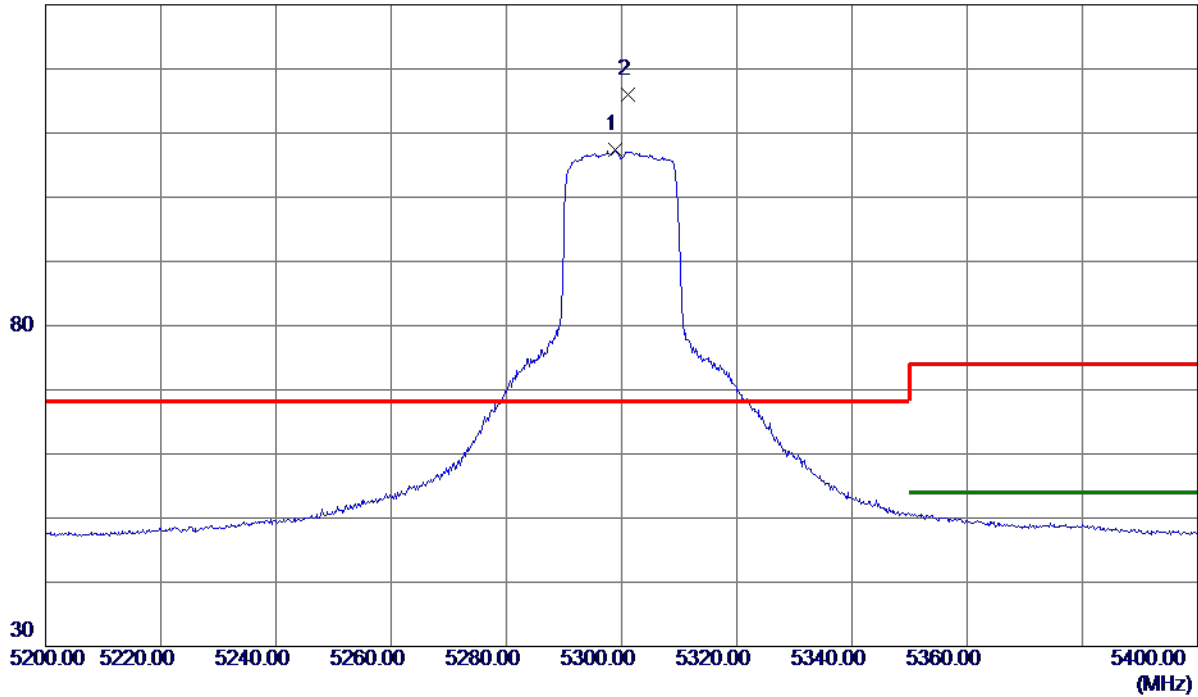

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5298.9000	91.82	15.60	107.42	999.00	-891.58	AVG	No Limit
2 *	5301.2000	100.46	15.61	116.07	68.30	47.77	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE20) Mode 5300 MHz

Vertical

80 dBuV/m

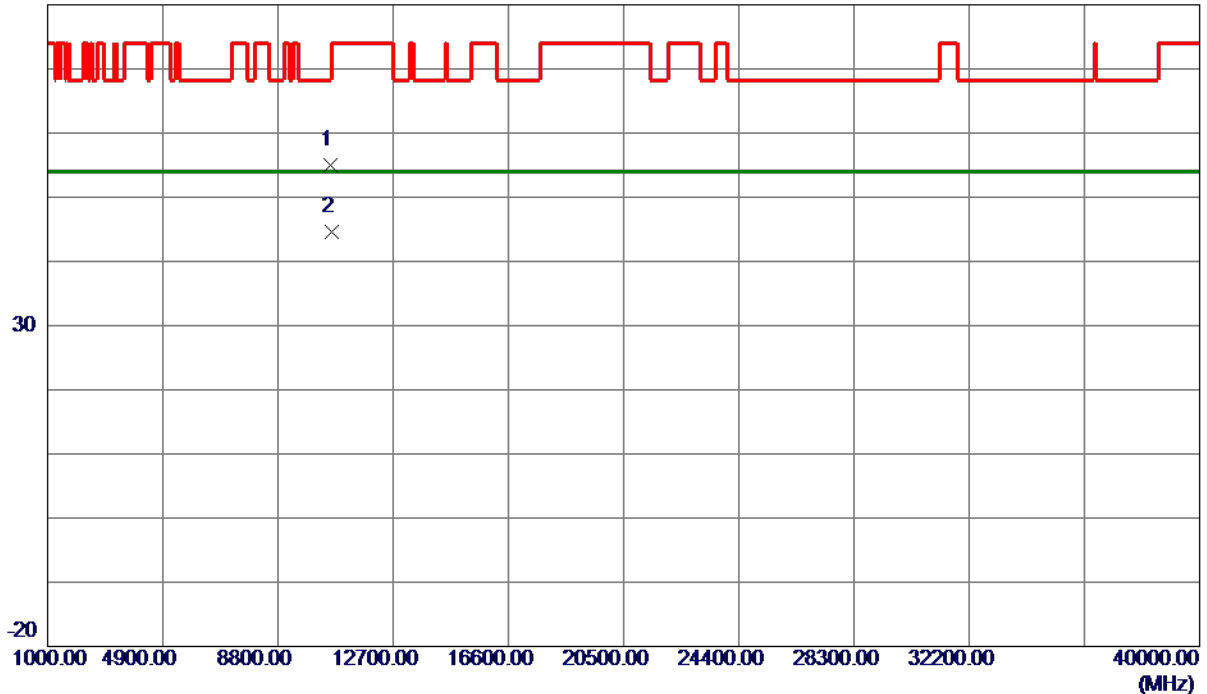

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10597.5700	42.61	12.45	55.06	68.30	-13.24	Peak	
2 *	10598.3800	32.12	12.45	44.57	54.00	-9.43	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE20) Mode 5300 MHz

Horizontal

130 dBuV/m

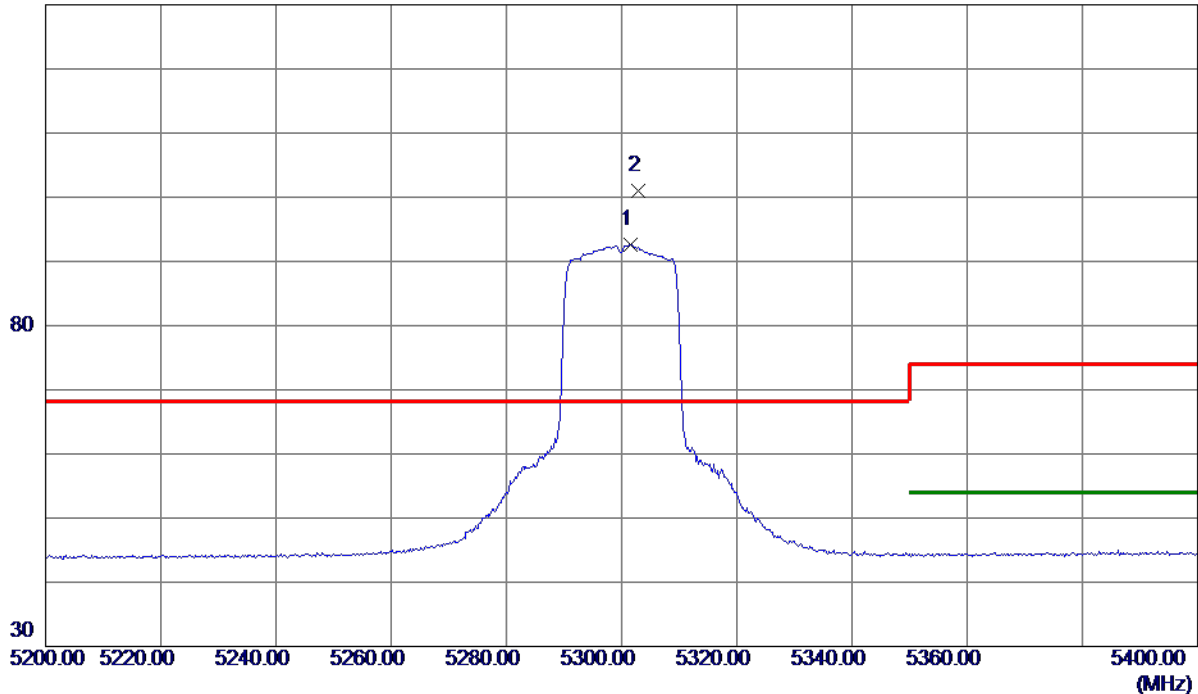

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5301.6000	76.93	15.61	92.54	999.00	-906.46	AVG	No Limit
2 *	5302.8000	85.48	15.61	101.09	68.30	32.79	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE20) Mode 5300 MHz

Horizontal

80 dBuV/m

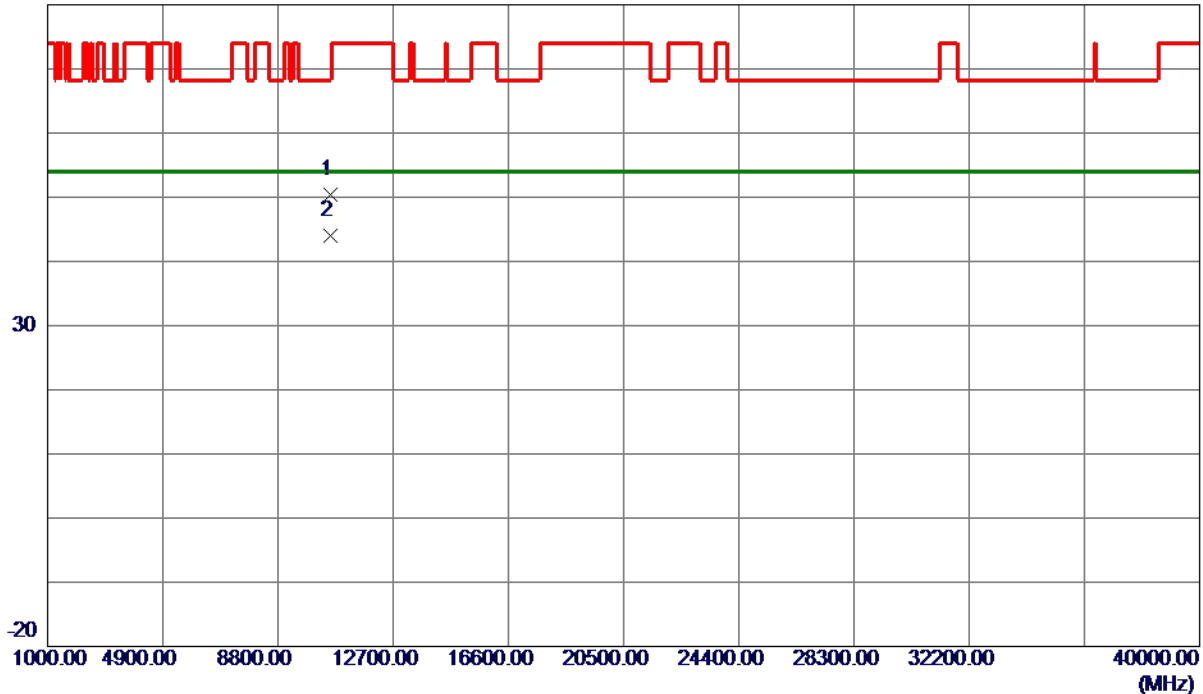


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10592.6200	38.00	12.45	50.45	68.30	-17.85	Peak	
2 *	10597.2699	31.59	12.45	44.04	54.00	-9.96	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz

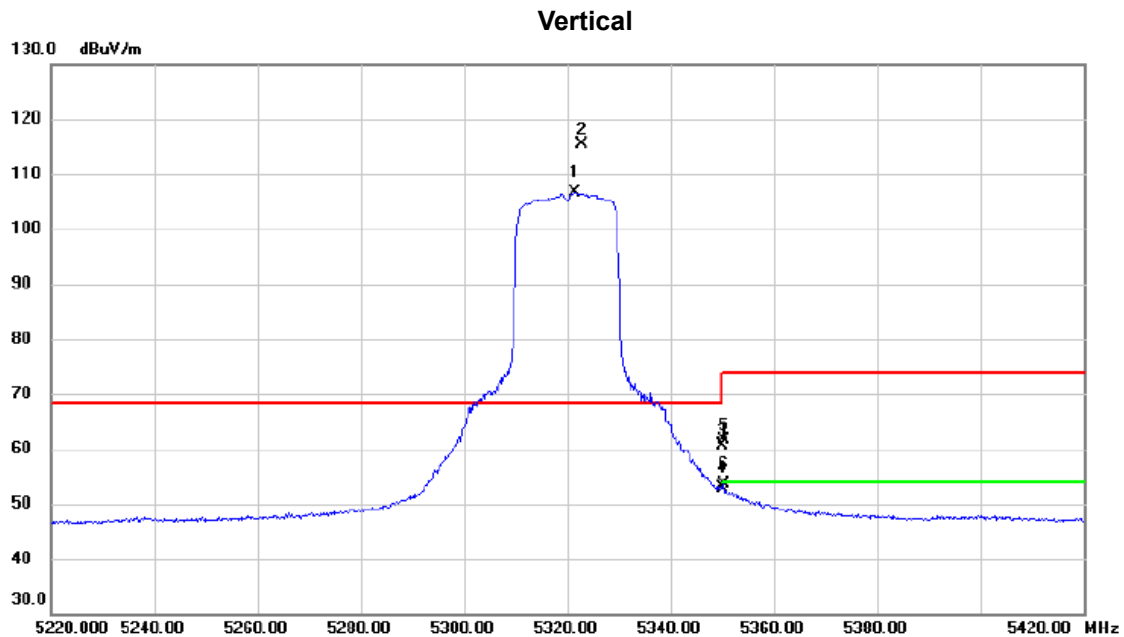

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5321.500	90.93	15.65	106.58	68.30	38.28	AVG	No Limit
2	*	5322.900	99.77	15.65	115.42	68.30	47.12	peak	No Limit
3		5350.000	44.87	15.72	60.59	74.00	-13.41	peak	
4		5350.000	37.14	15.72	52.86	54.00	-1.14	AVG	
5		5350.200	45.88	15.72	61.60	74.00	-12.40	peak	
6		5350.200	37.85	15.72	53.57	54.00	-0.43	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz

Vertical

80 dBuV/m

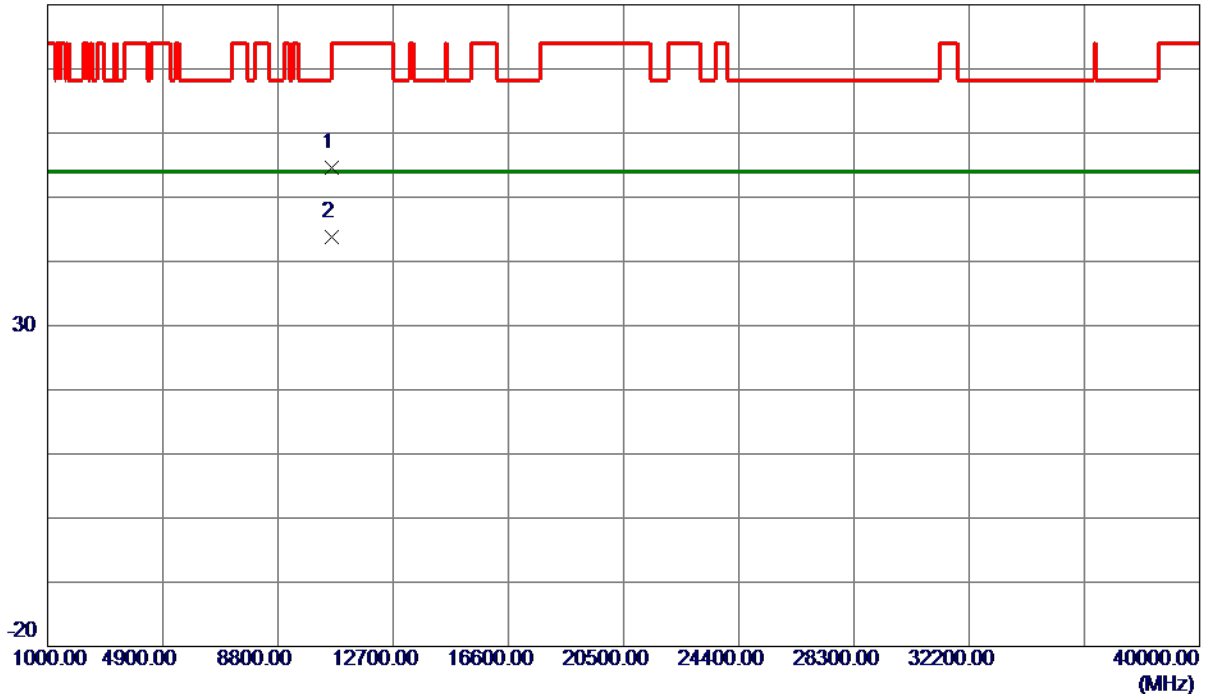


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10636.7300	42.13	12.49	54.62	74.00	-19.38	Peak	
2 *	10637.6000	31.22	12.49	43.71	54.00	-10.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz

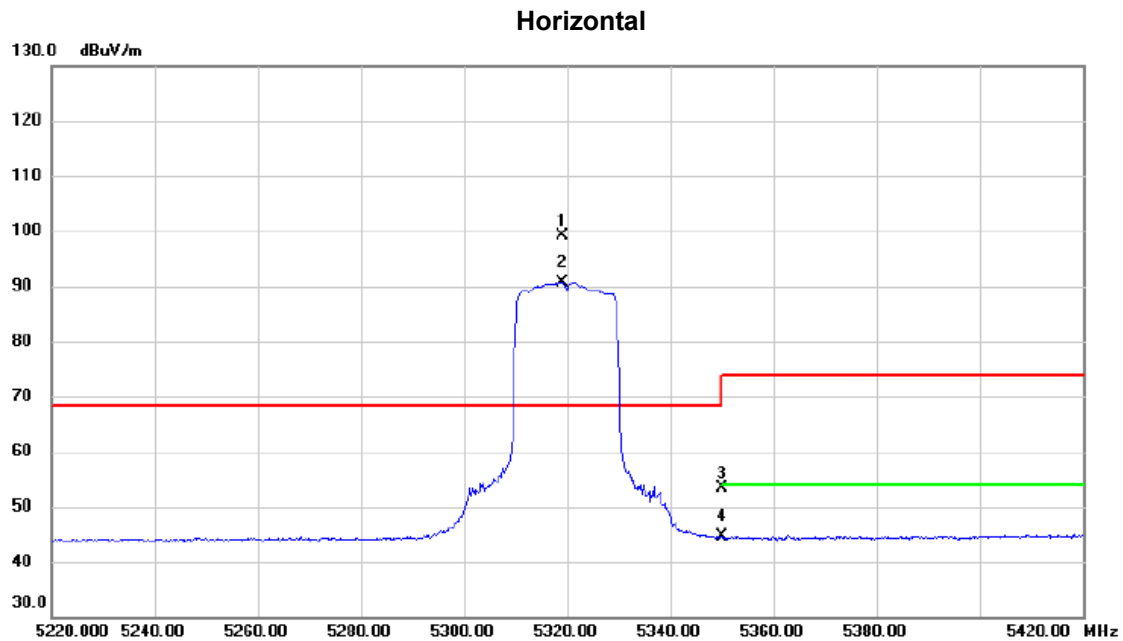

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5319.200	83.57	15.64	99.21	68.30	30.91	peak	No Limit
2	X	5319.200	75.04	15.64	90.68	68.30	22.38	AVG	No Limit
3		5350.000	37.63	15.72	53.35	74.00	-20.65	peak	
4		5350.000	28.97	15.72	44.69	54.00	-9.31	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE20) Mode 5320 MHz

Horizontal

80 dBuV/m

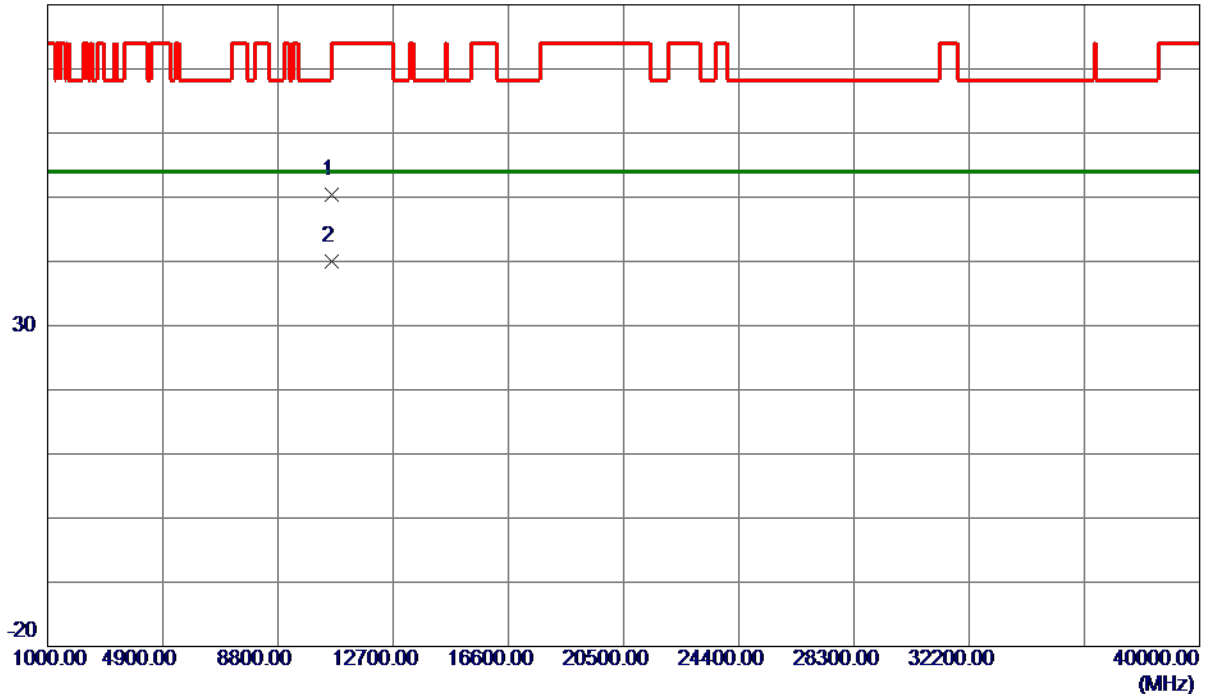

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10626.5000	37.84	12.48	50.32	74.00	-23.68	Peak	
2 *	10631.1500	27.50	12.48	39.98	54.00	-14.02	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz

Vertical

130 dBuV/m

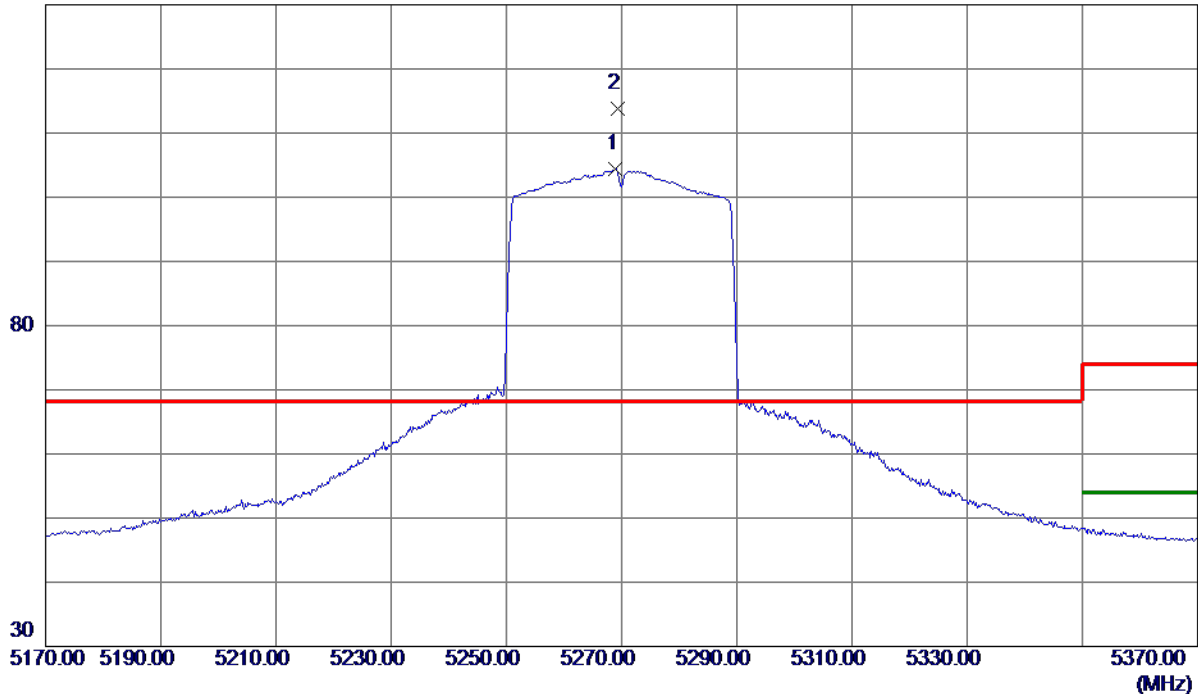

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5269.0000	88.83	15.54	104.37	999.00	-894.63	AVG	No Limit
2 *	5269.4000	98.35	15.54	113.89	68.30	45.59	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz

Vertical

80 dBuV/m

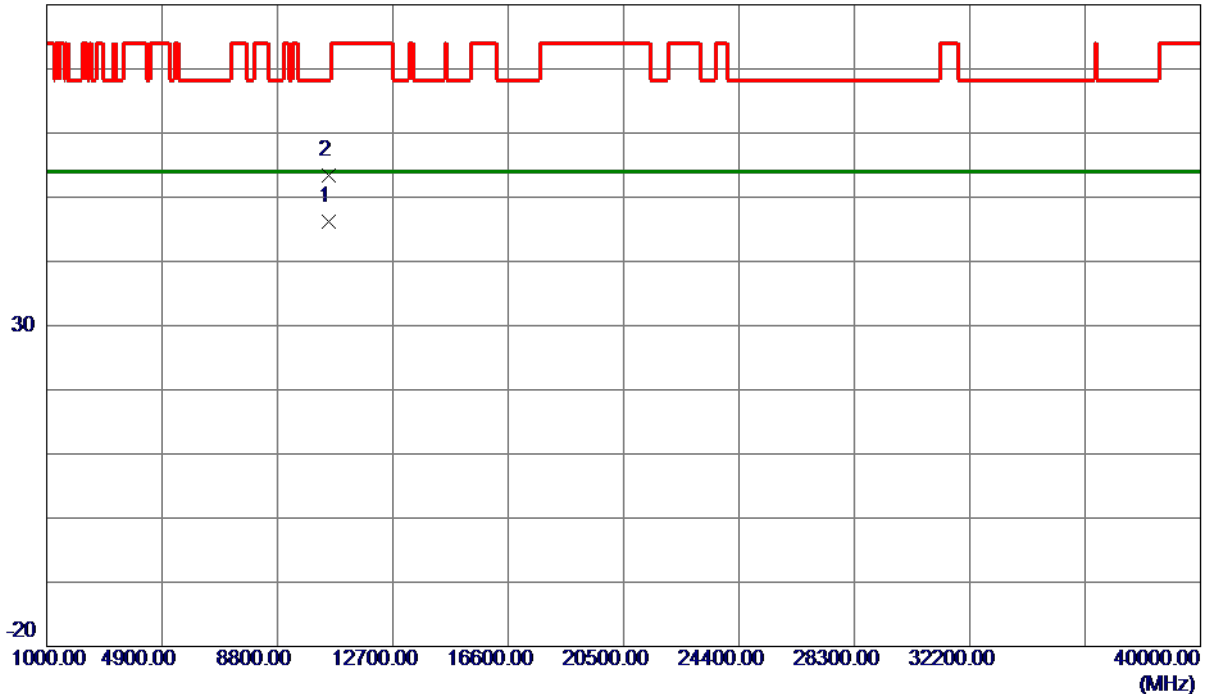

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10528.7200	33.75	12.40	46.15	54.00	-7.85	AVG	
2	10545.5199	41.04	12.41	53.45	68.30	-14.85	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz

Horizontal

130 dBuV/m

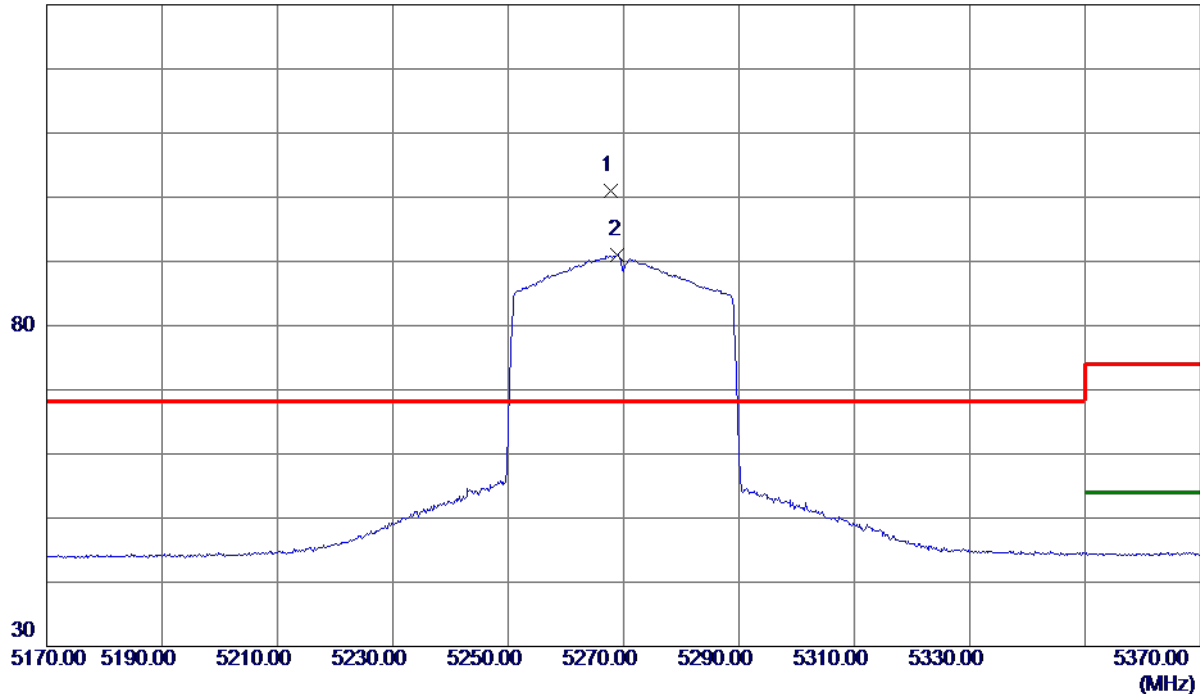

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5267.8000	85.47	15.53	101.00	68.30	32.70	Peak	No Limit
2	5269.0000	75.49	15.54	91.03	999.00	-907.97	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE40) Mode 5270 MHz

Horizontal

80 dBuV/m

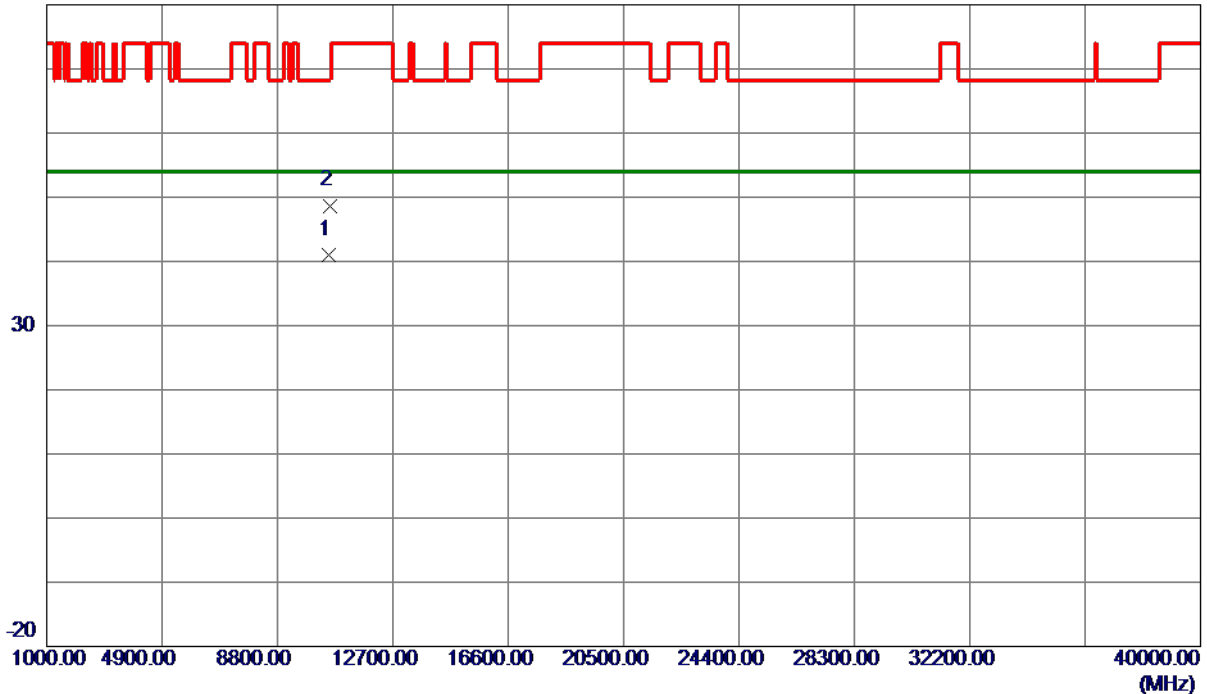


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10521.0400	28.59	12.39	40.98	54.00	-13.02	AVG	
2	10576.8000	36.26	12.44	48.70	68.30	-19.60	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz

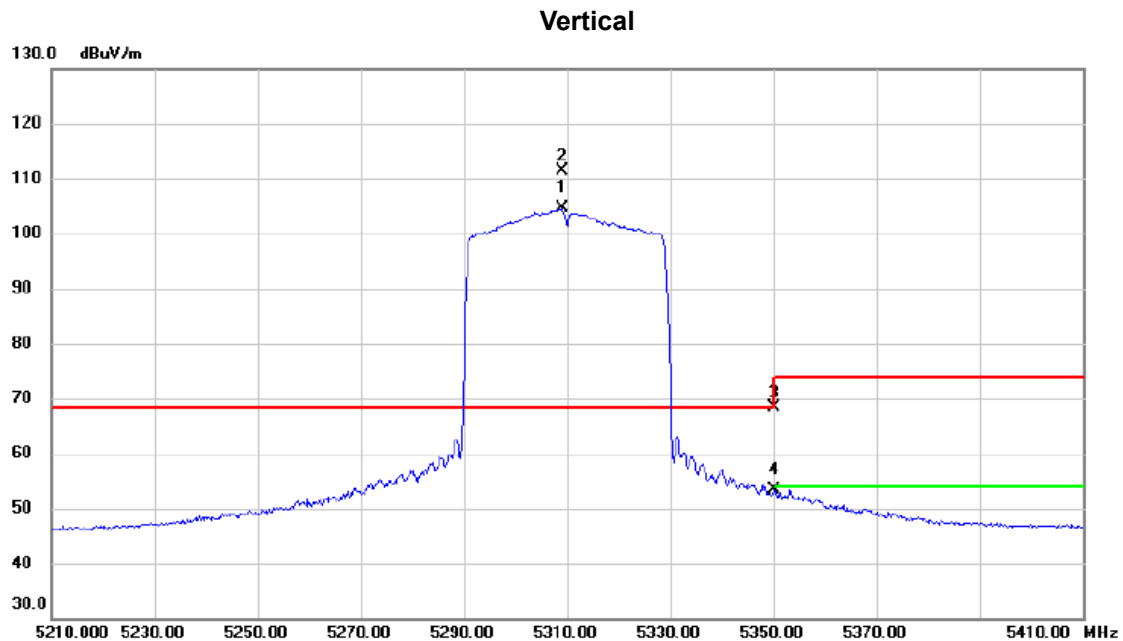

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5309.000	88.95	15.63	104.58	68.30	36.28	AVG	No Limit
2	*	5309.200	95.79	15.63	111.42	68.30	43.12	peak	No Limit
3		5350.000	52.67	15.72	68.39	74.00	-5.61	peak	
4		5350.000	37.59	15.72	53.31	54.00	-0.69	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz

Vertical

80 dBuV/m

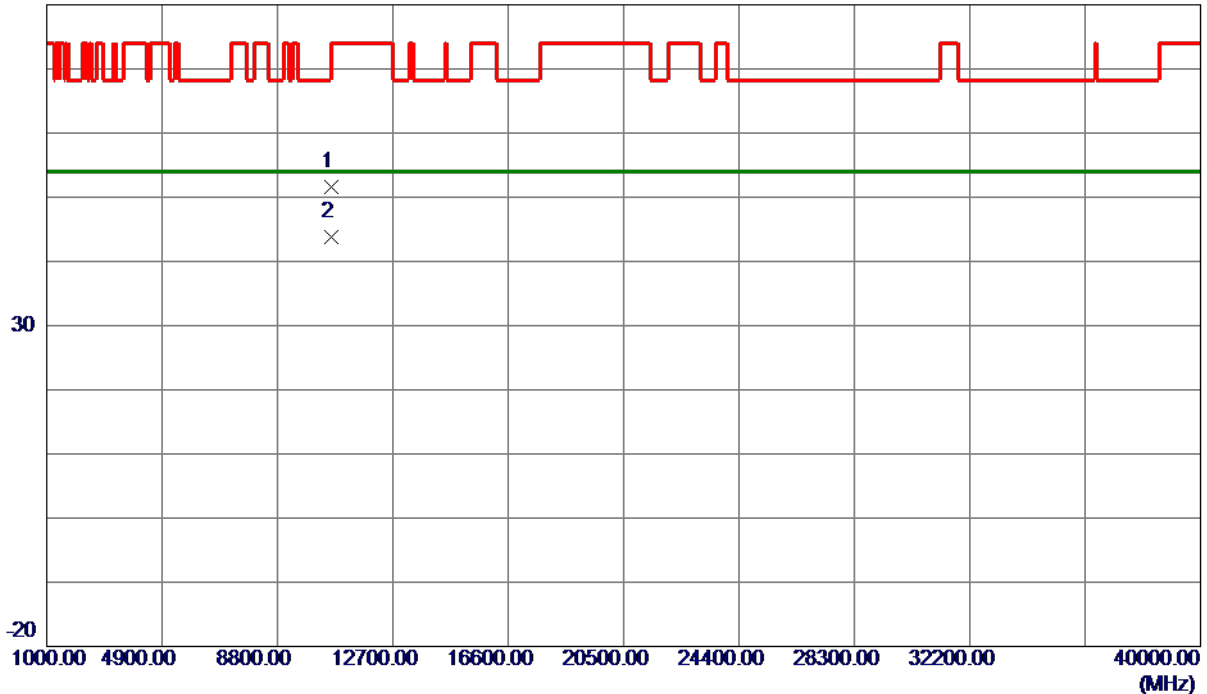


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10607.4400	39.12	12.46	51.58	74.00	-22.42	Peak	
2 *	10626.9600	31.34	12.48	43.82	54.00	-10.18	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz

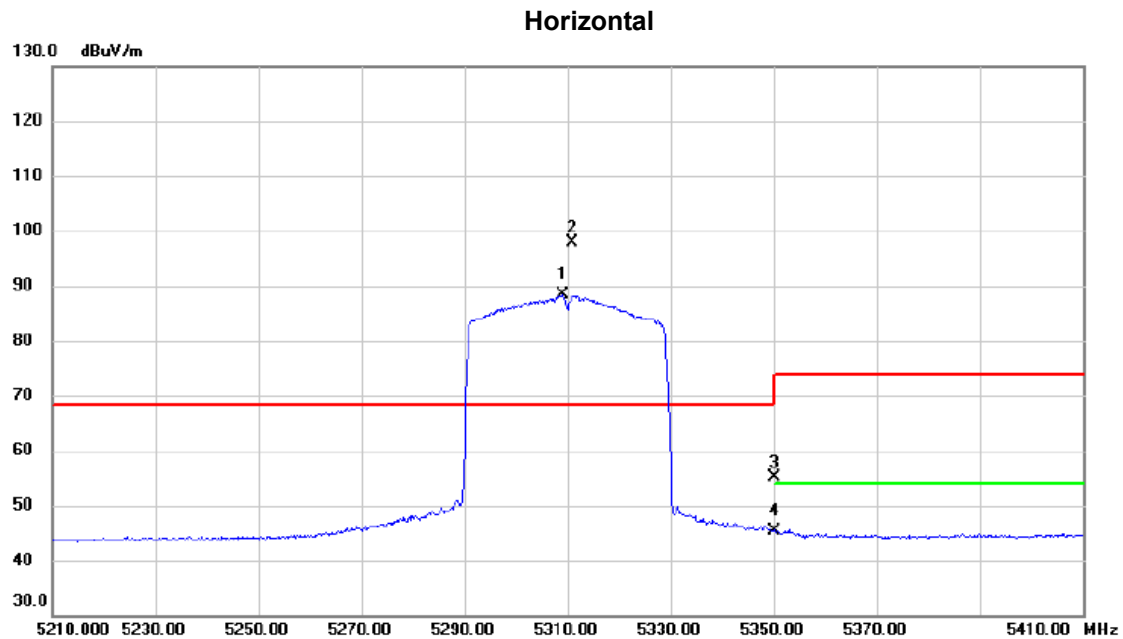

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5309.000	72.70	15.63	88.33	68.30	20.03	AVG	No Limit
2	*	5311.000	82.23	15.63	97.86	68.30	29.56	peak	No Limit
3		5350.000	39.33	15.72	55.05	74.00	-18.95	peak	
4		5350.000	29.69	15.72	45.41	54.00	-8.59	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE40) Mode 5310 MHz

Horizontal

80 dBuV/m

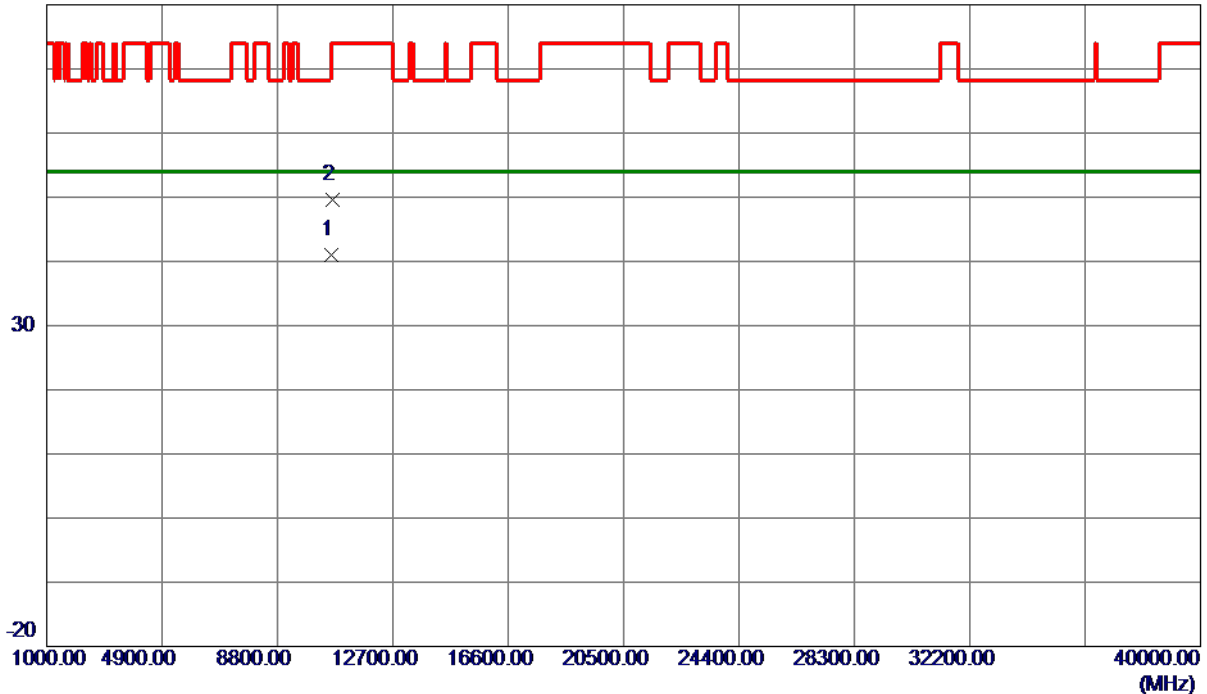


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10616.9600	28.60	12.47	41.07	54.00	-12.93	AVG	
2	10656.4000	37.08	12.50	49.58	74.00	-24.42	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz

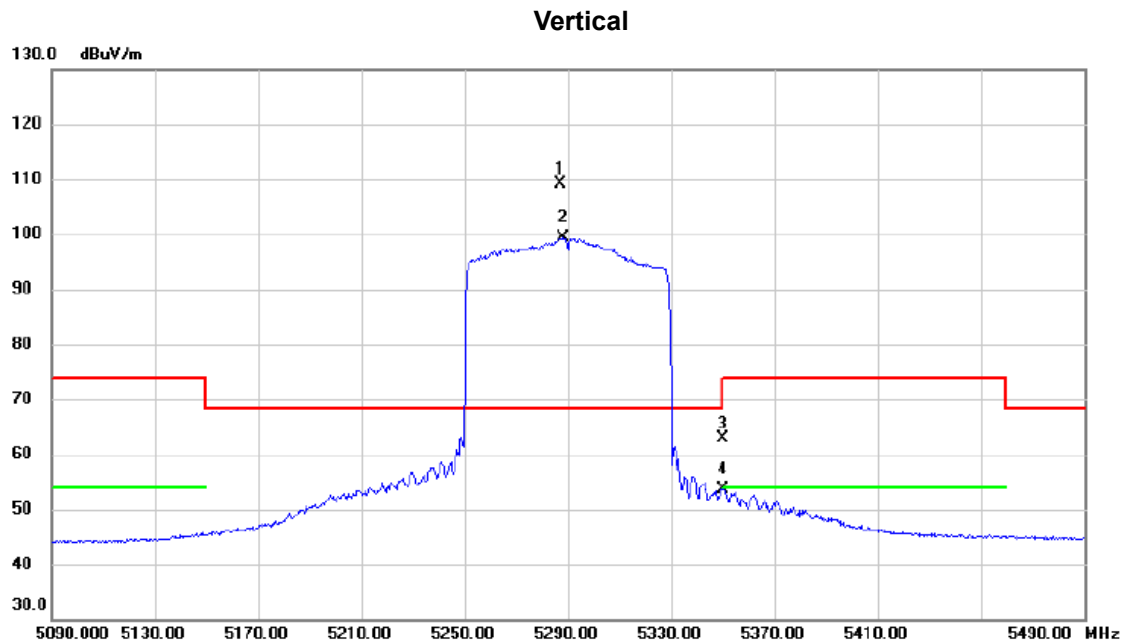

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5287.200	93.53	15.59	109.12	68.30	40.82	peak	No Limit
2	X	5288.000	83.74	15.59	99.33	68.30	31.03	AVG	No Limit
3		5350.000	47.23	15.72	62.95	74.00	-11.05	peak	
4		5350.000	37.95	15.72	53.67	54.00	-0.33	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz

Vertical

80 dBuV/m

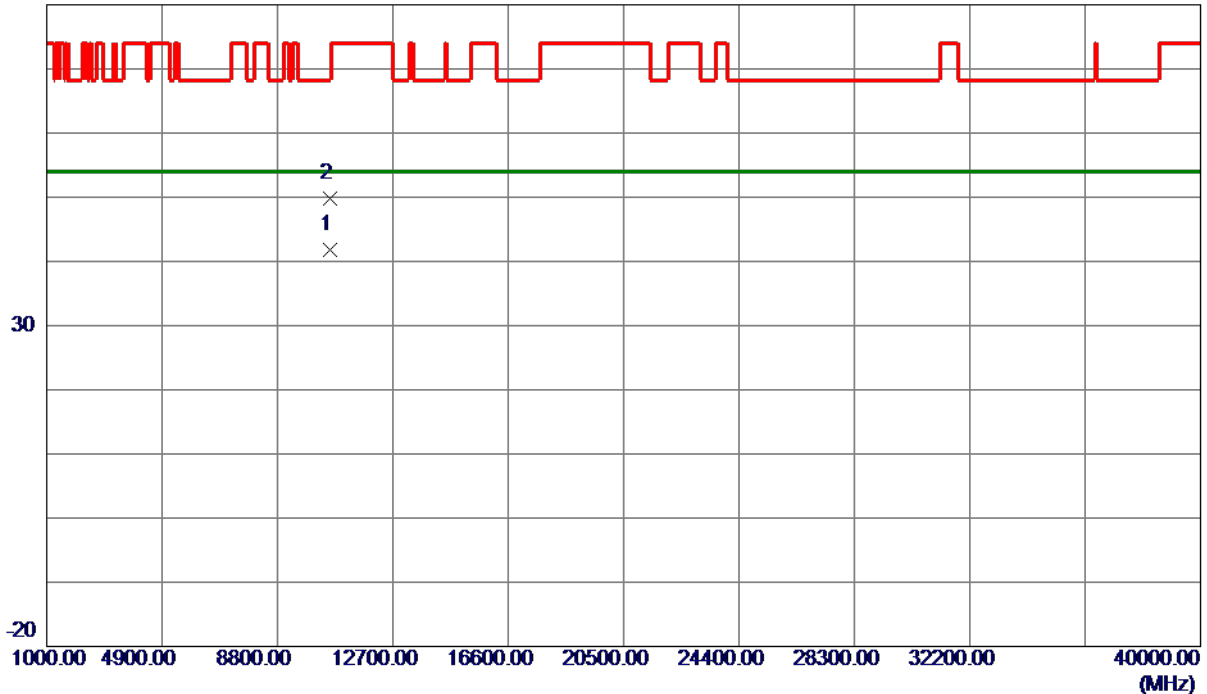


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10594.3200	29.37	12.45	41.82	54.00	-12.18	AVG	
2	10598.1600	37.30	12.45	49.75	68.30	-18.55	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz

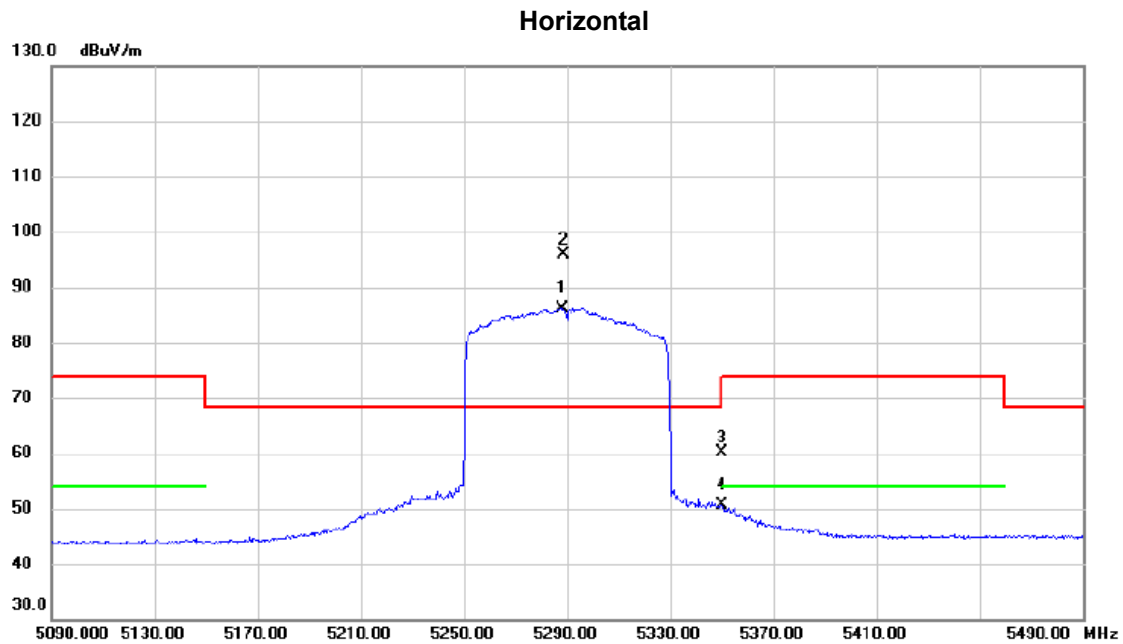

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5288.000	70.60	15.59	86.19	68.30	17.89	AVG	No Limit
2	*	5288.800	80.34	15.59	95.93	68.30	27.63	peak	No Limit
3		5350.000	44.48	15.72	60.20	74.00	-13.80	peak	
4		5350.000	35.01	15.72	50.73	54.00	-3.27	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX AX(HE80) Mode 5290 MHz

Horizontal

80 dBuV/m

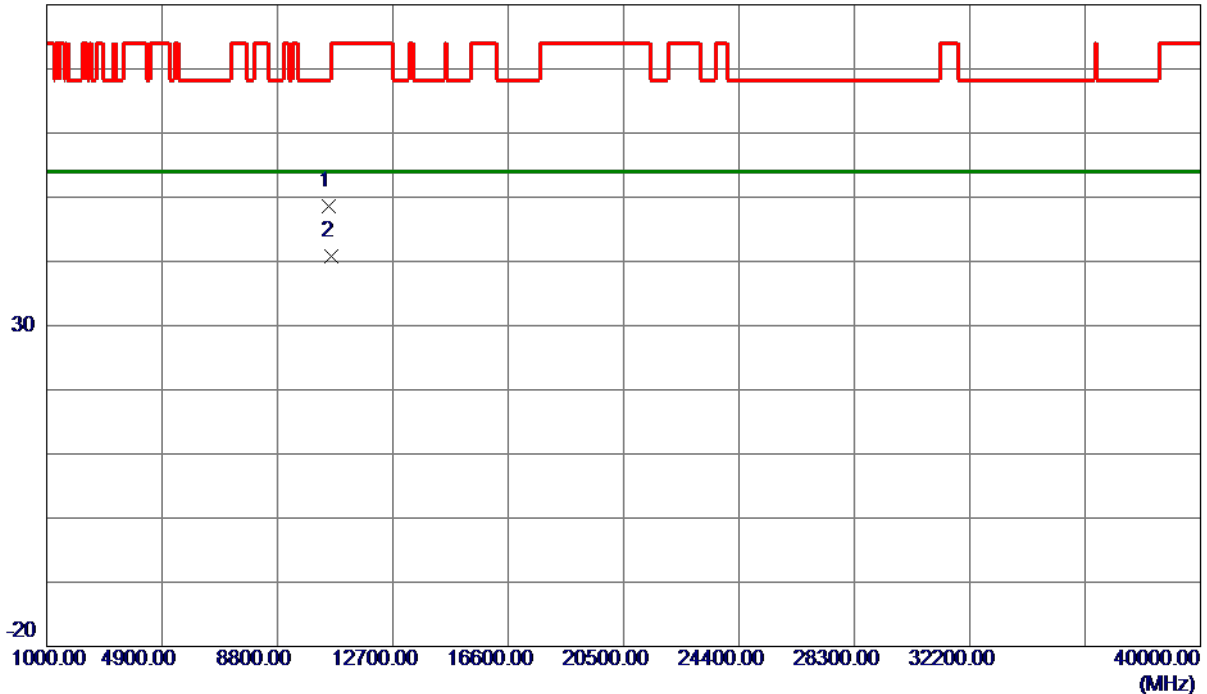

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10546.0800	36.11	12.41	48.52	68.30	-19.78	Peak	
2 *	10617.1200	28.42	12.47	40.89	54.00	-13.11	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz

Vertical

130 dBuV/m

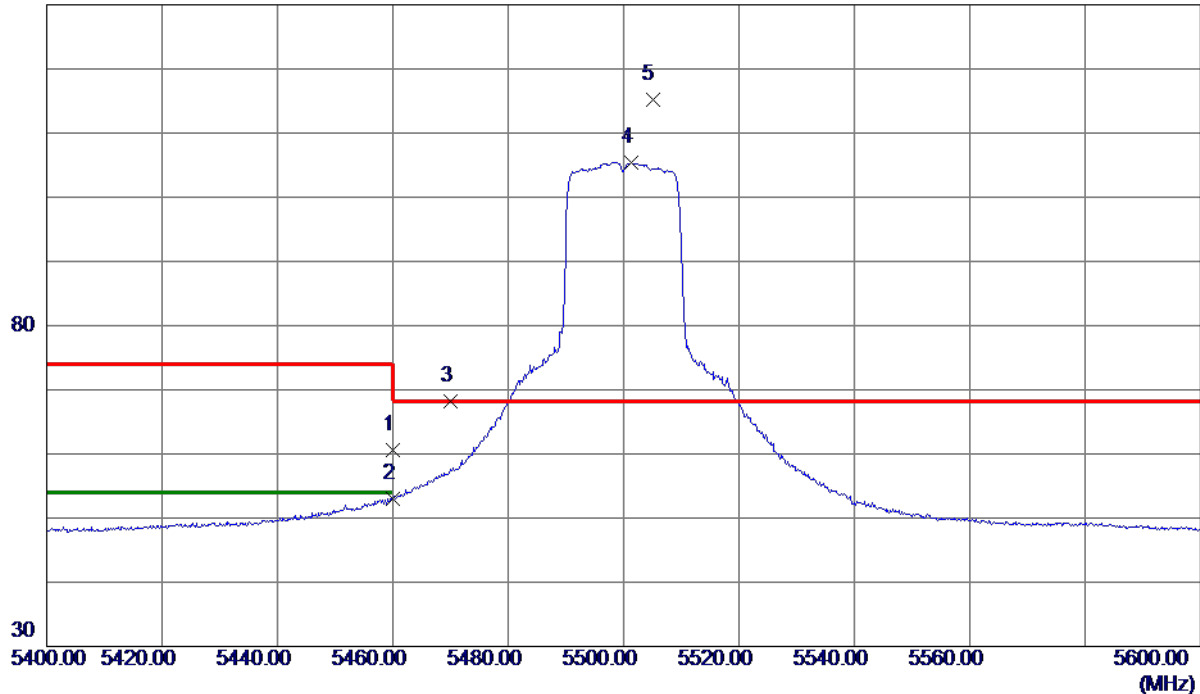

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	44.67	15.97	60.64	74.00	-13.36	Peak	
2	5460.0000	36.98	15.97	52.95	54.00	-1.05	AVG	
3	5470.0000	52.19	16.00	68.19	68.30	-0.11	Peak	
4	5501.3000	89.40	16.07	105.47	999.00	-893.53	AVG	No Limit
5 *	5505.0000	99.07	16.07	115.14	68.30	46.84	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz

Vertical

80 dBuV/m

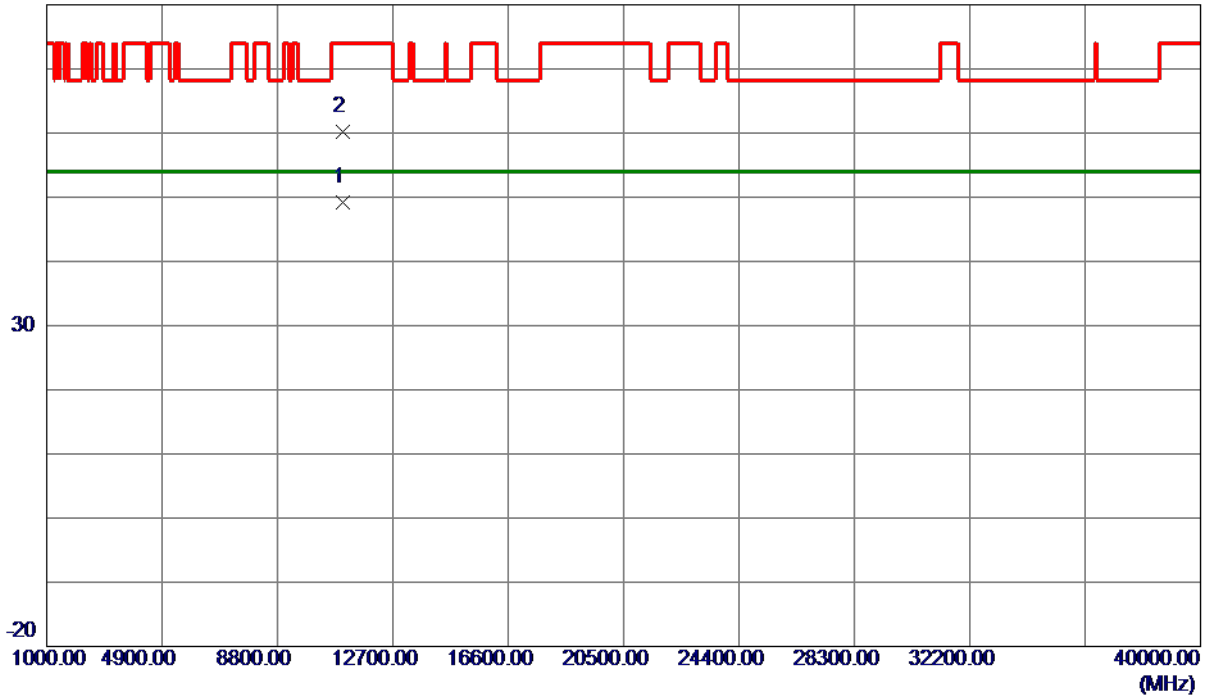

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11001.0800	36.37	12.78	49.15	54.00	-4.85	AVG	
2	11001.9200	47.41	12.78	60.19	74.00	-13.81	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz

Horizontal

130 dBuV/m

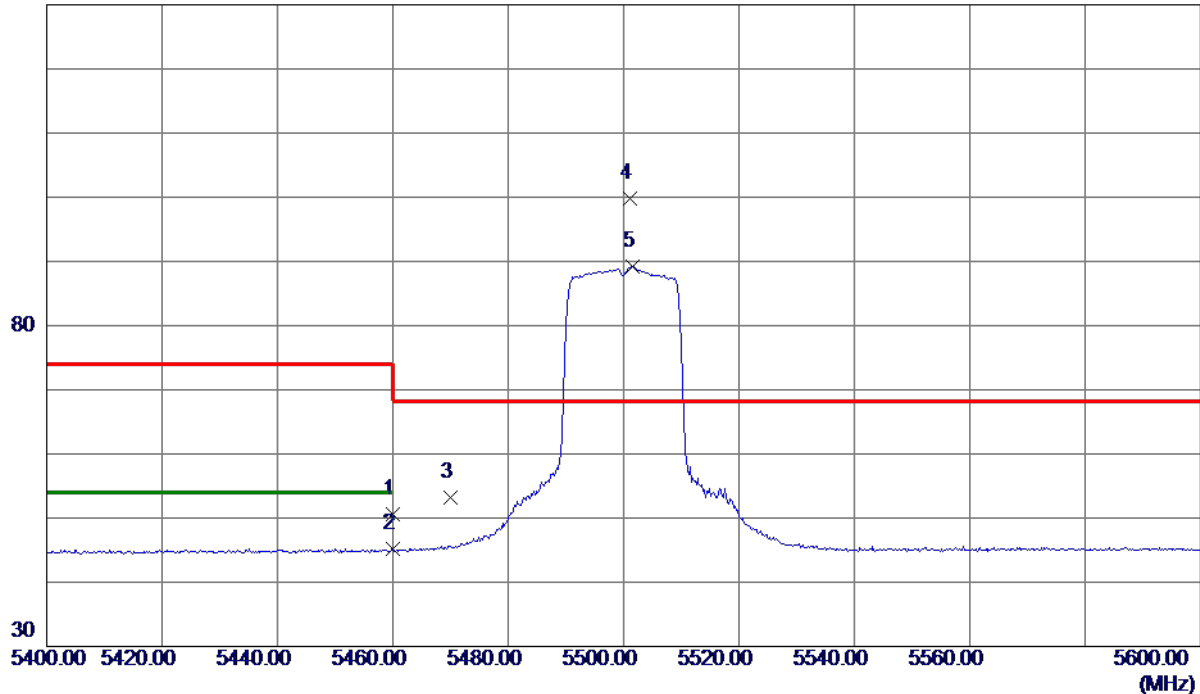

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	34.67	15.97	50.64	74.00	-23.36	Peak	
2	5460.0000	29.17	15.97	45.14	54.00	-8.86	AVG	
3	5470.0000	37.27	16.00	53.27	68.30	-15.03	Peak	
4 *	5501.2000	83.77	16.07	99.84	68.30	31.54	Peak	No Limit
5	5501.6000	73.14	16.07	89.21	999.00	-909.79	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE20) Mode 5500 MHz

Horizontal

80 dBuV/m

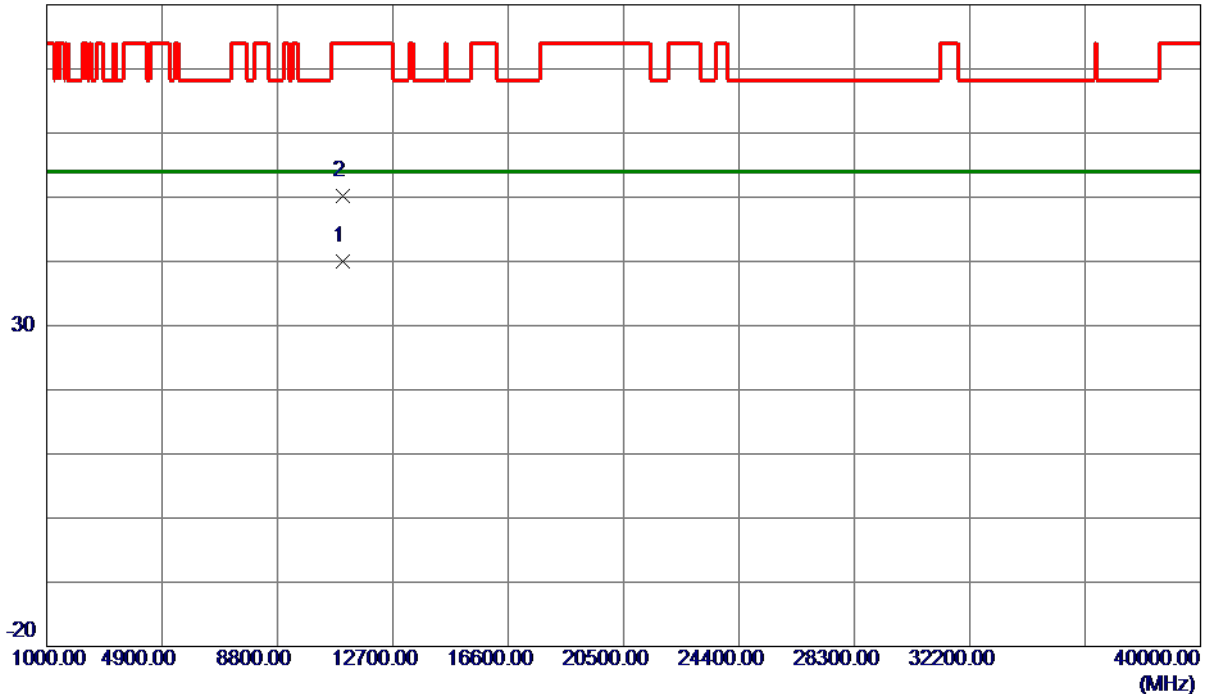

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10998.5300	27.26	12.78	40.04	54.00	-13.96	AVG	
2	11002.8800	37.35	12.78	50.13	74.00	-23.87	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz

Vertical

130 dBuV/m

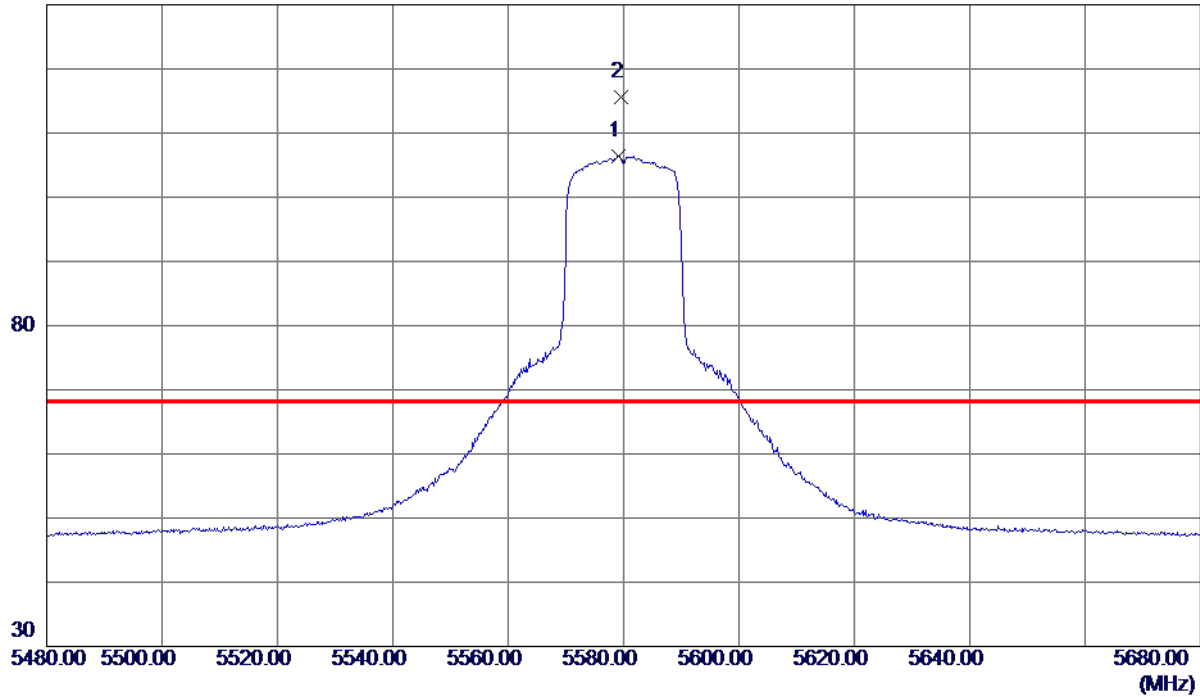

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5579.2000	90.19	16.22	106.41	999.00	-892.59	AVG	No Limit
2 *	5579.5000	99.30	16.22	115.52	68.30	47.22	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz

Vertical

80 dBuV/m

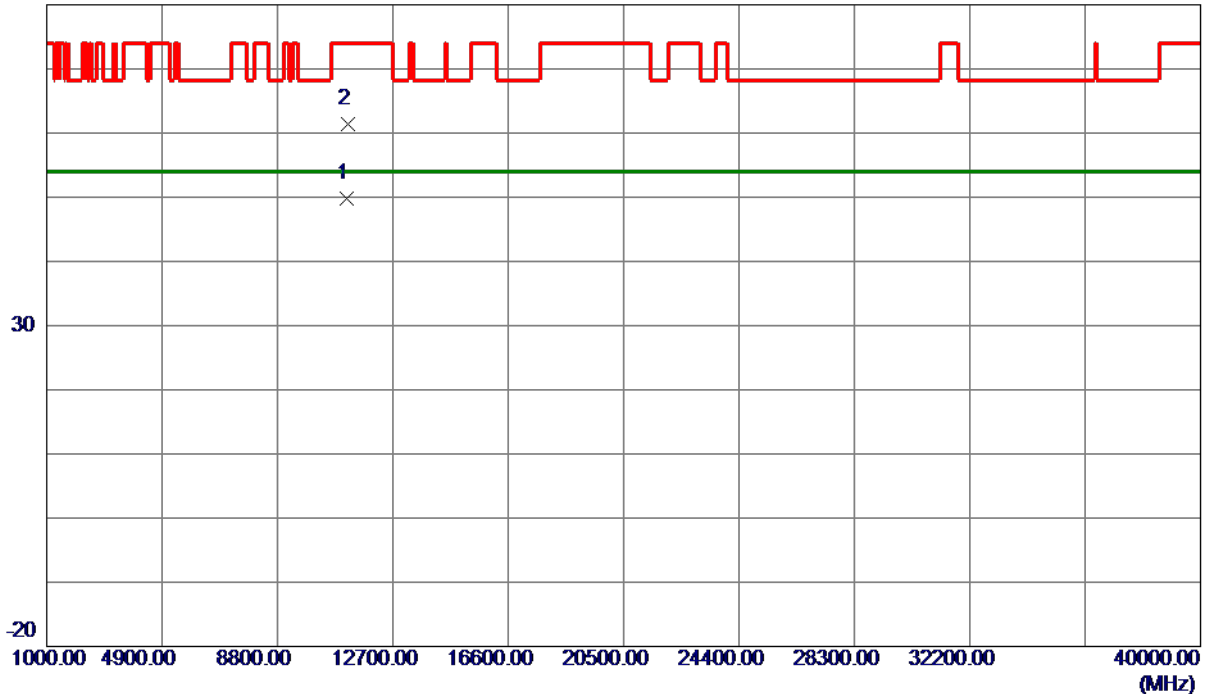

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11161.0199	36.84	12.90	49.74	54.00	-4.26	AVG	
2	11162.7600	48.45	12.90	61.35	74.00	-12.65	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz

Horizontal

130 dBuV/m

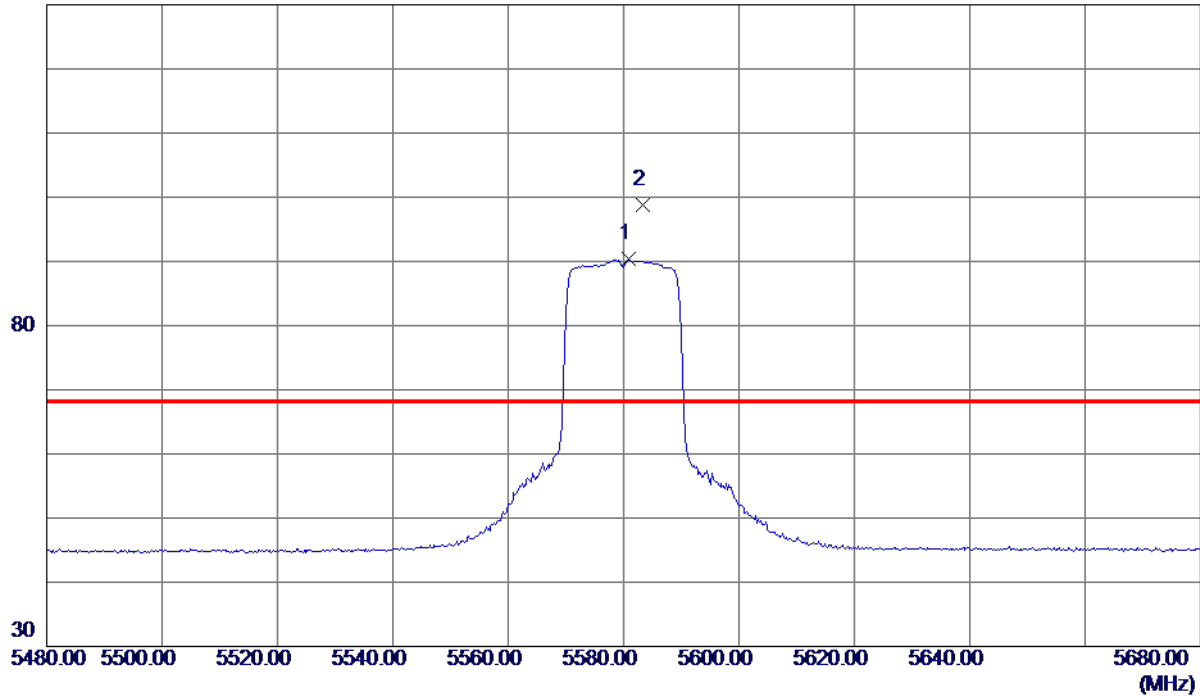

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5580.8000	74.11	16.23	90.34	999.00	-908.66	AVG	No Limit
2 *	5583.4000	82.58	16.23	98.81	68.30	30.51	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE20) Mode 5580 MHz

Horizontal

80 dBuV/m

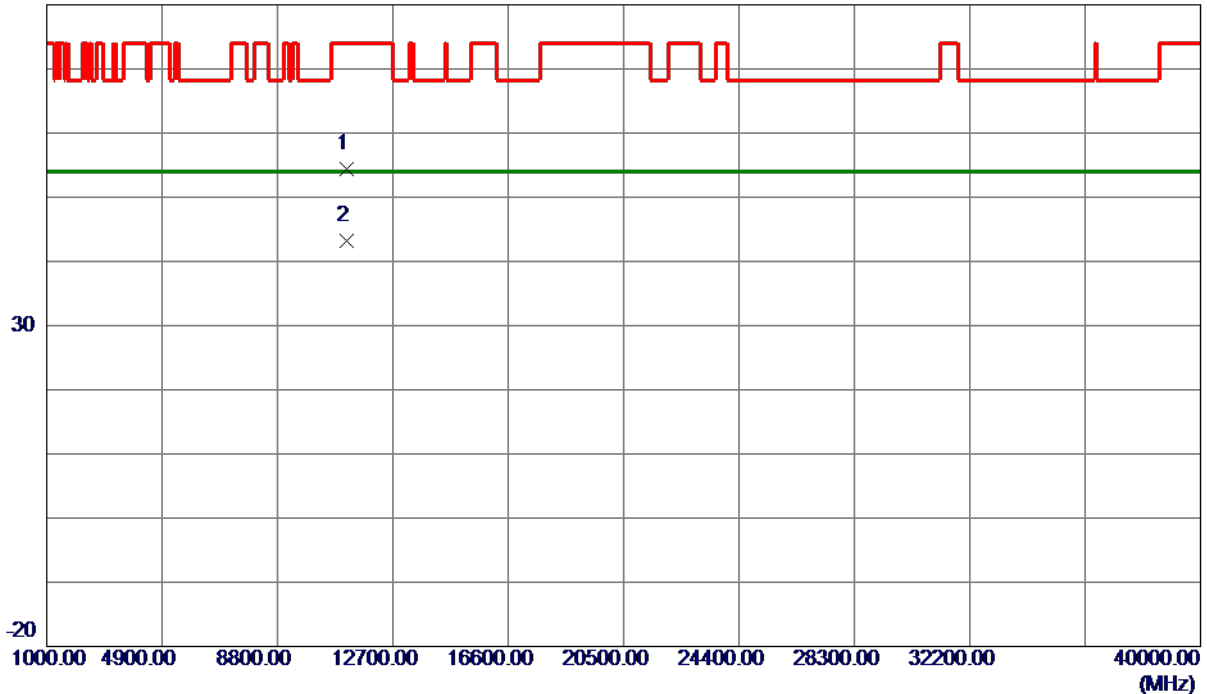

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11161.1700	41.44	12.90	54.34	74.00	-19.66	Peak	
2 *	11161.2300	30.35	12.90	43.25	54.00	-10.75	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz

Vertical

130 dBuV/m

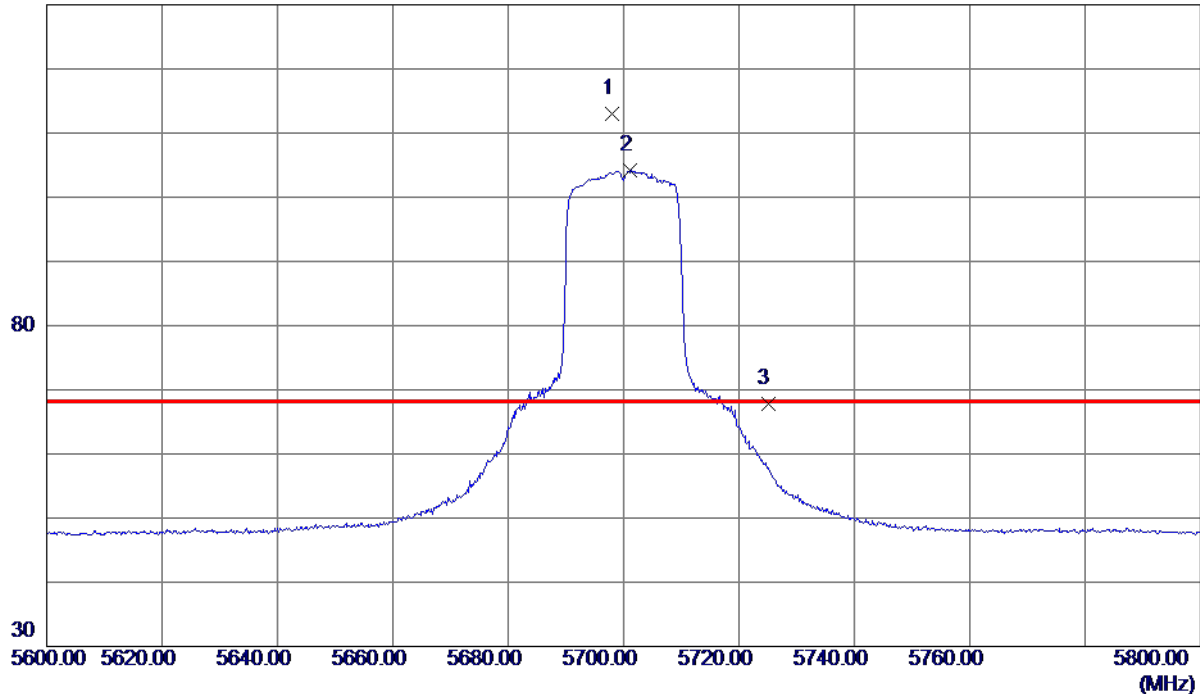

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5698.0000	96.60	16.46	113.06	68.30	44.76	Peak	No Limit
2	5701.2000	87.64	16.47	104.11	999.00	-894.89	AVG	No Limit
3	5725.0000	51.21	16.51	67.72	68.30	-0.58	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz

Vertical

80 dBuV/m

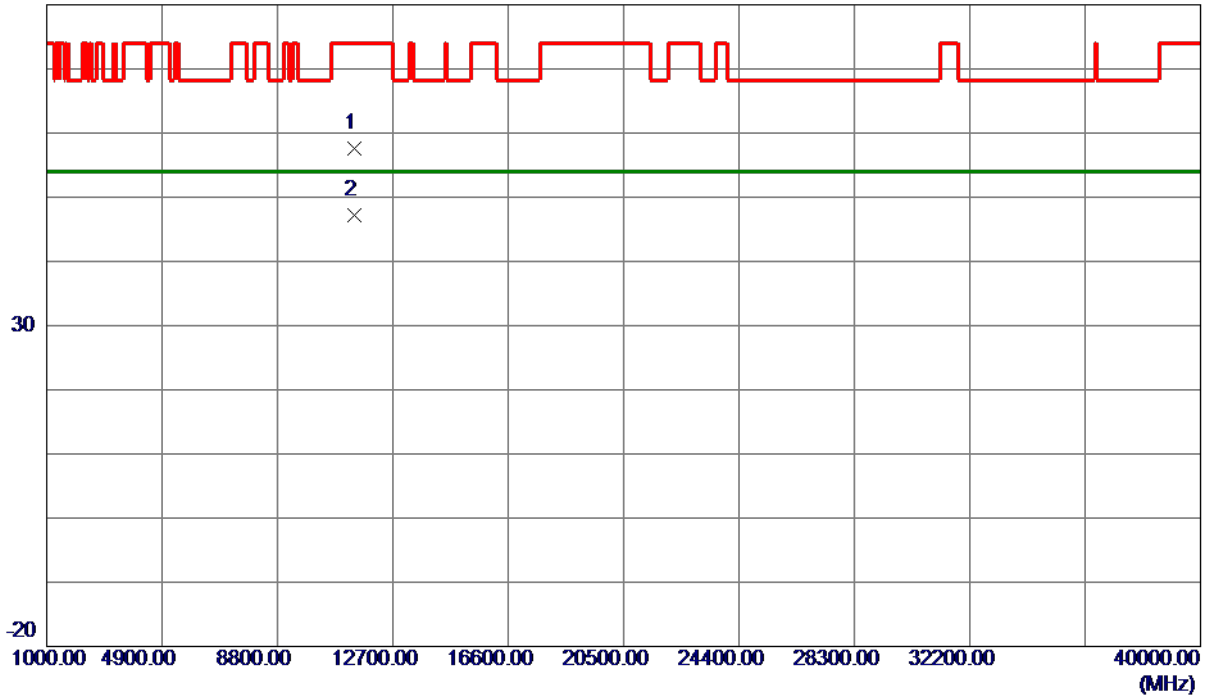

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11397.6600	44.49	13.08	57.57	74.00	-16.43	Peak	
2 *	11401.0800	34.12	13.08	47.20	54.00	-6.80	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz

Horizontal

130 dBuV/m

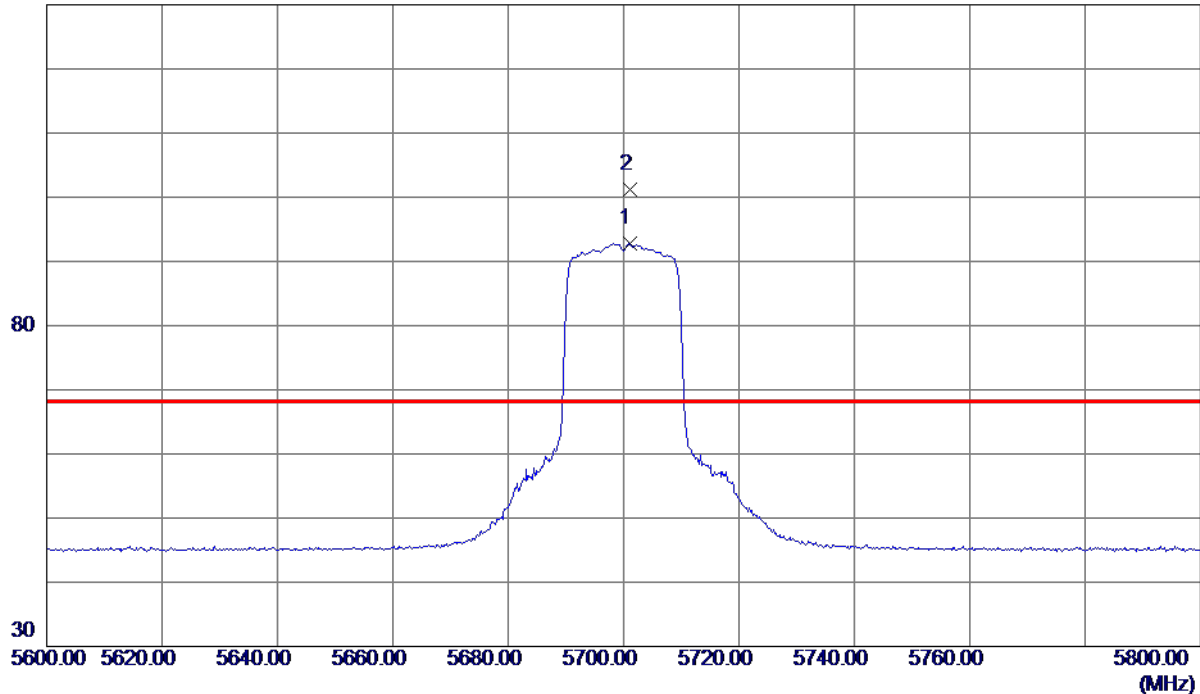

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5701.0000	76.31	16.46	92.77	999.00	-906.23	AVG	No Limit
2 *	5701.2000	84.64	16.47	101.11	68.30	32.81	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE20) Mode 5700 MHz

Horizontal

80 dBuV/m

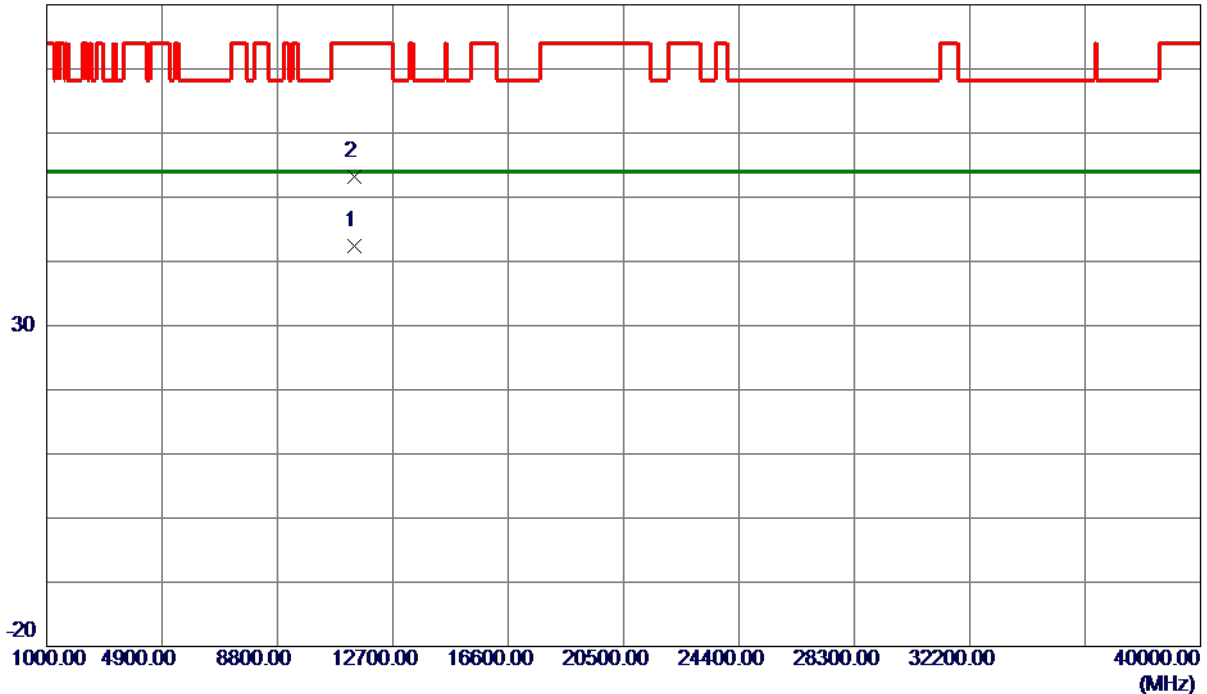

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11401.4400	29.40	13.08	42.48	54.00	-11.52	AVG	
2	11402.1600	40.21	13.08	53.29	74.00	-20.71	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz

Vertical

130 dBuV/m

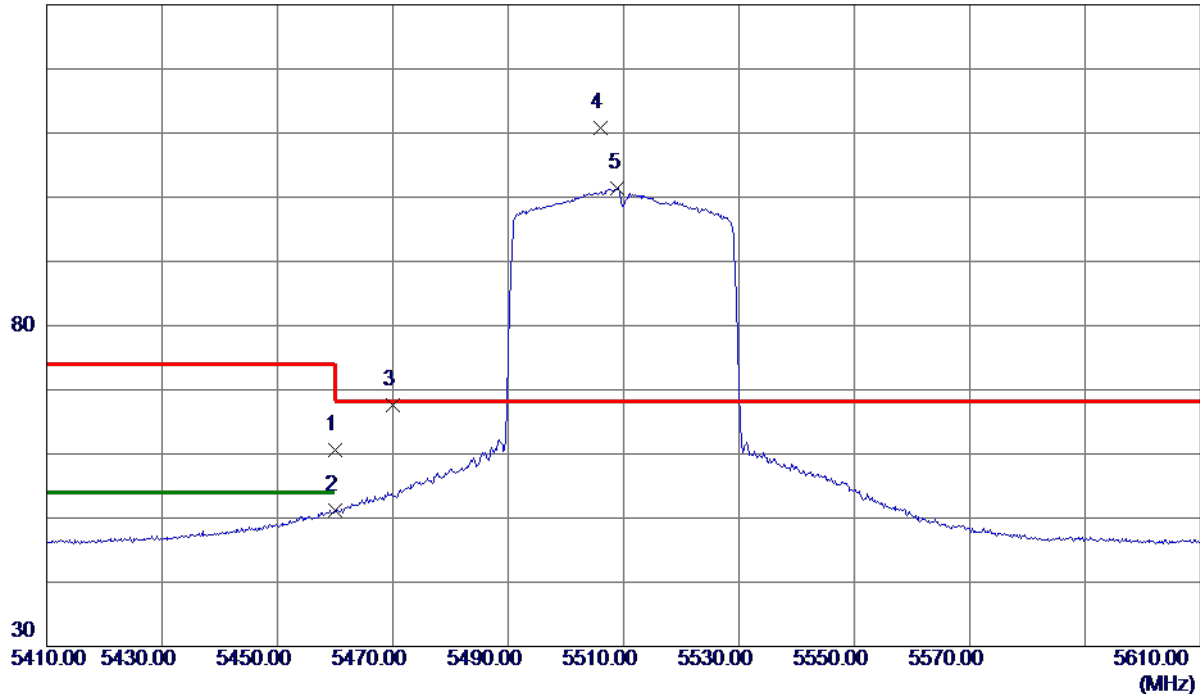

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	44.70	15.97	60.67	74.00	-13.33	Peak	
2	5460.0000	35.16	15.97	51.13	54.00	-2.87	AVG	
3	5470.0000	51.67	16.00	67.67	68.30	-0.63	Peak	
4 *	5506.0000	94.70	16.08	110.78	68.30	42.48	Peak	No Limit
5	5509.0000	85.27	16.08	101.35	999.00	-897.65	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz

Vertical

80 dBuV/m

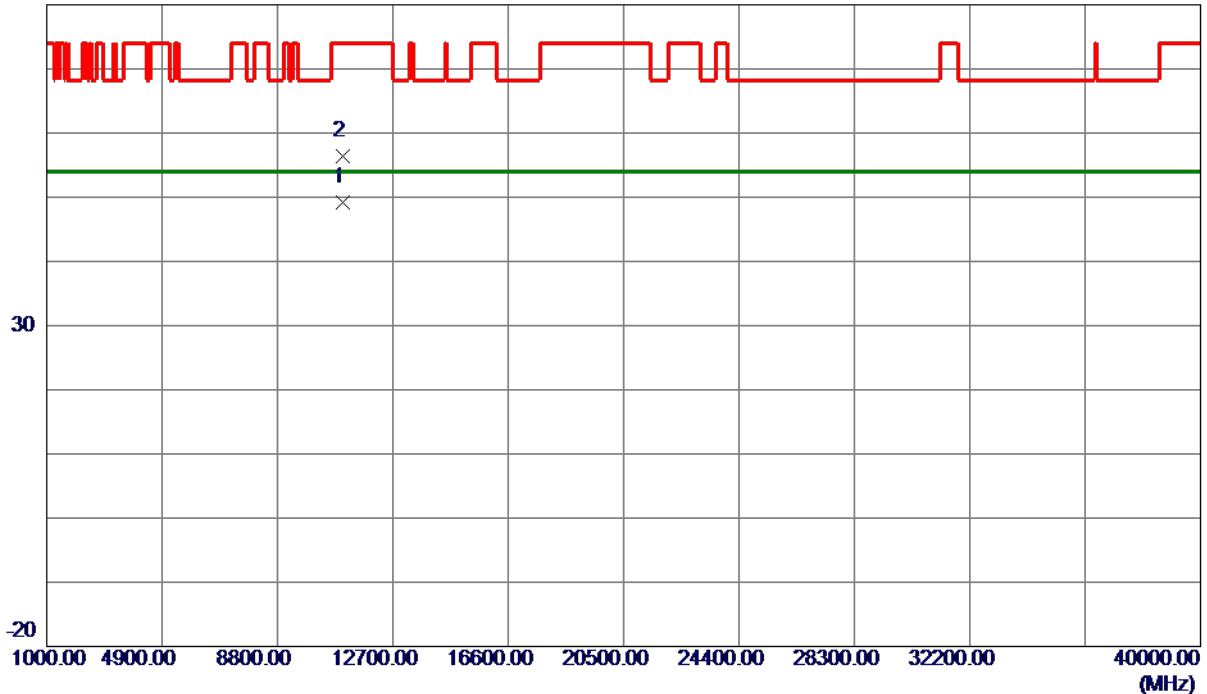

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11013.8400	36.34	12.79	49.13	54.00	-4.87	AVG	
2	11019.0400	43.59	12.79	56.38	74.00	-17.62	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz

Horizontal

130 dBuV/m

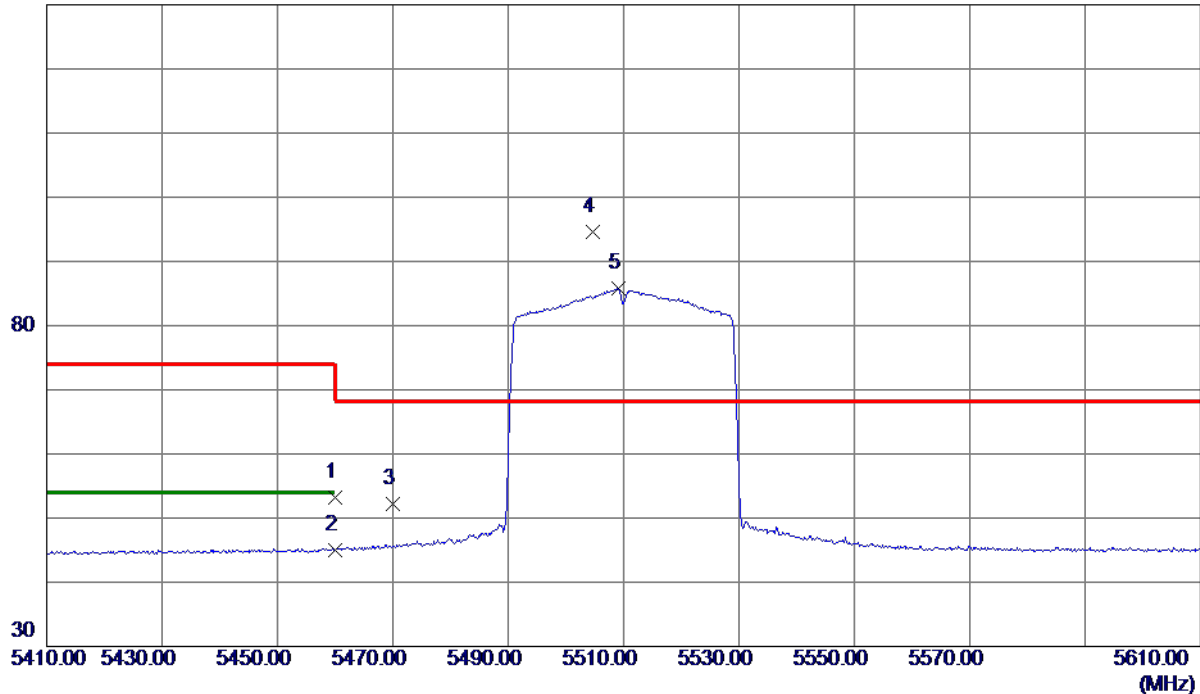

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	37.19	15.97	53.16	74.00	-20.84	Peak	
2	5460.0000	29.11	15.97	45.08	54.00	-8.92	AVG	
3	5470.0000	36.19	16.00	52.19	68.30	-16.11	Peak	
4 *	5504.6000	78.60	16.07	94.67	68.30	26.37	Peak	No Limit
5	5509.2000	69.81	16.08	85.89	999.00	-913.11	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE40) Mode 5510 MHz

Horizontal

80 dBuV/m

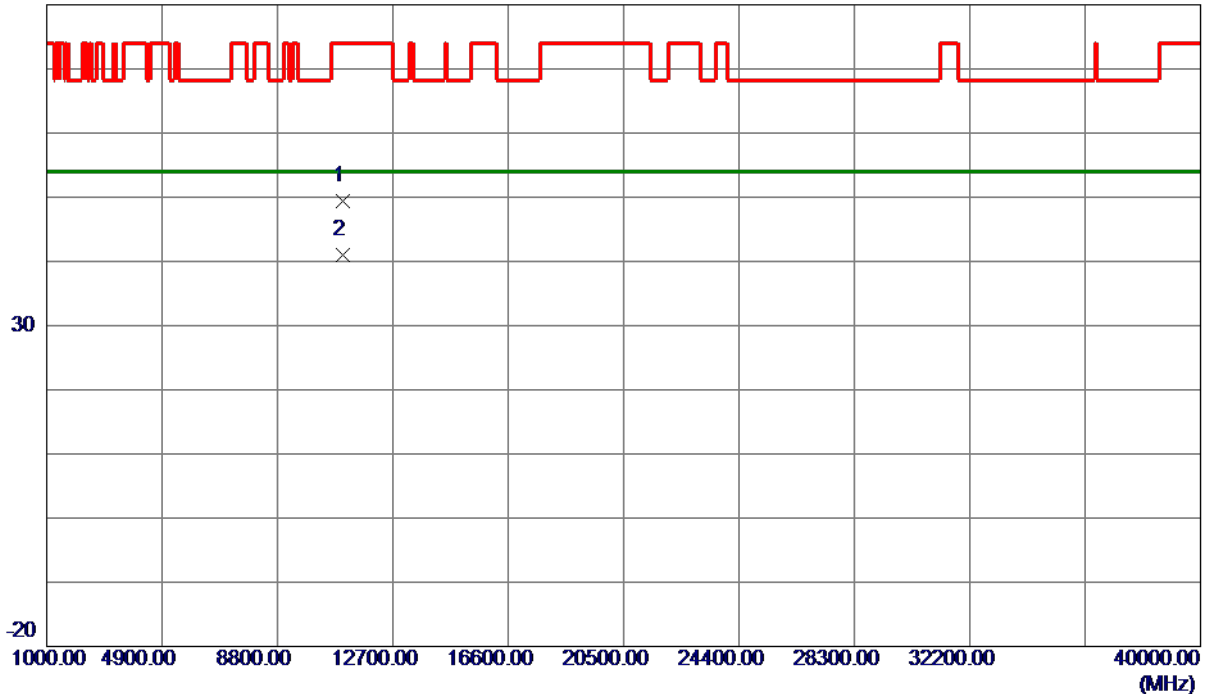

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11006.5599	36.60	12.78	49.38	74.00	-24.62	Peak	
2 *	11010.8800	28.13	12.79	40.92	54.00	-13.08	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz

Vertical

130 dBuV/m

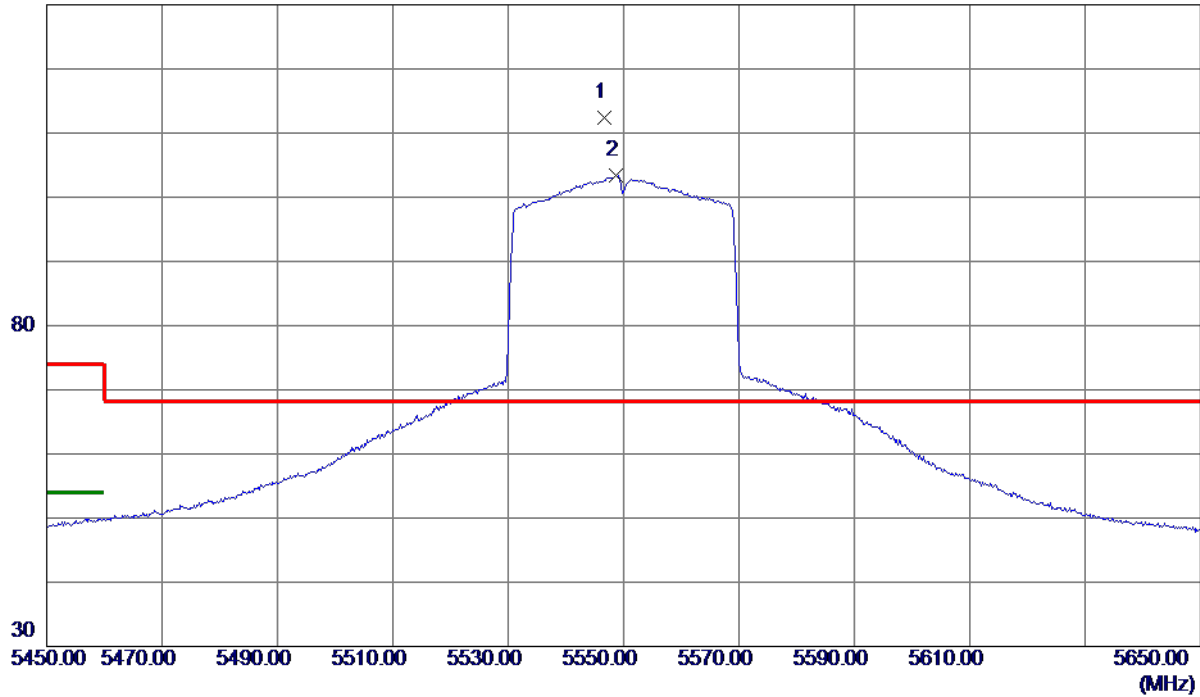

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5546.6000	96.27	16.16	112.43	68.30	44.13	Peak	No Limit
2	5548.6000	87.19	16.16	103.35	999.00	-895.65	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz

Vertical

80 dBuV/m



No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11092.7200	37.56	12.85	50.41	54.00	-3.59	AVG	
2	11101.2000	45.23	12.86	58.09	74.00	-15.91	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz

Horizontal

130 dBuV/m

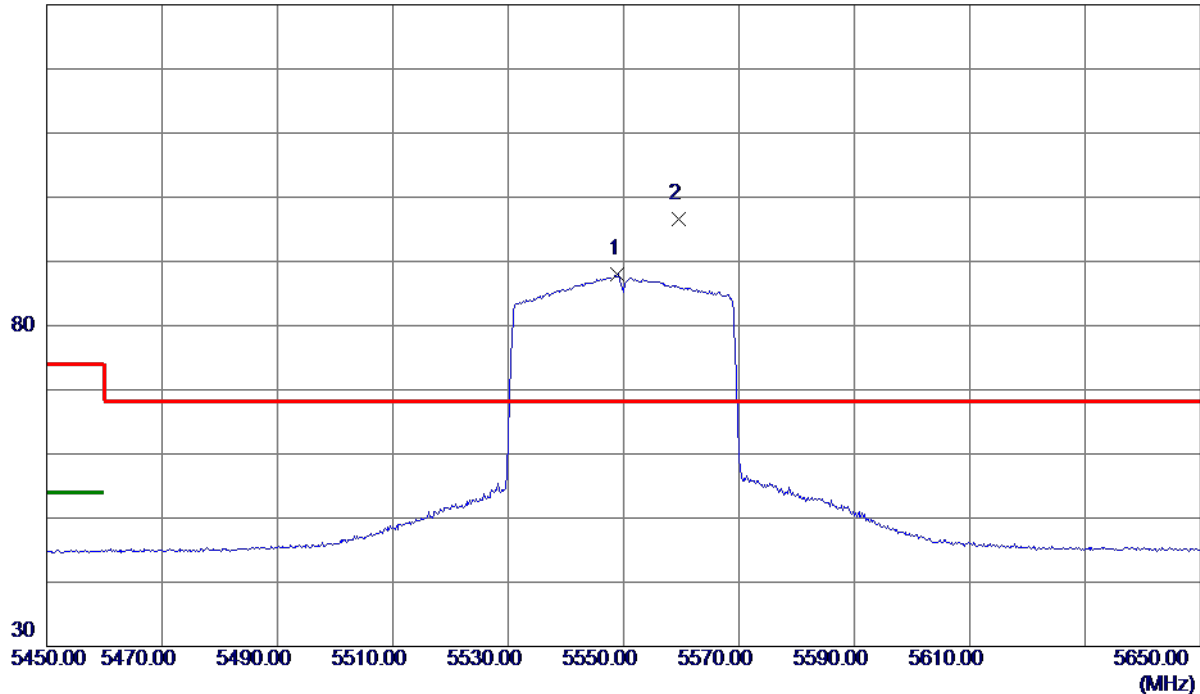

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5549.0000	71.76	16.16	87.92	999.00	-911.08	AVG	No Limit
2 *	5559.6000	80.50	16.18	96.68	68.30	28.38	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE40) Mode 5550 MHz

Horizontal

80 dBuV/m

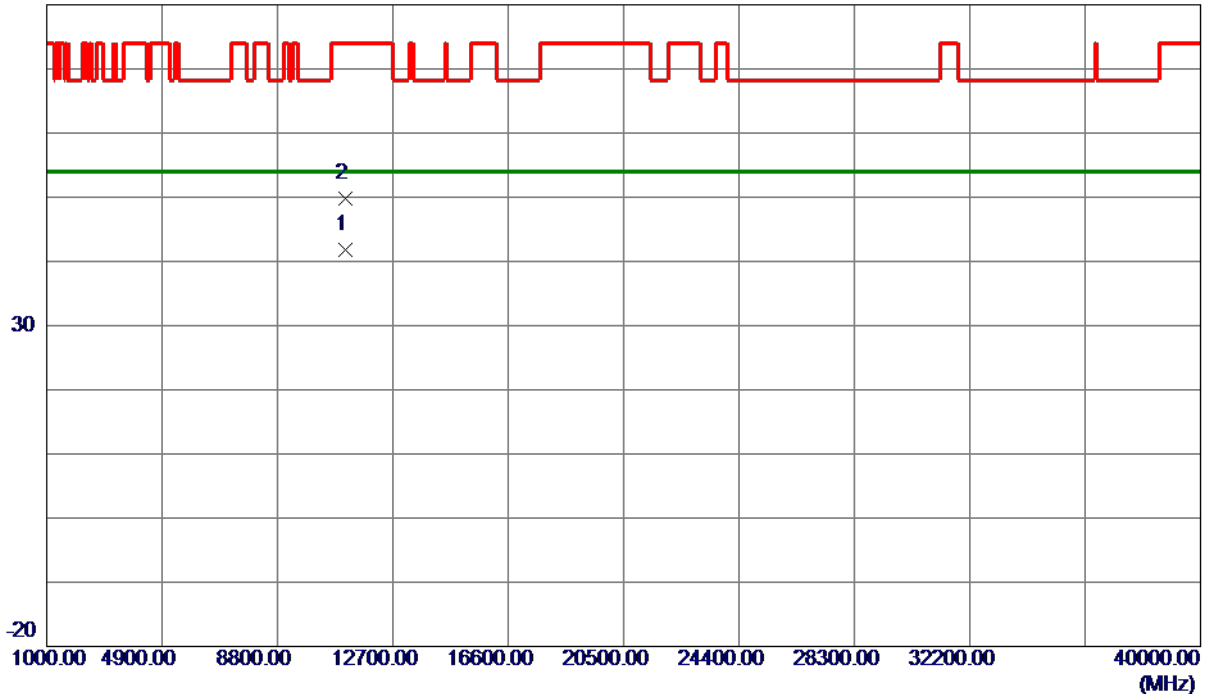

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11095.7600	28.87	12.85	41.72	54.00	-12.28	AVG	
2	11116.2400	37.02	12.87	49.89	74.00	-24.11	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz

Vertical

130 dBuV/m

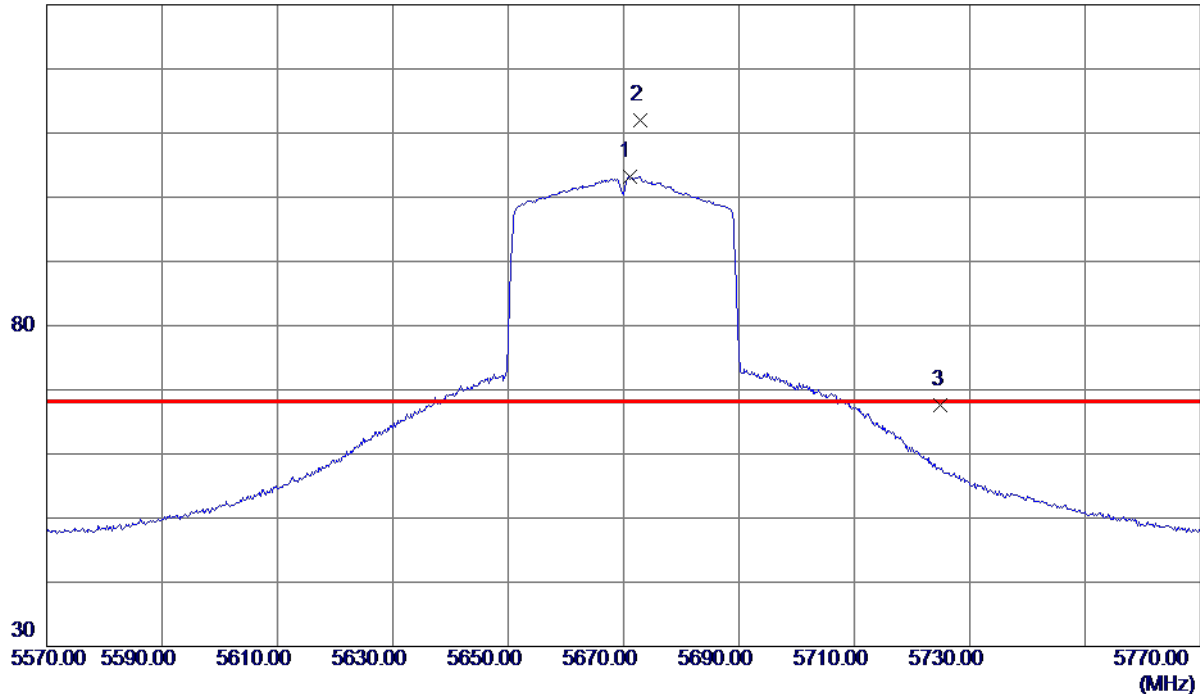

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5671.0000	86.84	16.41	103.25	999.00	-895.75	AVG	No Limit
2 *	5672.8000	95.67	16.41	112.08	68.30	43.78	Peak	No Limit
3	5725.0000	51.01	16.51	67.52	68.30	-0.78	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz

Vertical

80 dBuV/m

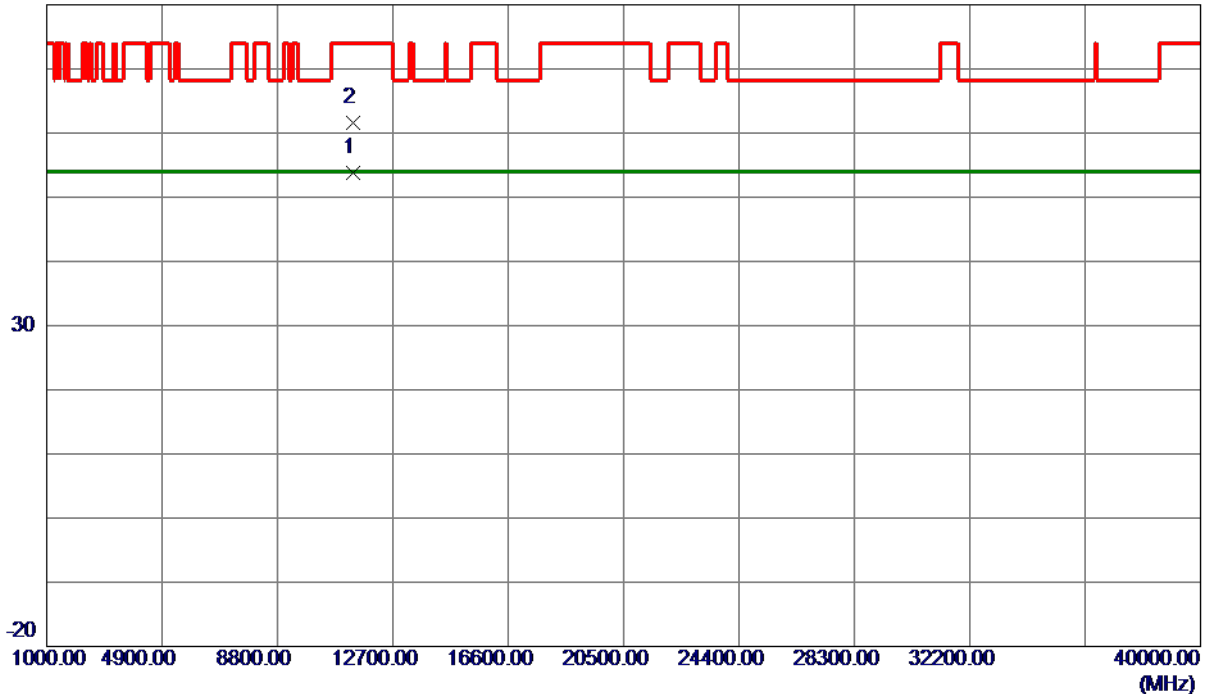

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11350.9600	40.82	13.04	53.86	54.00	-0.14	AVG	
2	11356.0800	48.57	13.05	61.62	74.00	-12.38	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz

Horizontal

130 dBuV/m

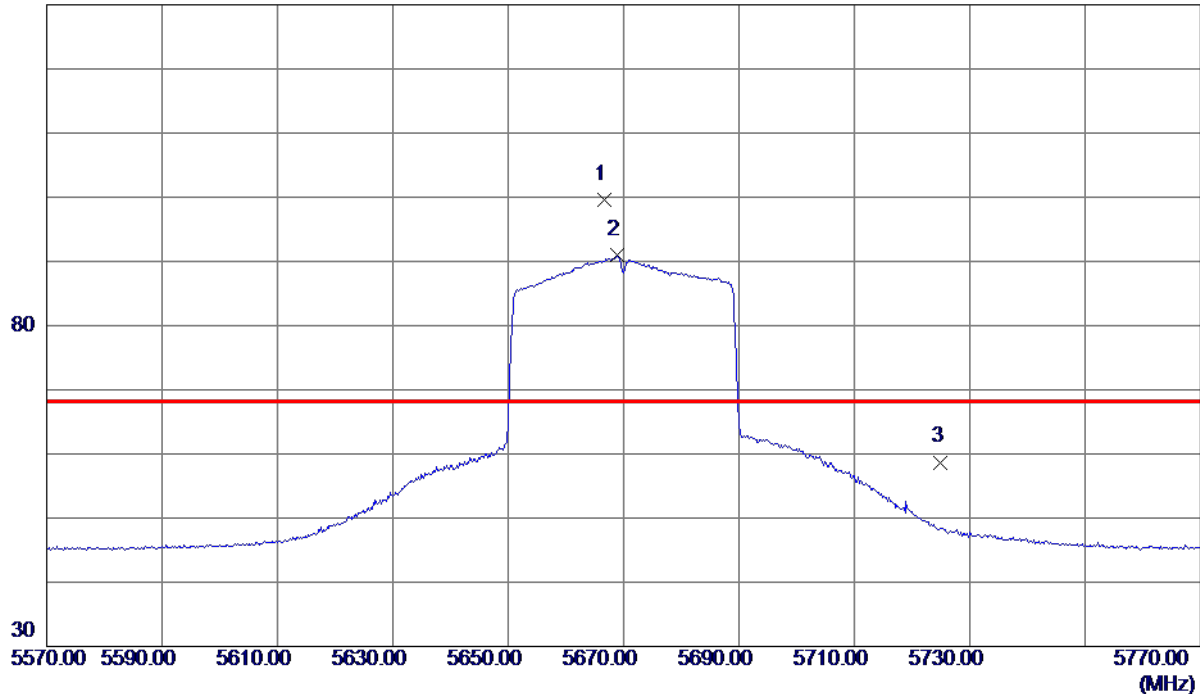

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5666.6000	83.12	16.40	99.52	68.30	31.22	Peak	No Limit
2	5668.8000	74.53	16.40	90.93	999.00	-908.07	AVG	No Limit
3	5725.0000	42.19	16.51	58.70	68.30	-9.60	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE40) Mode 5670 MHz

Horizontal

80 dBuV/m

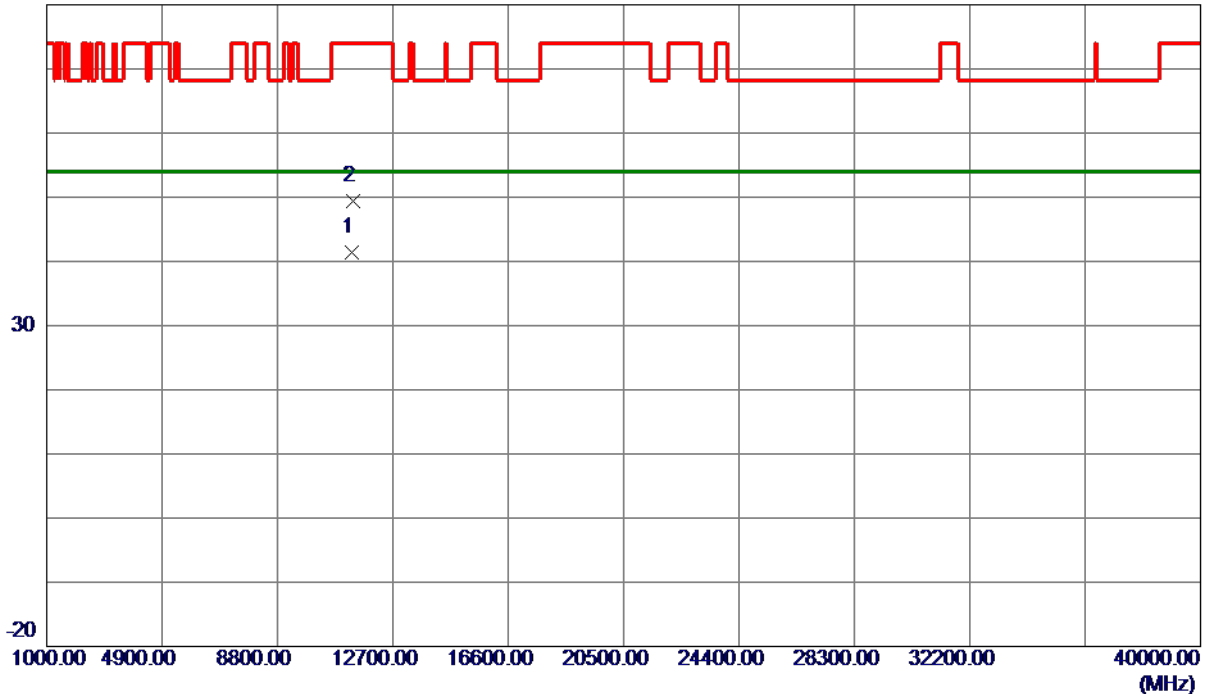

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11334.8000	28.34	13.03	41.37	54.00	-12.63	AVG	
2	11352.2400	36.45	13.04	49.49	74.00	-24.51	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz

Vertical

130 dBuV/m

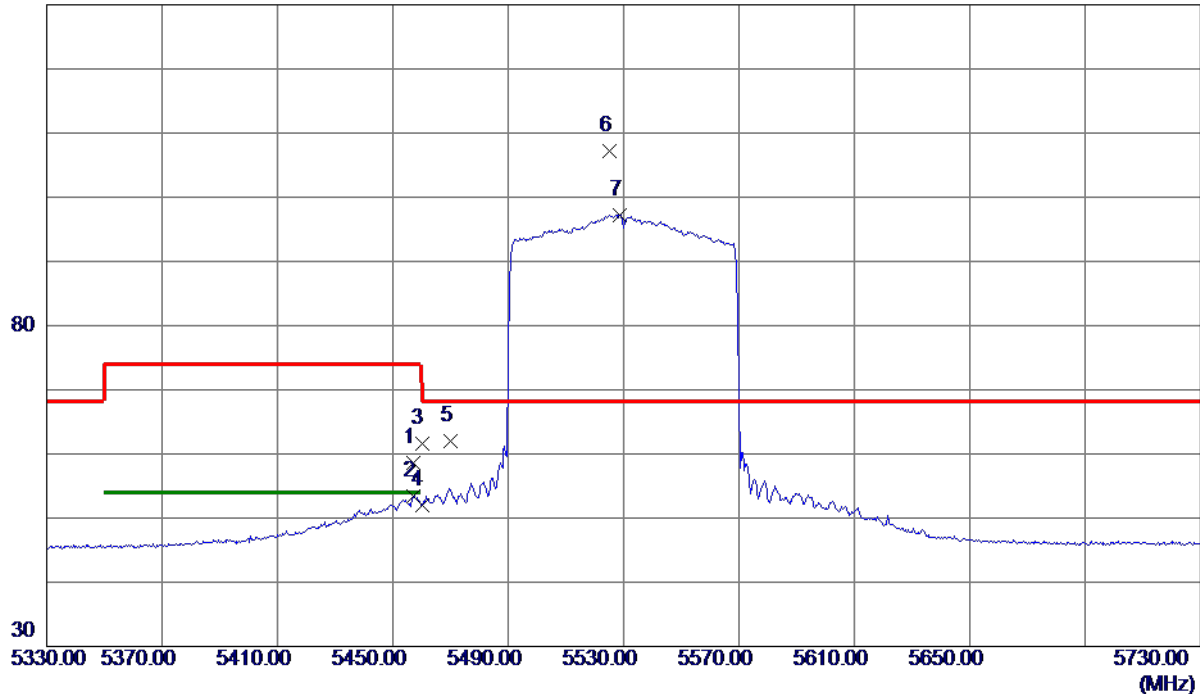

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5457.2000	42.59	15.97	58.56	74.00	-15.44	Peak	
2	5457.2000	37.51	15.97	53.48	54.00	-0.52	AVG	
3	5460.0000	45.71	15.97	61.68	74.00	-12.32	Peak	
4	5460.0000	35.97	15.97	51.94	54.00	-2.06	AVG	
5	5470.0000	45.94	16.00	61.94	68.30	-6.36	Peak	
6 *	5525.2000	91.12	16.12	107.24	68.30	38.94	Peak	No Limit
7	5528.8000	81.16	16.12	97.28	999.00	-901.72	AVG	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz

Vertical

80 dBuV/m

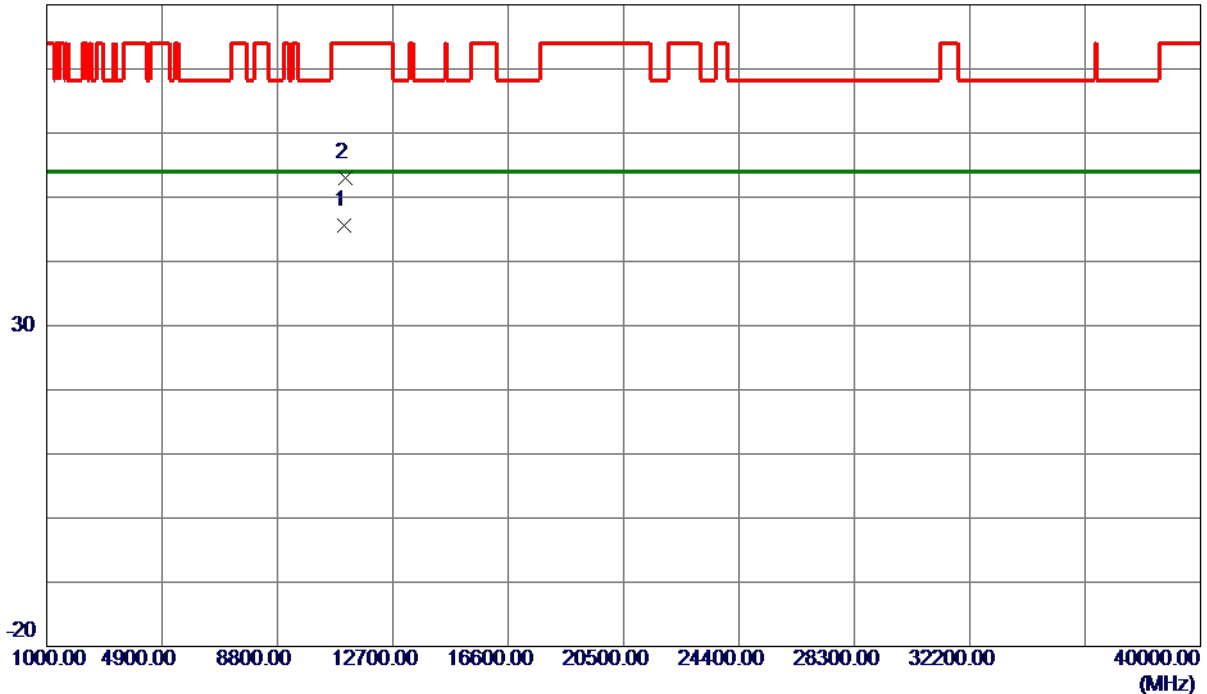

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11074.4000	32.68	12.84	45.52	54.00	-8.48	AVG	
2	11076.7200	40.25	12.84	53.09	74.00	-20.91	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz

Horizontal

130 dBuV/m

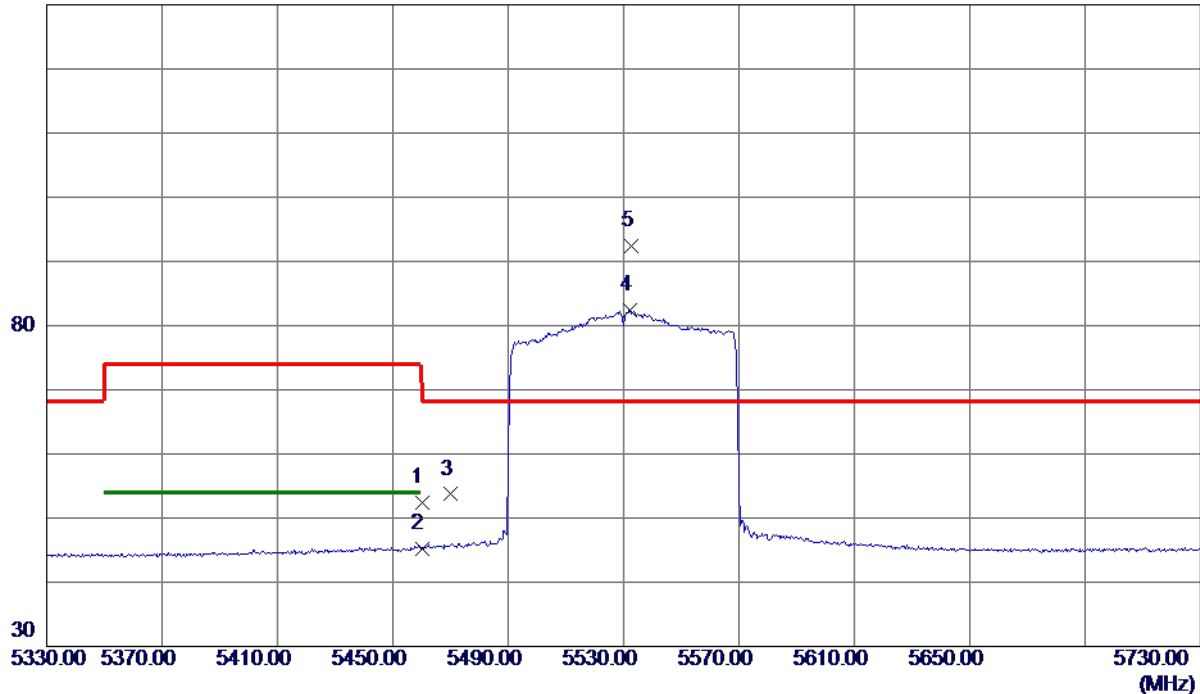

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	36.42	15.97	52.39	74.00	-21.61	Peak	
2	5460.0000	29.25	15.97	45.22	54.00	-8.78	AVG	
3	5470.0000	37.70	16.00	53.70	68.30	-14.60	Peak	
4	5532.4000	66.26	16.13	82.39	999.00	-916.61	AVG	No Limit
5 *	5532.8000	76.25	16.13	92.38	68.30	24.08	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE80) Mode 5530 MHz

Horizontal

80 dBuV/m

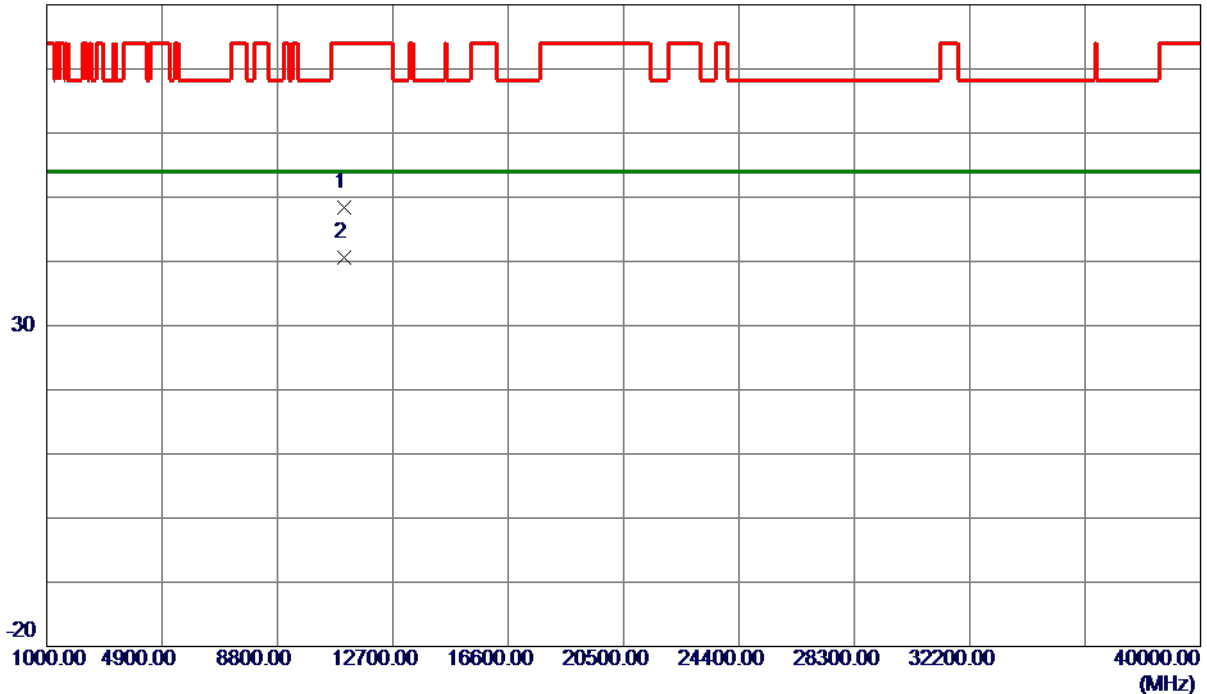

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11045.1200	35.60	12.81	48.41	74.00	-25.59	Peak	
2 *	11059.9200	27.87	12.82	40.69	54.00	-13.31	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz

Vertical

130 dBuV/m

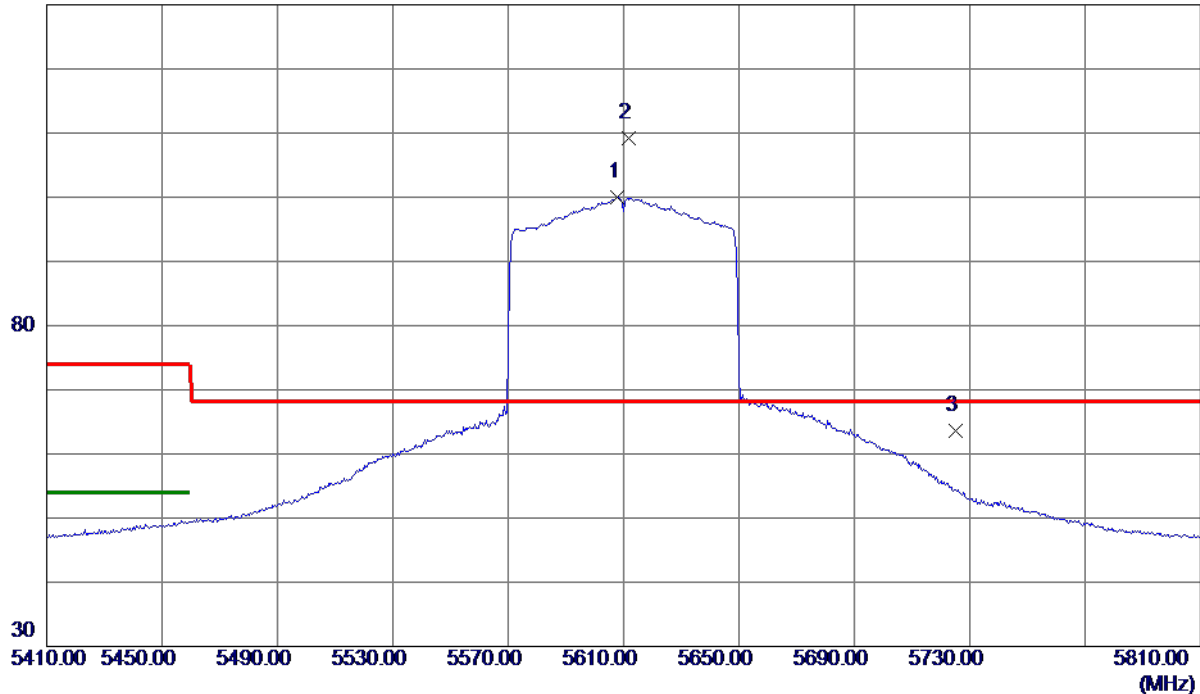

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5608.0000	83.73	16.28	100.01	999.00	-898.99	AVG	No Limit
2 *	5611.6000	92.86	16.29	109.15	68.30	40.85	Peak	No Limit
3	5725.0000	47.00	16.51	63.51	68.30	-4.79	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz

Vertical

80 dBuV/m

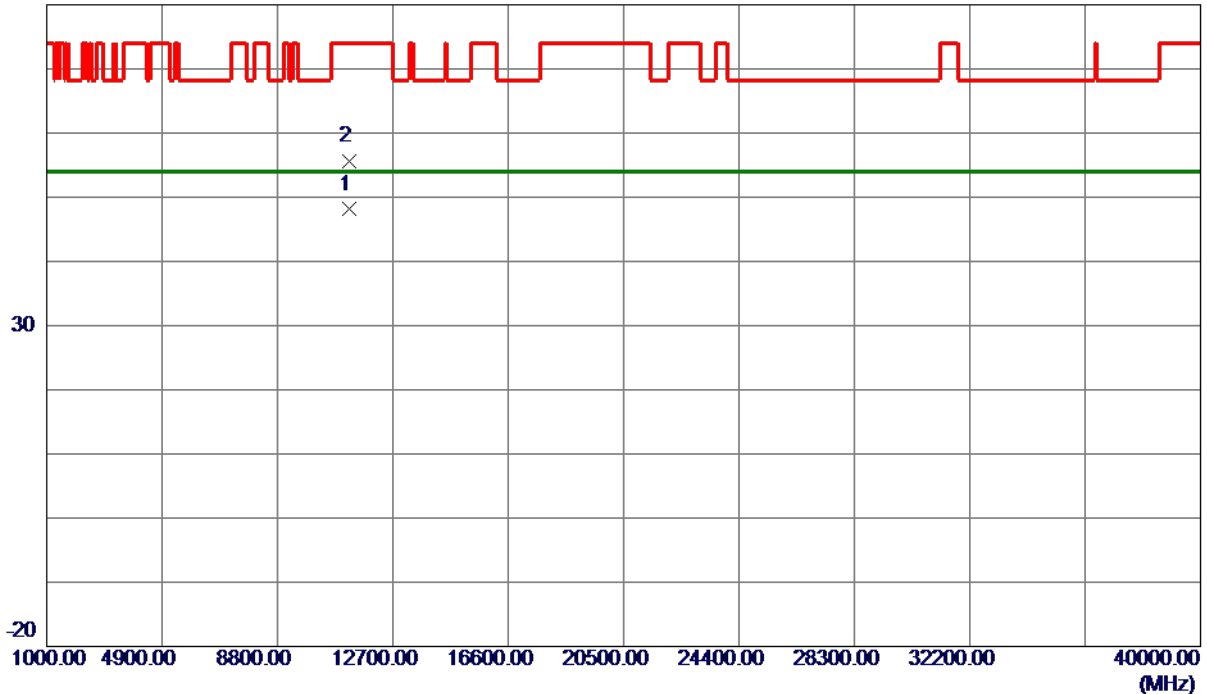

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11234.6400	35.14	12.96	48.10	54.00	-5.90	AVG	
2	11240.8800	42.64	12.96	55.60	74.00	-18.40	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz

Horizontal

130 dBuV/m

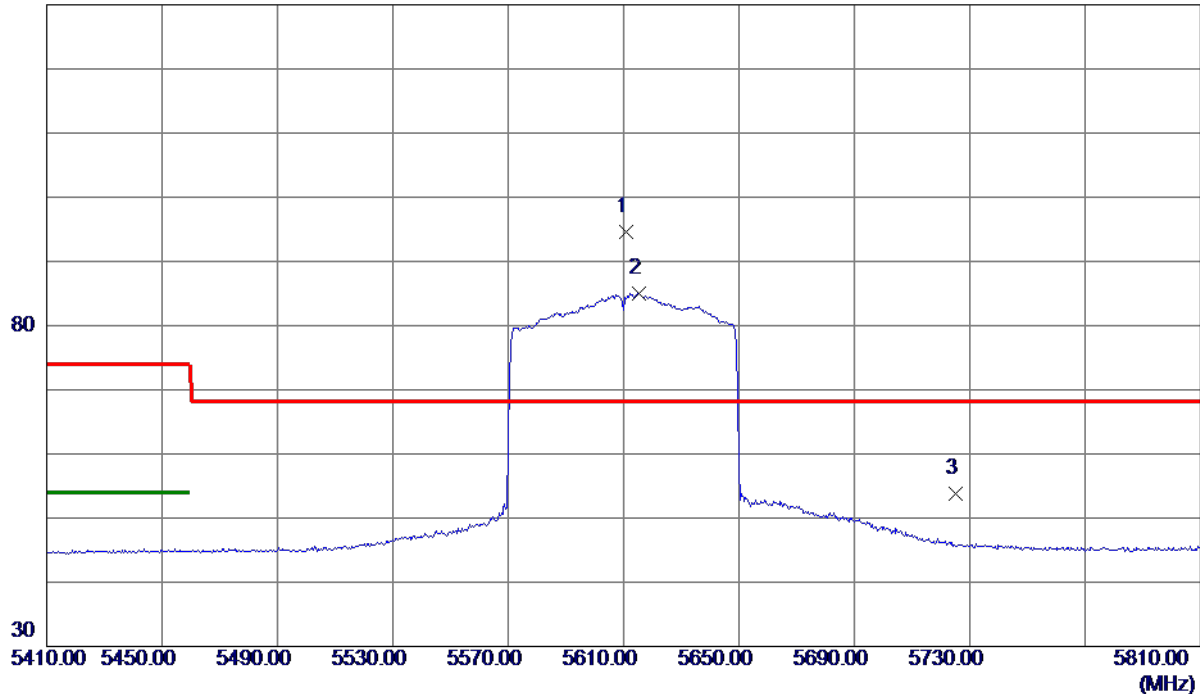

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5610.8000	78.40	16.29	94.69	68.30	26.39	Peak	No Limit
2	5615.2000	68.79	16.29	85.08	999.00	-913.92	AVG	No Limit
3	5725.0000	37.38	16.51	53.89	68.30	-14.41	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AX(HE80) Mode 5610 MHz

Horizontal

80 dBuV/m

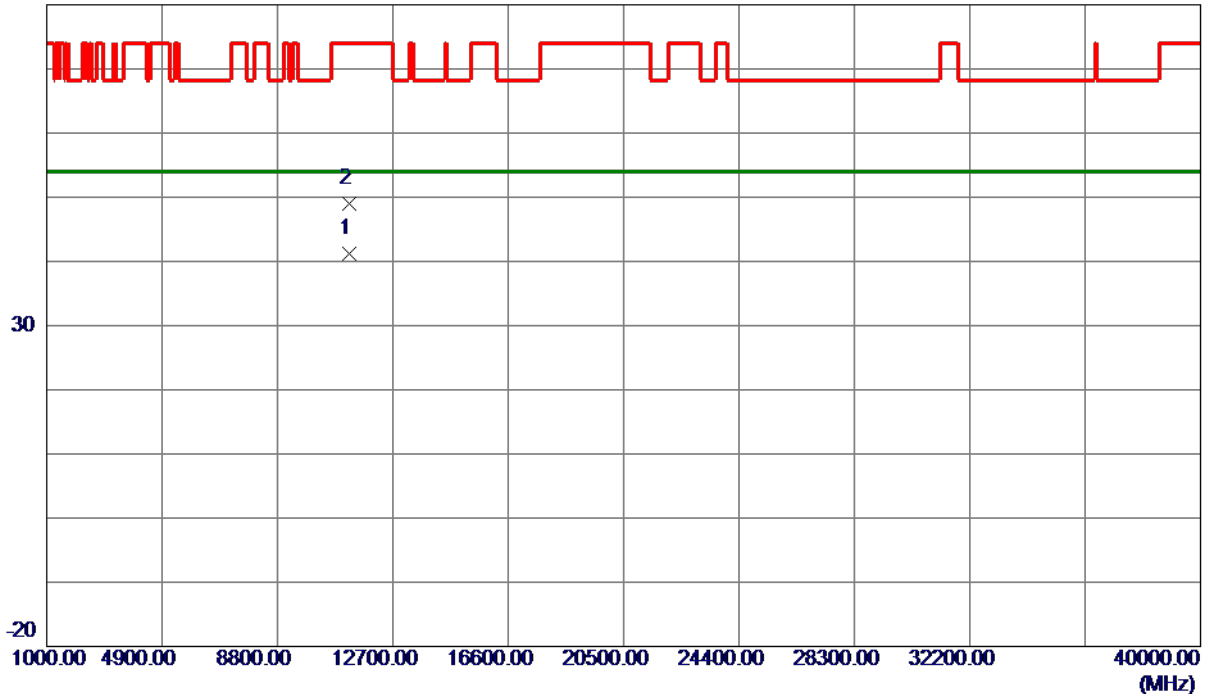

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11226.9600	28.22	12.95	41.17	54.00	-12.83	AVG	
2	11239.4400	36.00	12.96	48.96	74.00	-25.04	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz

Vertical

130 dBuV/m

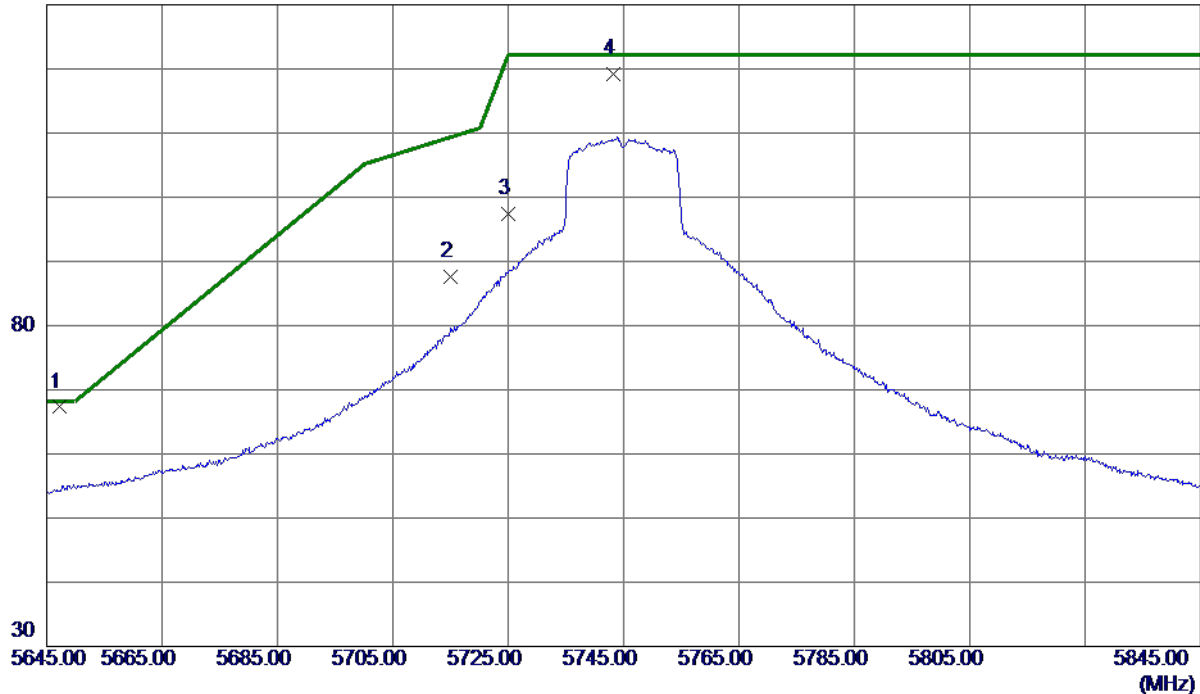

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5647.2000	50.94	16.36	67.30	68.20	-0.90	Peak	
2	5715.0000	71.20	16.49	87.69	109.40	-21.71	Peak	
3	5725.0000	80.81	16.51	97.32	122.20	-24.88	Peak	
4	5743.2000	102.75	16.55	119.30	122.20	-2.90	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz

Vertical

80 dBuV/m

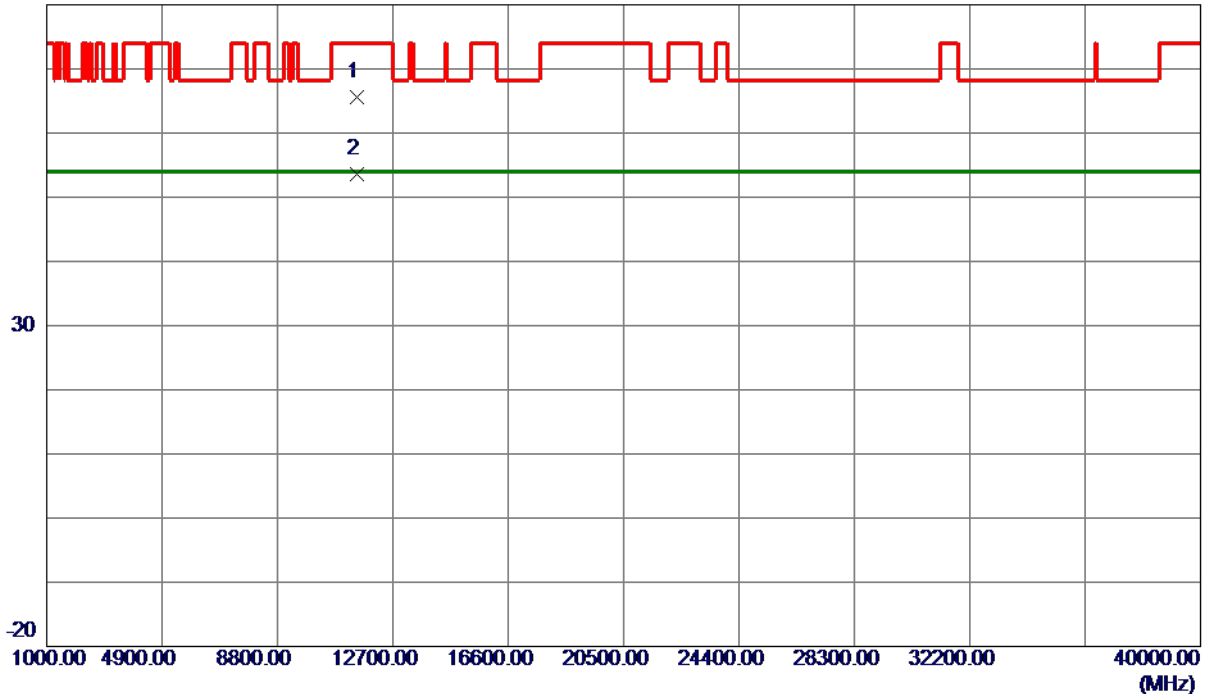

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11486.2800	52.52	13.14	65.66	74.00	-8.34	Peak	
2 *	11491.1700	40.51	13.15	53.66	54.00	-0.34	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz

Horizontal

130 dBuV/m

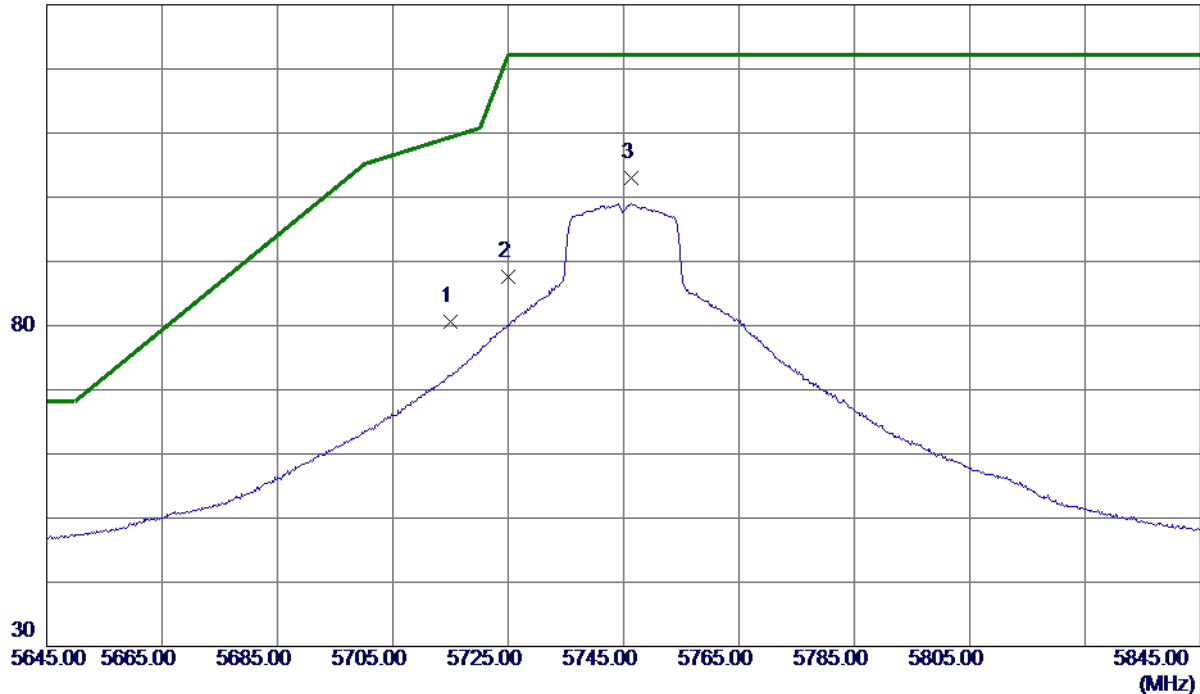

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	64.07	16.49	80.56	109.40	-28.84	Peak	
2	5725.0000	71.04	16.51	87.55	122.20	-34.65	Peak	
3 *	5746.4000	86.44	16.56	103.00	122.20	-19.20	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE20) Mode 5745 MHz

Horizontal

80 dBuV/m

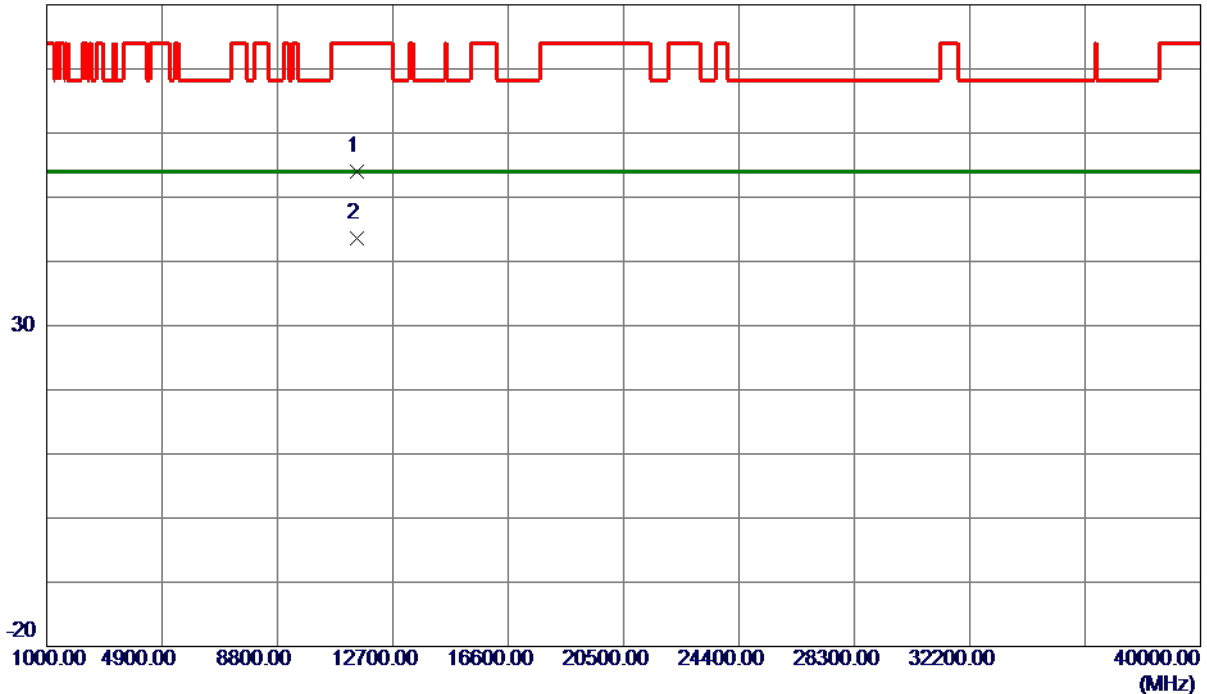

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11489.6100	40.89	13.15	54.04	74.00	-19.96	Peak	
2 *	11491.0800	30.38	13.15	43.53	54.00	-10.47	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz

Vertical

130 dBuV/m

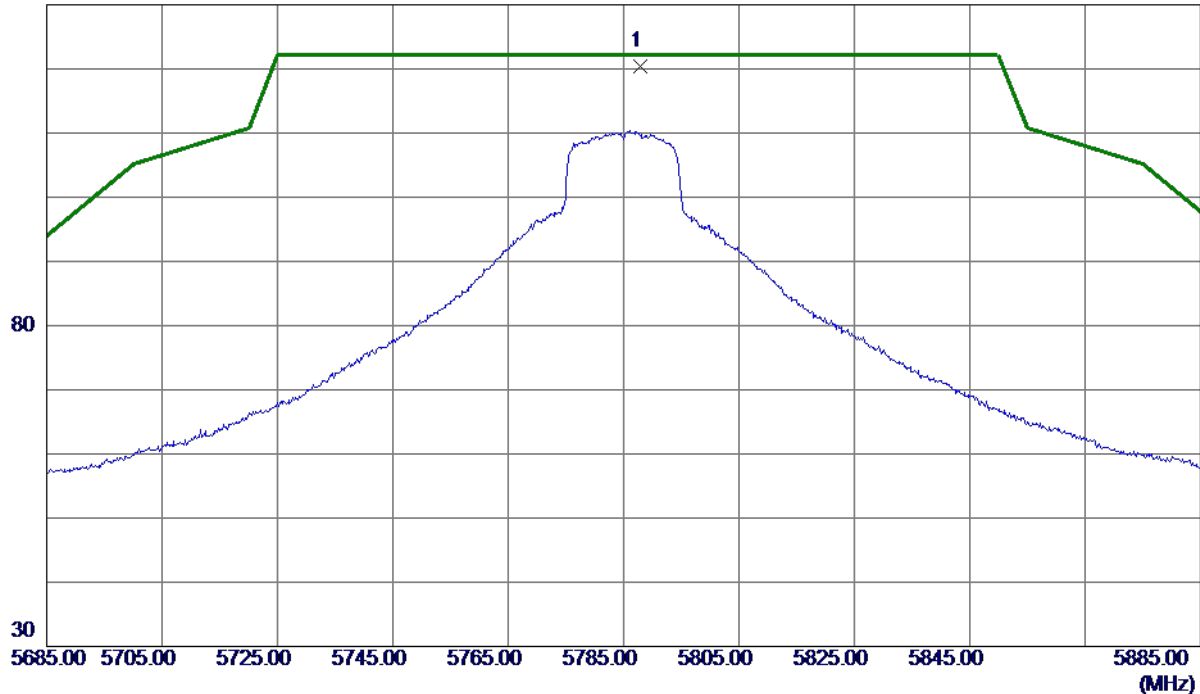

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5787.9000	103.67	16.64	120.31	122.20	-1.89	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz

Vertical

80 dBuV/m

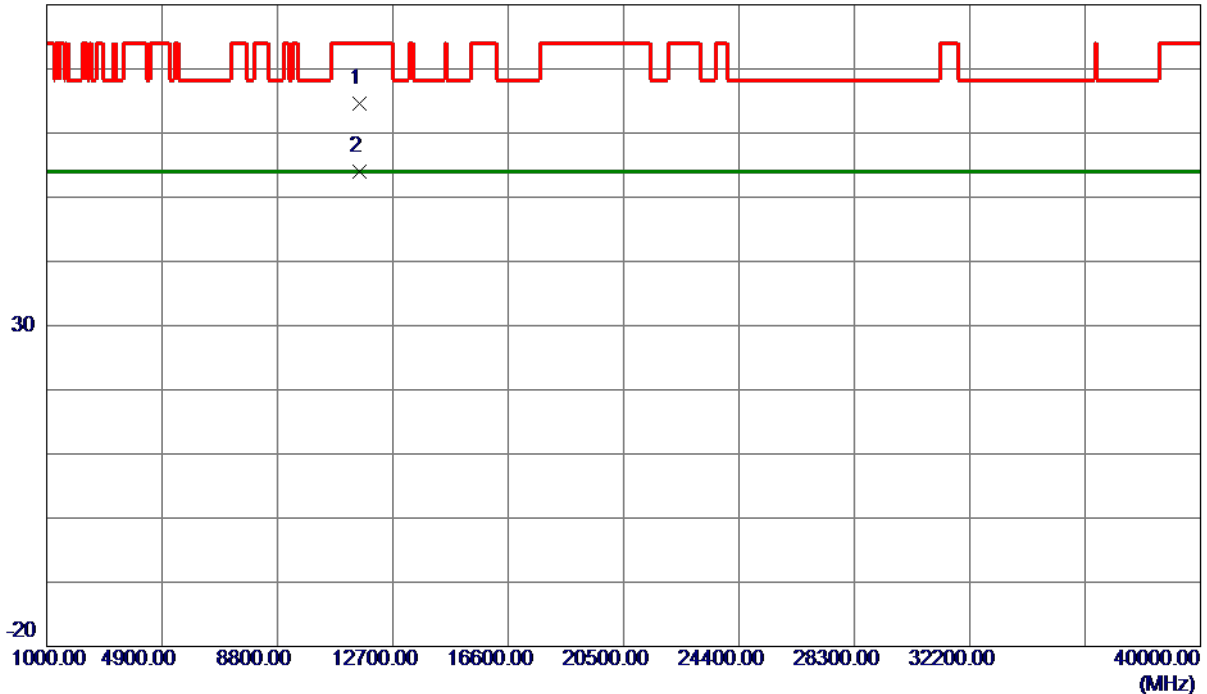

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11566.0700	51.45	13.20	64.65	74.00	-9.35	Peak	
2 *	11571.2300	40.79	13.20	53.99	54.00	-0.01	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz

Horizontal

130 dBuV/m

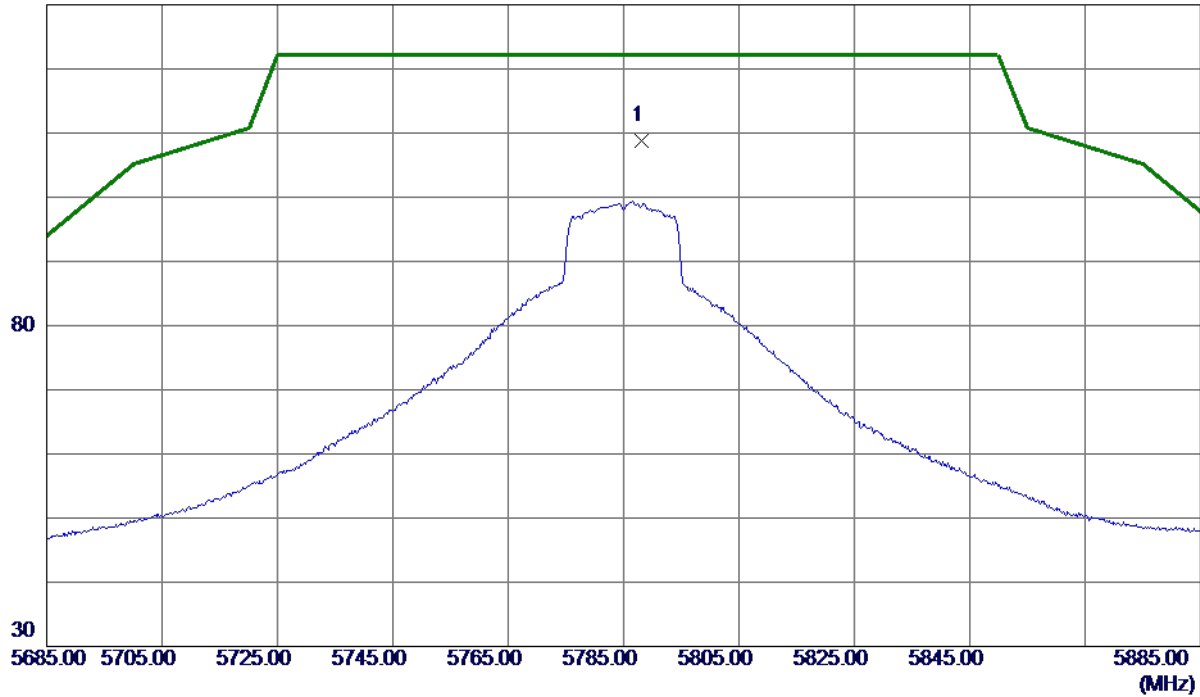

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5788.2000	92.17	16.64	108.81	122.20	-13.39	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE20) Mode 5785 MHz

Horizontal

80 dBuV/m

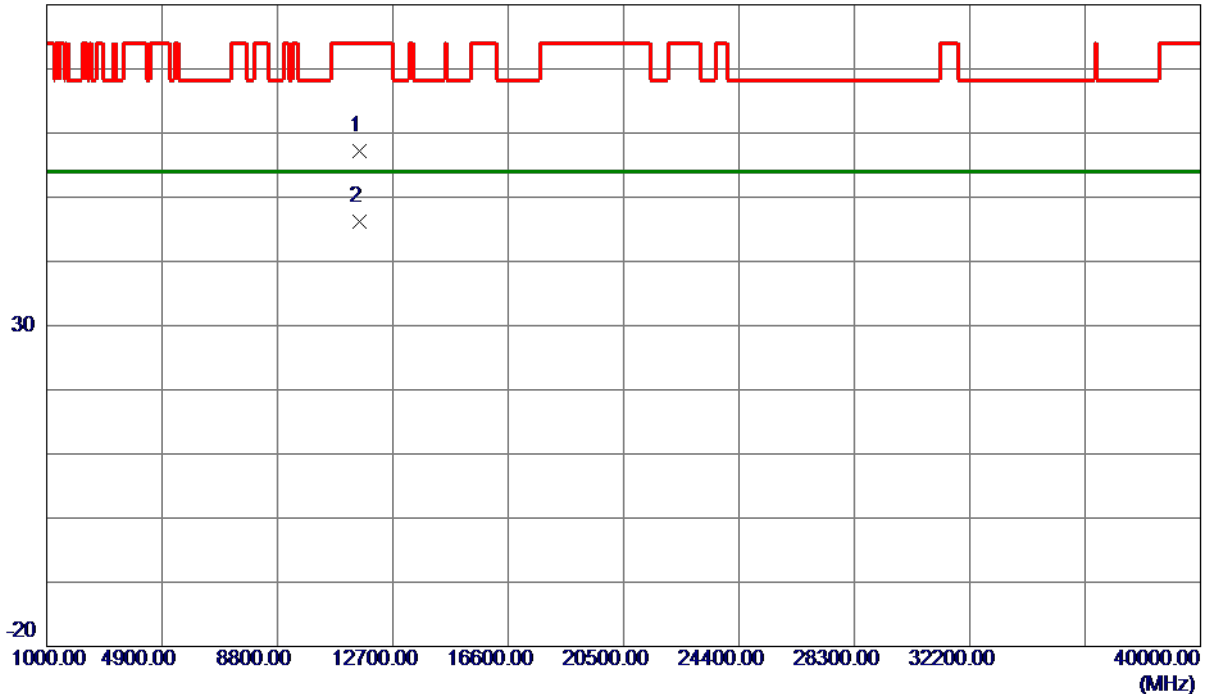


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11566.1000	44.06	13.20	57.26	74.00	-16.74	Peak	
2 *	11571.0800	32.99	13.20	46.19	54.00	-7.81	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz

Vertical

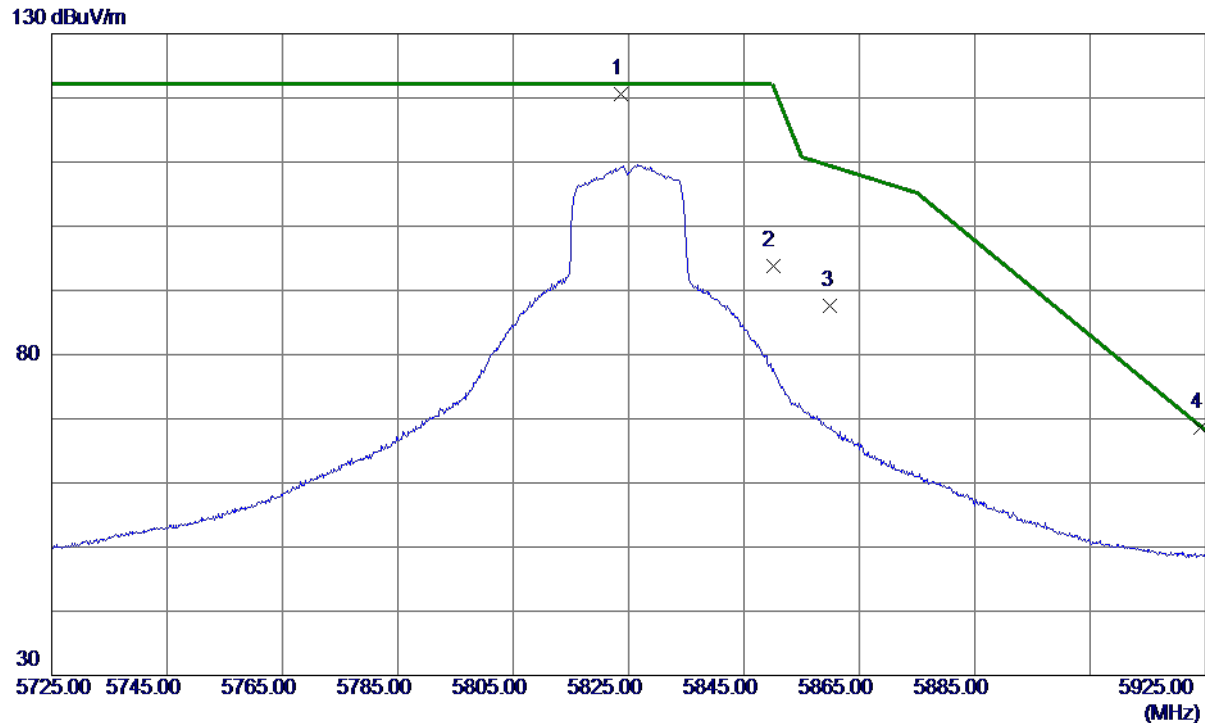

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5823.7000	103.87	16.71	120.58	122.20	-1.62	Peak	No Limit
2	5850.0000	77.06	16.76	93.82	122.20	-28.38	Peak	
3	5860.0000	70.73	16.78	87.51	109.40	-21.89	Peak	
4 *	5924.2000	51.69	16.91	68.60	68.79	-0.19	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz

Vertical

80 dBuV/m

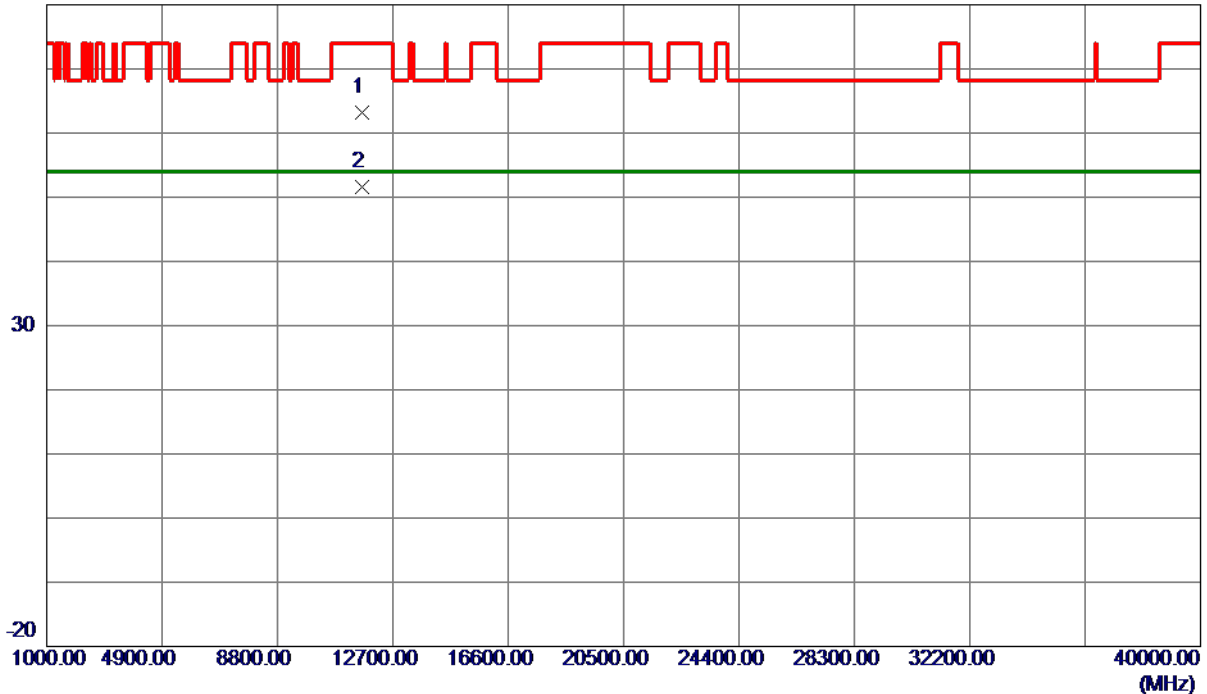

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.9900	49.87	13.25	63.12	74.00	-10.88	Peak	
2 *	11651.2300	38.34	13.25	51.59	54.00	-2.41	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz

Horizontal

130 dBuV/m

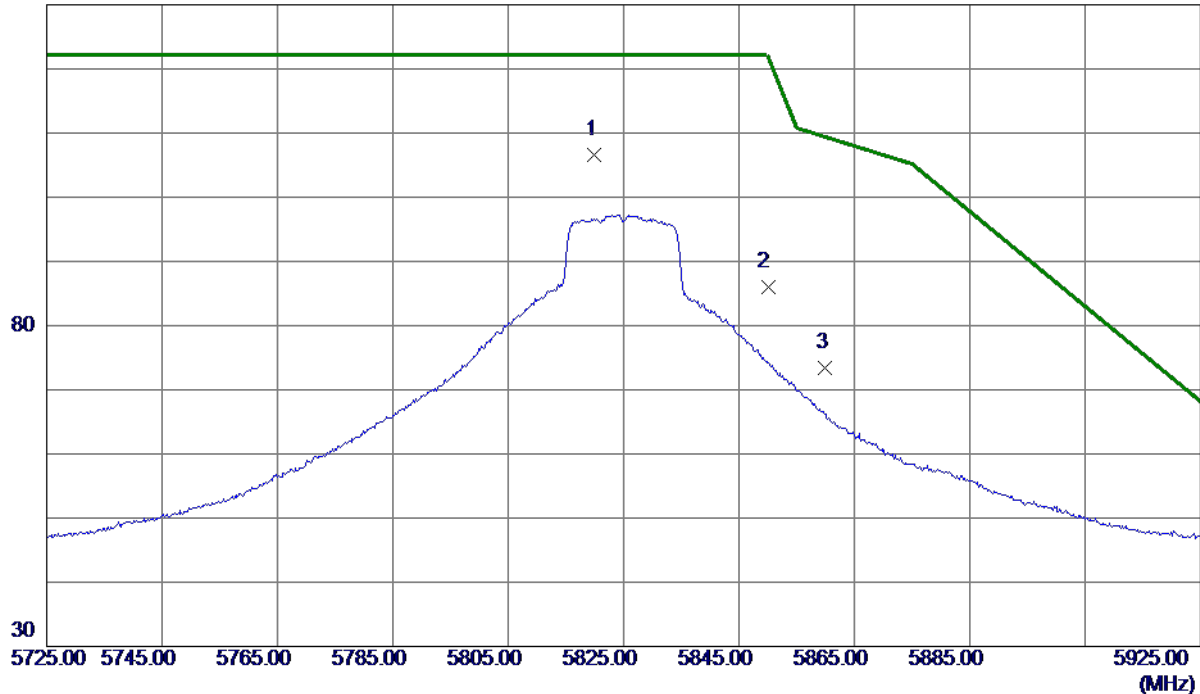

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5820.0000	89.83	16.70	106.53	122.20	-15.67	Peak	No Limit
2	5850.0000	69.27	16.76	86.03	122.20	-36.17	Peak	
3	5860.0000	56.68	16.78	73.46	109.40	-35.94	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE20) Mode 5825 MHz

Horizontal

80 dBuV/m

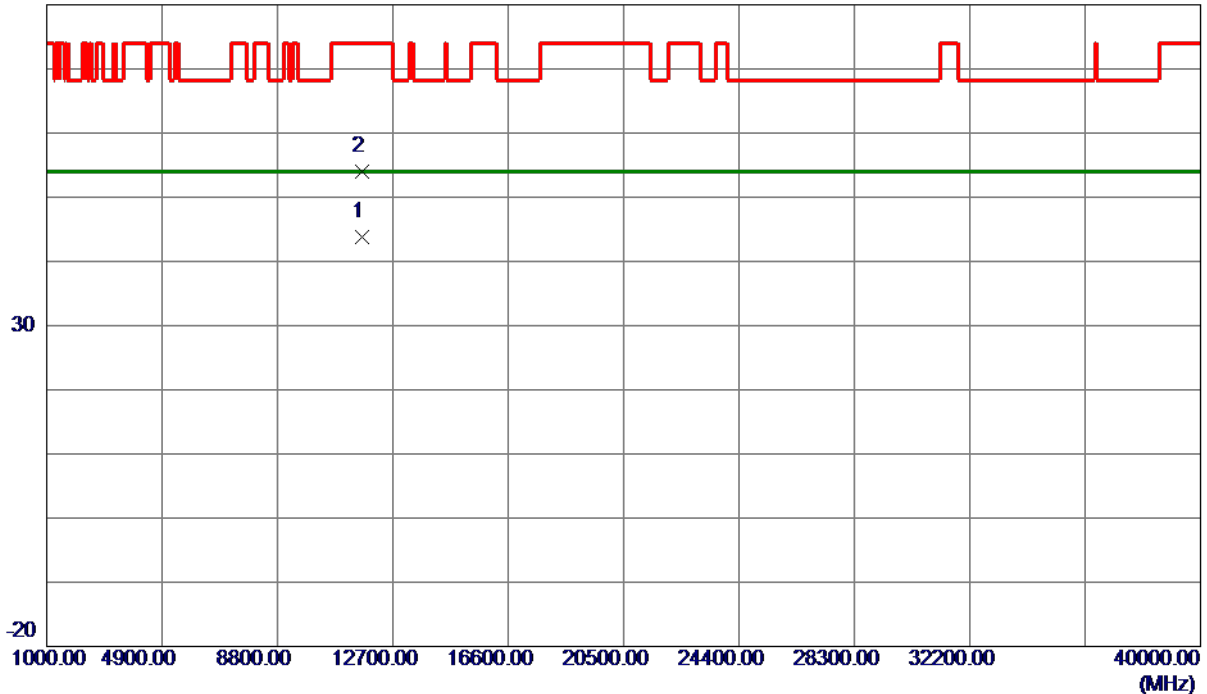

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.9600	30.59	13.25	43.84	54.00	-10.16	AVG	
2	11657.1400	40.73	13.25	53.98	74.00	-20.02	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz

Vertical

130 dBuV/m

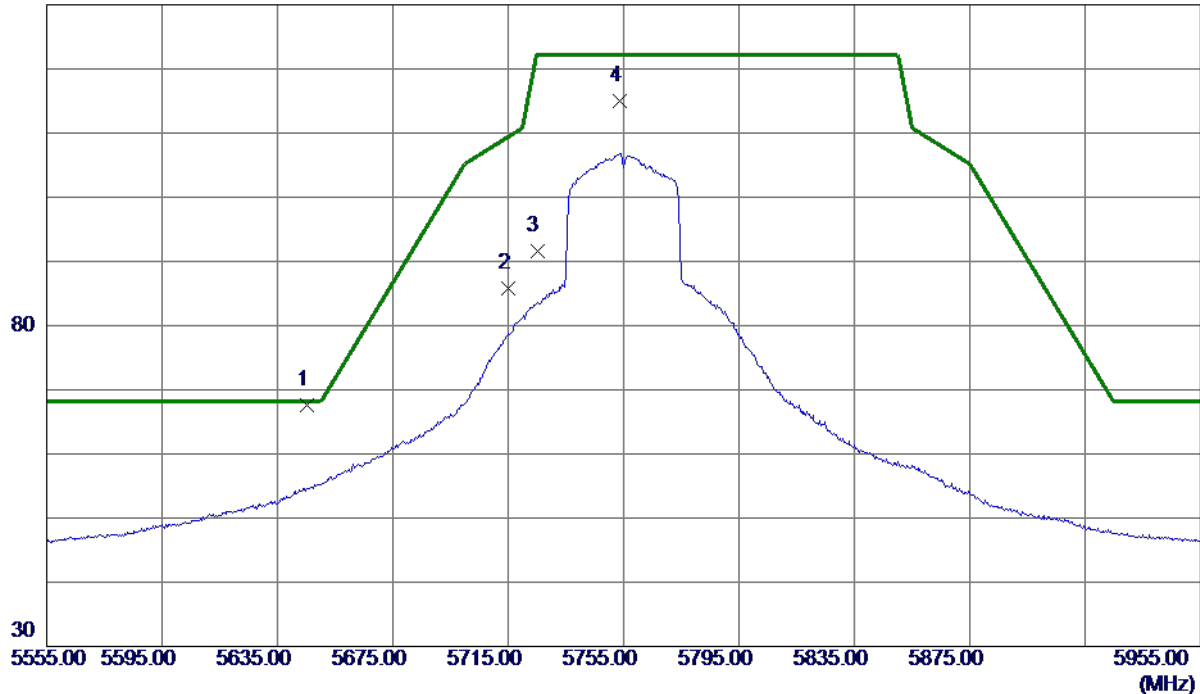

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5645.4000	51.34	16.35	67.69	68.20	-0.51	Peak	
2	5715.0000	69.28	16.49	85.77	109.40	-23.63	Peak	
3	5725.0000	75.12	16.51	91.63	122.20	-30.57	Peak	
4	5753.8000	98.46	16.57	115.03	122.20	-7.17	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz

Vertical

80 dBuV/m

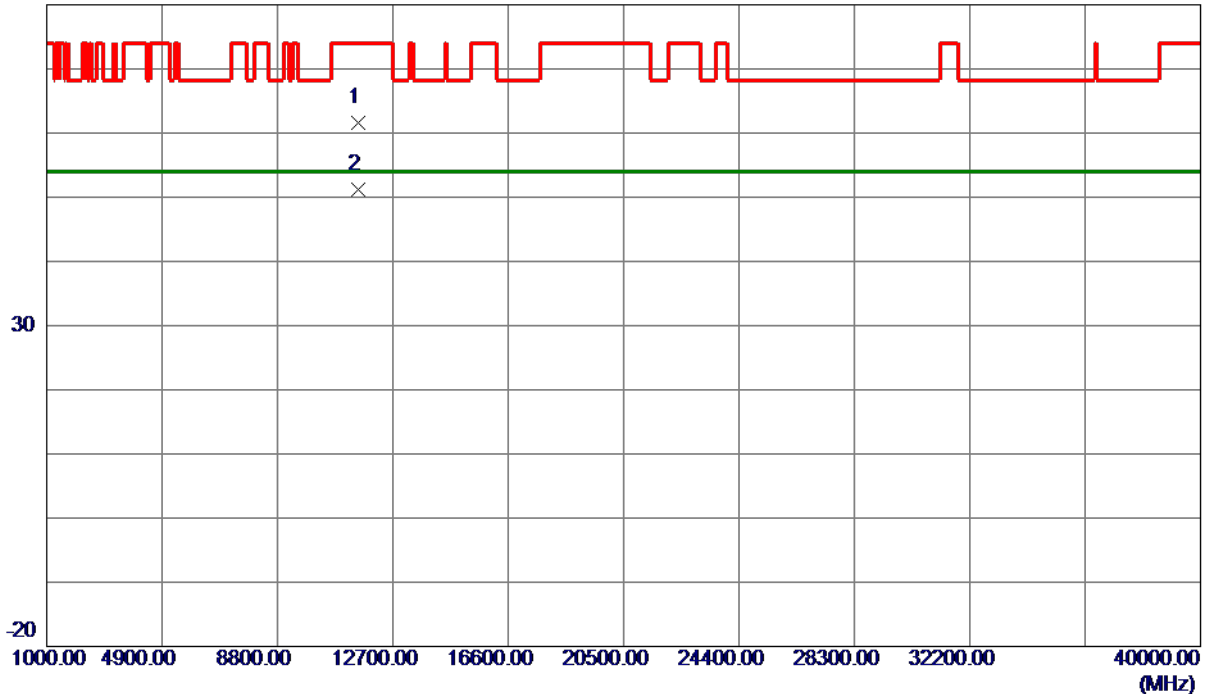

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11511.0500	48.44	13.16	61.60	74.00	-12.40	Peak	
2 *	11516.0000	37.95	13.17	51.12	54.00	-2.88	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz

Horizontal

130 dBuV/m

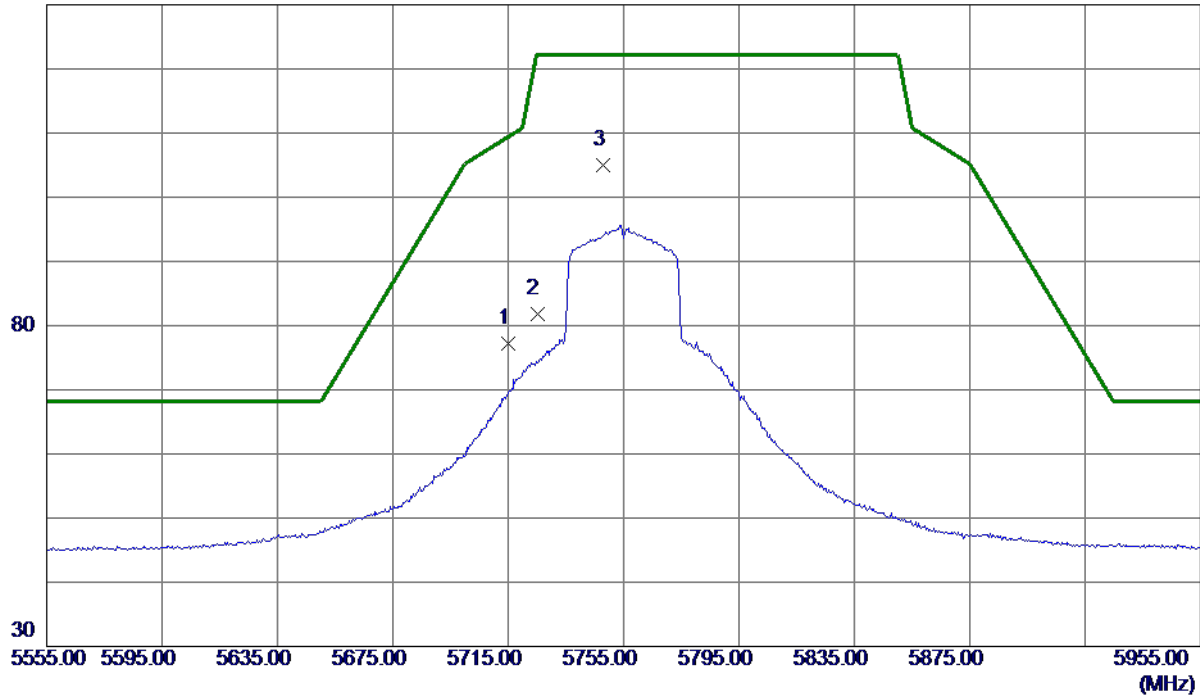

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	60.65	16.49	77.14	109.40	-32.26	Peak	
2	5725.0000	65.34	16.51	81.85	122.20	-40.35	Peak	
3 *	5747.8000	88.47	16.56	105.03	122.20	-17.17	Peak	No Limit


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE40) Mode 5755 MHz

Horizontal

80 dBuV/m

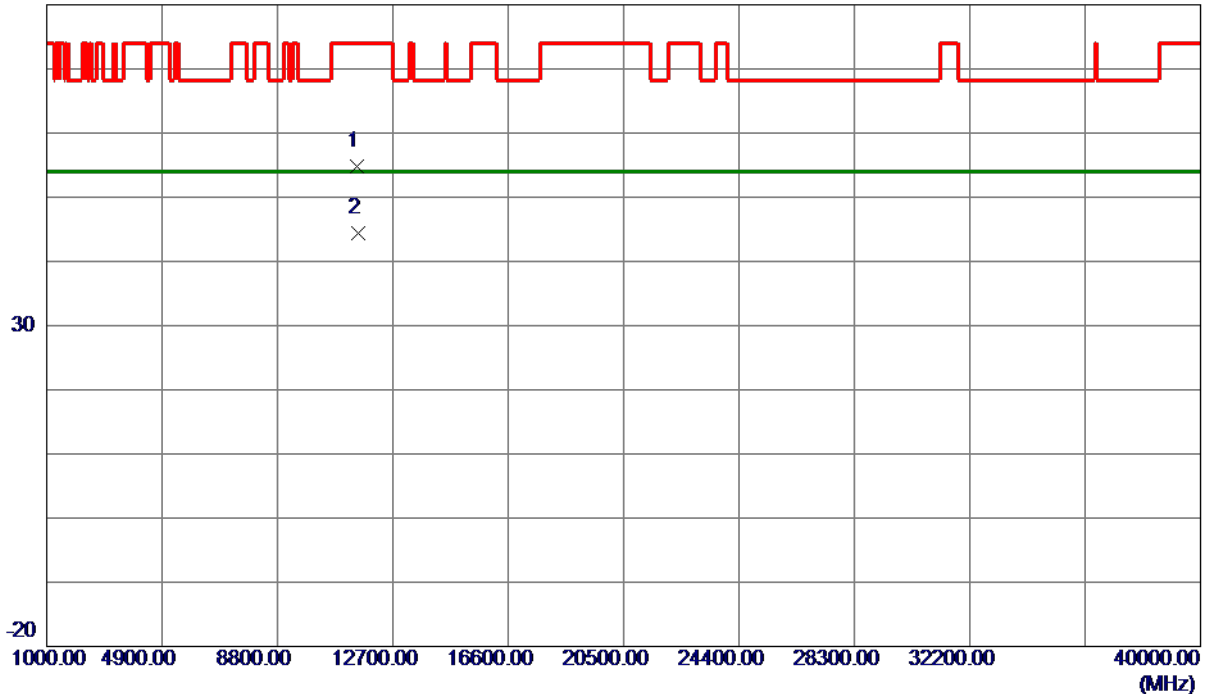

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11501.1000	41.55	13.16	54.71	74.00	-19.29	Peak	
2 *	11515.6500	31.16	13.16	44.32	54.00	-9.68	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz

Vertical

130 dBuV/m

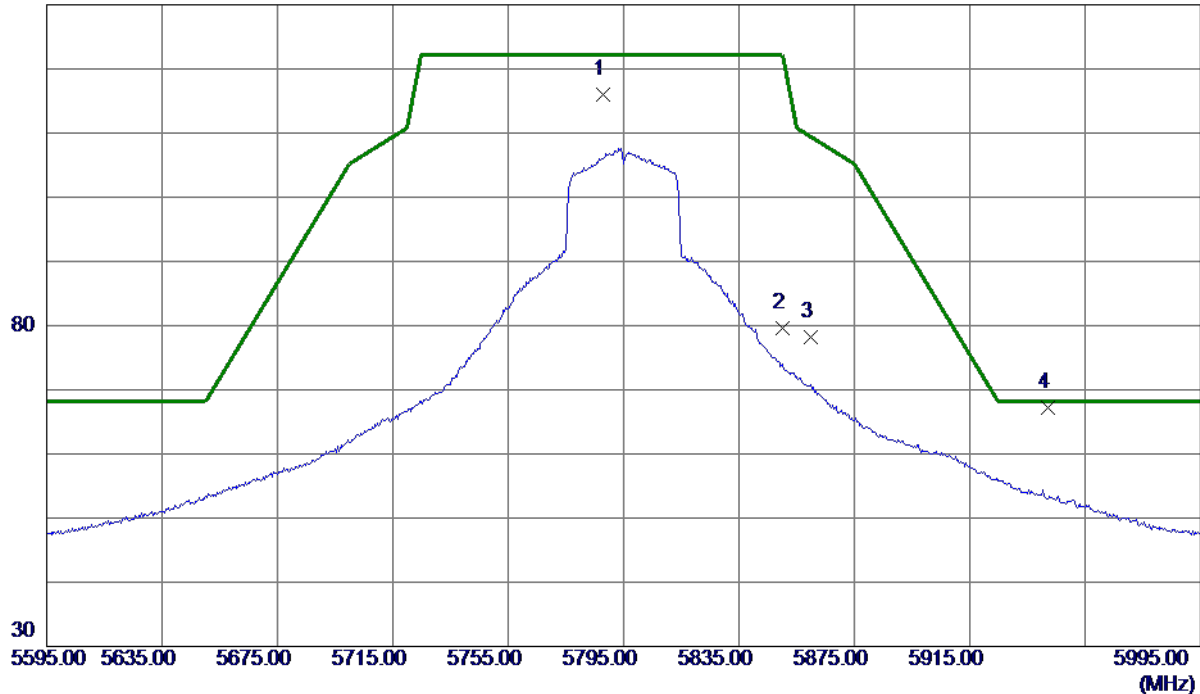

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5787.8000	99.42	16.64	116.06	122.20	-6.14	Peak	No Limit
2	5850.0000	62.75	16.76	79.51	122.20	-42.69	Peak	
3	5860.0000	61.49	16.78	78.27	109.40	-31.13	Peak	
4 *	5942.2000	50.31	16.94	67.25	68.20	-0.95	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz

Vertical

80 dBuV/m

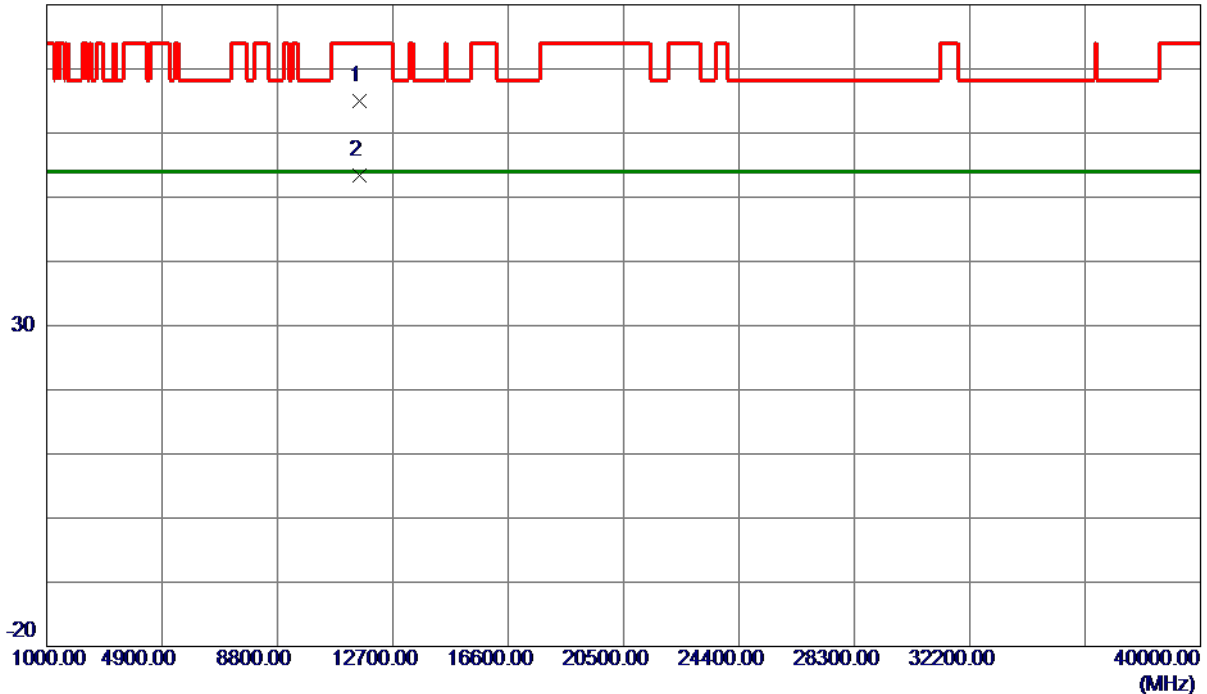

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11586.5500	51.74	13.21	64.95	74.00	-9.05	Peak	
2 *	11587.3500	40.12	13.21	53.33	54.00	-0.67	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz

Horizontal

130 dBuV/m

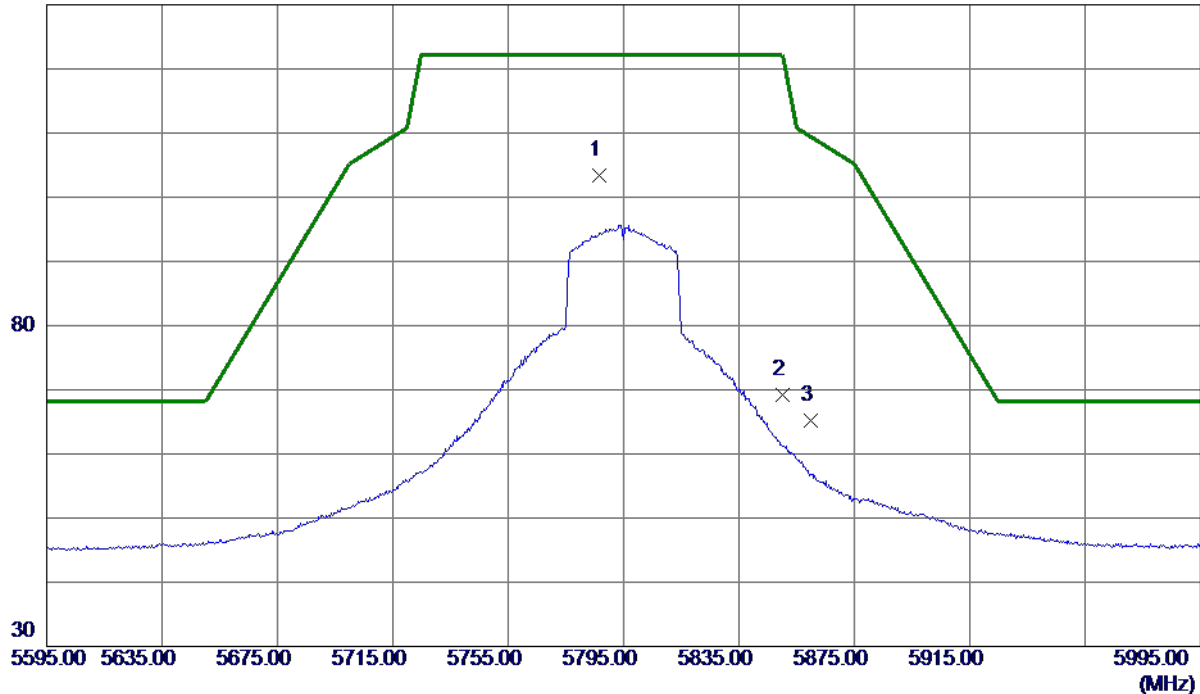

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5786.6000	86.79	16.64	103.43	122.20	-18.77	Peak	No Limit
2	5850.0000	52.51	16.76	69.27	122.20	-52.93	Peak	
3	5860.0000	48.47	16.78	65.25	109.40	-44.15	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE40) Mode 5795 MHz

Horizontal

80 dBuV/m

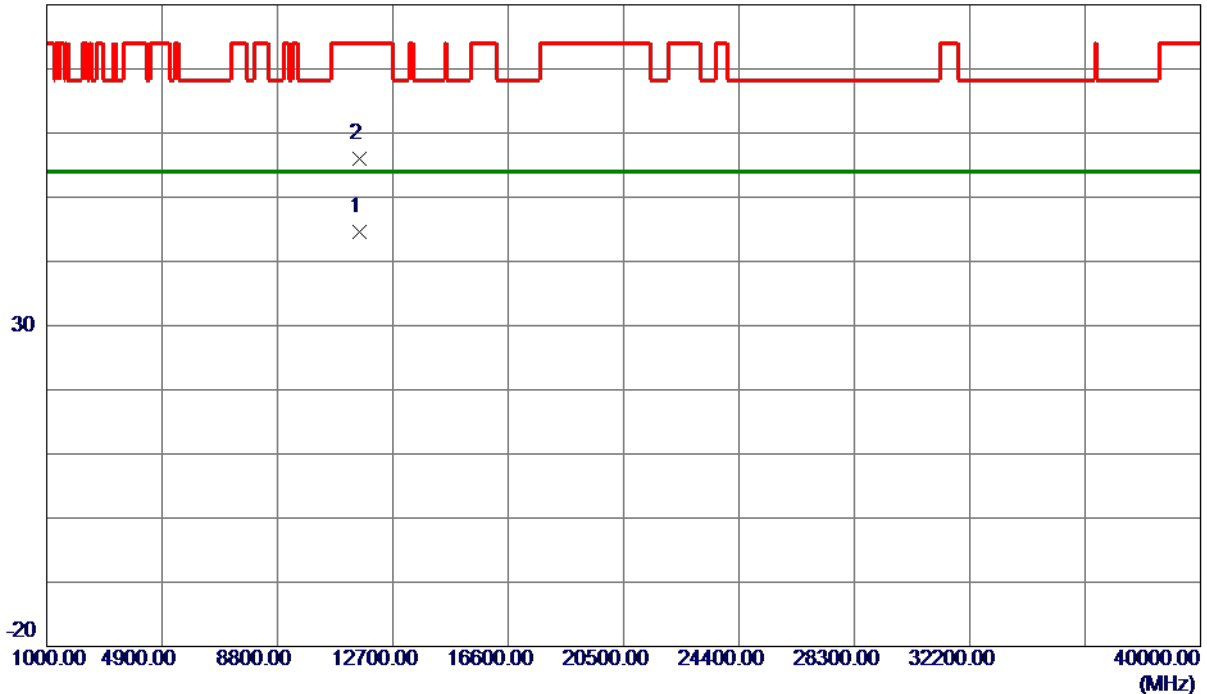

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11583.1500	31.43	13.21	44.64	54.00	-9.36	AVG	
2	11586.4000	42.85	13.21	56.06	74.00	-17.94	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz

Vertical

130 dBuV/m

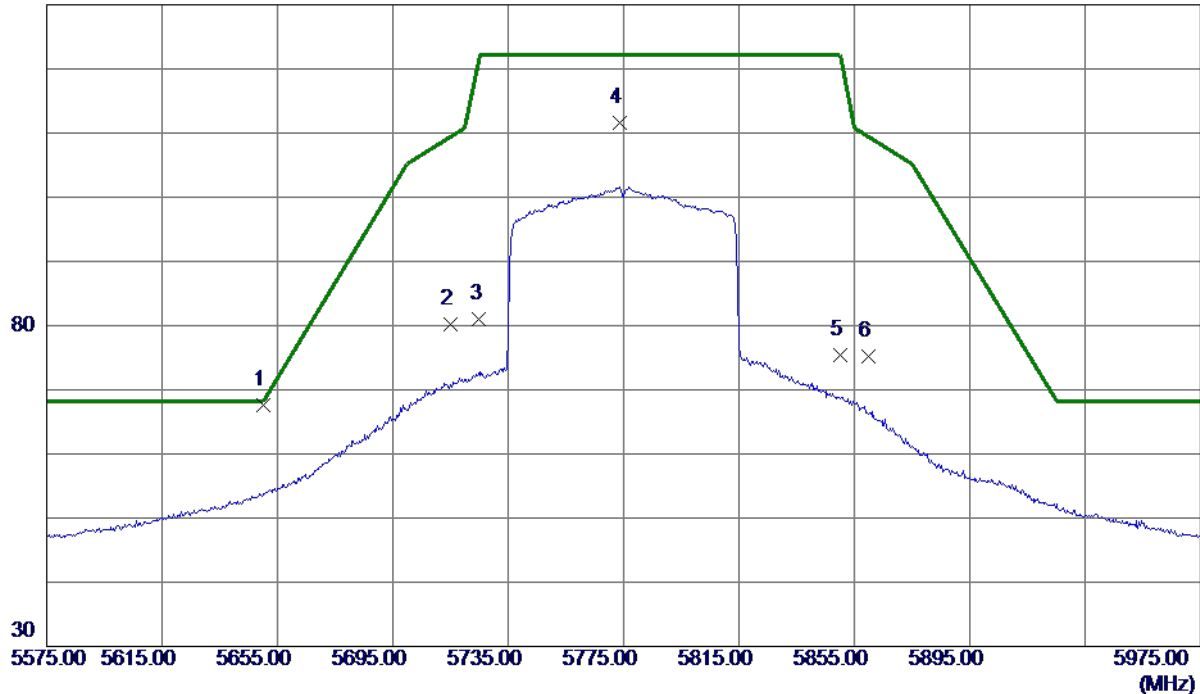

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5650.2000	51.25	16.36	67.61	68.35	-0.74	Peak	
2	5715.0000	63.80	16.49	80.29	109.40	-29.11	Peak	
3	5725.0000	64.53	16.51	81.04	122.20	-41.16	Peak	
4	5773.8000	94.92	16.61	111.53	122.20	-10.67	Peak	No Limit
5	5850.0000	58.56	16.76	75.32	122.20	-46.88	Peak	
6	5860.0000	58.40	16.78	75.18	109.40	-34.22	Peak	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz

Vertical

80 dBuV/m

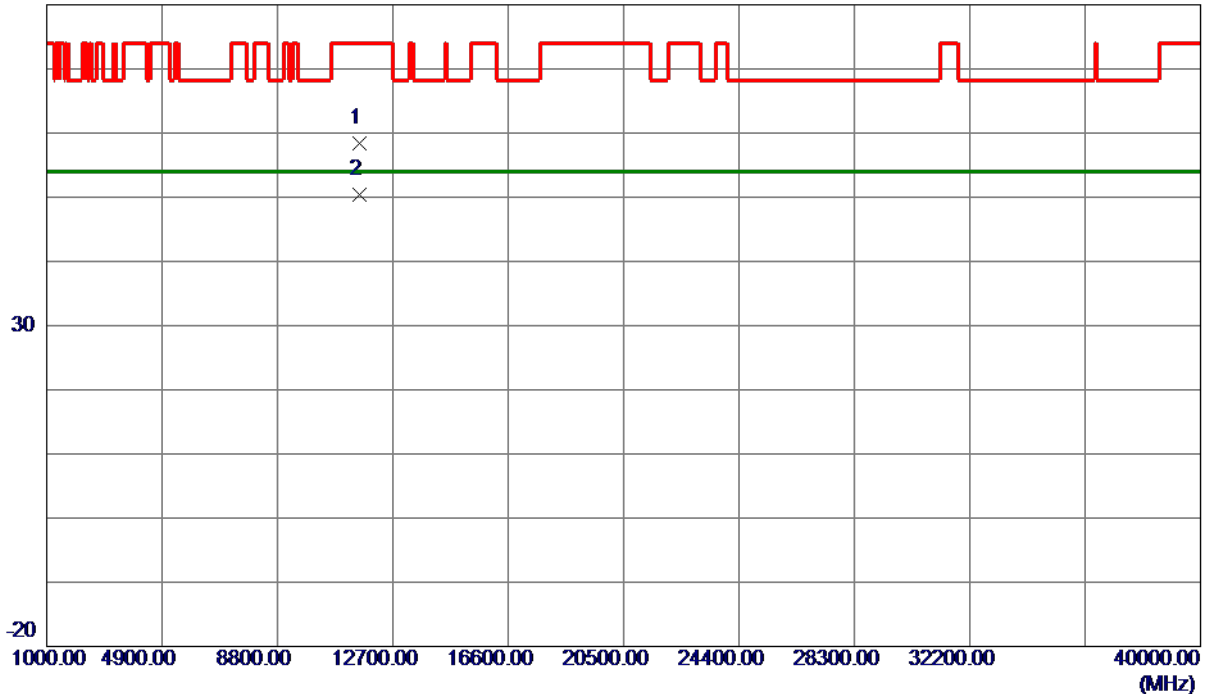

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11571.0400	45.20	13.20	58.40	74.00	-15.60	Peak	
2 *	11571.1200	37.26	13.20	50.46	54.00	-3.54	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz

Horizontal

130 dBuV/m

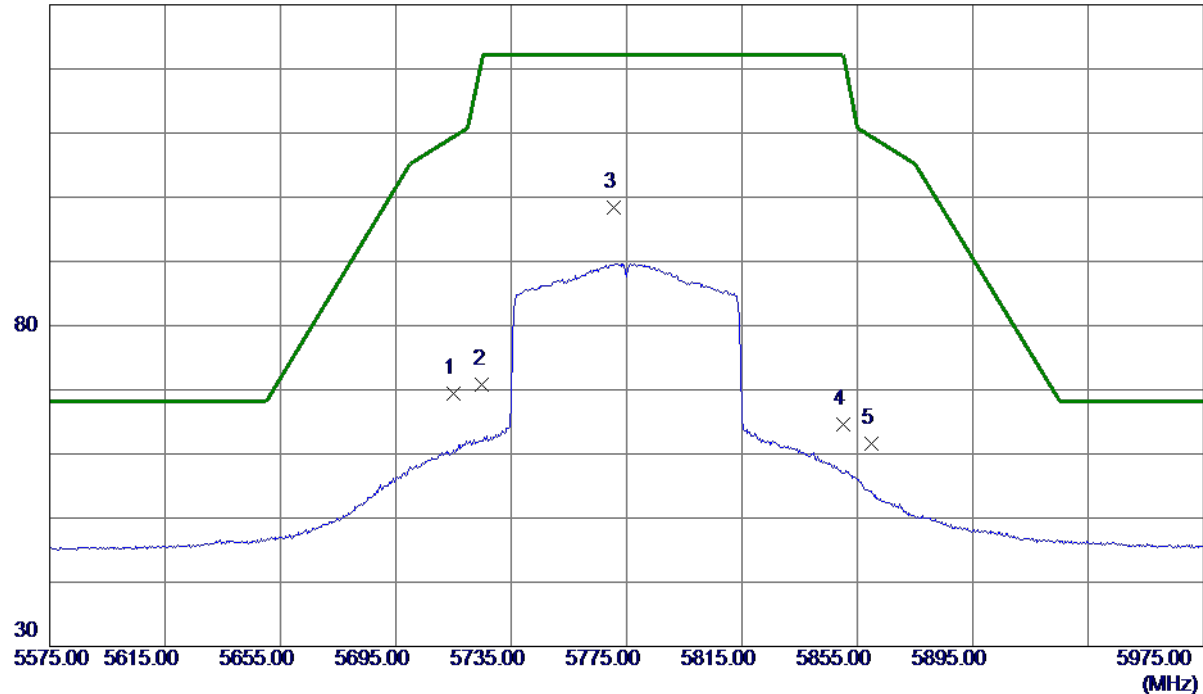

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5715.0000	53.00	16.49	69.49	109.40	-39.91	Peak	
2	5725.0000	54.30	16.51	70.81	122.20	-51.39	Peak	
3 *	5770.6000	81.78	16.60	98.38	122.20	-23.82	Peak	No Limit
4	5850.0000	47.79	16.76	64.55	122.20	-57.65	Peak	
5	5860.0000	44.90	16.78	61.68	109.40	-47.72	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AX(HE80) Mode 5775 MHz

Horizontal

80 dBuV/m

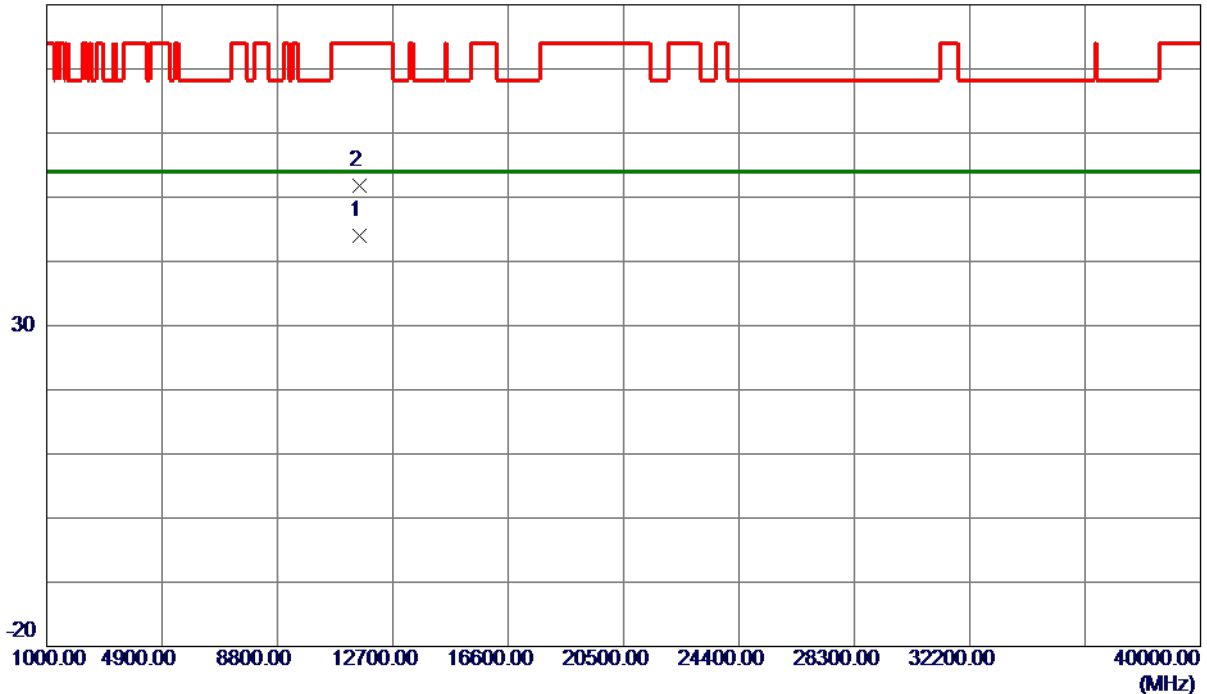

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11555.6800	30.79	13.19	43.98	54.00	-10.02	AVG	
2	11571.1200	38.61	13.20	51.81	74.00	-22.19	Peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	UNII-1_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	23.89	17.10
40	5200	36.00	18.30
48	5240	29.05	17.20

CH36

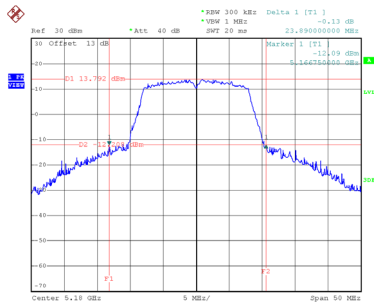


Date: 26.NOV.2020 11:35:00

CH40
26 dB Bandwidth

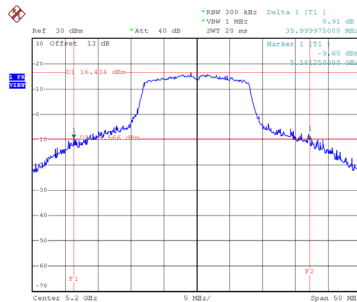


Date: 26.NOV.2020 11:36:09

CH48

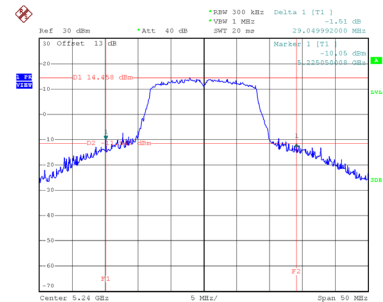


Date: 26.NOV.2020 14:29:27


99 % Emission Bandwidth

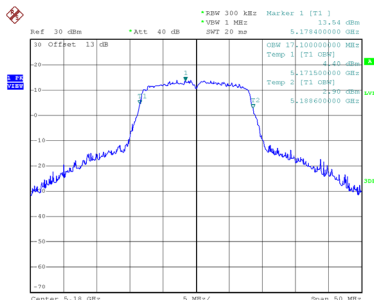

Date: 26.NOV.2020 11:34:12

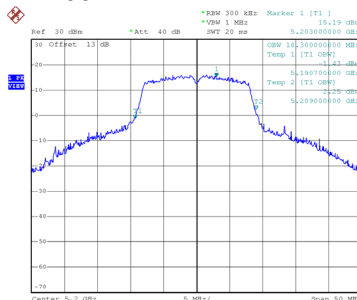

Date: 26.NOV.2020 11:35:36

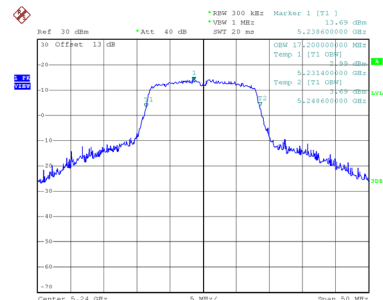


Date: 26.NOV.2020 14:29:35

Test Mode	UNII-2A_TX A Mode
-----------	-------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
52	5260	35.39	17.70
60	5300	31.95	17.30
64	5320	26.50	17.20

CH52

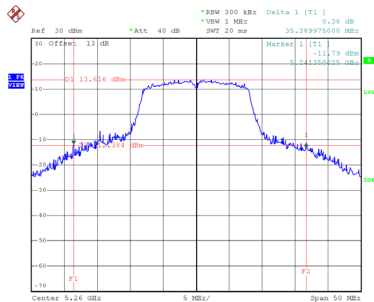


Date: 23.NOV.2020 18:45:43

CH60
26 dB Bandwidth

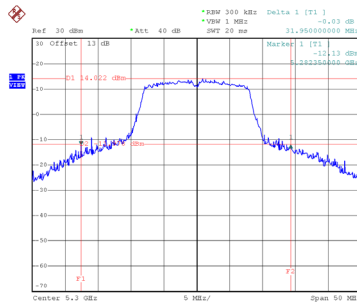


Date: 23.NOV.2020 18:46:52

CH64

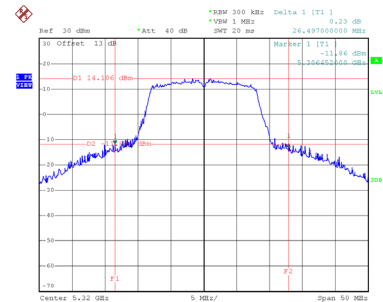


Date: 23.NOV.2020 18:48:24


99 % Emission Bandwidth

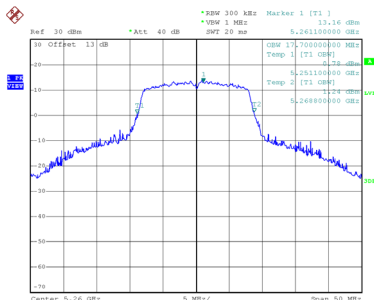

Date: 23.NOV.2020 18:45:13

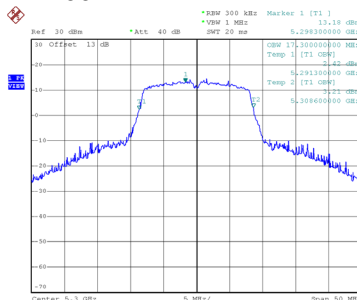


Date: 23.NOV.2020 18:46:18

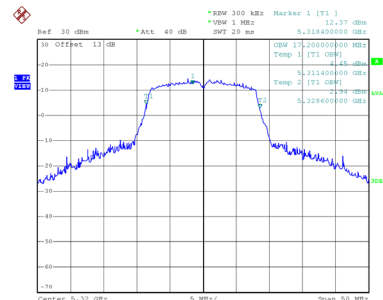

Date: 23.NOV.2020 18:47:26


Test Mode	UNII-2C_TX A Mode		
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
100	5500	20.75	17.00
116	5580	22.60	17.10
140	5700	20.60	17.00

CH100

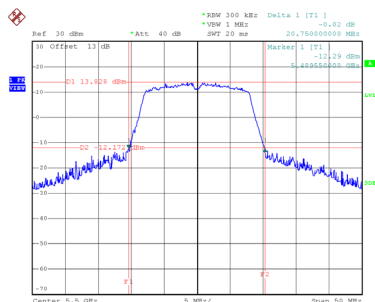


Date: 23.NOV.2020 18:50:36

CH116
26 dB Bandwidth

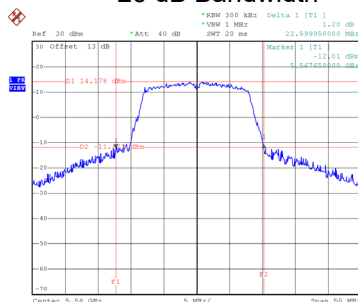


Date: 23.NOV.2020 18:52:13

CH140

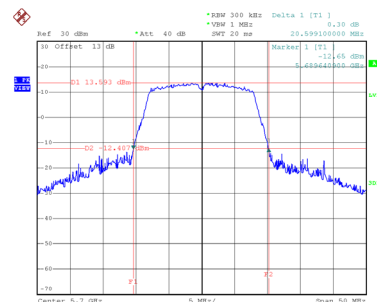


Date: 23-NOV-2020 18:53:43


99 % Emission Bandwidth

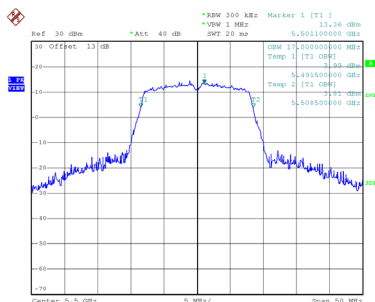

Date: 23.NOV.2020 18:49:47

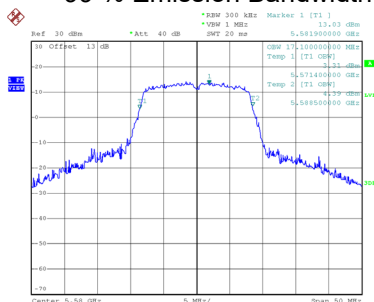

Date: 23.NOV.2020 18:51:22

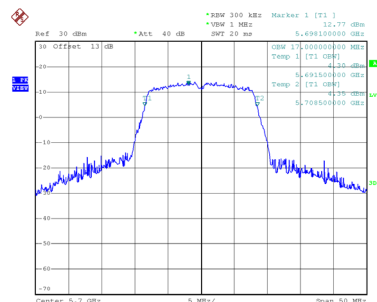


Date: 23.NOV.2020 18:52:55

Test Mode	UNII-3_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
149	5745	15.30	22.80	500	Complies
157	5785	15.35	22.70	500	Complies
165	5825	15.80	24.60	500	Complies

CH149

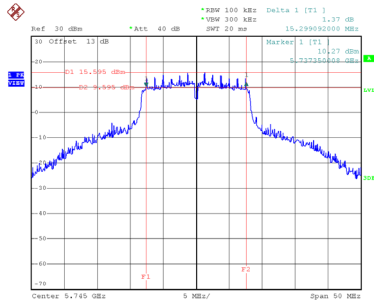


Date: 27.NOV.2020 17:03:58

CH157
6 dB Bandwidth

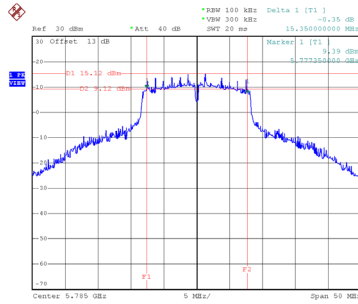


Date: 27.NOV.2020 17:06:06

CH165

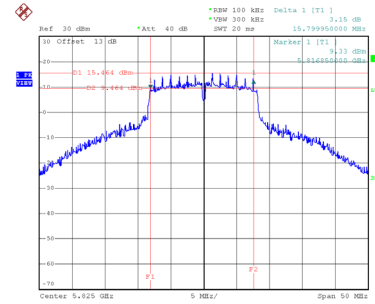


Date: 27.NOV.2020 17:07:41


99 % Emission Bandwidth

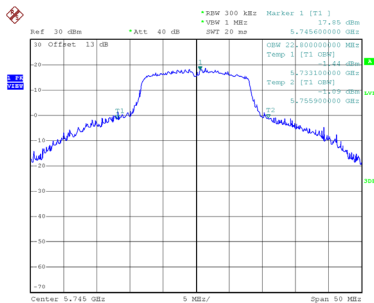

Date: 27.NOV.2020 17:03:07

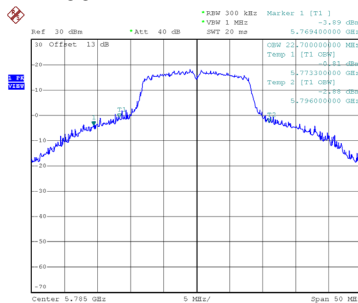

Date: 27.NOV.2020 17:05:16

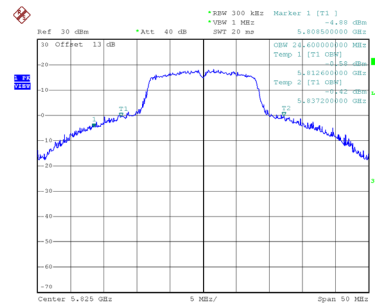


Date: 27.NOV.2020 17:06:49

Test Mode	UNII-1_TX AC(VHT20) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	23.79	18.10
40	5200	33.35	18.30
48	5240	43.90	25.30

CH36

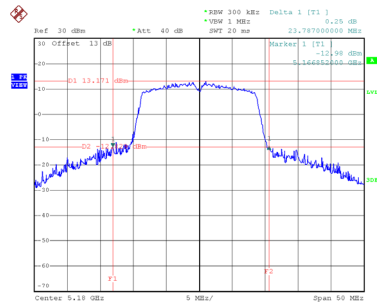


Date: 29.NOV.2020 15:40:34

CH40
26 dB Bandwidth

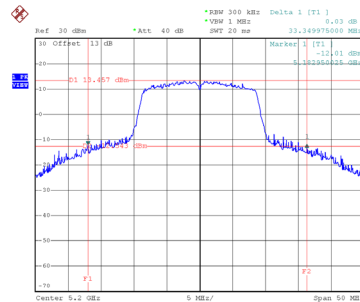


Date: 29.NOV.2020 15:41:58

CH48

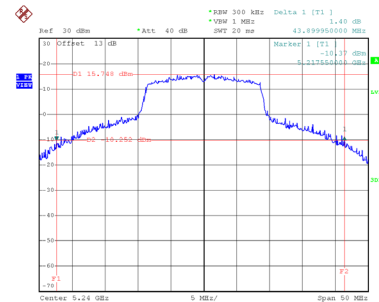


Date: 29.NOV.2020 15:42:48


99 % Emission Bandwidth

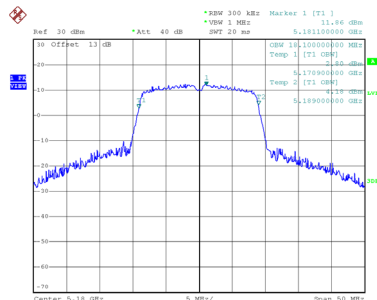

Date: 29.NOV.2020 15:39:47

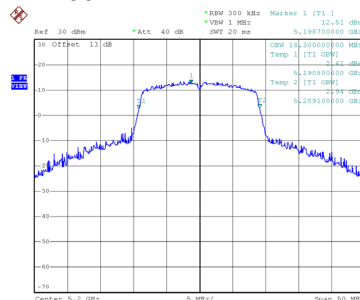

Date: 29.NOV.2020 15:41:28

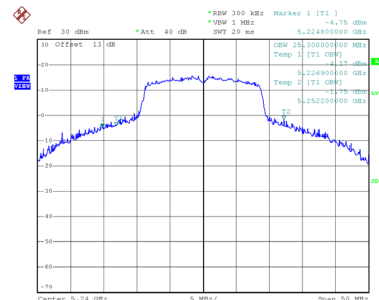


Date: 29.NOV.2020 15:42:33

Test Mode	UNII-1_TX AC(VHT40) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
38	5190	40.00	36.40
46	5230	56.60	37.40

CH38

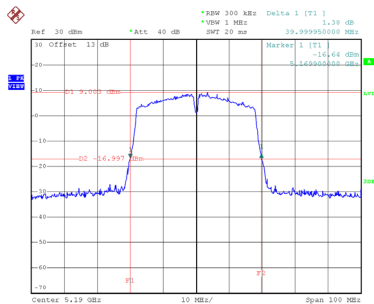


Date: 26.NOV.2020 15:11:37

CH46
26 dB Bandwidth

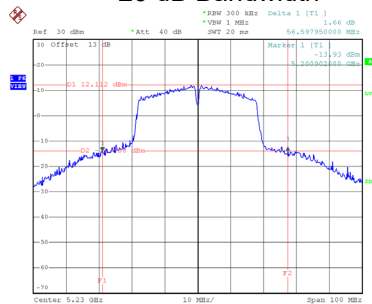


Date: 30.NOV.2020 16:03:48

99 % Emission Bandwidth

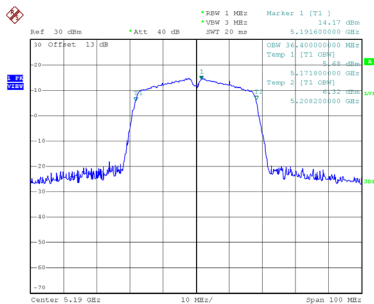

Date: 26.NOV.2020 15:10:50

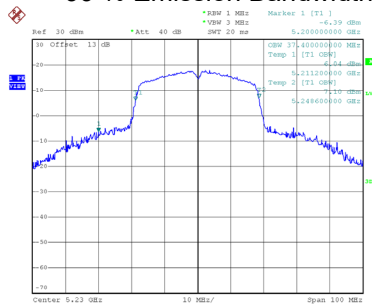


Date: 30.NOV.2020 15:55:34

Test Mode	UNII-1_TX AC(VHT80) Mode
-----------	--------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
42	5210	80.40	75.20

CH42 26 dB Bandwidth

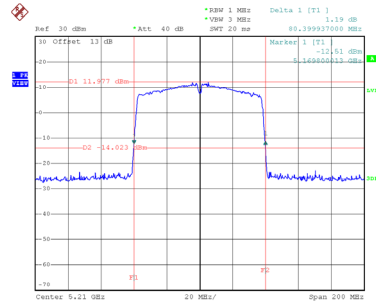

Date: 27_NOV_2020 16:22:47


99 % Emission Bandwidth

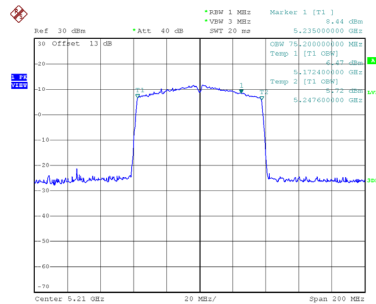

Date: 27_NOV_2020 16:22:47


Test Mode	UNII-2A_TX AC(VHT20) Mode		
Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
52	5260	25.25	18.00
60	5300	20.95	18.00
64	5320	20.80	17.90

CH52

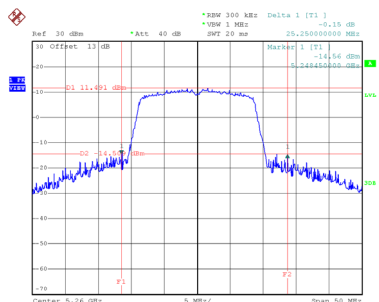


Date: 23.NOV.2020 18:32:47

CH60
26 dB Bandwidth

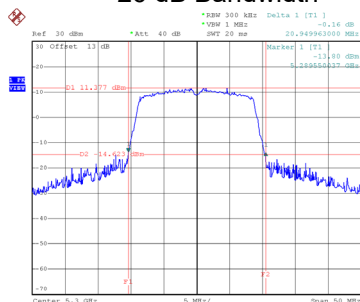


Date: 23.NOV.2020 18:34:23

CH64

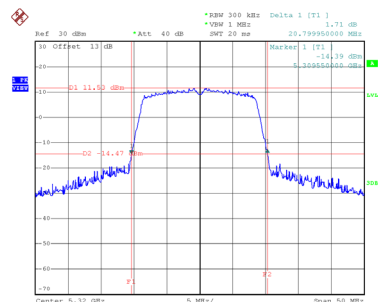


Date: 23.NOV.2020 18:35:48


99 % Emission Bandwidth

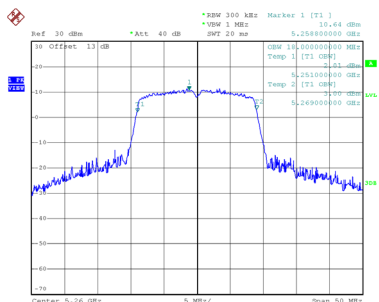

Date: 23.NOV.2020 18:32:05

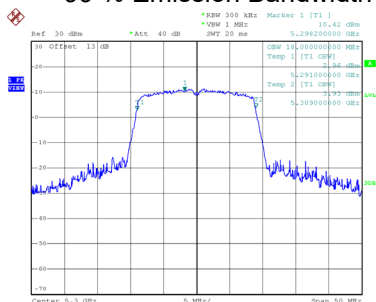

Date: 23.NOV.2020 18:33:23

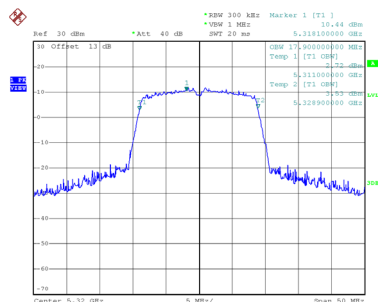


Date: 23.NOV.2020 18:34:59

Test Mode	UNII-2A_TX AC(VHT40) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
54	5270	54.80	37.60
62	5310	45.40	36.80

CH54

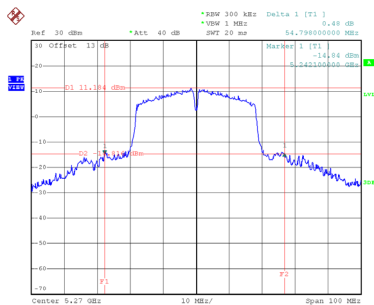


Date: 23.NOV.2020 15:37:34

CH62
26 dB Bandwidth

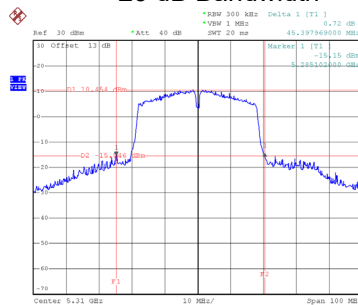


Date: 23.NOV.2020 15:40:29

99 % Emission Bandwidth

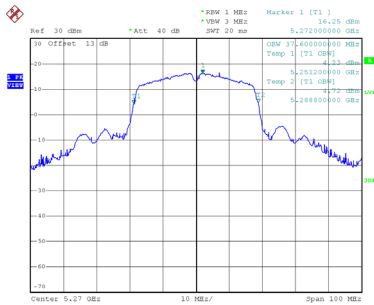

Date: 23.NOV.2020 15:36:14

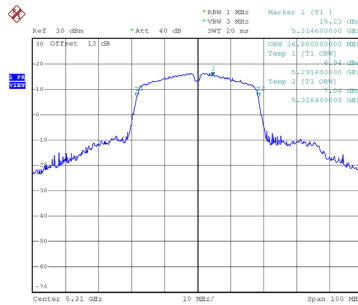


Date: 23.NOV.2020 15:39:33

Test Mode	UNII-2A_TX AC(VHT80) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
58	5290	142.80	76.00

CH58 26 dB Bandwidth

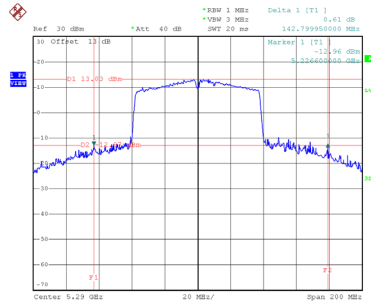

Date: 23.NOV.2020 15:59:13

99 % Emission Bandwidth

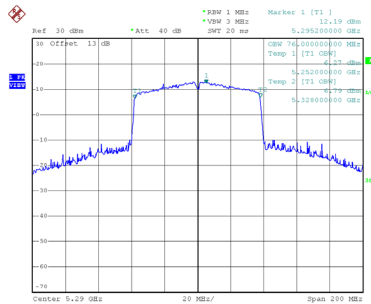

Date: 23.NOV.2020 15:58:39