


Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT20) Mode 5700 MHz

### Horizontal

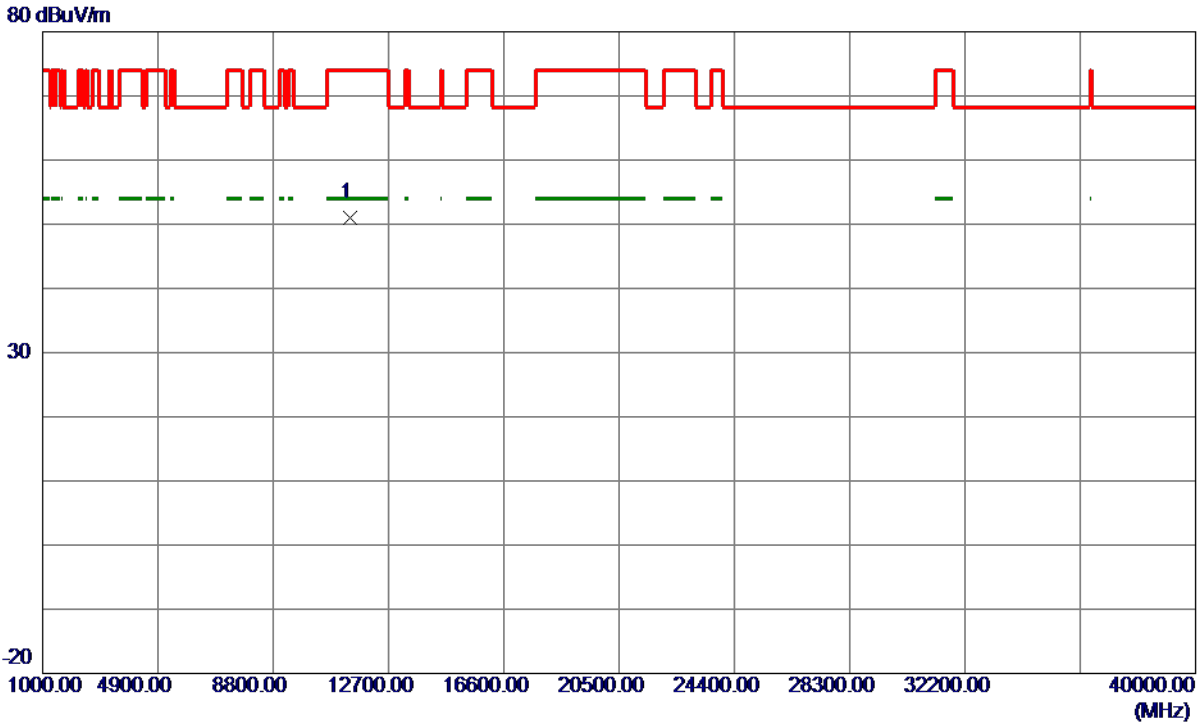

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11399.3500	48.82	2.13	50.95	74.00	-23.05	Peak	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5510 MHz

### Vertical

130 dBuV/m

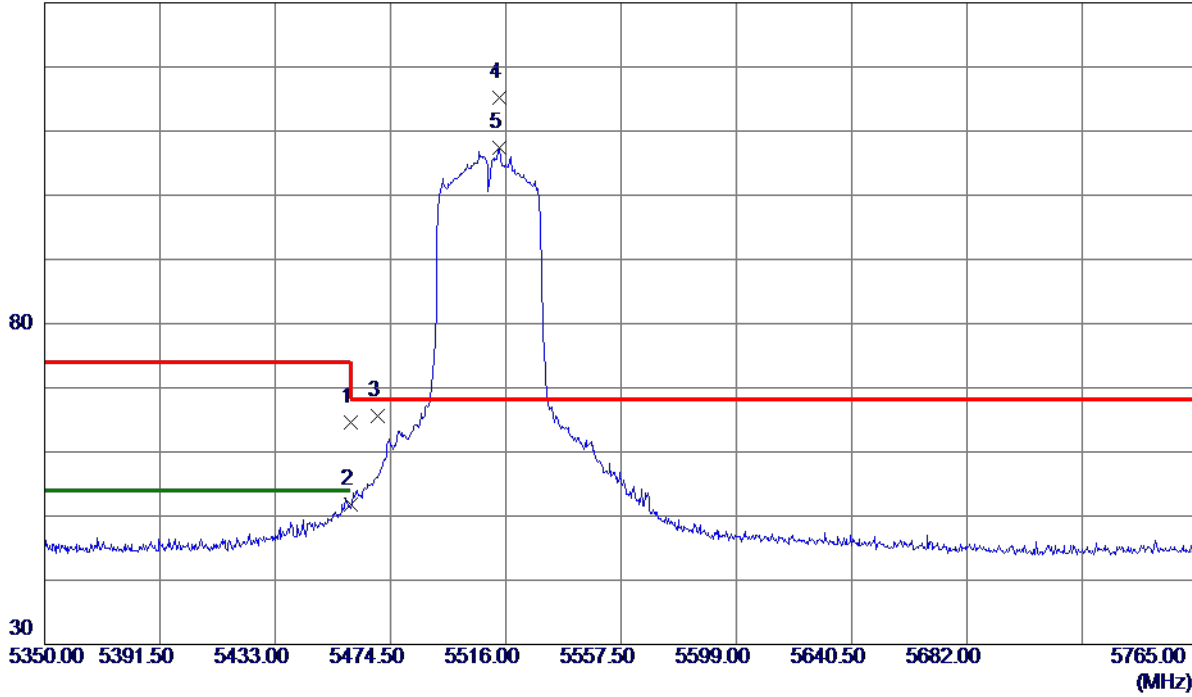


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5460.0000	26.51	38.12	64.63	74.00	-9.37	Peak	
2	5460.0000	13.65	38.12	51.77	54.00	-2.23	AVG	
3	5470.0000	27.51	38.15	65.66	68.20	-2.54	Peak	
4 *	5513.5099	76.86	38.25	115.11	68.20	46.91	Peak	
5	5513.5099	69.19	38.25	107.44	999.00	-891.56	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5510 MHz

**Vertical**

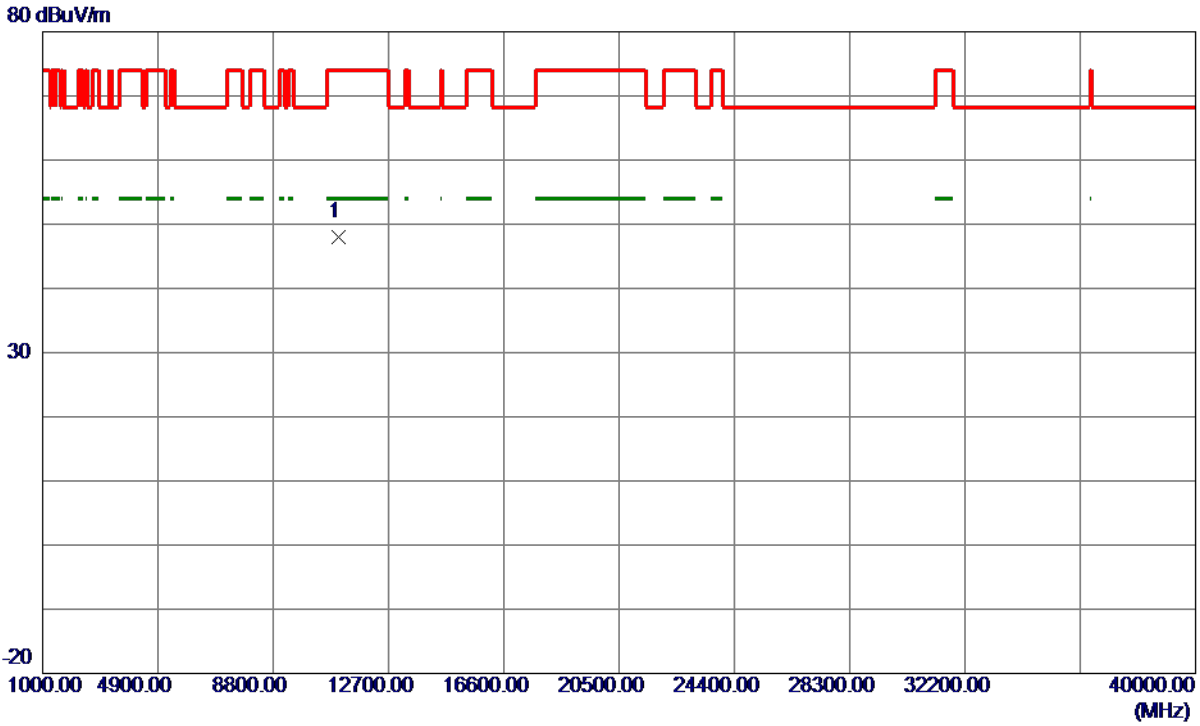

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11020.0000	45.62	2.30	47.92	74.00	-26.08	Peak	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5510 MHz

### Horizontal

130 dBuV/m

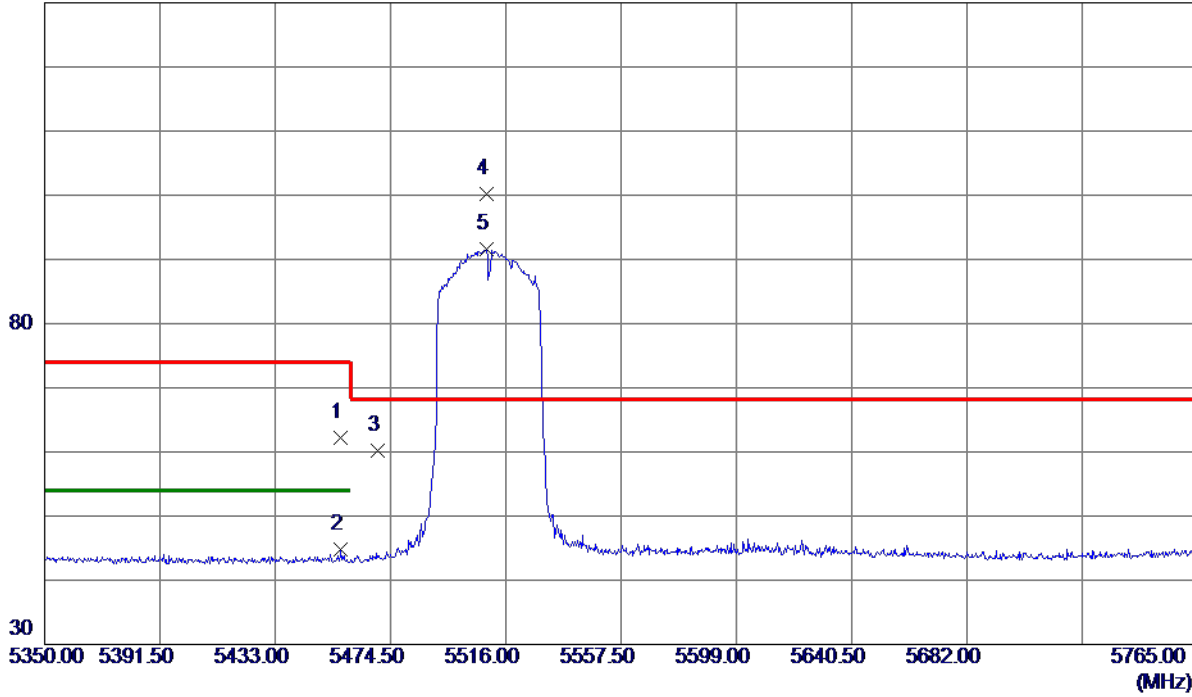

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5456.6549	24.16	38.11	62.27	74.00	-11.73	Peak	
2	5456.6549	6.74	38.11	44.85	54.00	-9.15	AVG	
3	5470.0000	22.13	38.15	60.28	68.20	-7.92	Peak	
4 *	5508.9450	61.94	38.25	100.19	68.20	31.99	Peak	
5	5508.9450	53.33	38.25	91.58	999.00	-907.42	AVG	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5510 MHz

### Horizontal

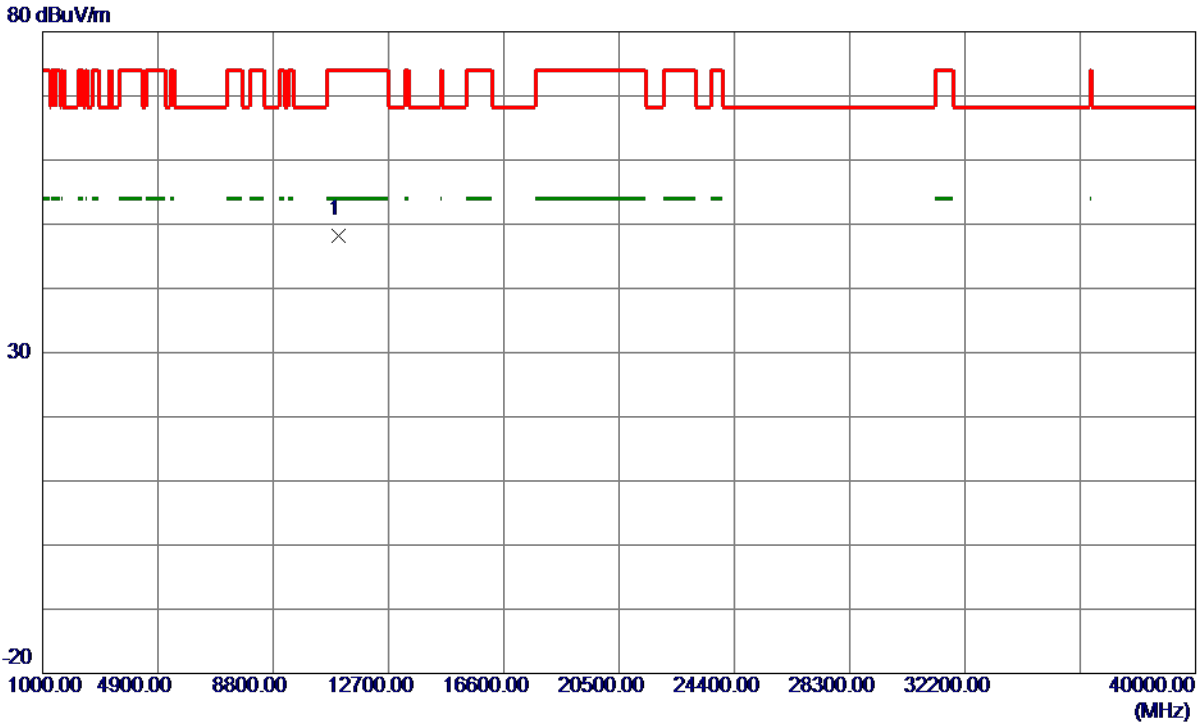

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11020.0000	46.00	2.30	48.30	74.00	-25.70	Peak	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5550 MHz

### Vertical

130 dBuV/m

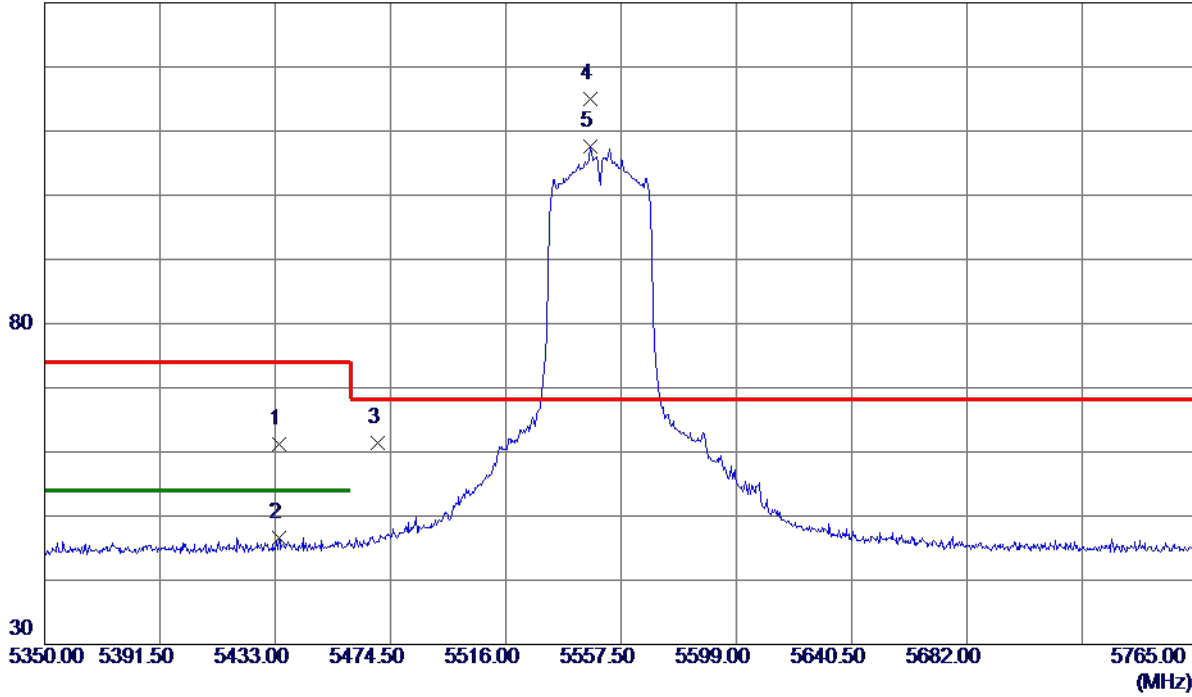


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5434.4530	23.07	38.04	61.11	74.00	-12.89	Peak	
2	5434.4530	8.65	38.04	46.69	54.00	-7.31	AVG	
3	5470.0000	23.26	38.15	61.41	68.20	-6.79	Peak	
4 *	5546.5019	76.62	38.29	114.91	68.20	46.71	Peak	
5	5546.5019	69.36	38.29	107.65	999.00	-891.35	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5550 MHz

### Vertical

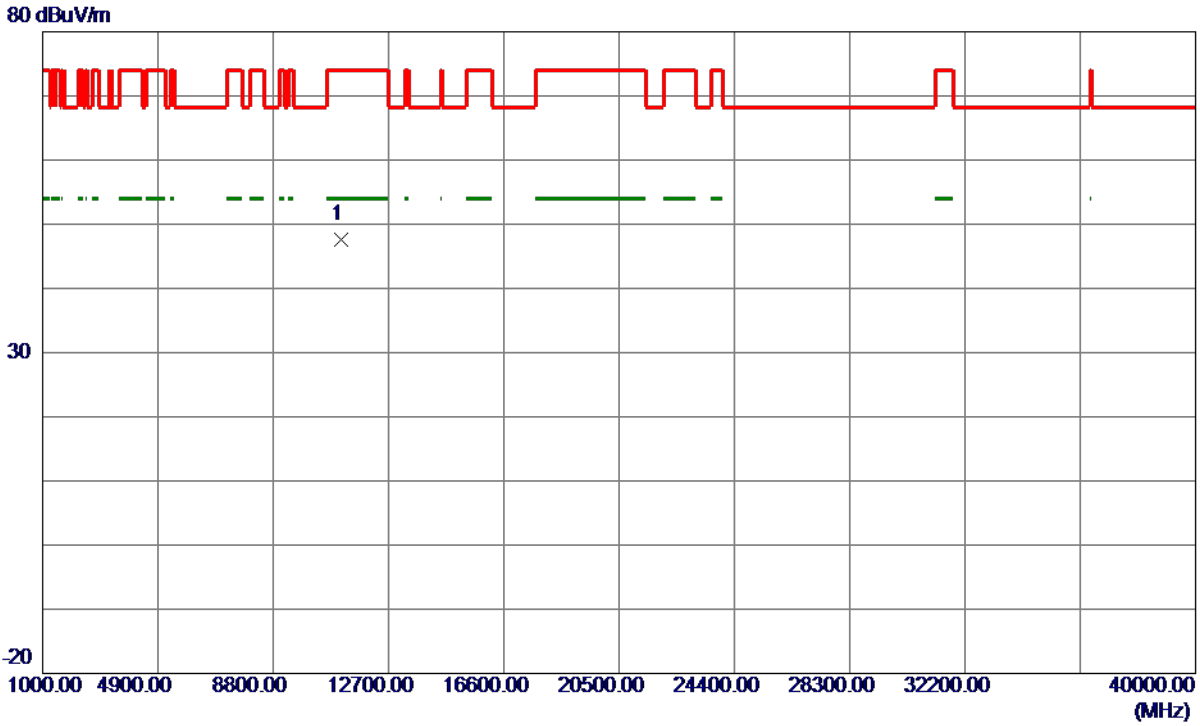

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11100.0000	45.44	2.15	47.59	74.00	-26.41	Peak	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5550 MHz

### Horizontal

130 dBuV/m

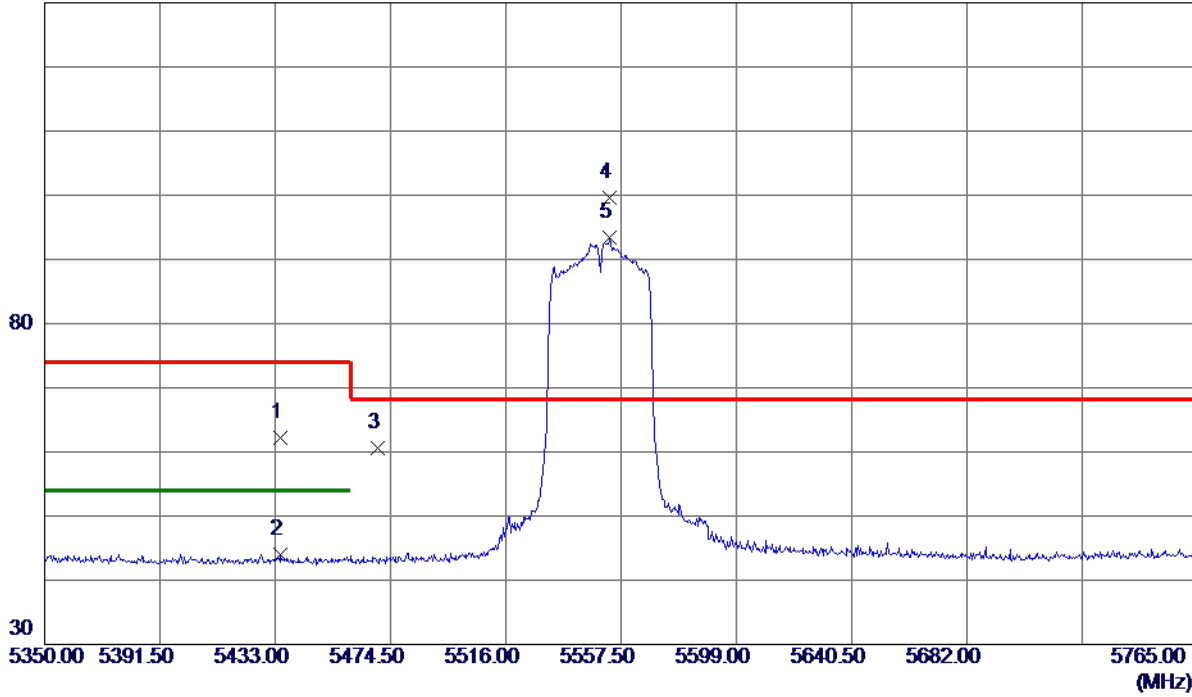

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5434.6600	24.13	38.04	62.17	74.00	-11.83	Peak	
2	5434.6600	5.97	38.04	44.01	54.00	-9.99	AVG	
3	5470.0000	22.42	38.15	60.57	68.20	-7.63	Peak	
4 *	5553.3500	61.35	38.29	99.64	68.20	31.44	Peak	
5	5553.3500	55.02	38.29	93.31	999.00	-905.69	AVG	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5550 MHz

### Horizontal

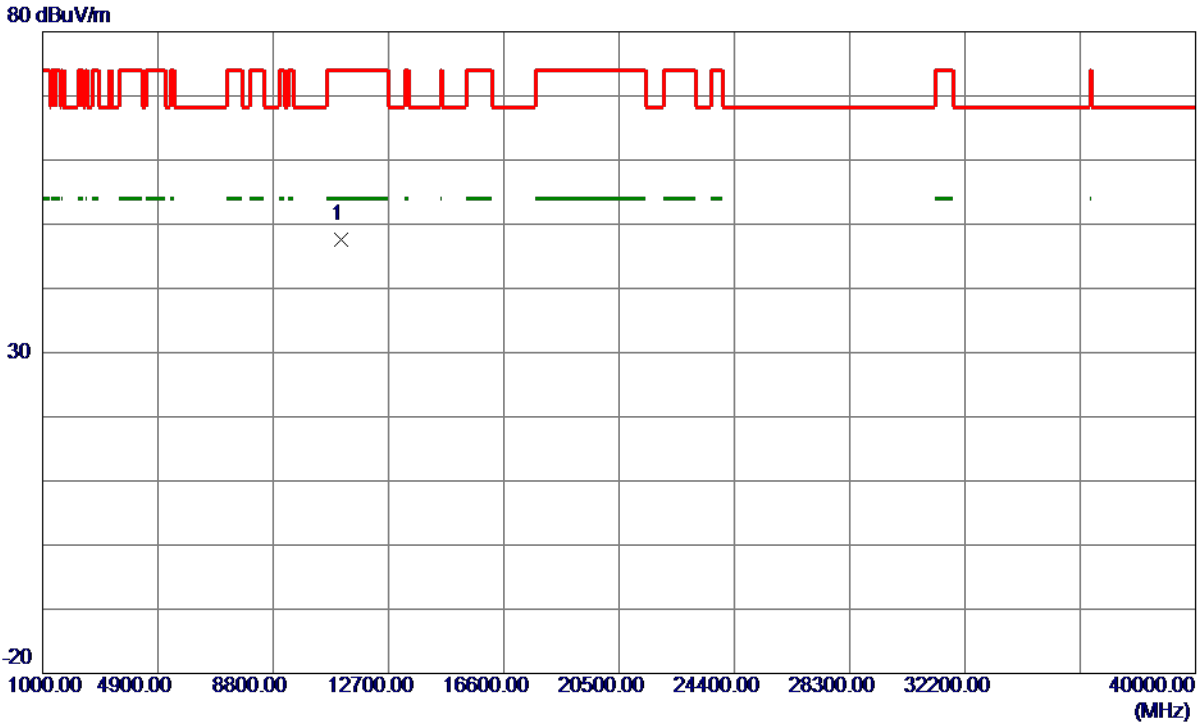

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11100.0000	45.50	2.15	47.65	74.00	-26.35	Peak	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5670 MHz

### Vertical

130 dBuV/m

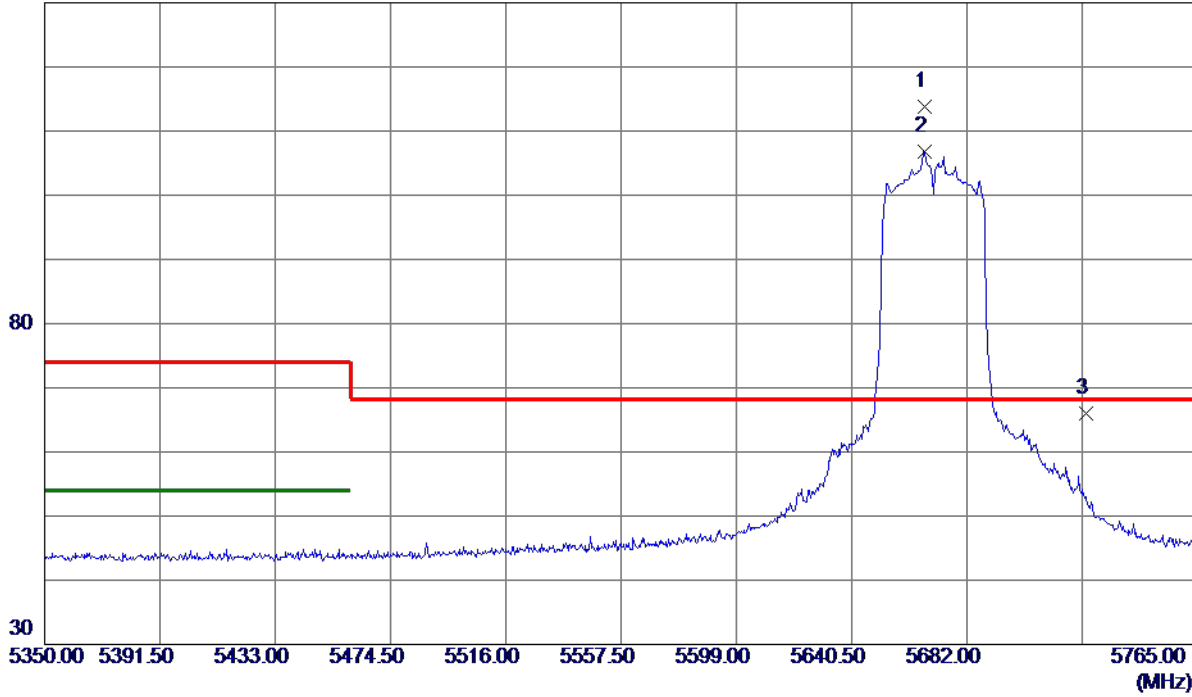


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5666.6450	75.32	38.38	113.70	68.20	45.50	Peak	
2	5666.6450	68.50	38.38	106.88	999.00	-892.12	AVG	
3	5725.0000	27.44	38.50	65.94	68.20	-2.26	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5670 MHz

**Vertical**

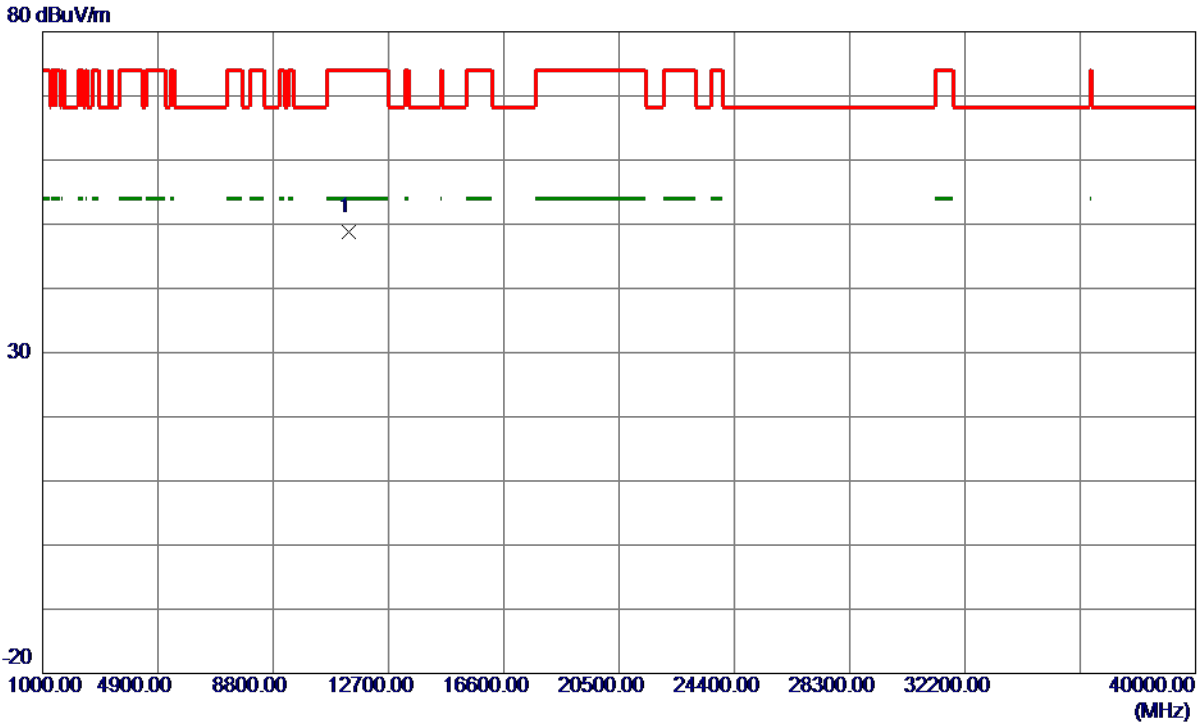

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11340.0000	46.73	2.08	48.81	74.00	-25.19	Peak	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5670 MHz

### Horizontal

130 dBuV/m

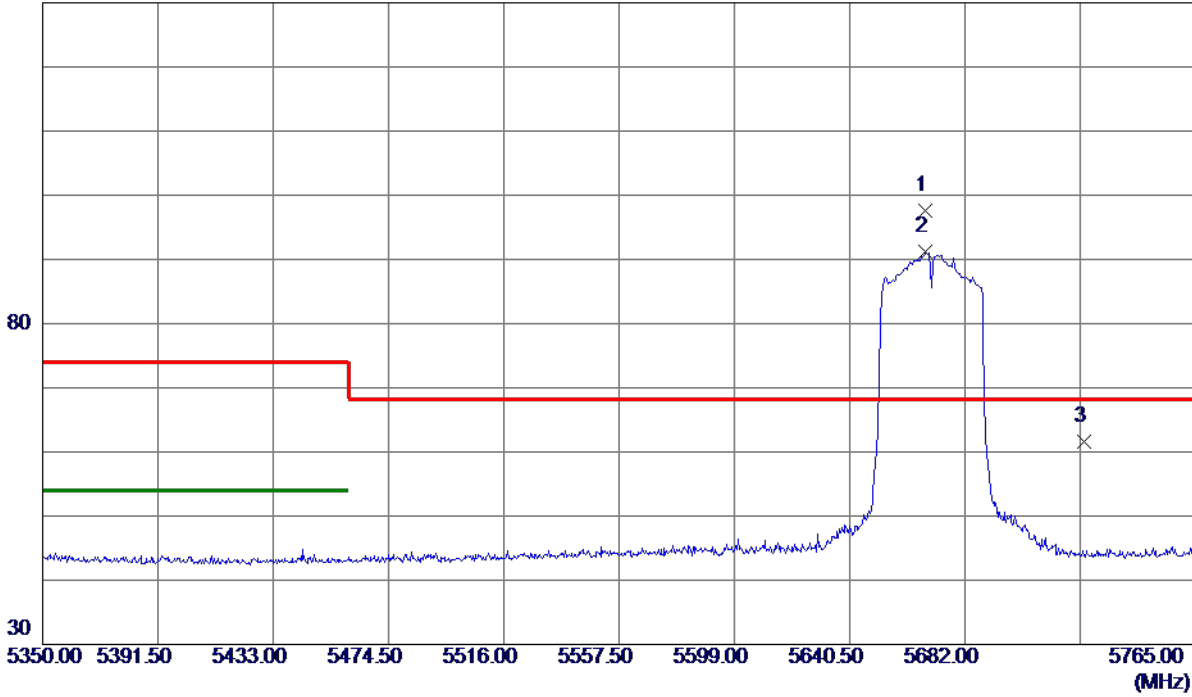


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5667.8900	59.21	38.38	97.59	68.20	29.39	Peak	
2	5667.8900	52.86	38.38	91.24	999.00	-907.76	AVG	
3	5725.0000	23.06	38.50	61.56	68.20	-6.64	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT40) Mode 5670 MHz

### Horizontal

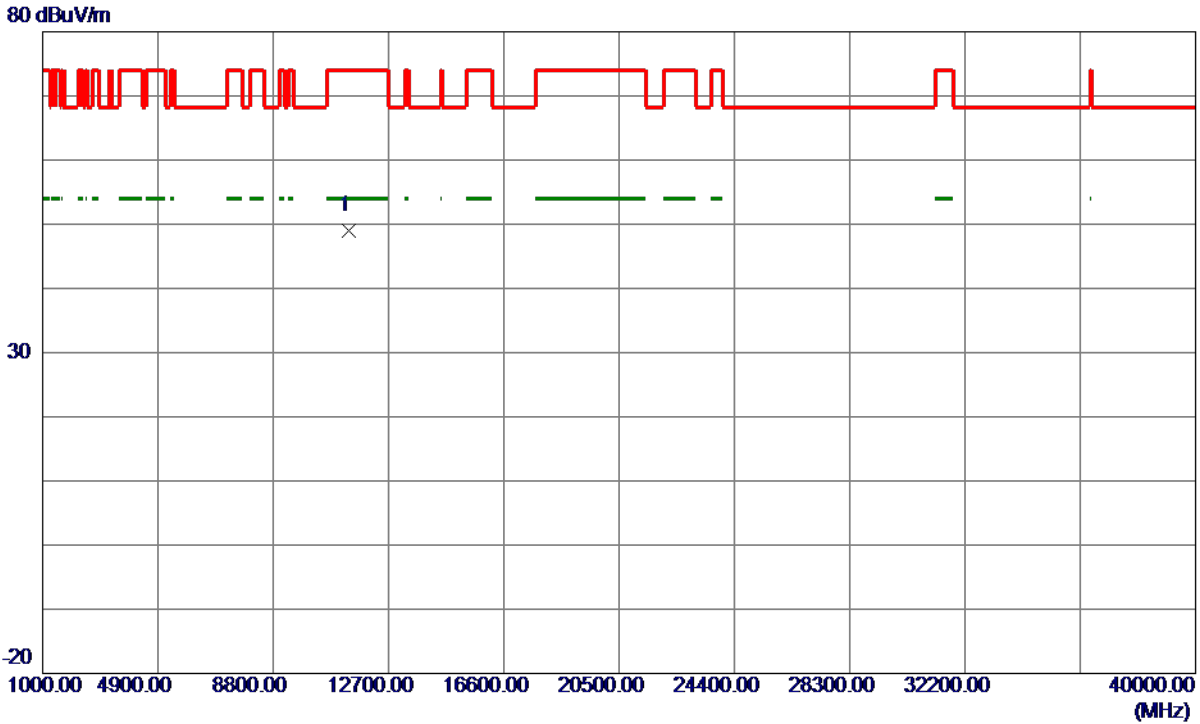

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11340.0000	46.86	2.08	48.94	74.00	-25.06	Peak	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5530 MHz

### Vertical

130 dBuV/m

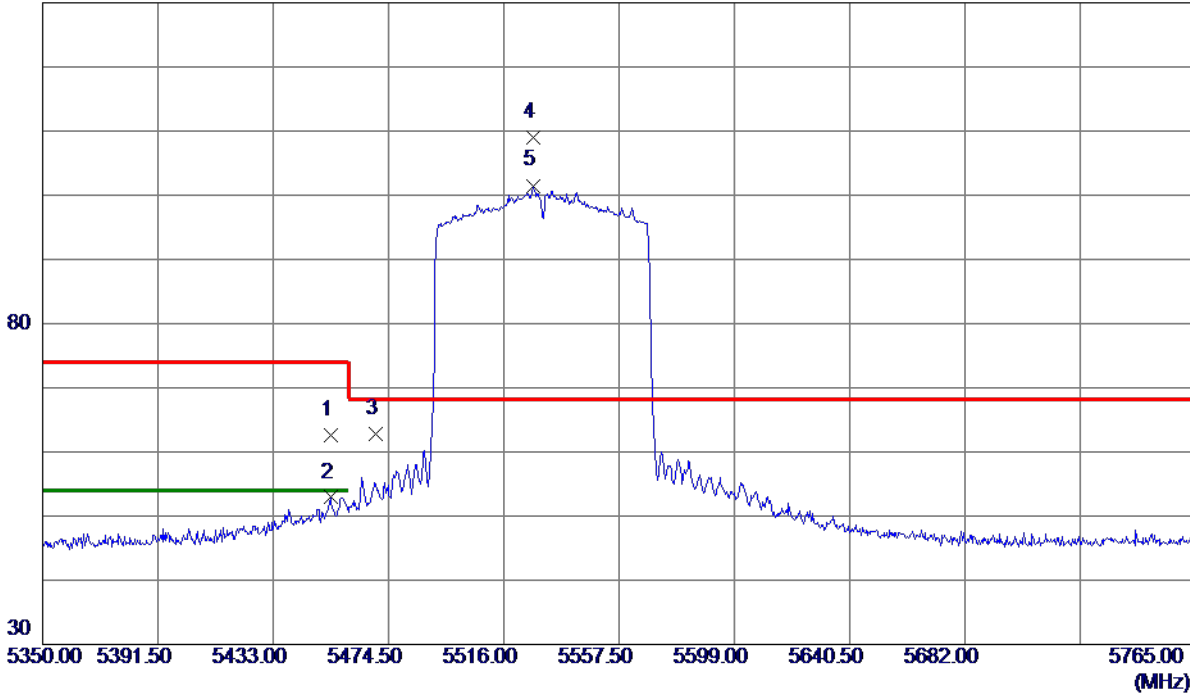


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5453.5419	24.58	38.10	62.68	74.00	-11.32	Peak	
2	5453.5419	14.80	38.10	52.90	54.00	-1.10	AVG	
3	5470.0000	24.72	38.15	62.87	68.20	-5.33	Peak	
4 *	5526.5830	70.75	38.27	109.02	68.20	40.82	Peak	
5	5526.5830	63.23	38.27	101.50	999.00	-897.50	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5530 MHz

### Vertical

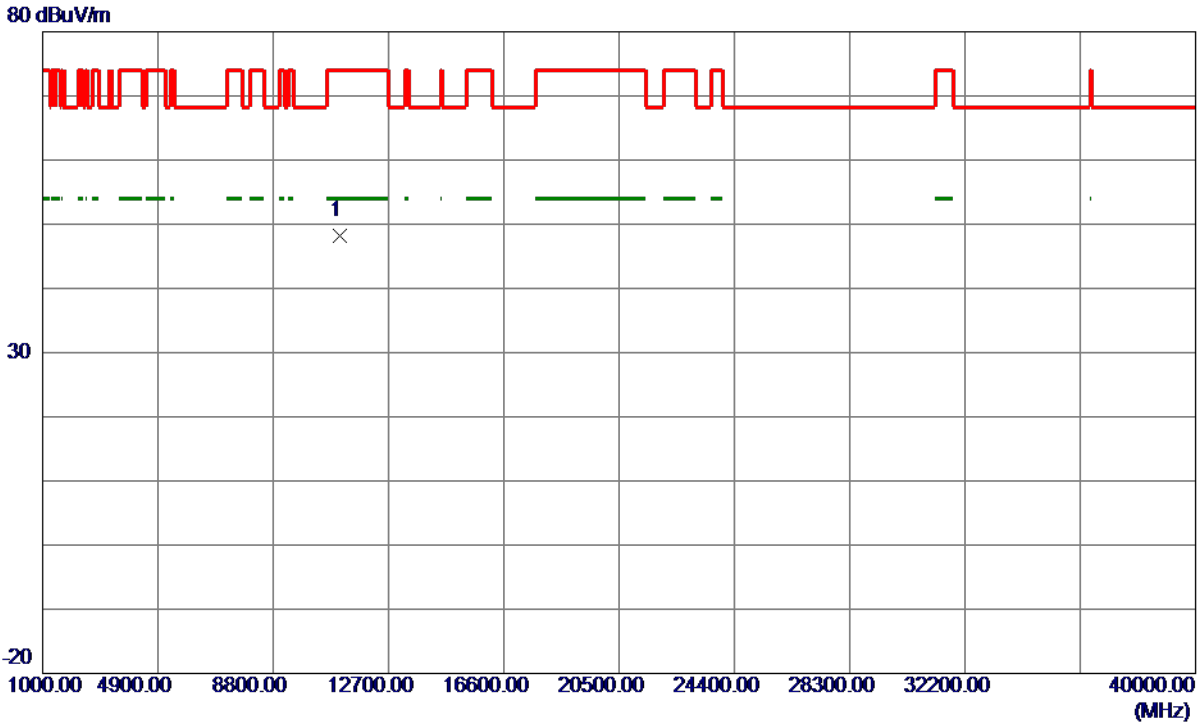


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11060.0000	45.88	2.23	48.11	74.00	-25.89	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5530 MHz

### Horizontal

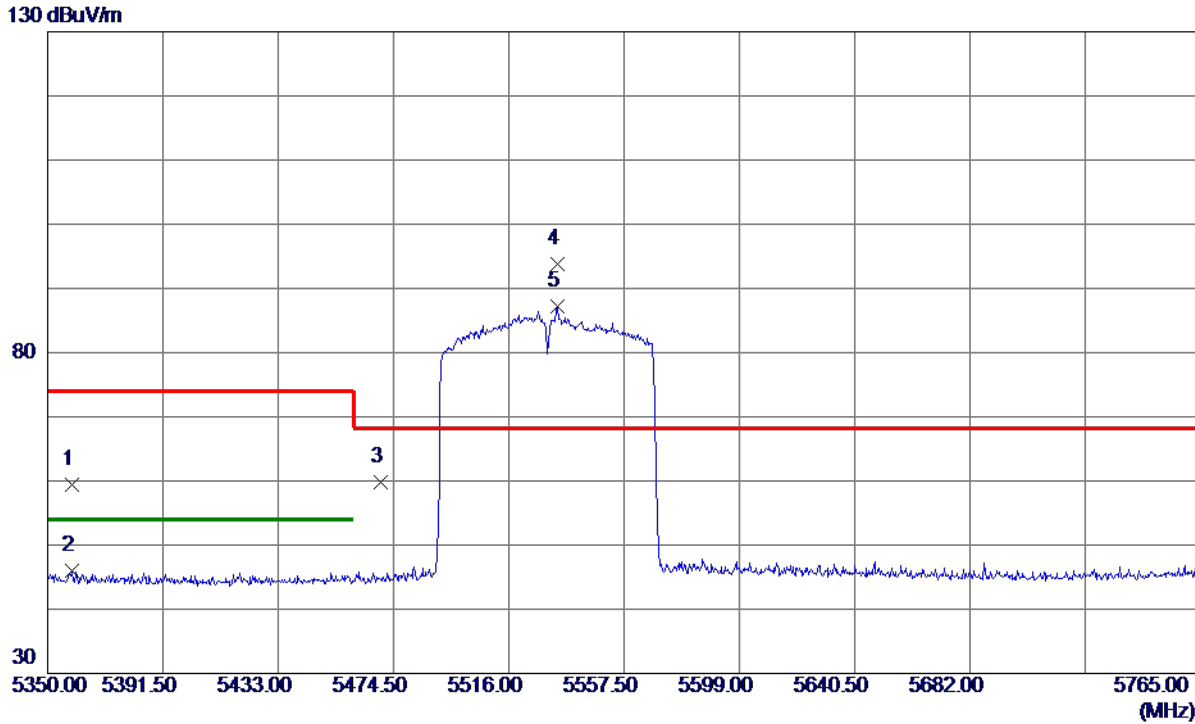

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5358.7150	21.54	37.77	59.31	74.00	-14.69	Peak	
2	5358.7150	8.23	37.77	46.00	54.00	-8.00	AVG	
3	5470.0000	21.65	38.15	59.80	68.20	-8.40	Peak	
4 *	5533.4300	55.58	38.27	93.85	68.20	25.65	Peak	
5	5533.4300	48.84	38.27	87.11	999.00	-911.89	AVG	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-2C_TX AC (VHT80) Mode 5530 MHz

### Horizontal

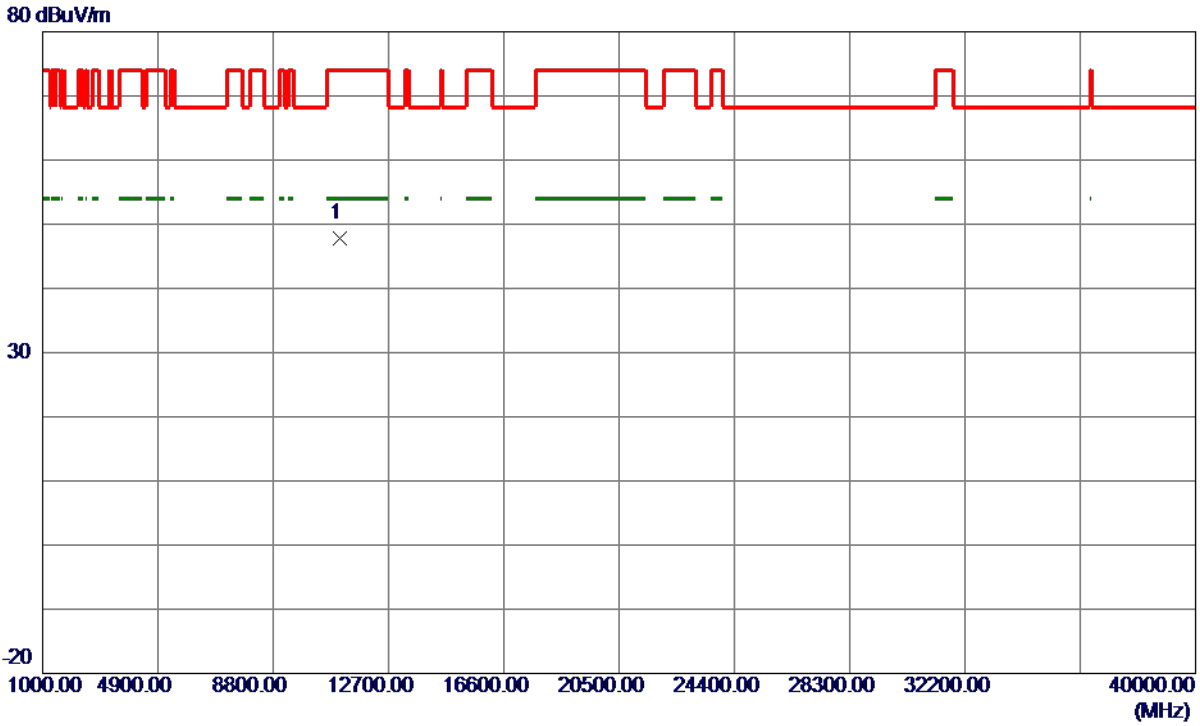


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11060.0000	45.50	2.23	47.73	74.00	-26.27	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

**Vertical**

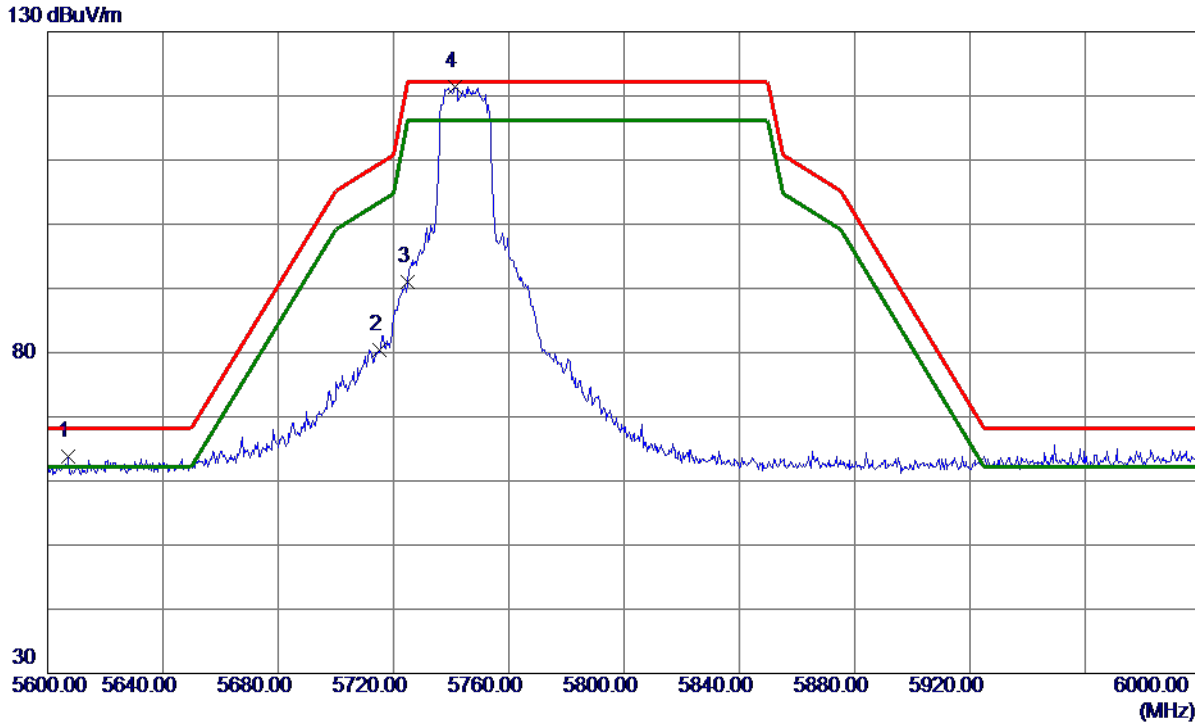


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5607.2000	25.39	38.34	63.73	68.20	-4.47	Peak	
2	5715.0000	41.92	38.46	80.38	109.40	-29.02	Peak	
3	5725.0000	52.51	38.50	91.01	122.20	-31.19	Peak	
4 *	5741.4000	82.85	38.56	121.41	122.20	-0.79	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

### Vertical

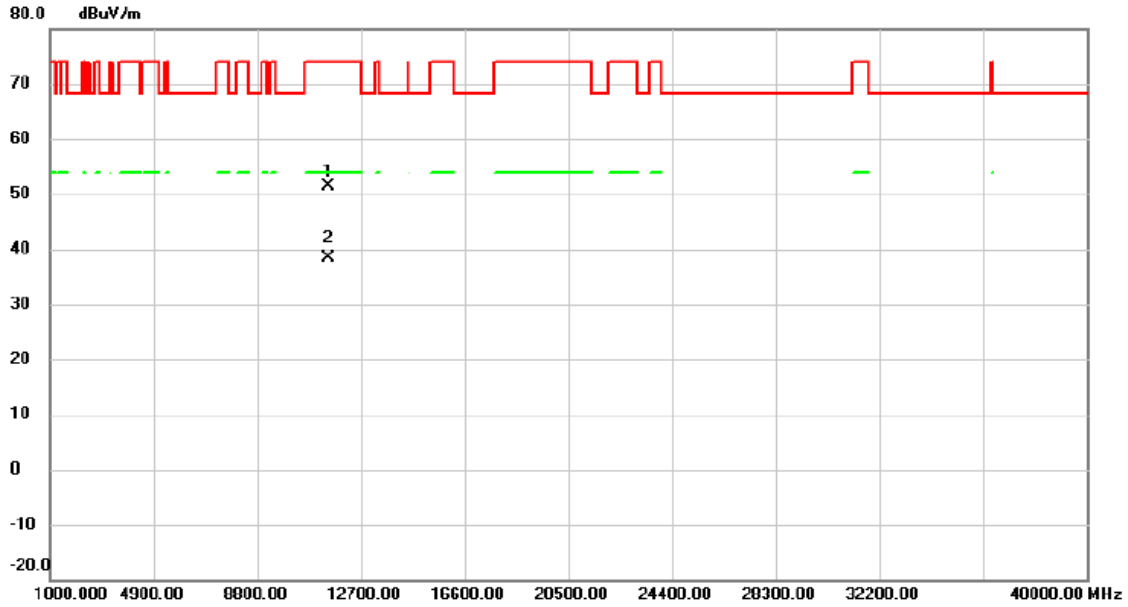


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11483.20	49.29	2.20	51.49	74.00	-22.51	peak	
2	*	11495.96	36.27	2.21	38.48	54.00	-15.52	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

### Horizontal

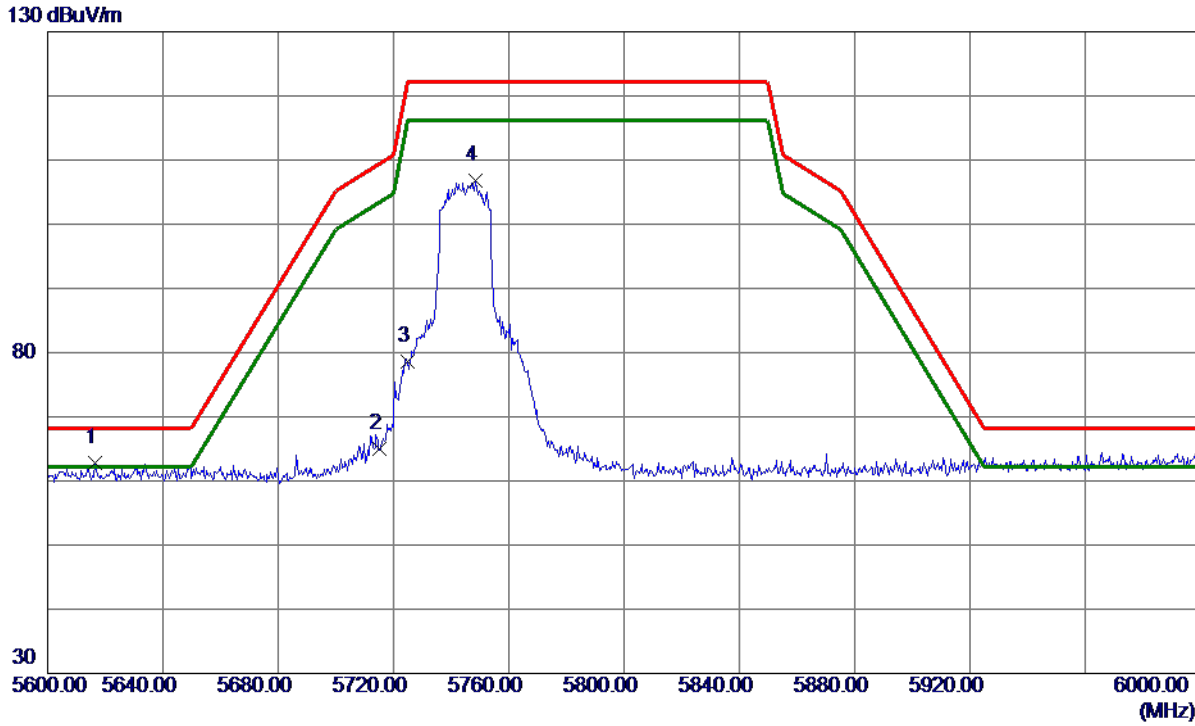


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5616.4000	24.49	38.35	62.84	68.20	-5.36	Peak	
2	5715.0000	26.49	38.46	64.95	109.40	-44.45	Peak	
3	5725.0000	40.19	38.50	78.69	122.20	-43.51	Peak	
4	5748.6000	68.22	38.59	106.81	122.20	-15.39	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

### Horizontal

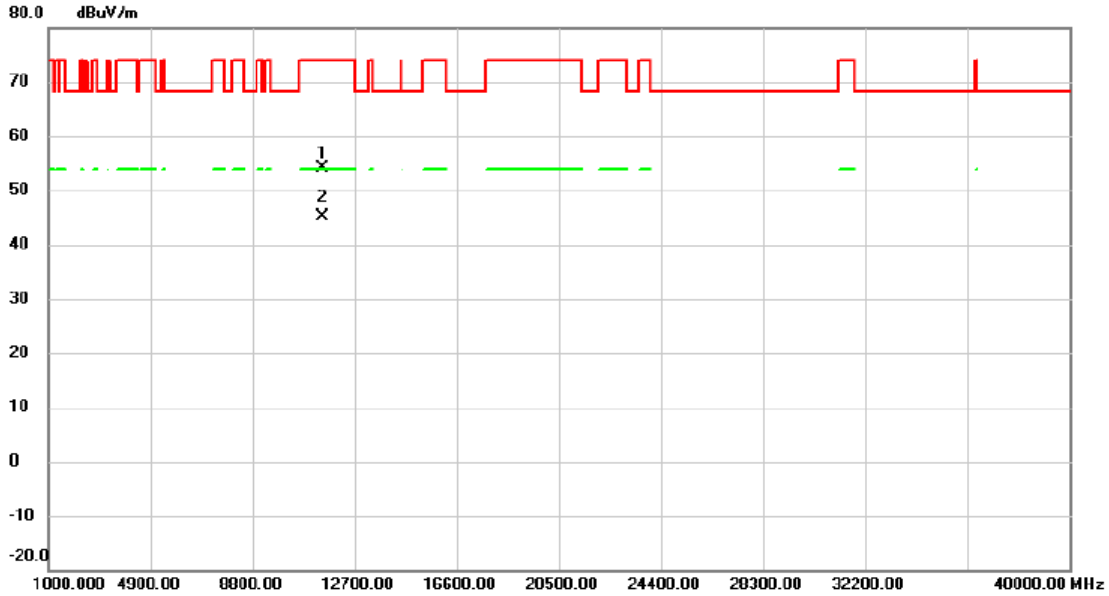


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11477.35	51.96	2.20	54.16	74.00	-19.84	peak	
2	*	11489.84	42.94	2.20	45.14	54.00	-8.86	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

### Vertical

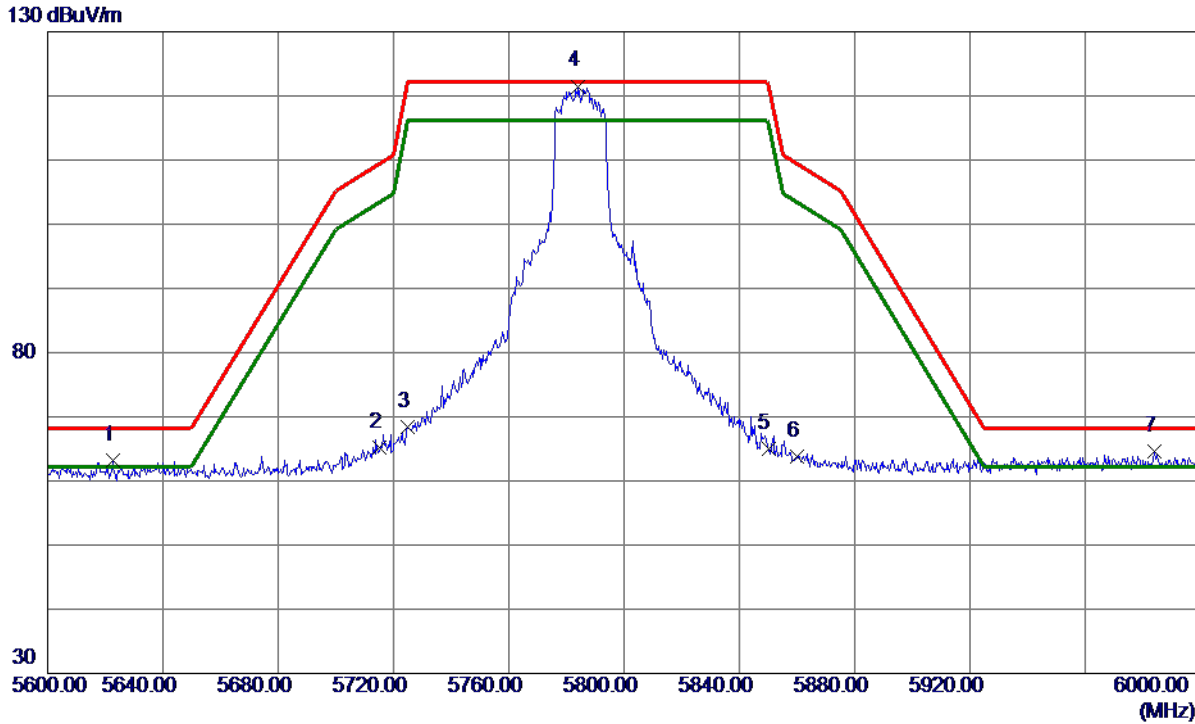


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5622.6000	24.80	38.35	63.15	68.20	-5.05	Peak	
2	5715.0000	26.81	38.46	65.27	109.40	-44.13	Peak	
3	5725.0000	29.97	38.50	68.47	122.20	-53.73	Peak	
4 *	5784.2000	82.78	38.72	121.50	122.20	-0.70	Peak	
5	5850.0000	26.00	38.91	64.91	122.20	-57.29	Peak	
6	5860.0000	24.90	38.94	63.84	109.40	-45.56	Peak	
7	5983.8000	25.44	39.22	64.66	68.20	-3.54	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

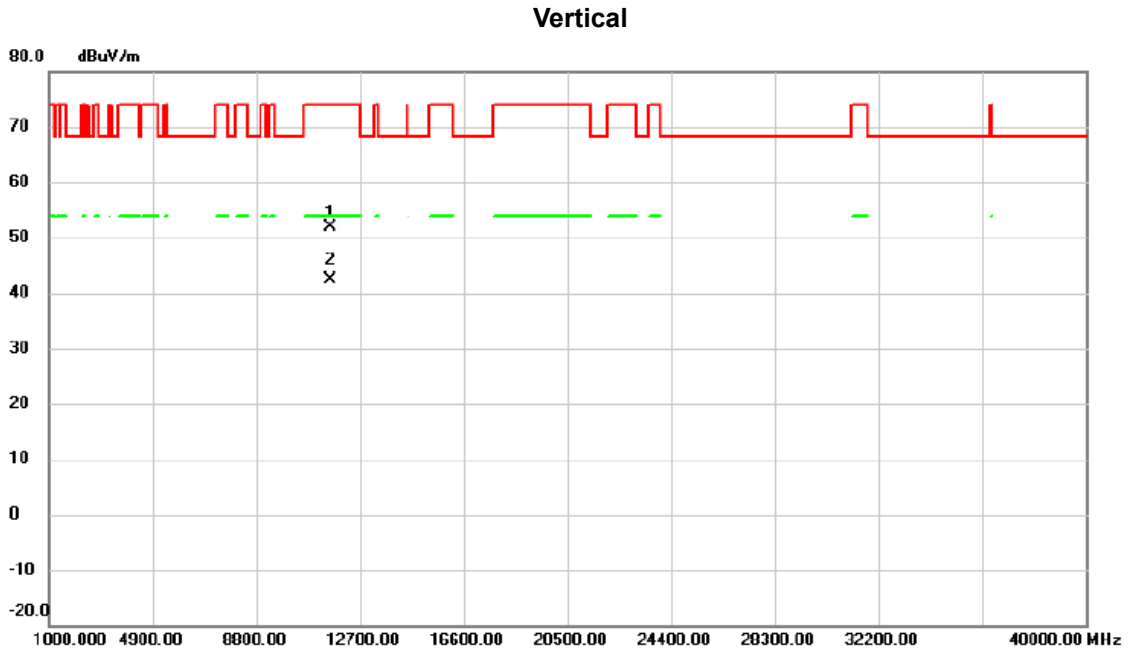

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.95	49.72	2.28	52.00	74.00	-22.00	peak	
2	*	11570.98	40.20	2.28	42.48	54.00	-11.52	AVG	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

### Horizontal

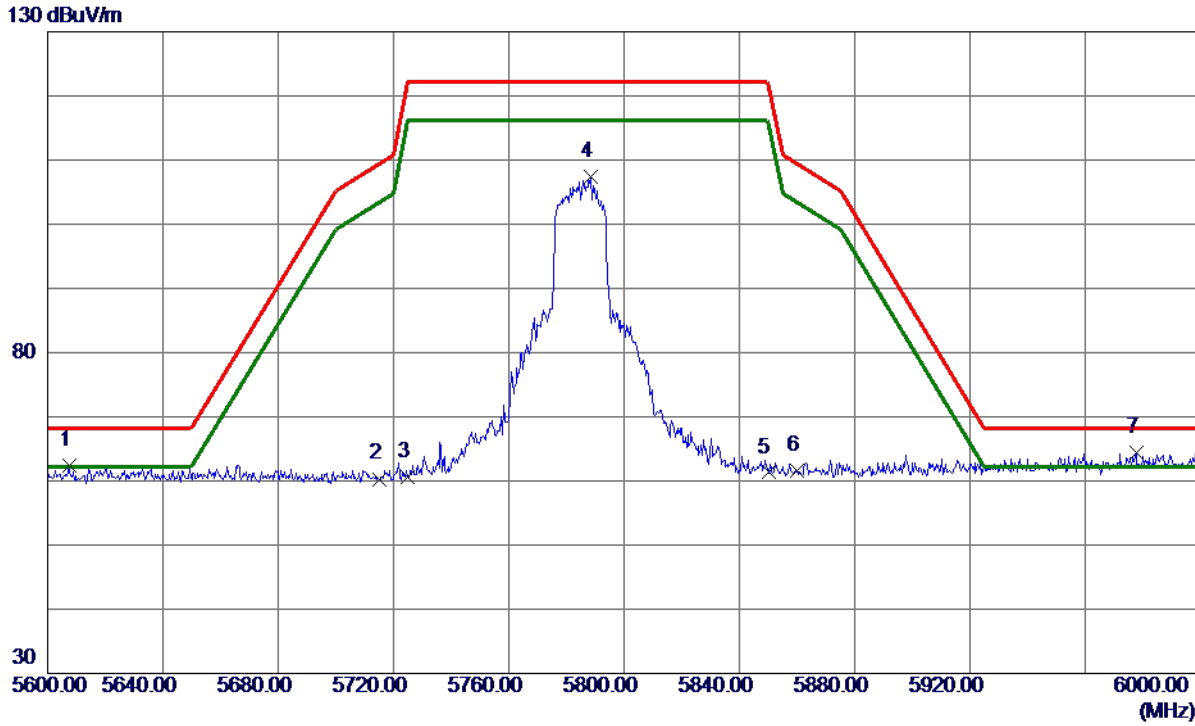


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5607.4000	24.13	38.34	62.47	68.20	-5.73	Peak	
2	5715.0000	21.84	38.46	60.30	109.40	-49.10	Peak	
3	5725.0000	22.17	38.50	60.67	122.20	-61.53	Peak	
4	5788.4000	68.66	38.74	107.40	122.20	-14.80	Peak	
5	5850.0000	22.39	38.91	61.30	122.20	-60.90	Peak	
6	5860.0000	22.64	38.94	61.58	109.40	-47.82	Peak	
7 *	5977.6000	25.20	39.21	64.41	68.20	-3.79	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

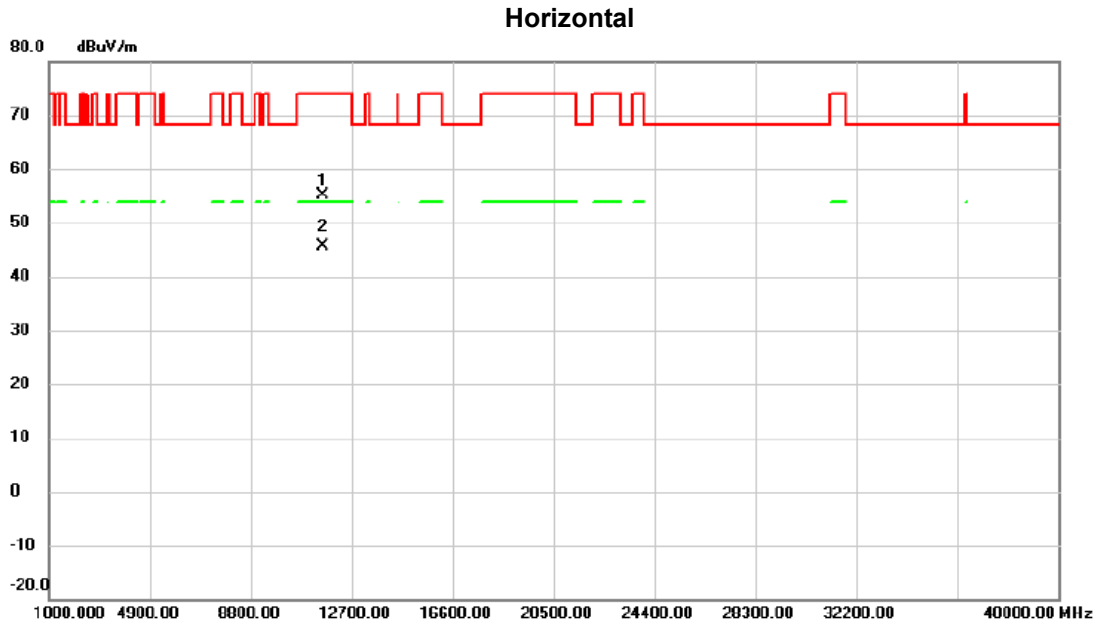


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11569.00	52.97	2.27	55.24	74.00	-18.76	peak	
2	*	11571.89	43.26	2.28	45.54	54.00	-8.46	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

### Vertical

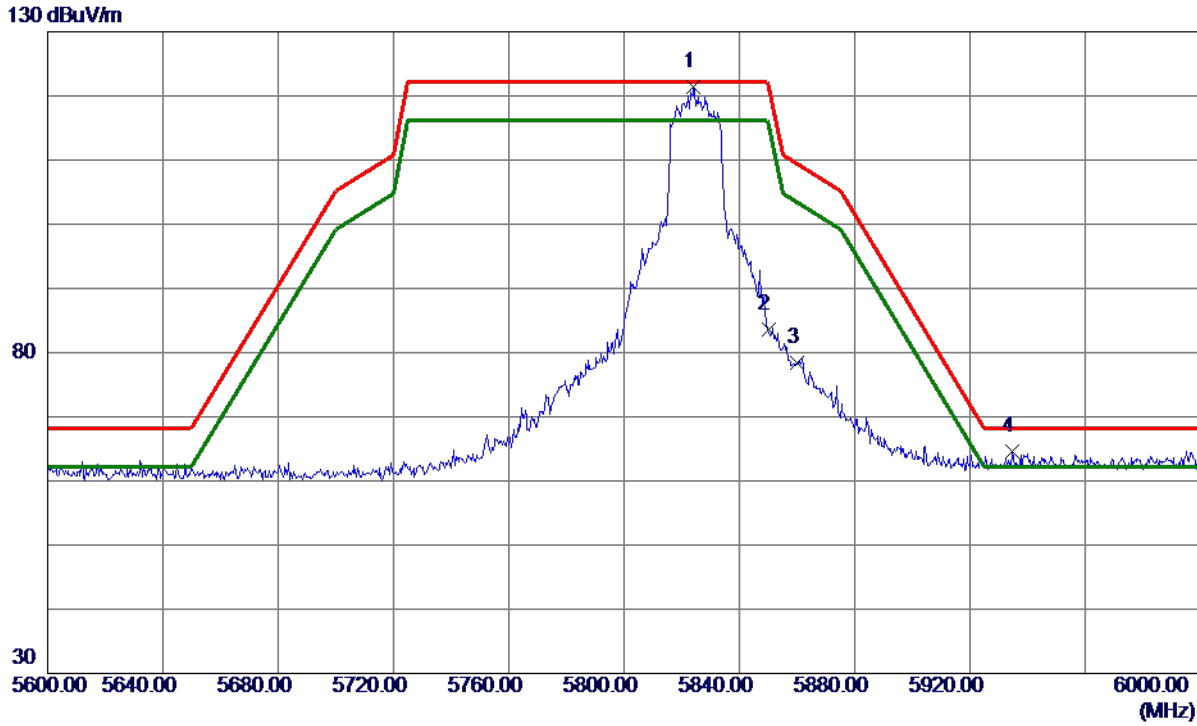

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5824.2000	82.46	38.85	121.31	122.20	-0.89	Peak	
2	5850.0000	44.69	38.91	83.60	122.20	-38.60	Peak	
3	5860.0000	39.41	38.94	78.35	109.40	-31.05	Peak	
4	5934.6000	25.50	39.12	64.62	68.20	-3.58	Peak	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

### Vertical

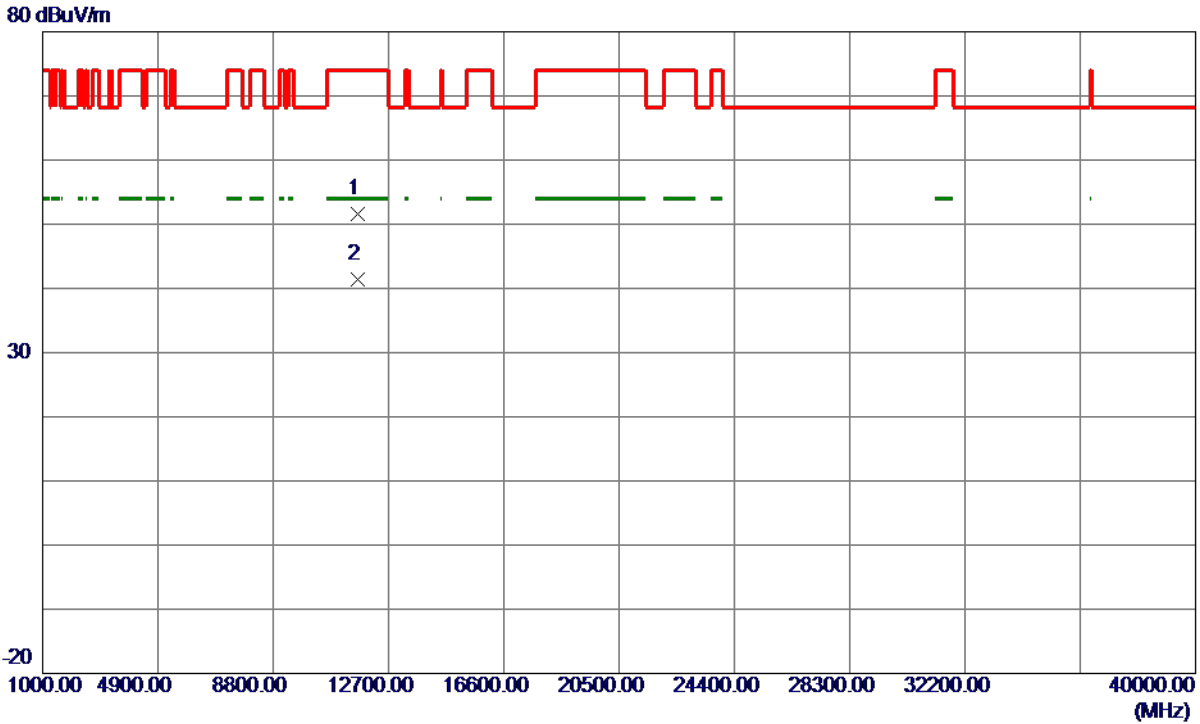


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11645.0500	49.43	2.12	51.55	74.00	-22.45	Peak	
2 *	11647.0220	39.23	2.12	41.35	54.00	-12.65	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

### Horizontal

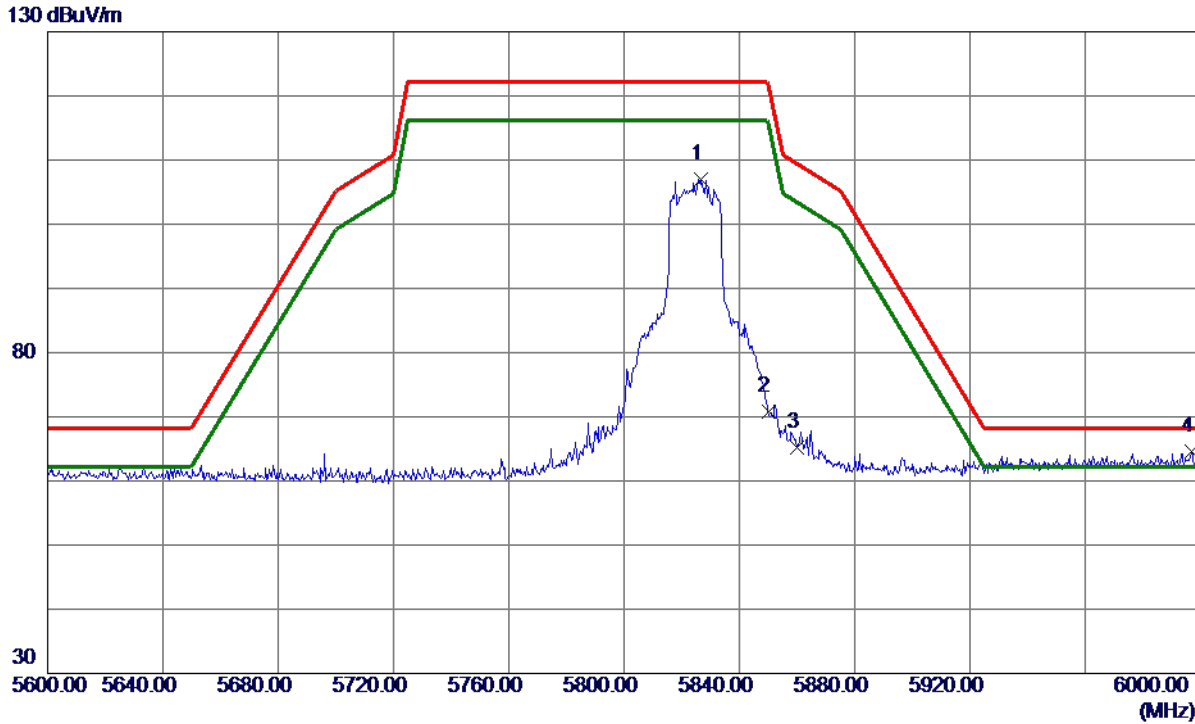


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5826.8000	68.25	38.85	107.10	122.20	-15.10	Peak	
2	5850.0000	31.81	38.91	70.72	122.20	-51.48	Peak	
3	5860.0000	26.29	38.94	65.23	109.40	-44.17	Peak	
4 *	5997.0000	25.34	39.24	64.58	68.20	-3.62	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

### Horizontal

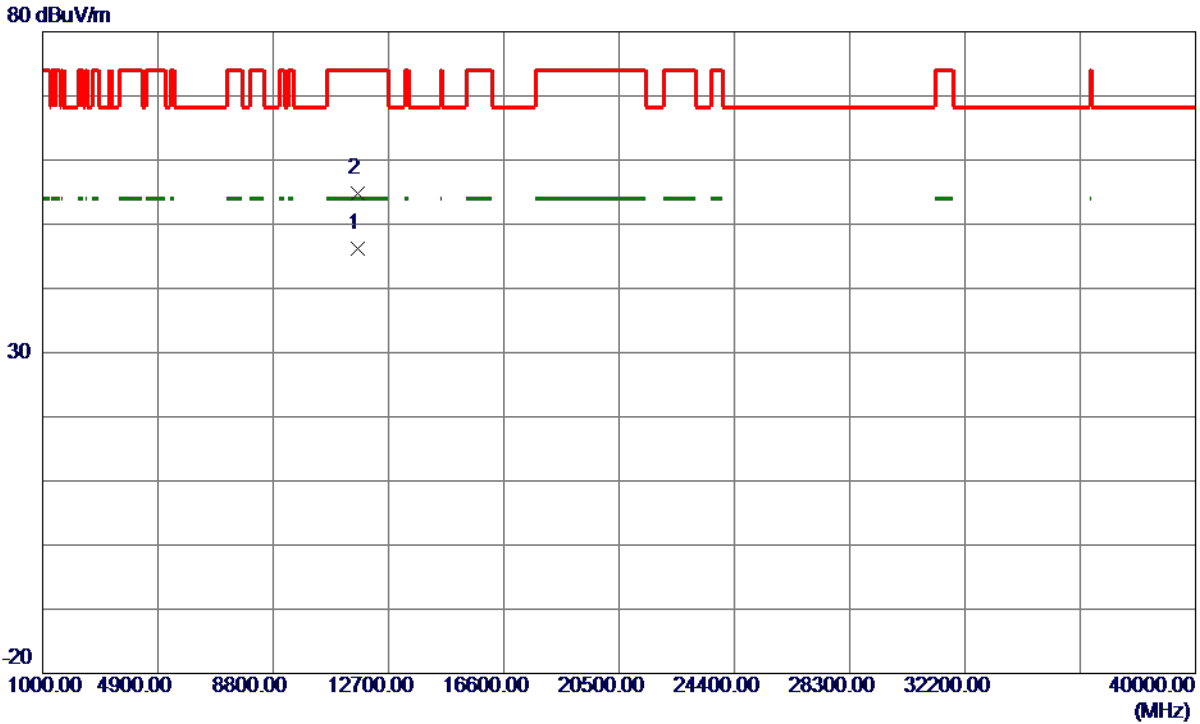


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11651.1140	44.16	2.10	46.26	54.00	-7.74	AVG	
2	11656.7500	52.75	2.08	54.83	74.00	-19.17	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

### Vertical

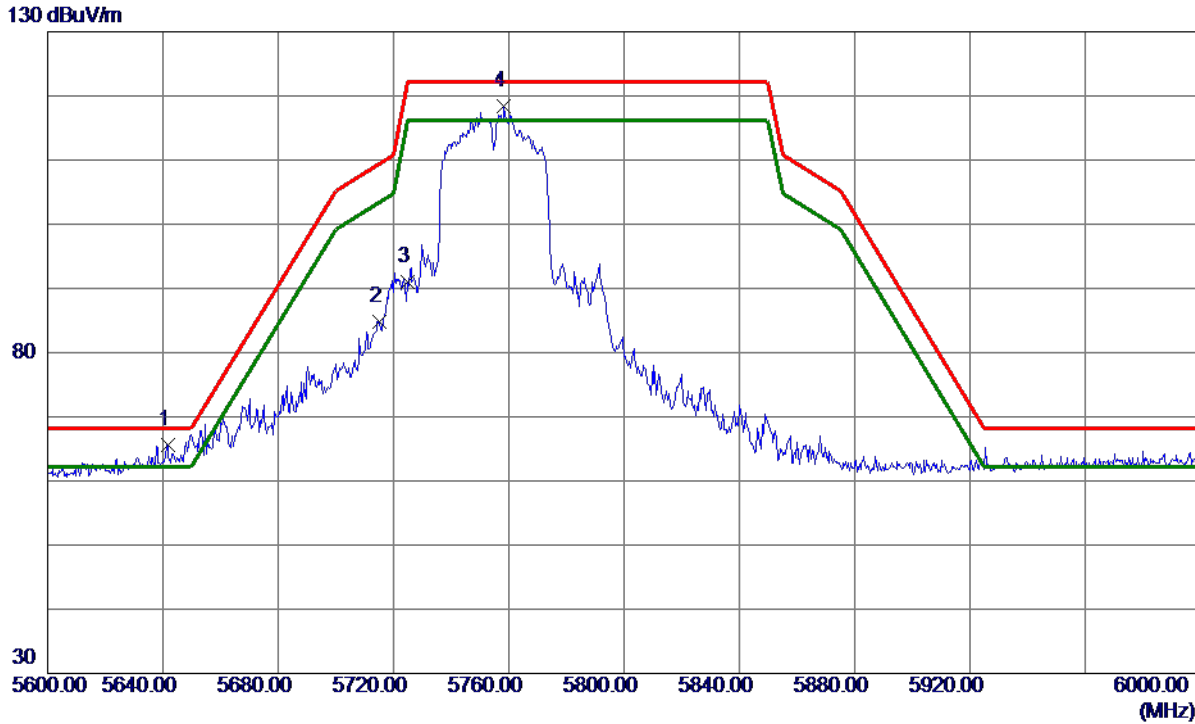


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5641.6000	27.22	38.37	65.59	68.20	-2.61	Peak	
2	5715.0000	46.32	38.46	84.78	109.40	-24.62	Peak	
3	5725.0000	52.56	38.50	91.06	122.20	-31.14	Peak	
4	5758.4000	79.71	38.62	118.33	122.20	-3.87	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

**Vertical**

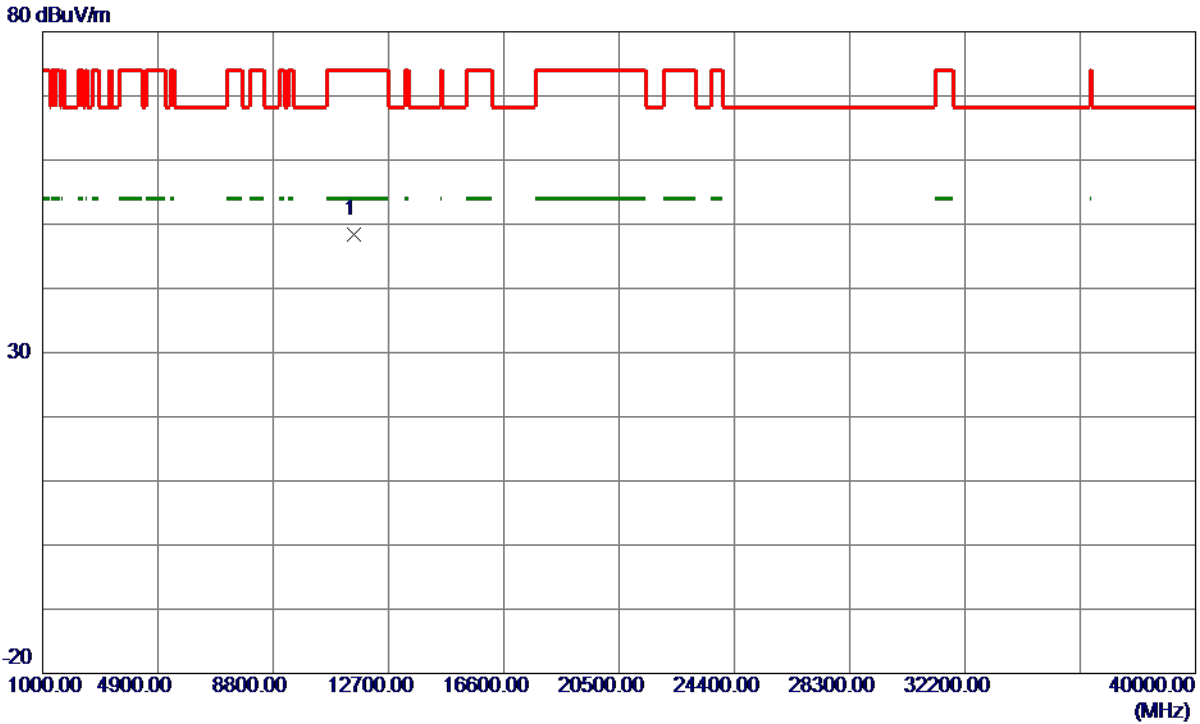


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11510.0000	46.11	2.22	48.33	74.00	-25.67	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

### Horizontal

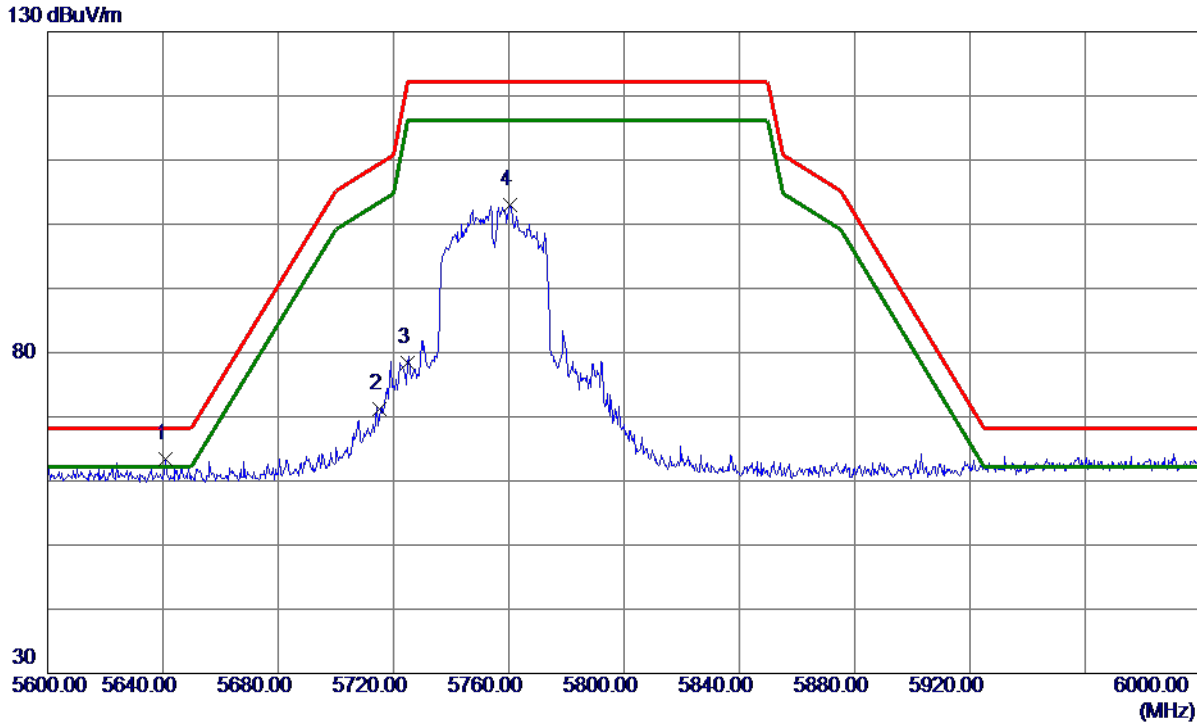

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5640.8000	24.98	38.37	63.35	68.20	-4.85	Peak	
2	5715.0000	32.72	38.46	71.18	109.40	-38.22	Peak	
3	5725.0000	39.95	38.50	78.45	122.20	-43.75	Peak	
4	5760.4000	64.29	38.63	102.92	122.20	-19.28	Peak	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

### Horizontal

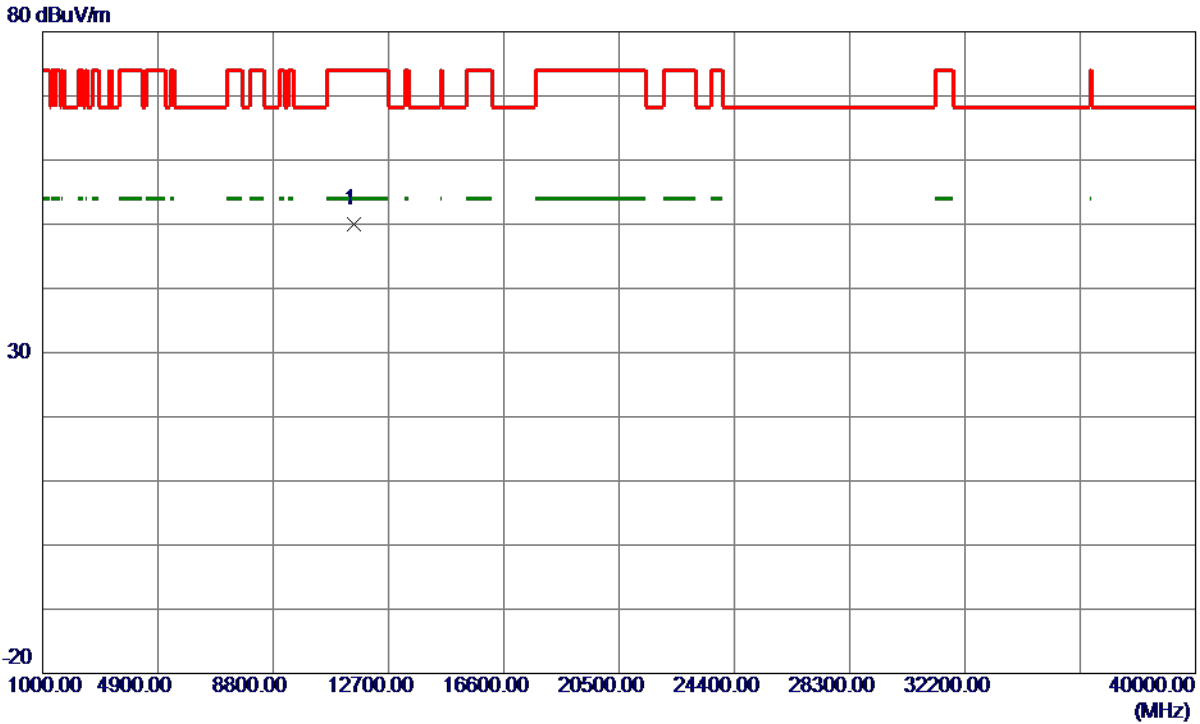


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11510.0000	47.75	2.22	49.97	74.00	-24.03	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

**Vertical**

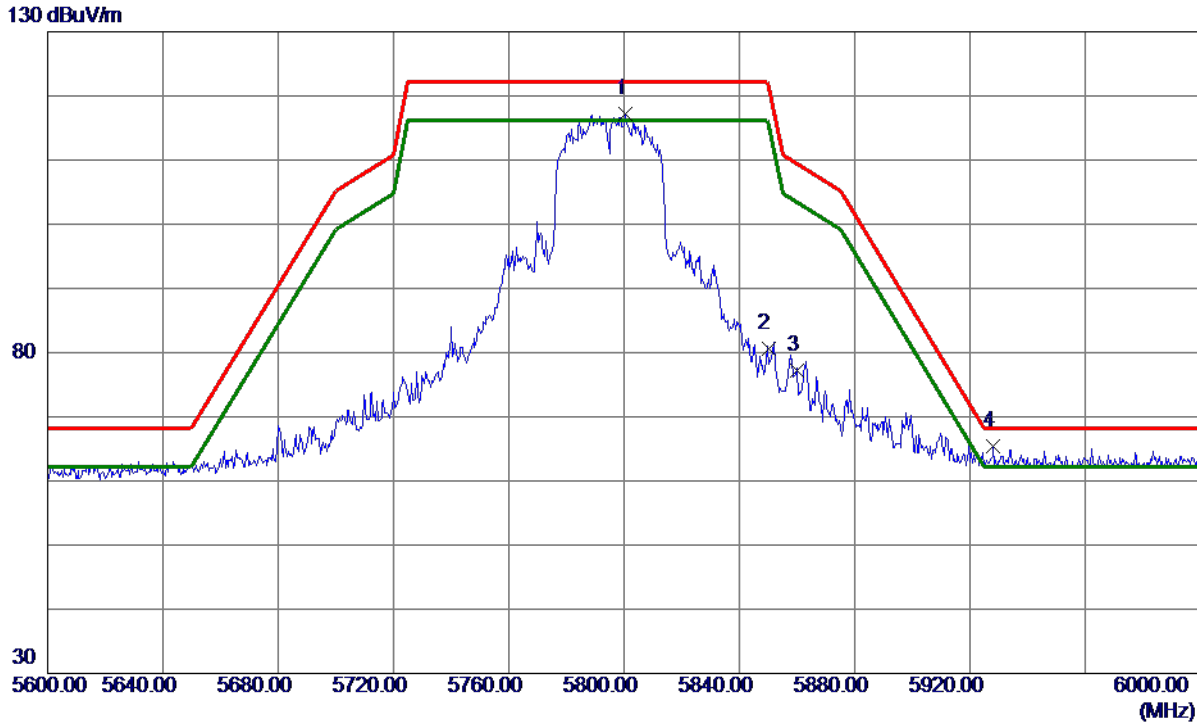


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5800.6000	78.51	38.78	117.29	122.20	-4.91	Peak	
2	5850.0000	41.78	38.91	80.69	122.20	-41.51	Peak	
3	5860.0000	38.26	38.94	77.20	109.40	-32.20	Peak	
4 *	5928.0000	26.28	39.11	65.39	68.20	-2.81	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

### Vertical

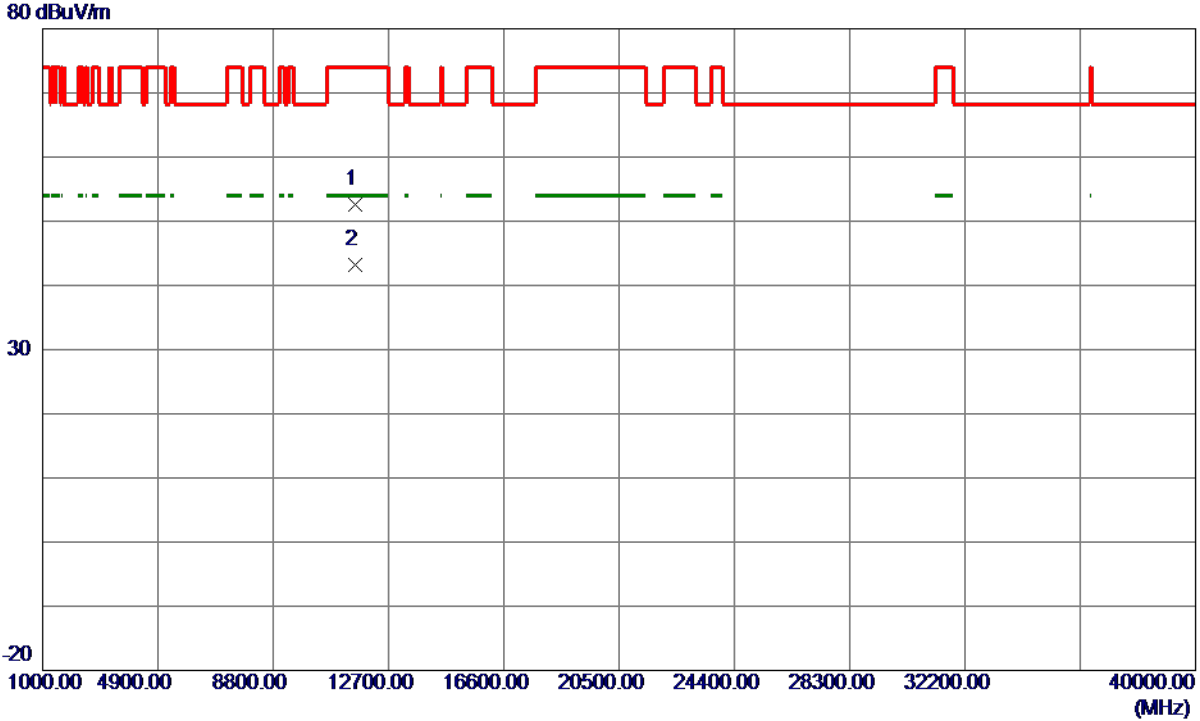


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11586.5500	50.26	2.29	52.55	74.00	-21.45	Peak	
2 *	11591.6300	40.85	2.29	43.14	54.00	-10.86	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

### Horizontal

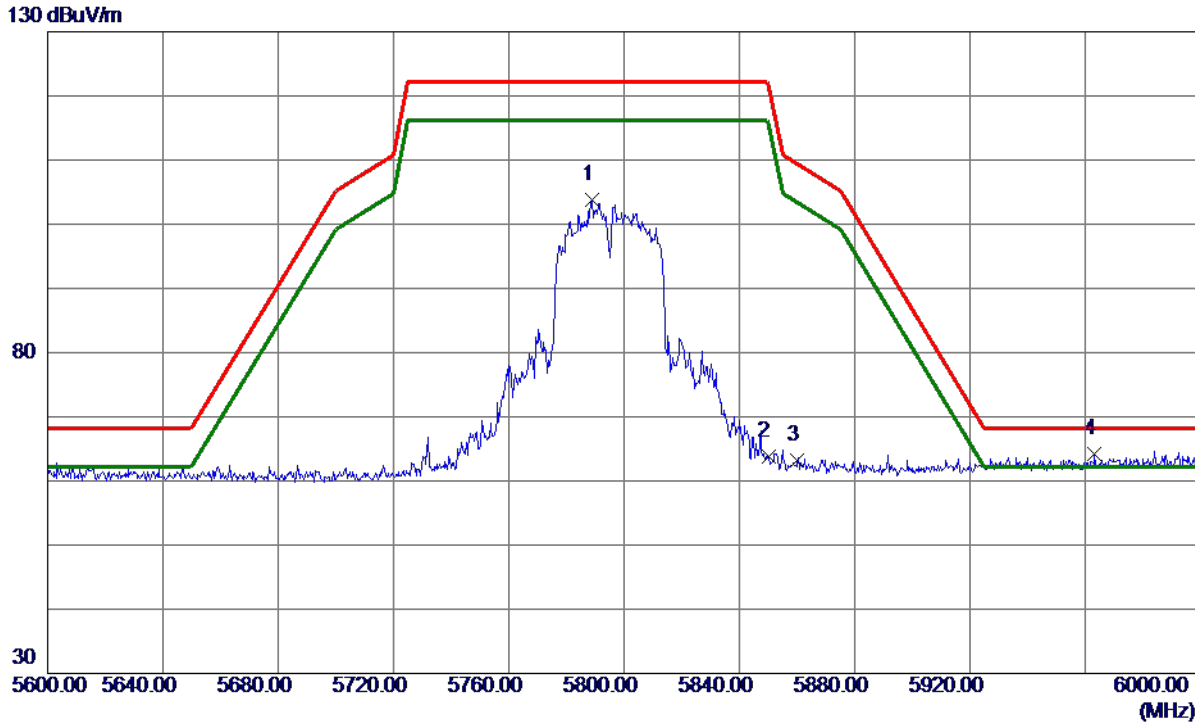


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5788.8000	65.03	38.74	103.77	122.20	-18.43	Peak	
2	5850.0000	24.88	38.91	63.79	122.20	-58.41	Peak	
3	5860.0000	24.19	38.94	63.13	109.40	-46.27	Peak	
4 *	5963.2000	25.05	39.18	64.23	68.20	-3.97	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

### Horizontal

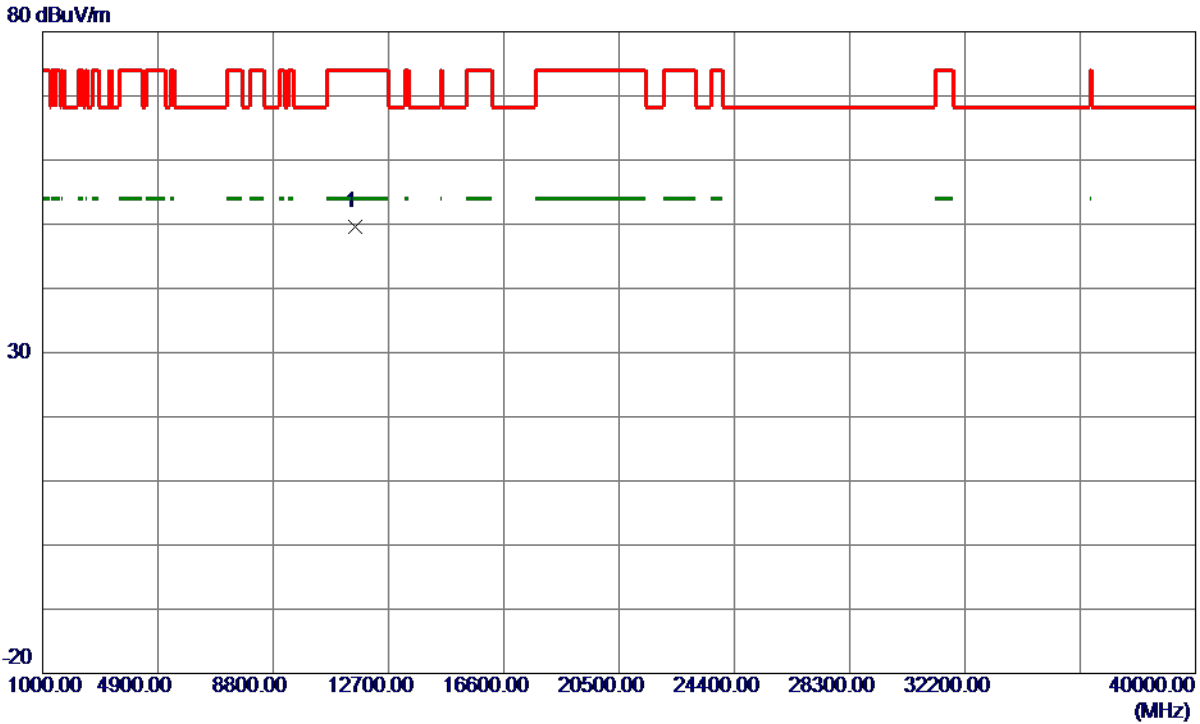

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11590.0000	47.23	2.29	49.52	74.00	-24.48	Peak	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

### Vertical

130 dBuV/m

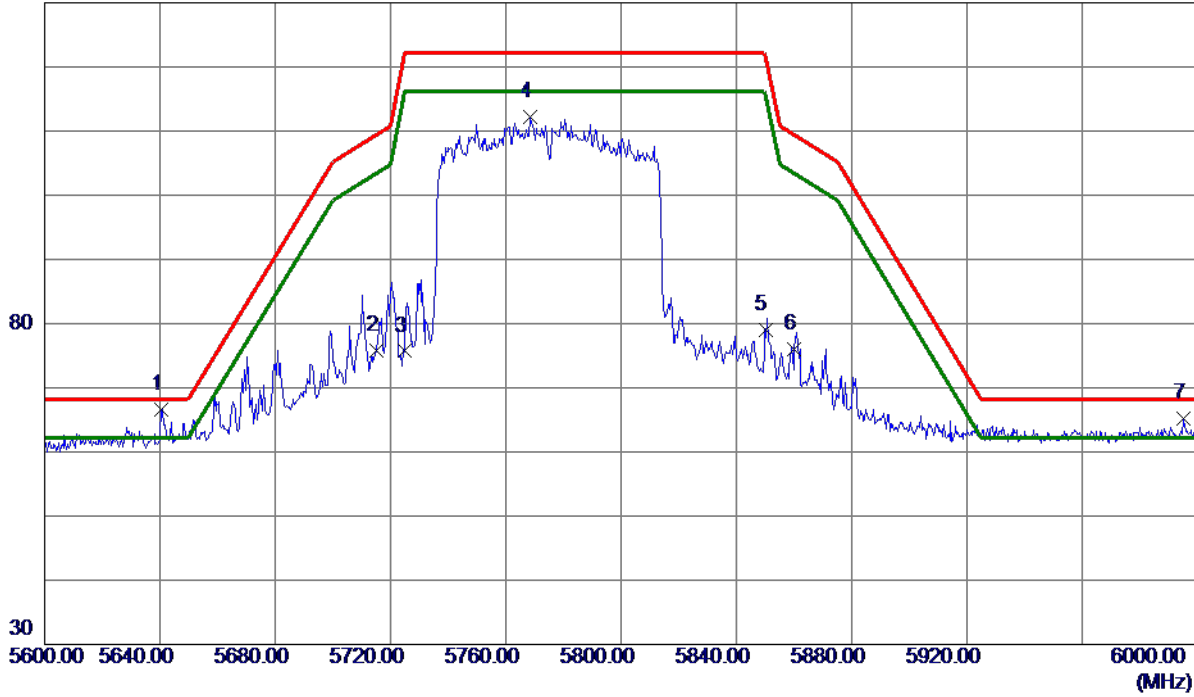


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5640.6000	28.21	38.37	66.58	68.20	-1.62	Peak	
2	5715.0000	37.38	38.46	75.84	109.40	-33.56	Peak	
3	5725.0000	37.20	38.50	75.70	122.20	-46.50	Peak	
4	5768.6000	73.46	38.66	112.12	122.20	-10.08	Peak	
5	5850.0000	40.06	38.91	78.97	122.20	-43.23	Peak	
6	5860.0000	37.05	38.94	75.99	109.40	-33.41	Peak	
7	5995.0000	25.87	39.24	65.11	68.20	-3.09	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

### Vertical

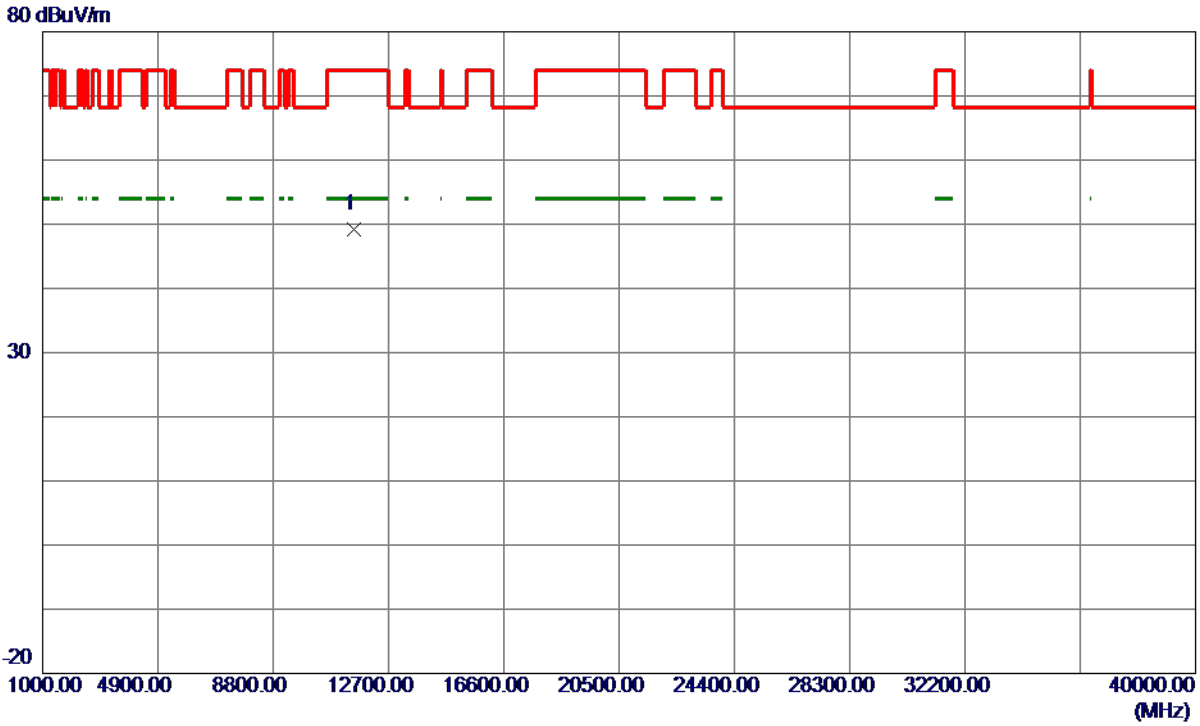

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11550.0000	46.97	2.26	49.23	74.00	-24.77	Peak	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

### Horizontal

130 dBuV/m

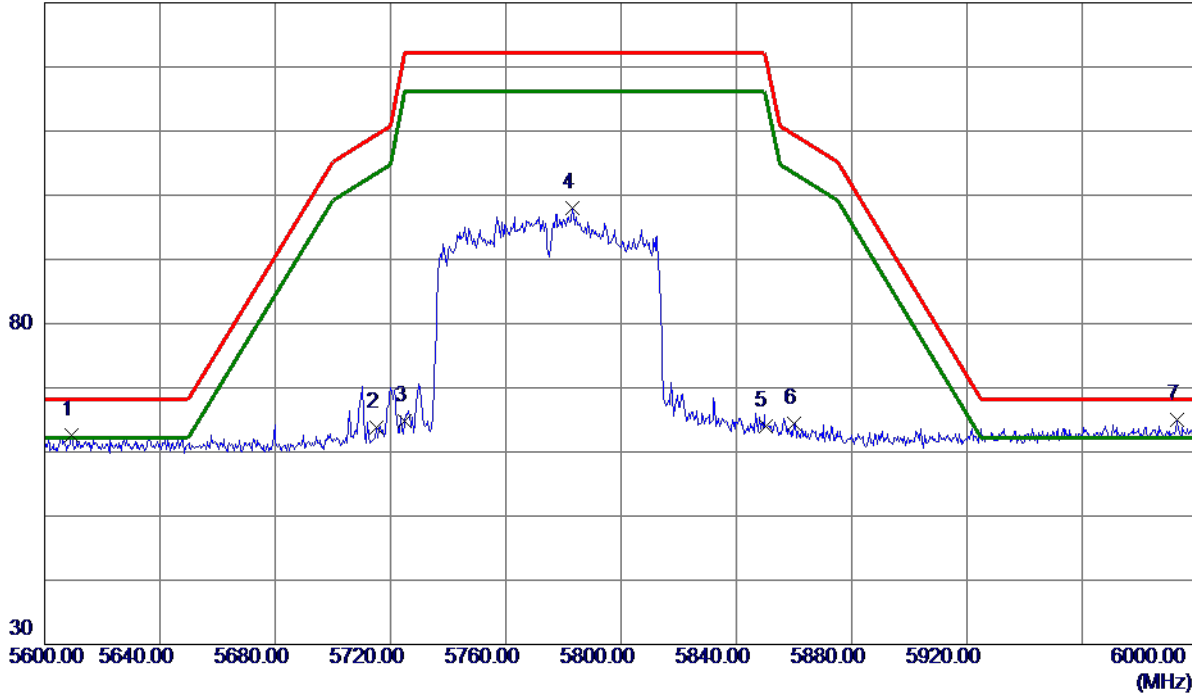

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5609.2000	24.18	38.35	62.53	68.20	-5.67	Peak	
2	5715.0000	25.32	38.46	63.78	109.40	-45.62	Peak	
3	5725.0000	26.24	38.50	64.74	122.20	-57.46	Peak	
4	5783.2000	59.18	38.72	97.90	122.20	-24.30	Peak	
5	5850.0000	25.16	38.91	64.07	122.20	-58.13	Peak	
6	5860.0000	25.53	38.94	64.47	109.40	-44.93	Peak	
7 *	5992.8000	25.85	39.24	65.09	68.20	-3.11	Peak	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

### Horizontal

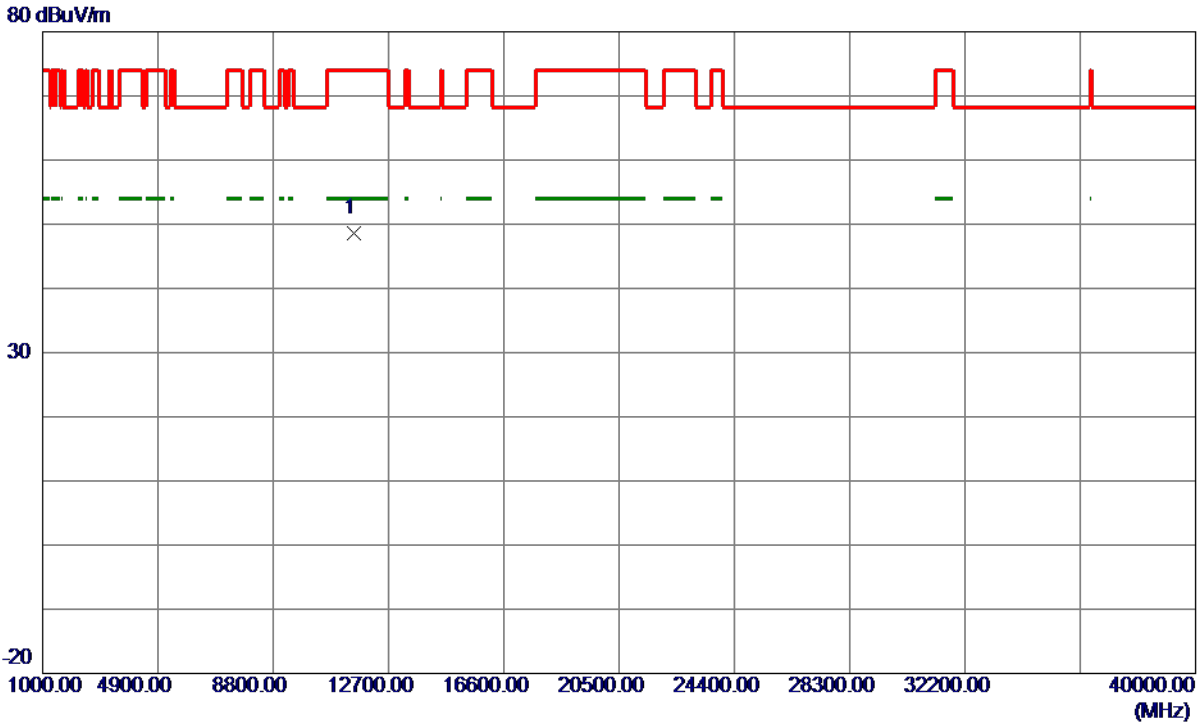


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11550.0000	46.42	2.26	48.68	74.00	-25.32	Peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE20) Mode 5180 MHz

### Vertical

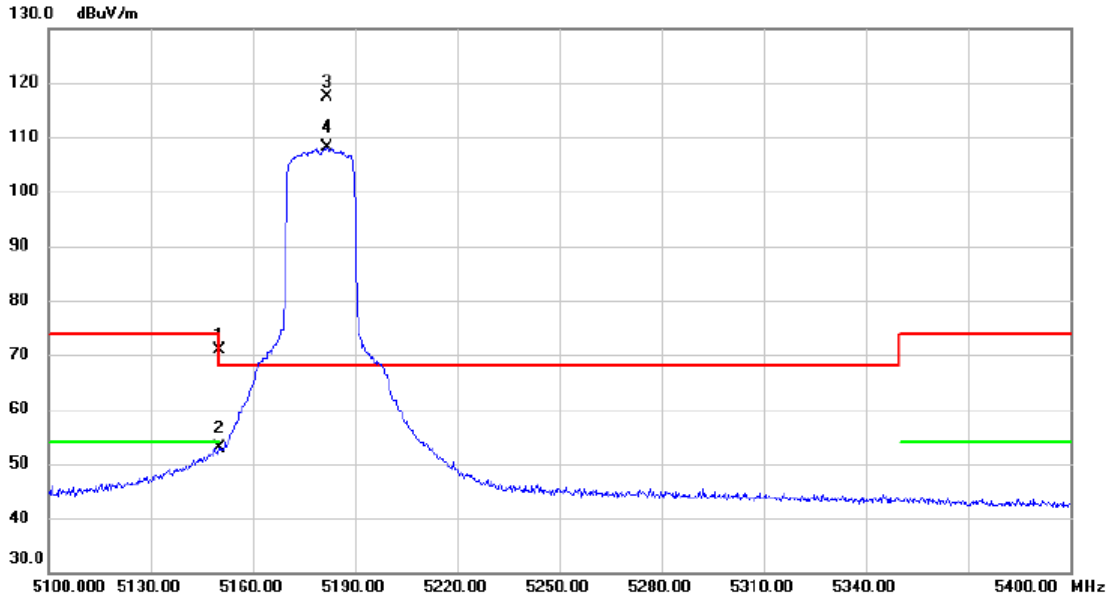


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	32.99	37.88	70.87	74.00	-3.13	peak	
2		5150.000	14.98	37.88	52.86	54.00	-1.14	AVG	
3	*	5181.900	79.75	37.75	117.50	68.20	49.30	peak	
4	X	5181.900	70.39	37.75	108.14	68.20	39.94	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE20) Mode 5180 MHz

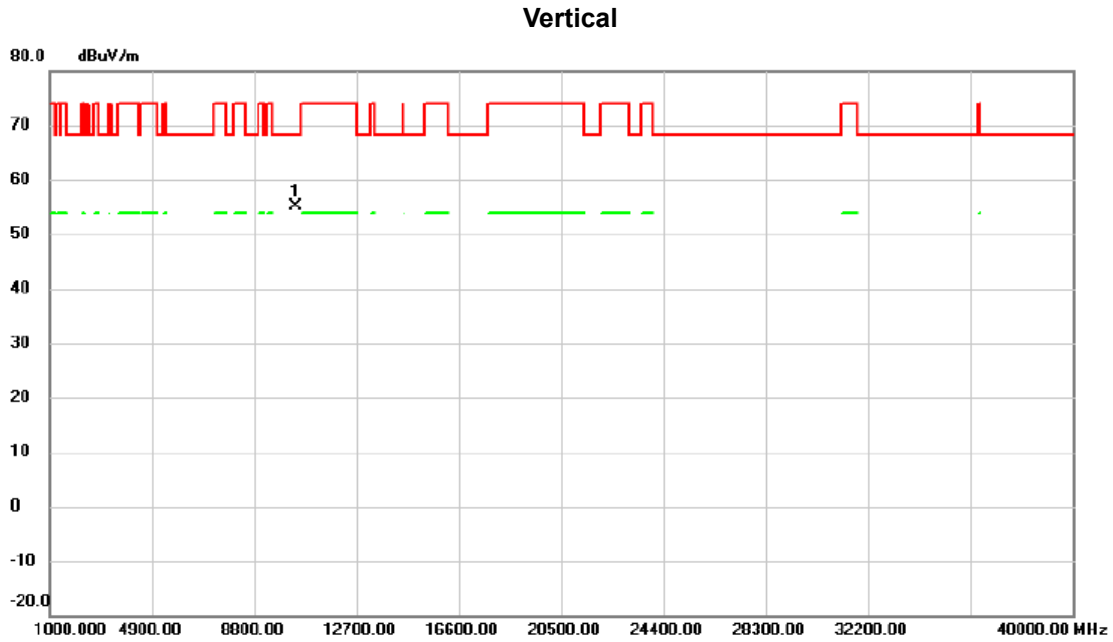


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10361.95	53.58	1.66	55.24	68.20	-12.96	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE20) Mode 5180 MHz

### Horizontal

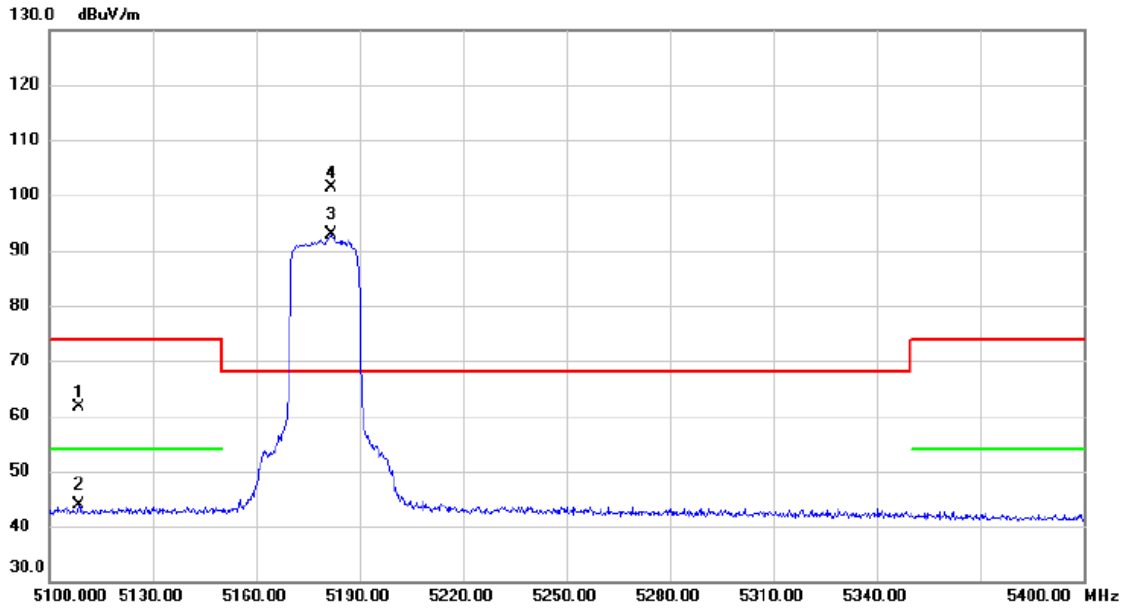


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5108.550	23.63	38.04	61.67	74.00	-12.33	peak	
2		5108.550	5.73	38.04	43.77	54.00	-10.23	AVG	
3	X	5181.750	55.24	37.75	92.99	68.20	24.79	AVG	
4	*	5181.750	63.74	37.75	101.49	68.20	33.29	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE20) Mode 5180 MHz

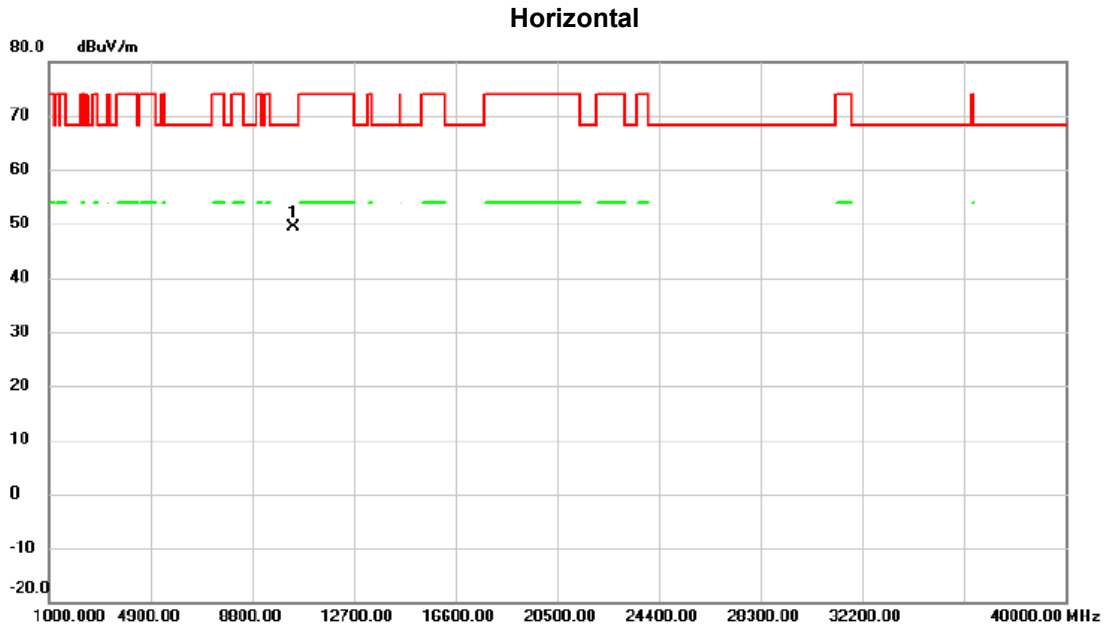


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10365.85	47.70	1.66	49.36	68.20	-18.84	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE20) Mode 5200 MHz

### Vertical

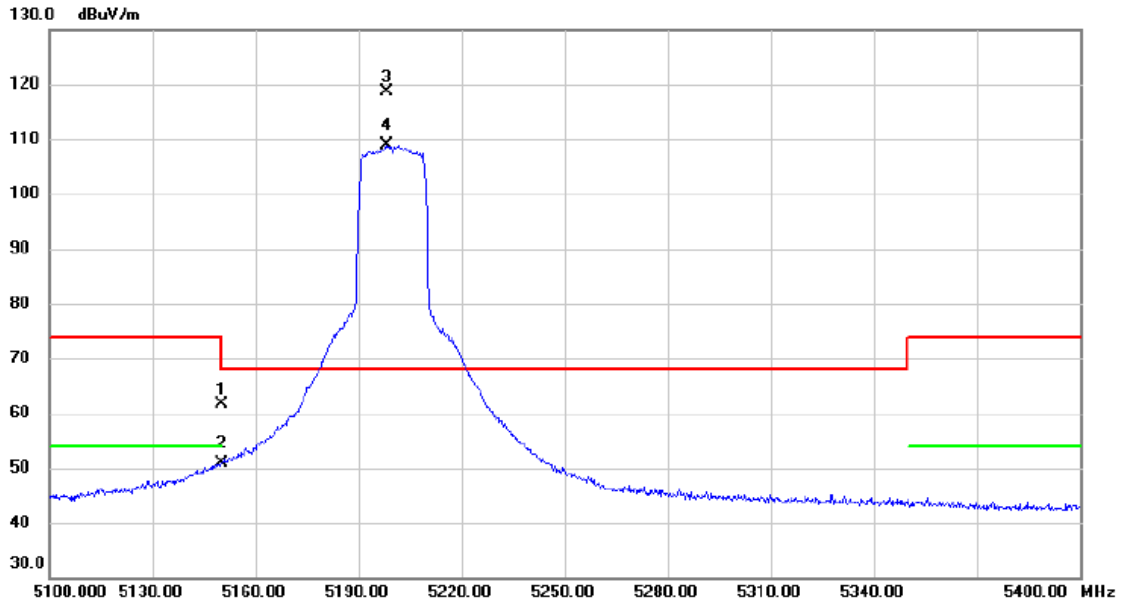


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	23.69	37.88	61.57	74.00	-12.43	peak	
2		5150.000	12.90	37.88	50.78	54.00	-3.22	AVG	
3	*	5198.250	81.02	37.69	118.71	68.20	50.51	peak	
4	X	5198.250	71.17	37.69	108.86	68.20	40.66	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE20) Mode 5200 MHz

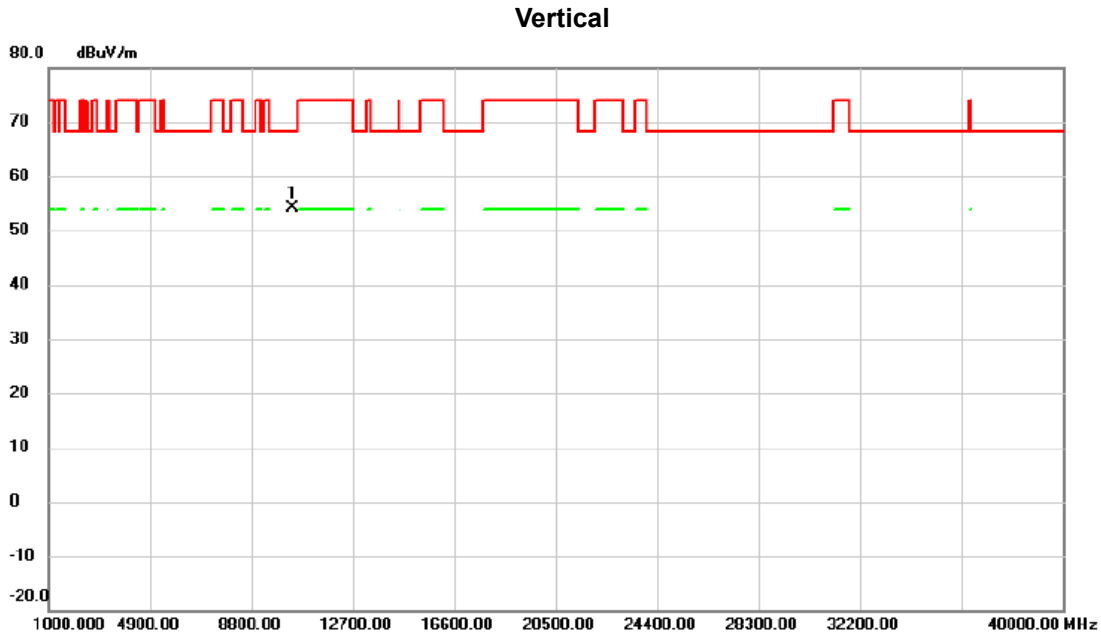


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.95	52.40	1.72	54.12	68.20	-14.08	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE20) Mode 5200 MHz

### Horizontal

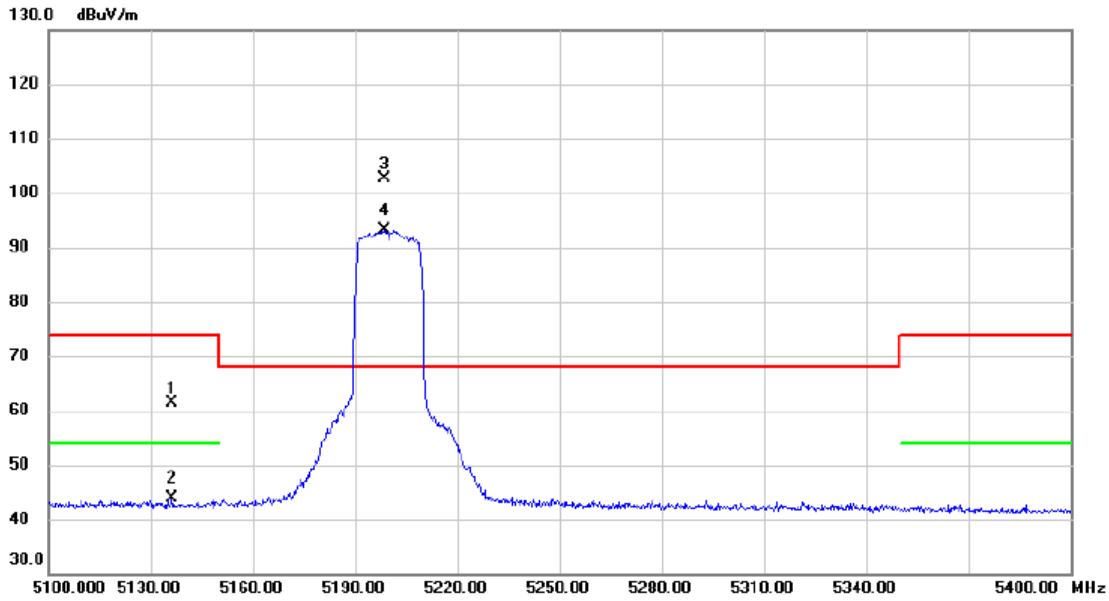


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5136.300	23.54	37.93	61.47	74.00	-12.53	peak	
2		5136.300	5.88	37.93	43.81	54.00	-10.19	AVG	
3	*	5198.550	65.00	37.69	102.69	68.20	34.49	peak	
4	X	5198.550	55.34	37.69	93.03	68.20	24.83	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE20) Mode 5200 MHz

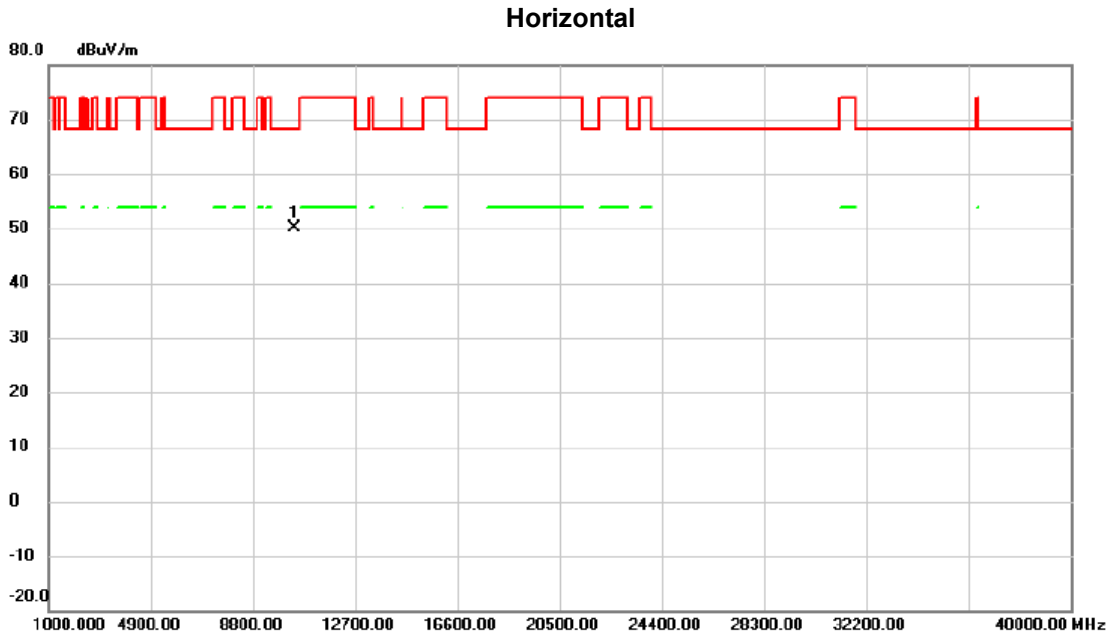


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10400.95	48.29	1.72	50.01	68.20	-18.19	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE20) Mode 5240 MHz

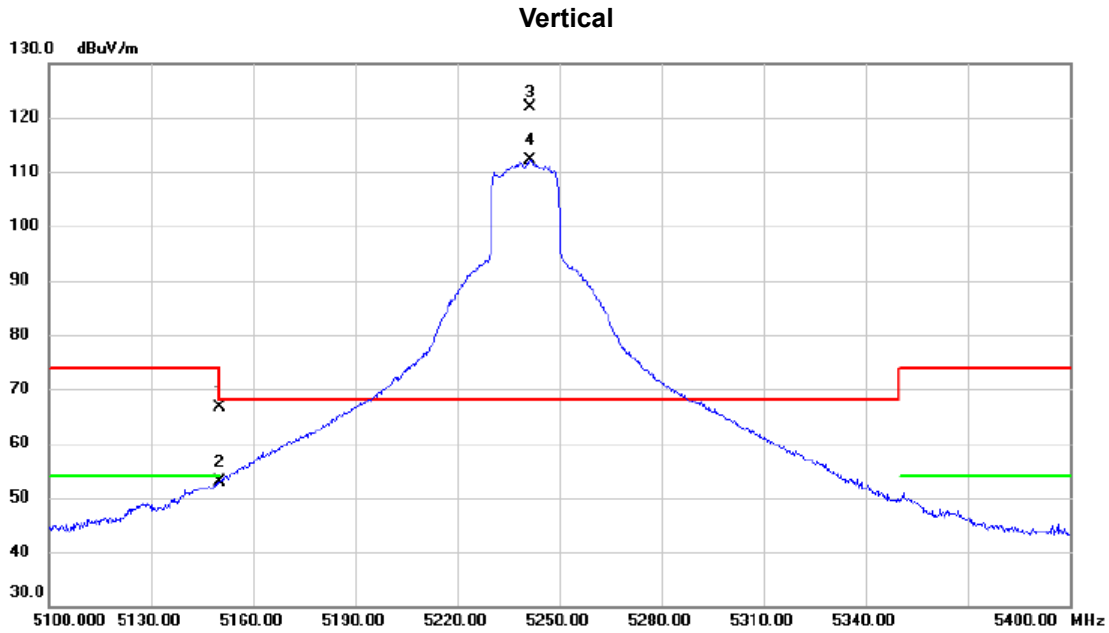


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5150.000	28.77	37.88	66.65	74.00	-7.35	peak	
2		5150.000	14.89	37.88	52.77	54.00	-1.23	AVG	
3	*	5241.450	84.36	37.62	121.98	68.20	53.78	peak	
4	X	5241.450	74.56	37.62	112.18	68.20	43.98	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE20) Mode 5240 MHz

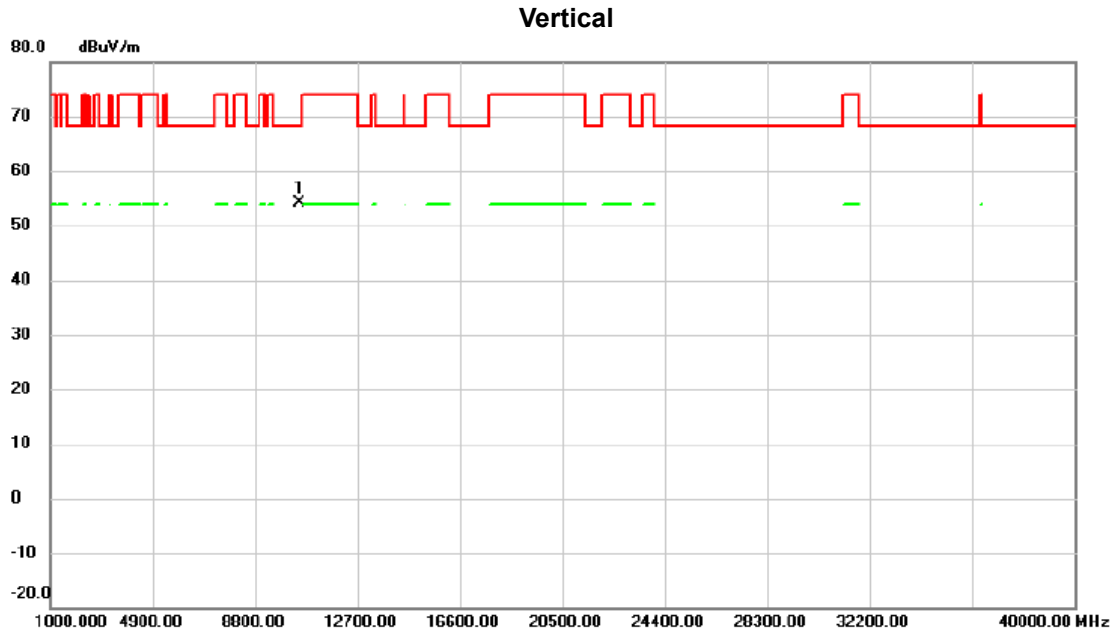


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10477.00	52.31	1.80	54.11	68.20	-14.09	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE20) Mode 5240 MHz

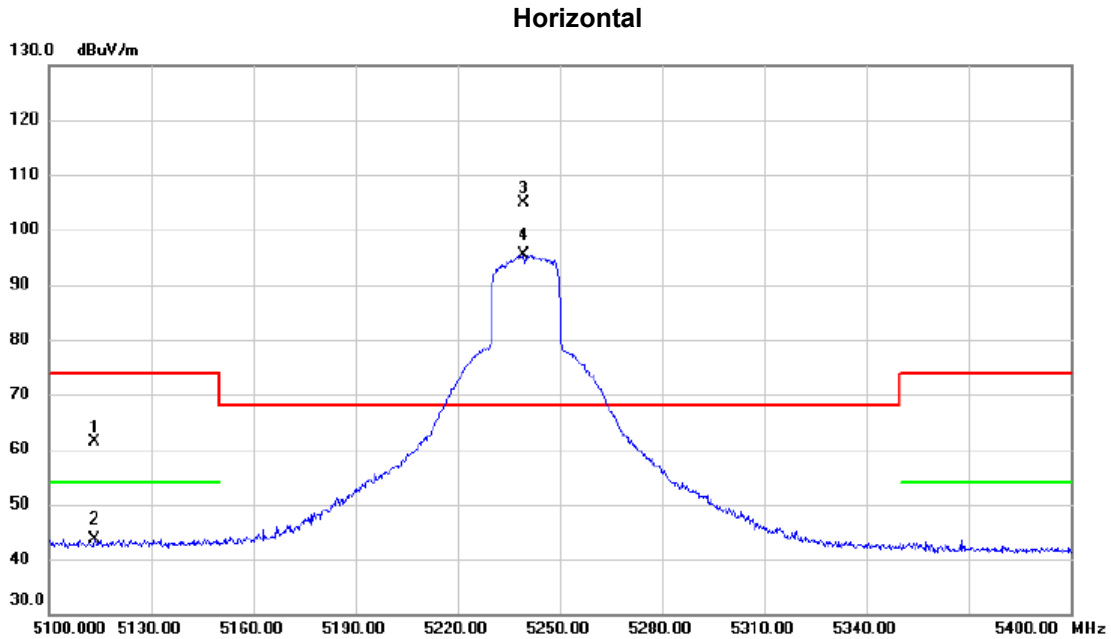


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5113.500	23.30	38.02	61.32	74.00	-12.68	peak	
2		5113.500	5.62	38.02	43.64	54.00	-10.36	AVG	
3	*	5239.350	67.20	37.63	104.83	68.20	36.63	peak	
4	X	5239.350	57.80	37.63	95.43	68.20	27.23	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE20) Mode 5240 MHz

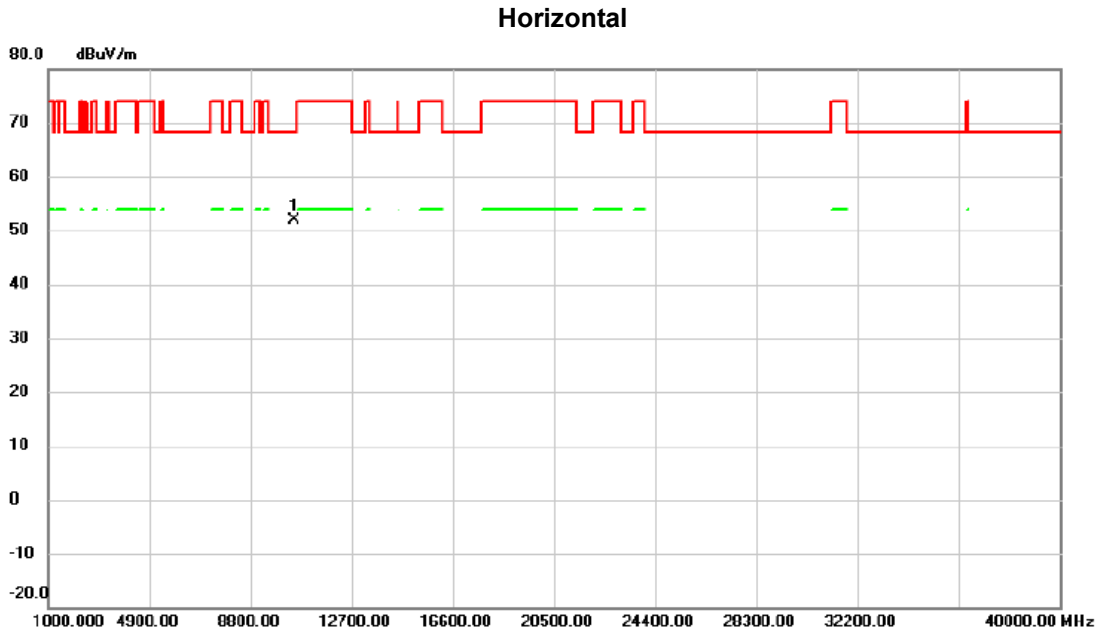


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10486.75	49.98	1.82	51.80	68.20	-16.40	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE40) Mode 5190 MHz

### Vertical

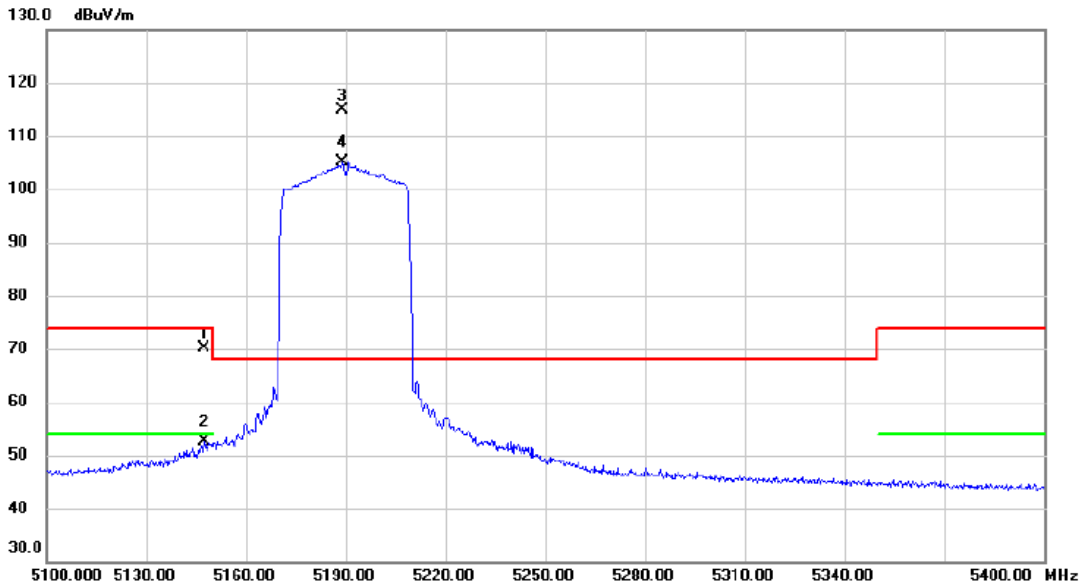


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5147.550	32.34	37.88	70.22	74.00	-3.78	peak	
2		5147.550	14.71	37.88	52.59	54.00	-1.41	AVG	
3	*	5189.100	77.13	37.72	114.85	68.20	46.65	peak	
4	X	5189.100	67.40	37.72	105.12	68.20	36.92	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE40) Mode 5190 MHz

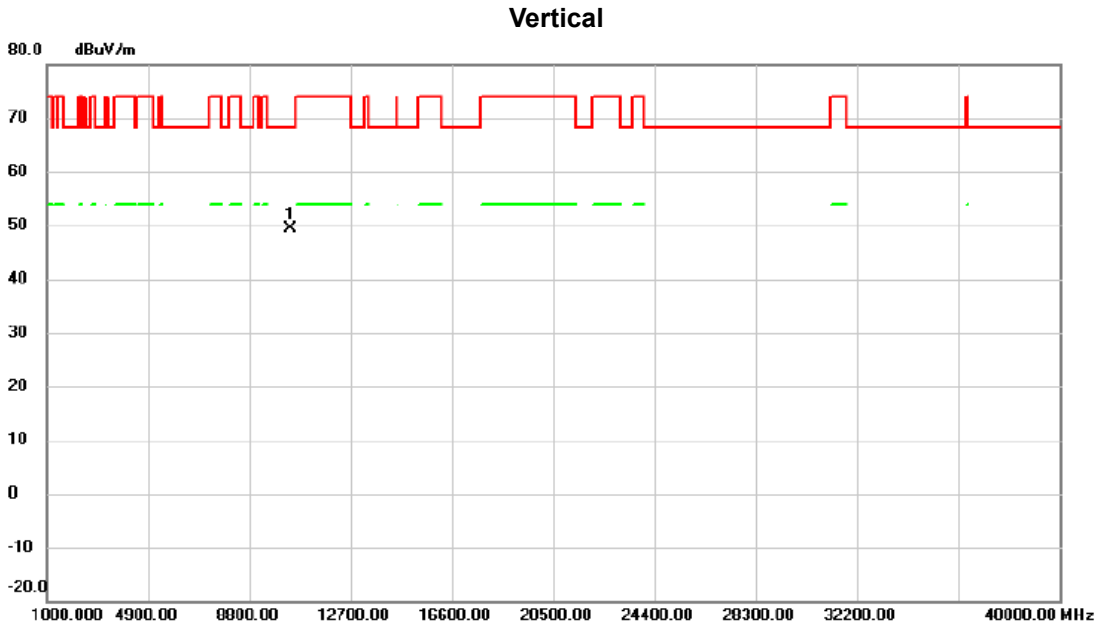


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	47.68	1.69	49.37	68.20	-18.83	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE40) Mode 5190 MHz

### Horizontal

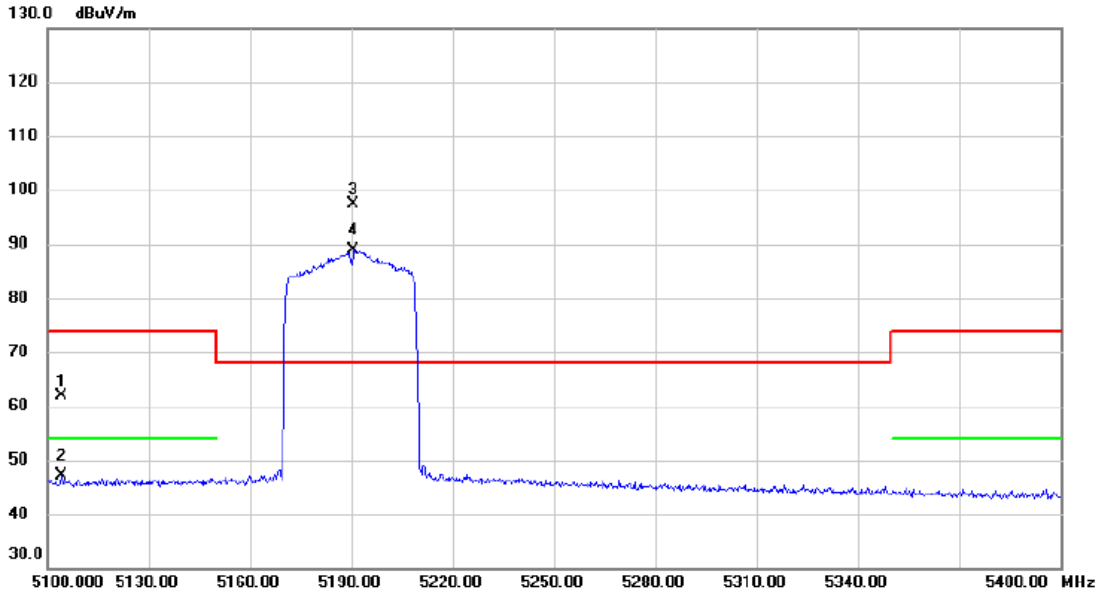


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5104.200	23.76	38.05	61.81	74.00	-12.19	peak	
2		5104.200	9.09	38.05	47.14	54.00	-6.86	AVG	
3	*	5190.750	59.68	37.72	97.40	68.20	29.20	peak	
4	X	5190.750	51.07	37.72	88.79	68.20	20.59	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE40) Mode 5190 MHz

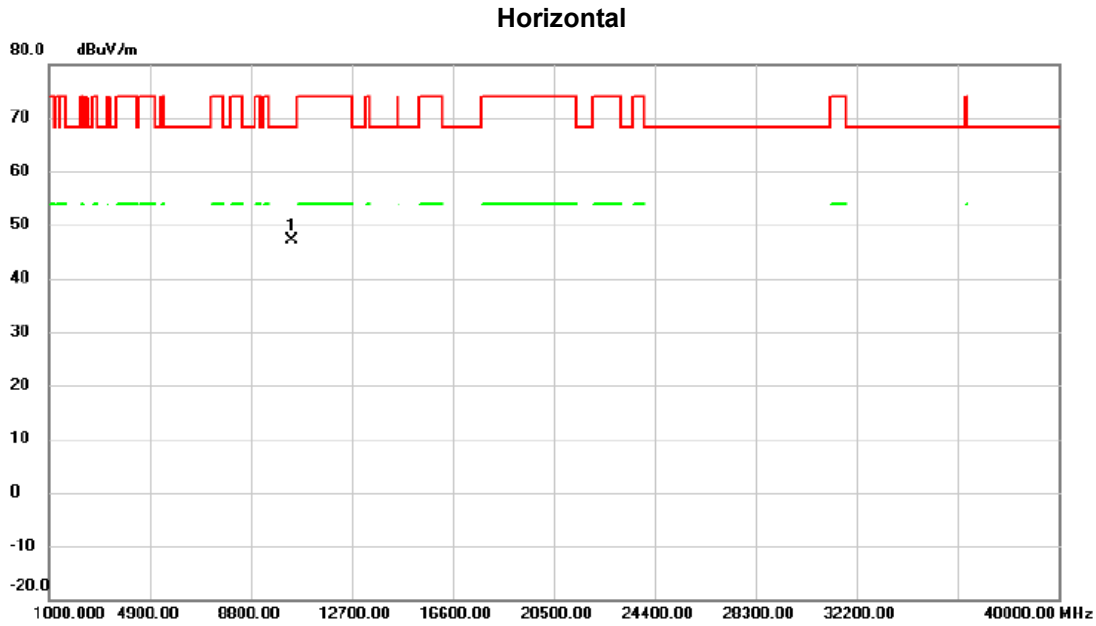


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10380.00	45.42	1.69	47.11	68.20	-21.09	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE40) Mode 5230 MHz

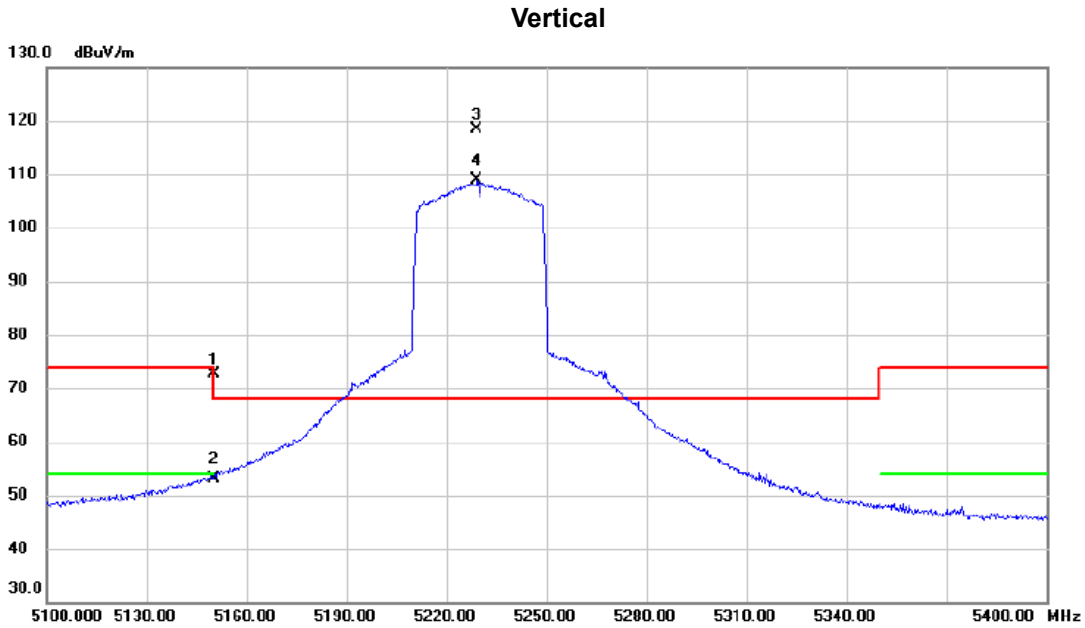


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		5150.000	34.87	37.88	72.75	74.00	-1.25	peak	
2		5150.000	15.24	37.88	53.12	54.00	-0.88	AVG	
3	*	5229.150	80.77	37.64	118.41	68.20	50.21	peak	
4	X	5229.150	71.21	37.64	108.85	68.20	40.65	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE40) Mode 5230 MHz

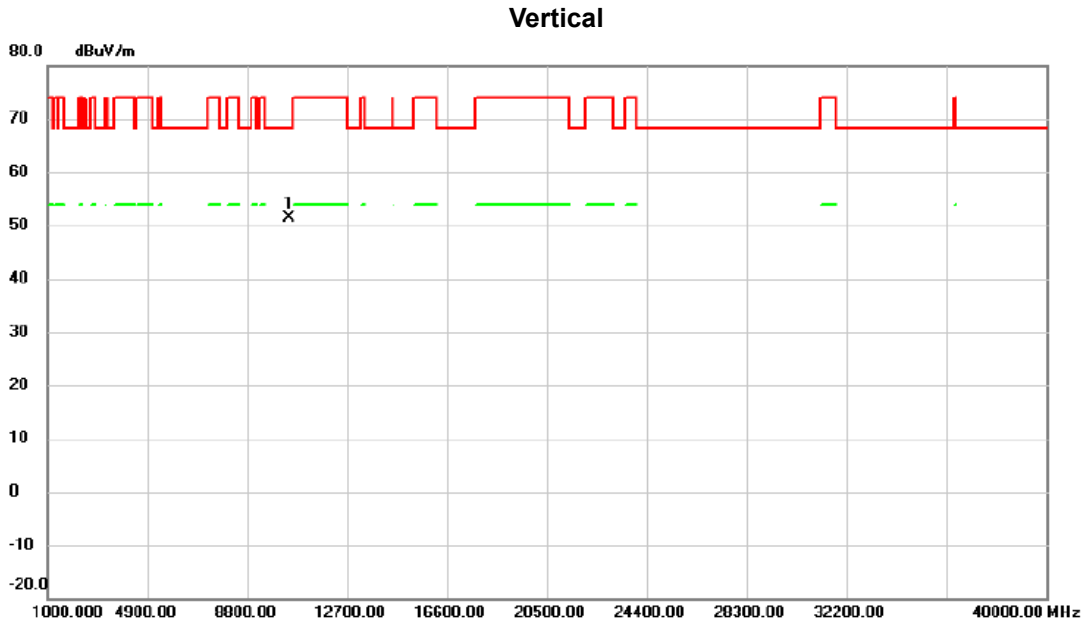


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10451.65	49.71	1.77	51.48	68.20	-16.72	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE40) Mode 5230 MHz

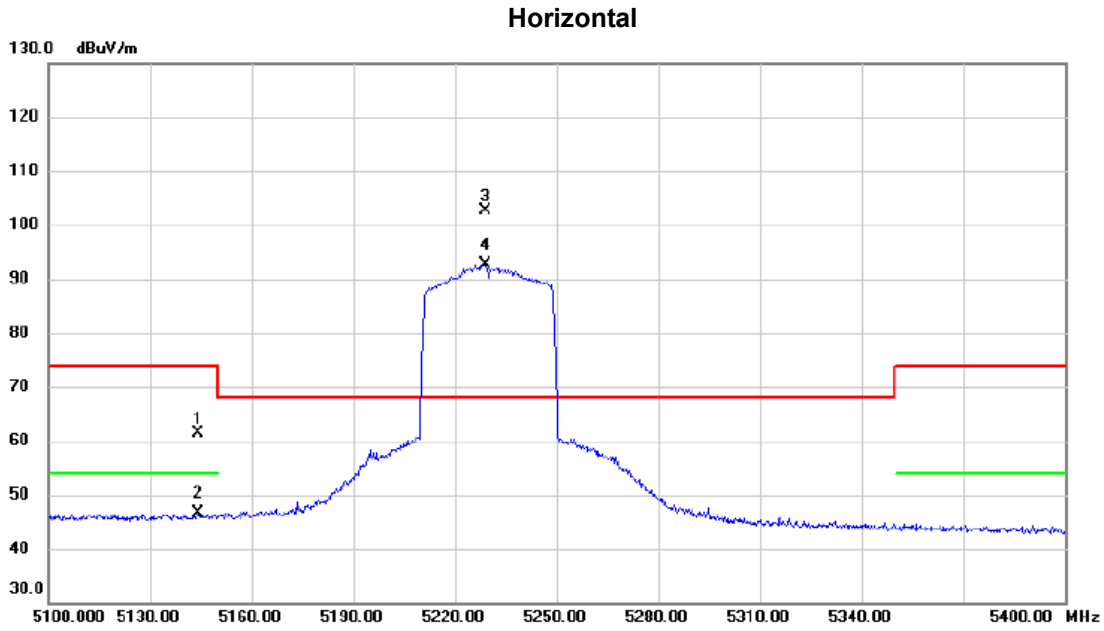

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5144.400	23.53	37.90	61.43	74.00	-12.57	peak	
2		5144.400	8.68	37.90	46.58	54.00	-7.42	AVG	
3	*	5229.000	65.05	37.64	102.69	68.20	34.49	peak	
4	X	5229.000	55.06	37.64	92.70	68.20	24.50	AVG	

REMARKS:  
 (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE40) Mode 5230 MHz

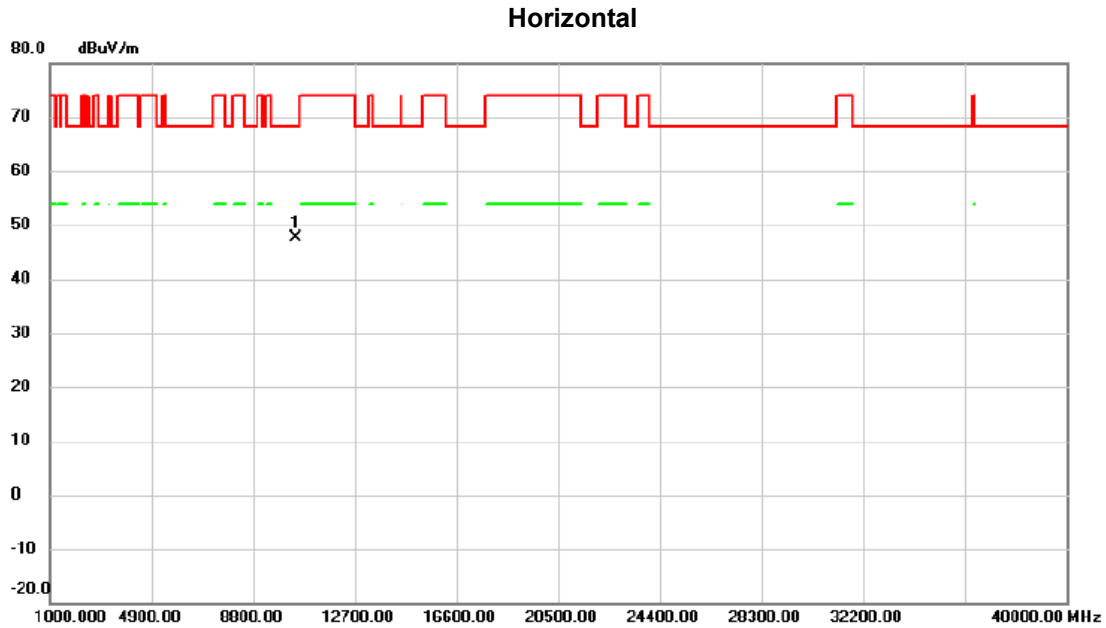


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10460.00	45.88	1.78	47.66	68.20	-20.54	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE80) Mode 5210 MHz

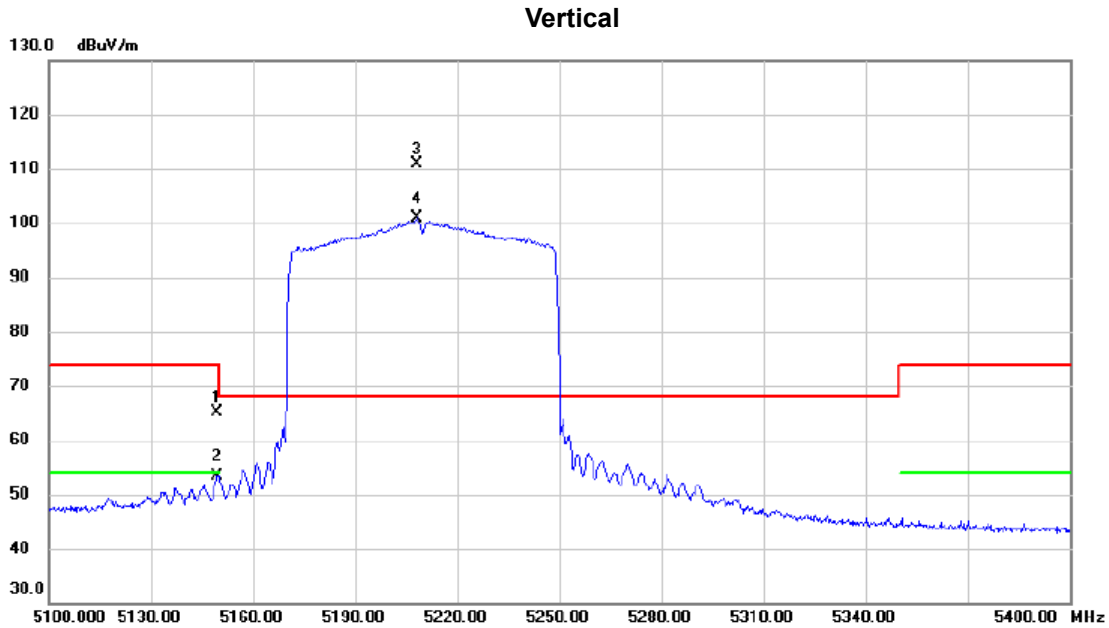


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5149.500	27.26	37.88	65.14	74.00	-8.86	peak	
2		5149.500	15.49	37.88	53.37	54.00	-0.63	AVG	
3	*	5208.300	73.19	37.67	110.86	68.20	42.66	peak	
4	X	5208.300	63.33	37.67	101.00	68.20	32.80	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE80) Mode 5210 MHz

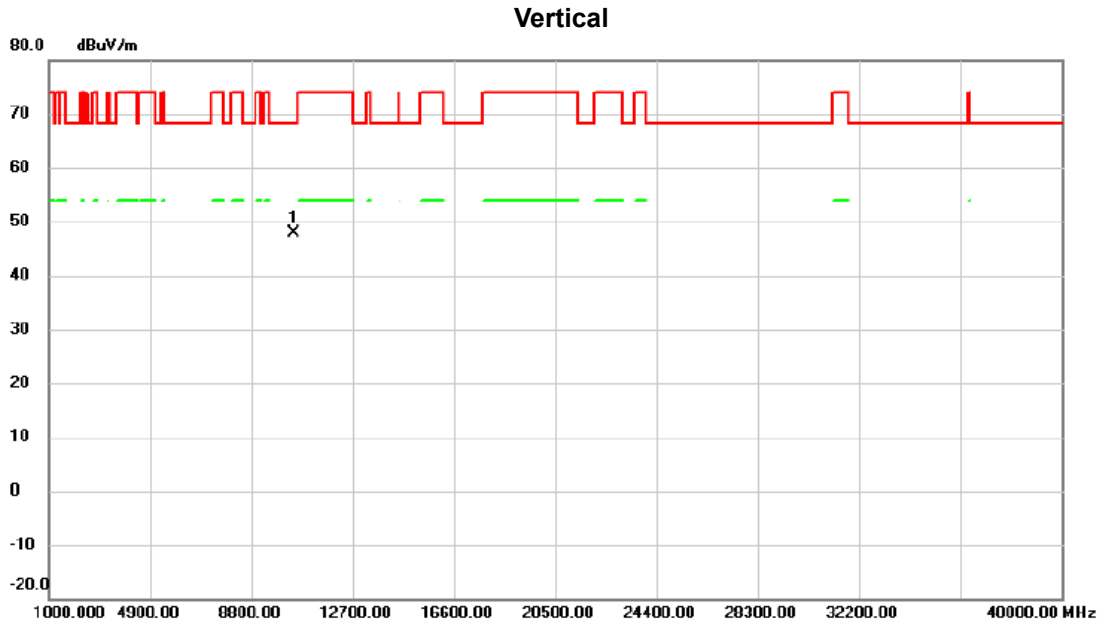


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10420.00	46.10	1.74	47.84	68.20	-20.36	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE80) Mode 5210 MHz

### Horizontal

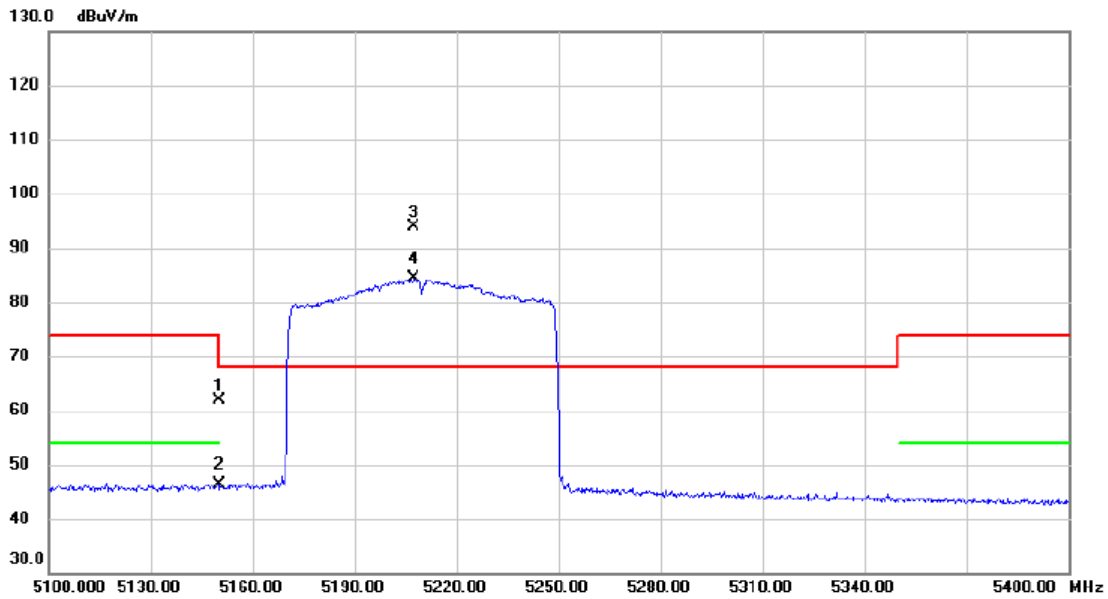

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5150.000	23.96	37.88	61.84	74.00	-12.16	peak	
2		5150.000	8.45	37.88	46.33	54.00	-7.67	AVG	
3	*	5207.550	56.16	37.67	93.83	68.20	25.63	peak	
4	X	5207.550	46.74	37.67	84.41	68.20	16.21	AVG	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-1_TX ax (HE80) Mode 5210 MHz

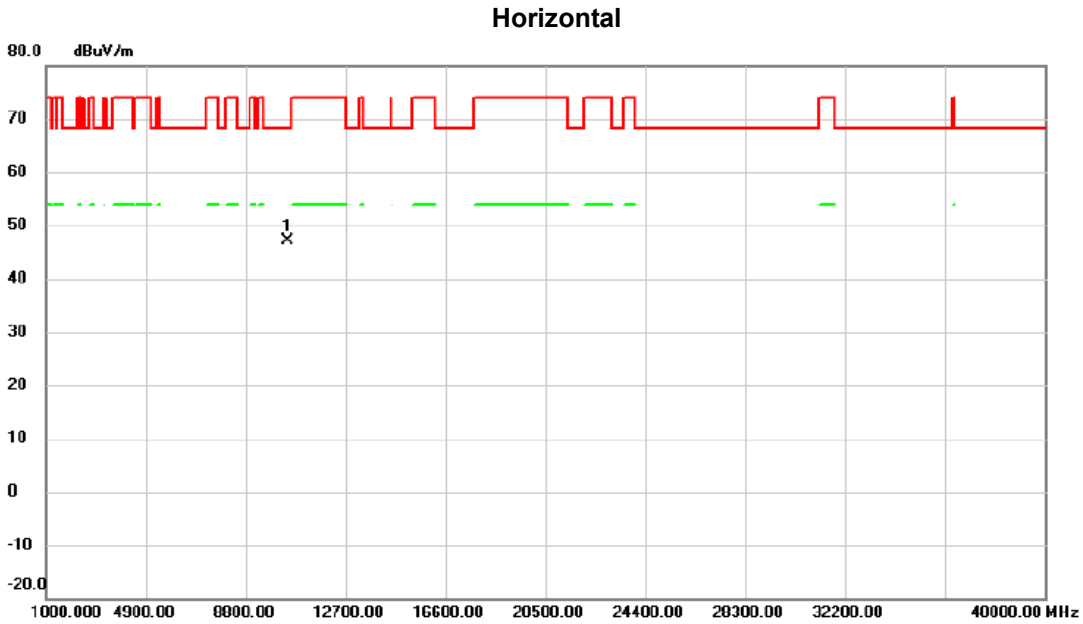


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10420.00	45.46	1.74	47.20	68.20	-21.00	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE20) Mode 5260 MHz

### Vertical

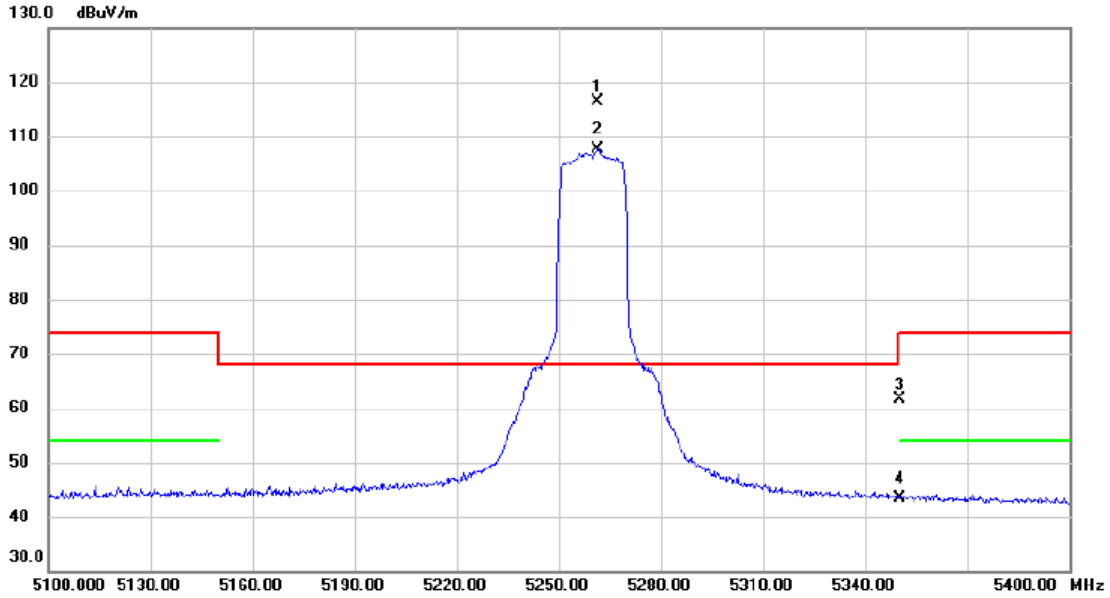


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5261.550	78.72	37.59	116.31	68.20	48.11	peak	
2	X	5261.550	70.09	37.59	107.68	68.20	39.48	AVG	
3		5350.000	23.78	37.73	61.51	74.00	-12.49	peak	
4		5350.000	5.73	37.73	43.46	54.00	-10.54	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE20) Mode 5260 MHz

### Vertical

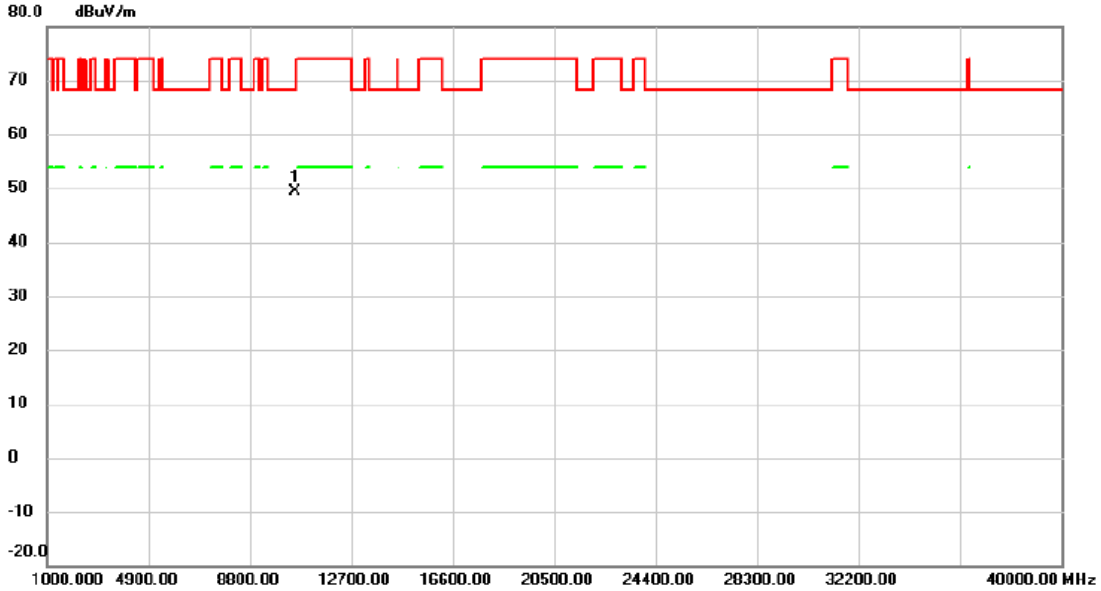


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10521.85	47.55	1.84	49.39	68.20	-18.81	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE20) Mode 5260 MHz

### Horizontal

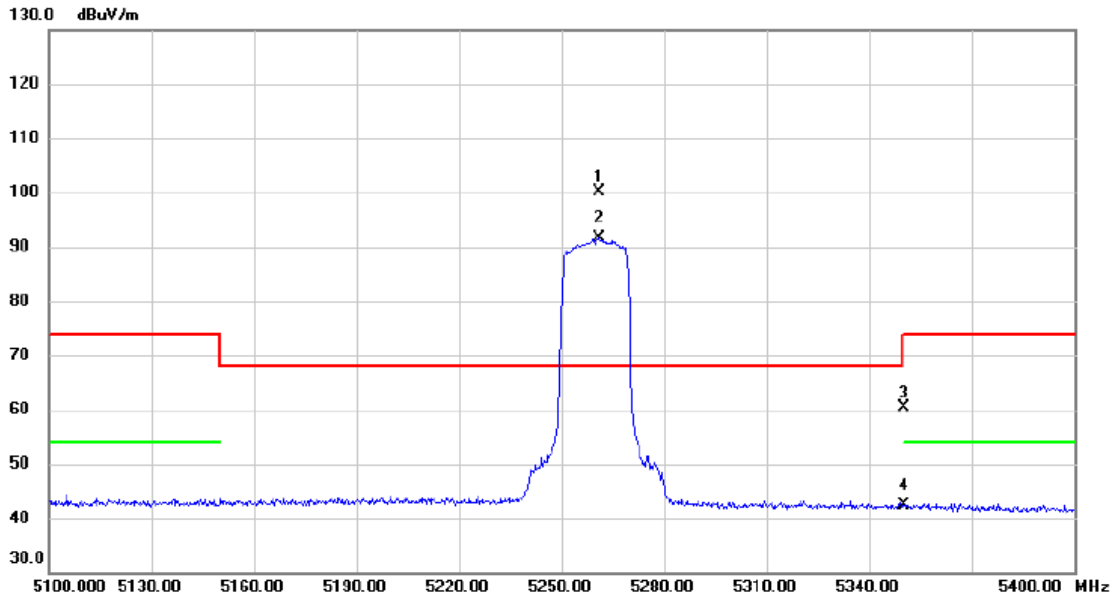


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5260.950	62.57	37.59	100.16	68.20	31.96	peak	
2	X	5260.950	53.96	37.59	91.55	68.20	23.35	AVG	
3		5350.000	22.76	37.73	60.49	74.00	-13.51	peak	
4		5350.000	4.60	37.73	42.33	54.00	-11.67	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE20) Mode 5260 MHz

### Horizontal

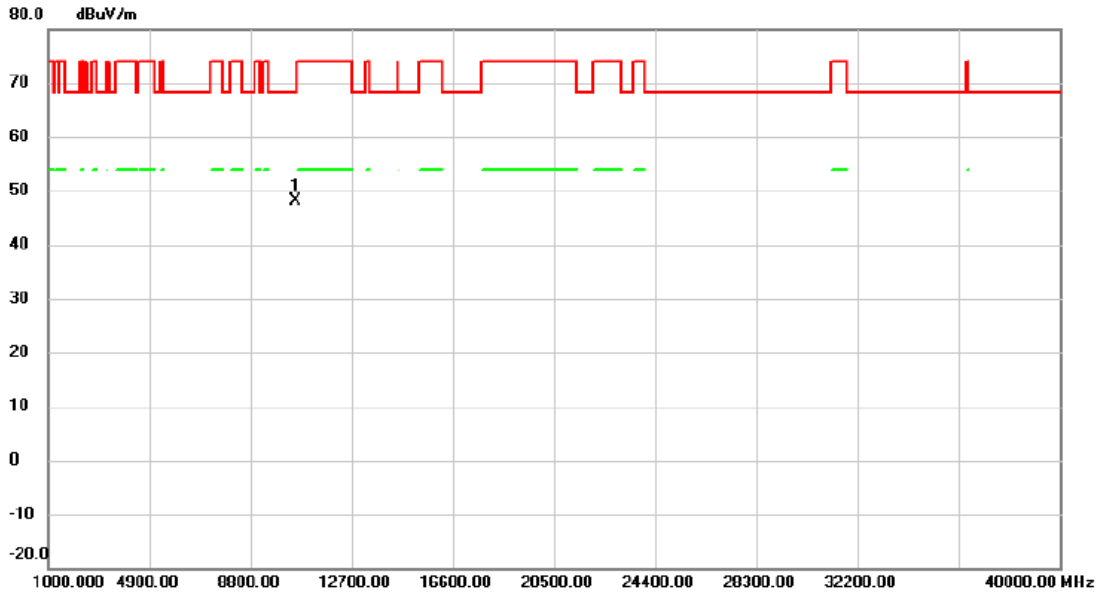


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10520.00	46.36	1.84	48.20	68.20	-20.00	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE20) Mode 5300 MHz

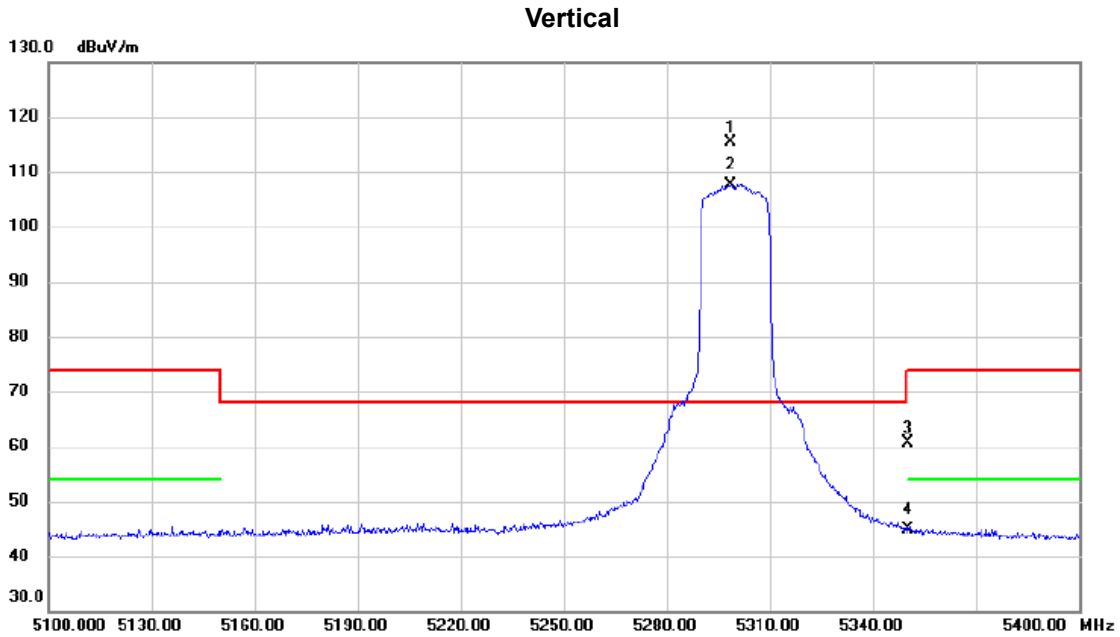


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5298.600	77.92	37.53	115.45	68.20	47.25	peak	
2	X	5298.600	70.13	37.53	107.66	68.20	39.46	AVG	
3		5350.000	23.01	37.73	60.74	74.00	-13.26	peak	
4		5350.000	7.21	37.73	44.94	54.00	-9.06	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE20) Mode 5300 MHz

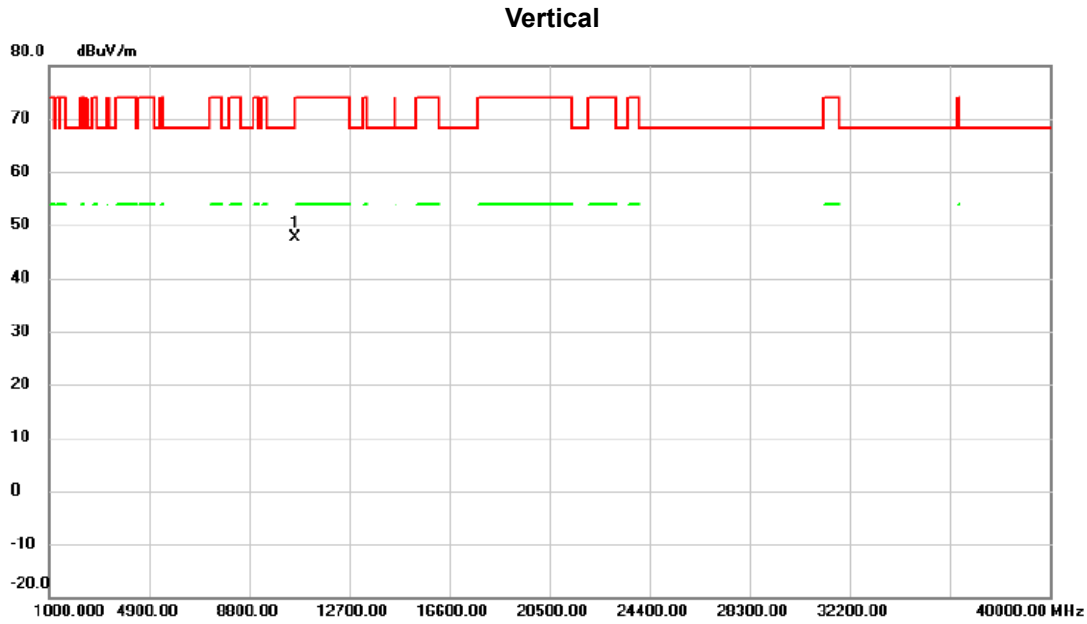


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10600.00	45.75	1.92	47.67	68.20	-20.53	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE20) Mode 5300 MHz

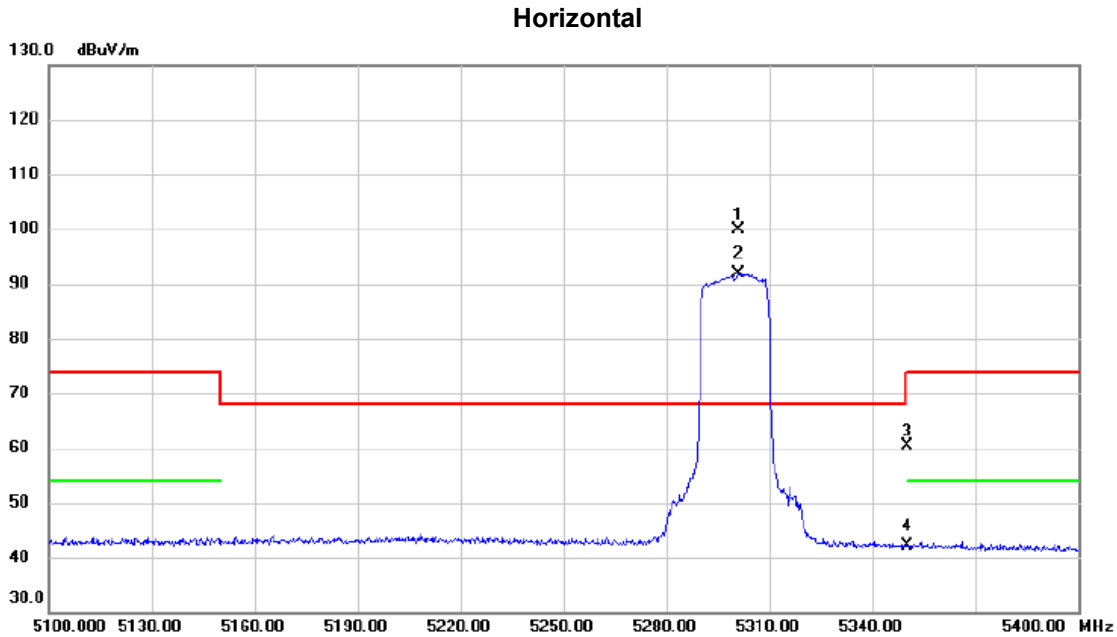

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5301.000	62.41	37.54	99.95	68.20	31.75	peak	
2	X	5301.000	54.31	37.54	91.85	68.20	23.65	AVG	
3		5350.000	22.59	37.73	60.32	74.00	-13.68	peak	
4		5350.000	4.43	37.73	42.16	54.00	-11.84	AVG	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE20) Mode 5300 MHz

### Horizontal

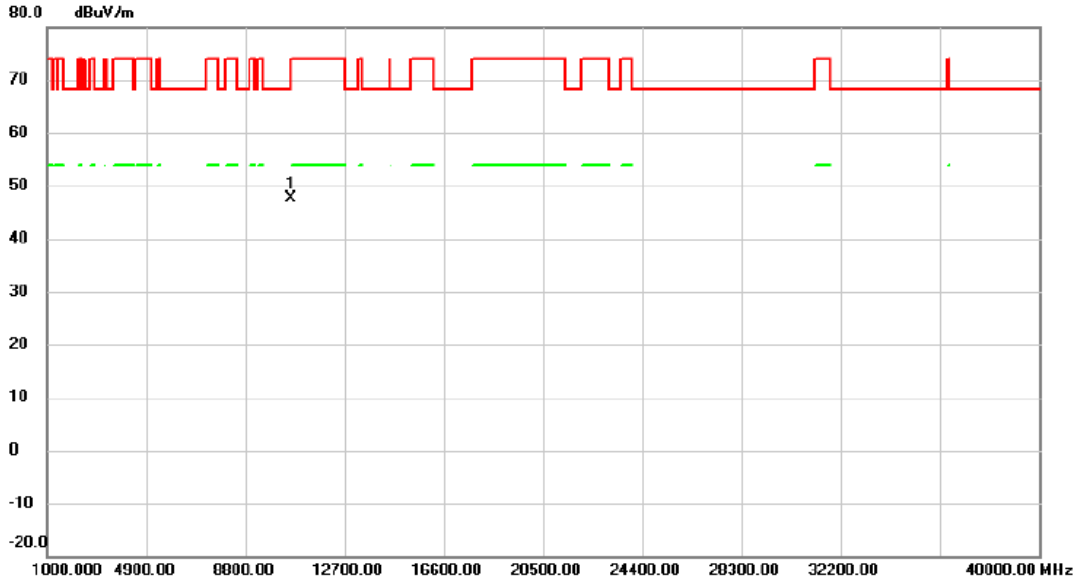


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10600.00	45.73	1.92	47.65	68.20	-20.55	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE20) Mode 5320 MHz

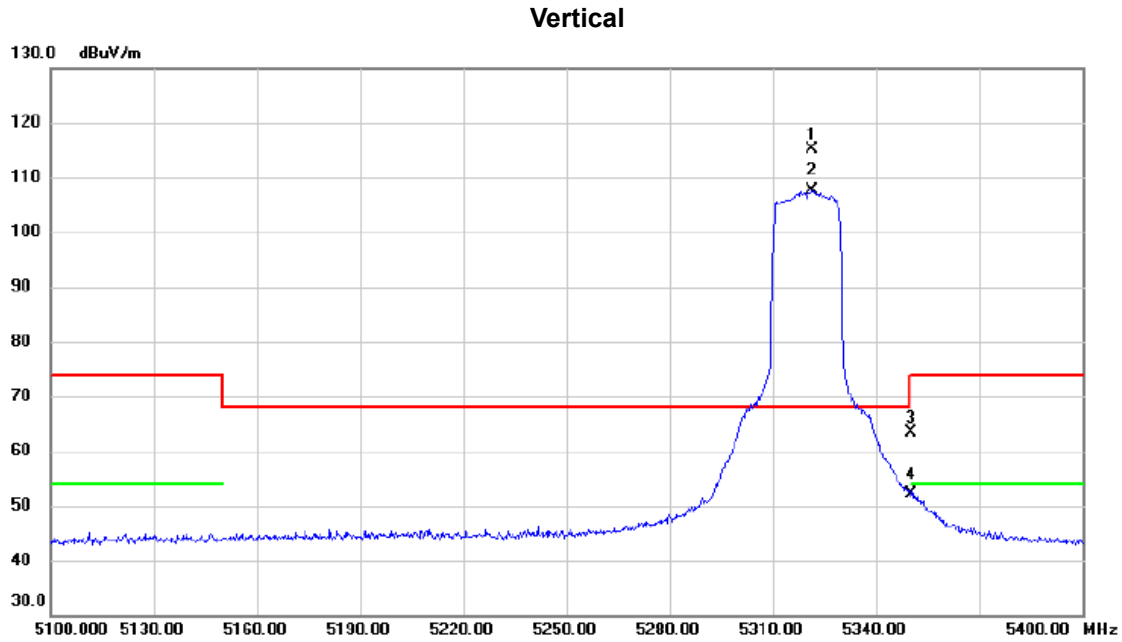


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5321.400	77.51	37.63	115.14	68.20	46.94	peak	
2	X	5321.400	69.92	37.63	107.55	68.20	39.35	AVG	
3		5350.000	25.66	37.73	63.39	74.00	-10.61	peak	
4		5350.000	14.37	37.73	52.10	54.00	-1.90	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE20) Mode 5320 MHz

### Vertical

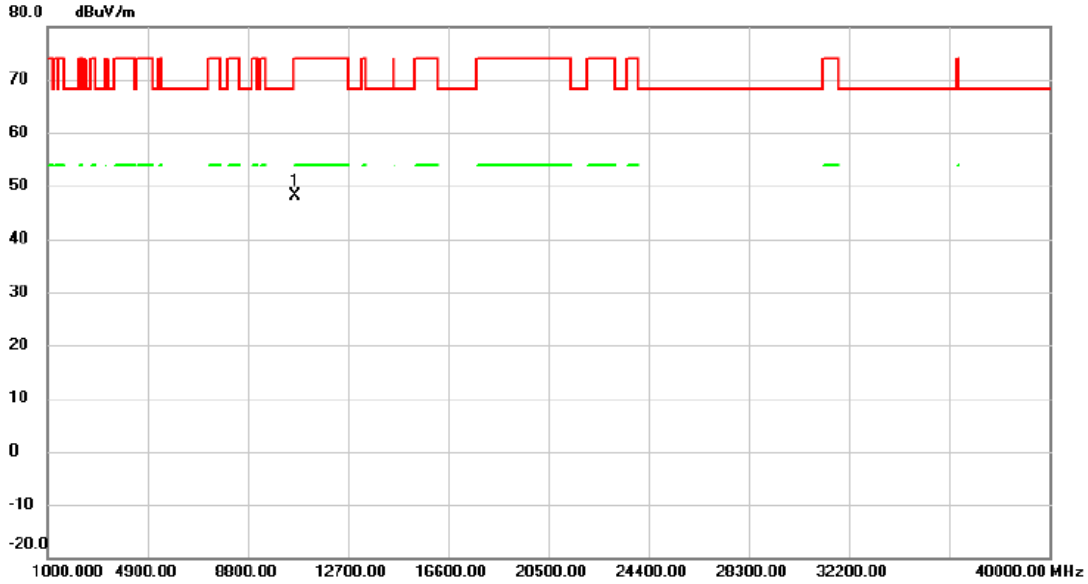


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10640.00	46.18	1.93	48.11	74.00	-25.89	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE20) Mode 5320 MHz

### Horizontal

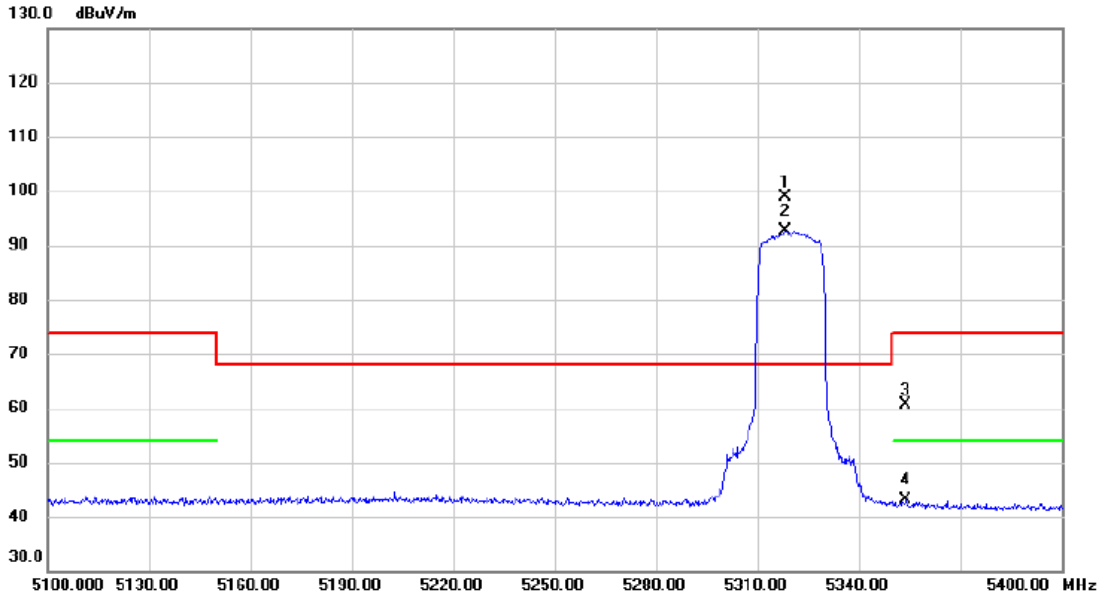


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5318.400	61.25	37.61	98.86	68.20	30.66	peak	
2	X	5318.400	54.97	37.61	92.58	68.20	24.38	AVG	
3		5353.950	22.79	37.76	60.55	74.00	-13.45	peak	
4		5353.950	5.28	37.76	43.04	54.00	-10.96	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE20) Mode 5320 MHz

### Horizontal

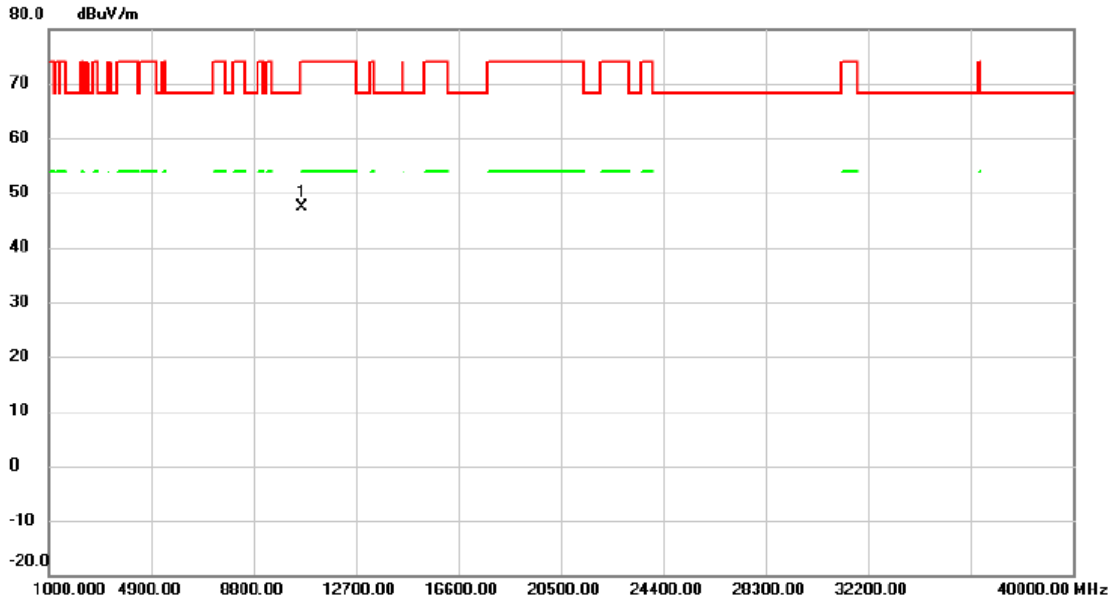


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10640.00	45.37	1.93	47.30	74.00	-26.70	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE40) Mode 5270 MHz

### Vertical

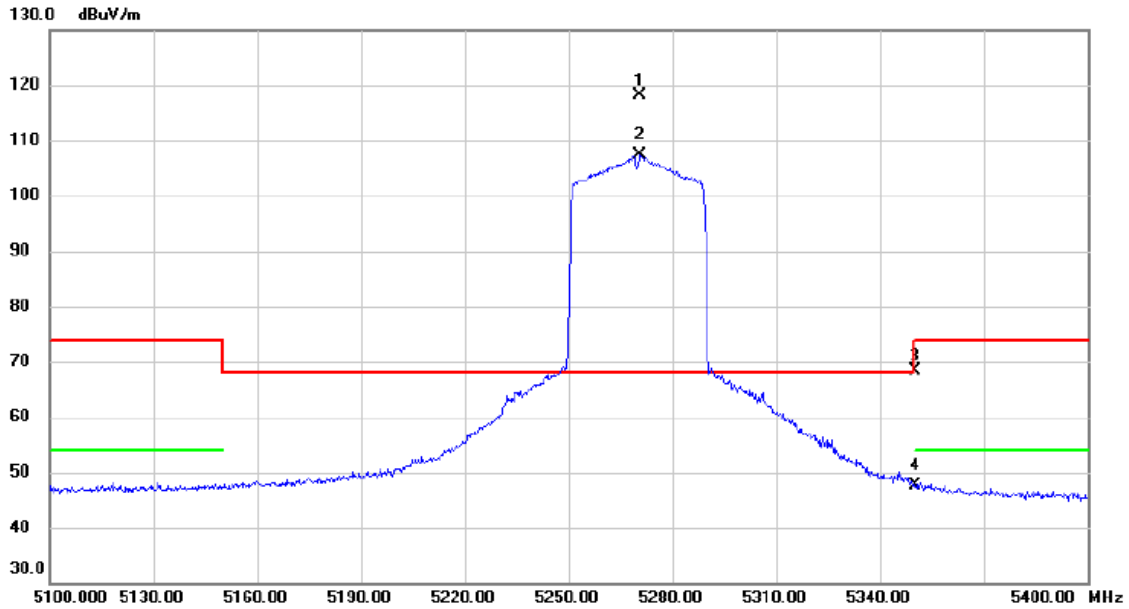


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5270.700	80.44	37.58	118.02	68.20	49.82	peak	
2	X	5270.700	69.76	37.58	107.34	68.20	39.14	AVG	
3		5350.000	30.77	37.73	68.50	74.00	-5.50	peak	
4		5350.000	9.85	37.73	47.58	54.00	-6.42	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE40) Mode 5270 MHz

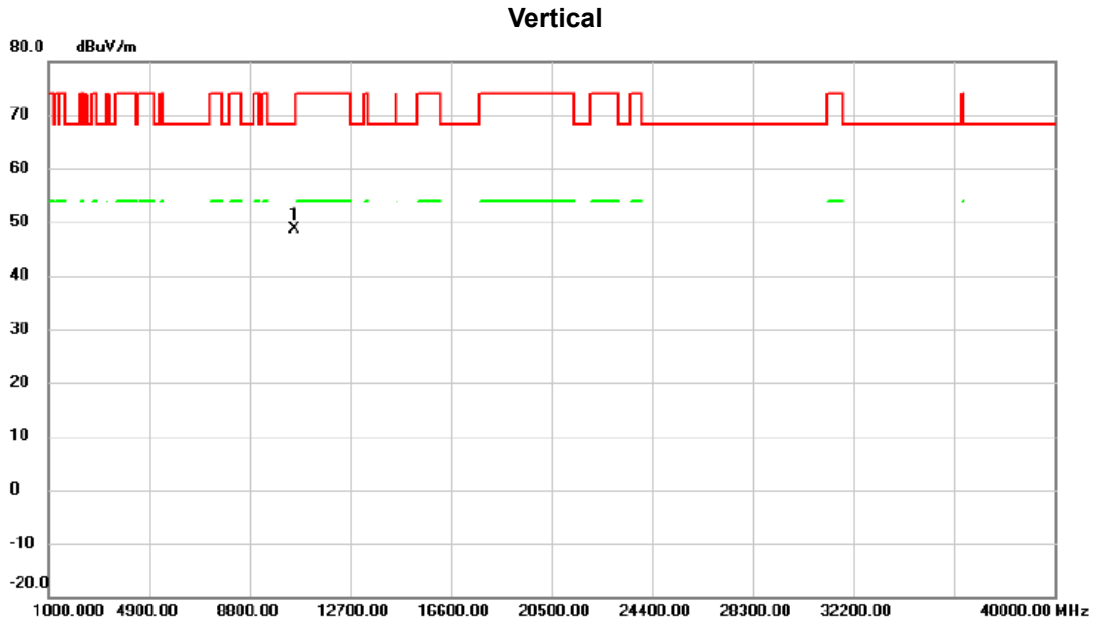


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10540.00	46.81	1.86	48.67	68.20	-19.53	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE40) Mode 5270 MHz

### Horizontal

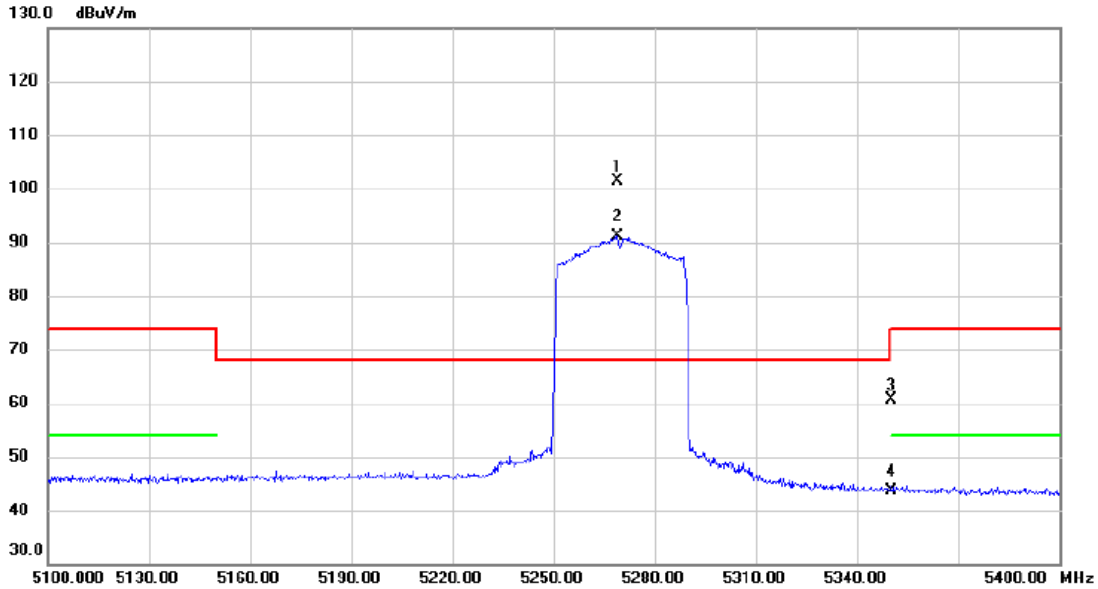


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5268.900	63.84	37.58	101.42	68.20	33.22	peak	
2	X	5268.900	53.61	37.58	91.19	68.20	22.99	AVG	
3		5350.000	22.88	37.73	60.61	74.00	-13.39	peak	
4		5350.000	5.90	37.73	43.63	54.00	-10.37	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE40) Mode 5270 MHz

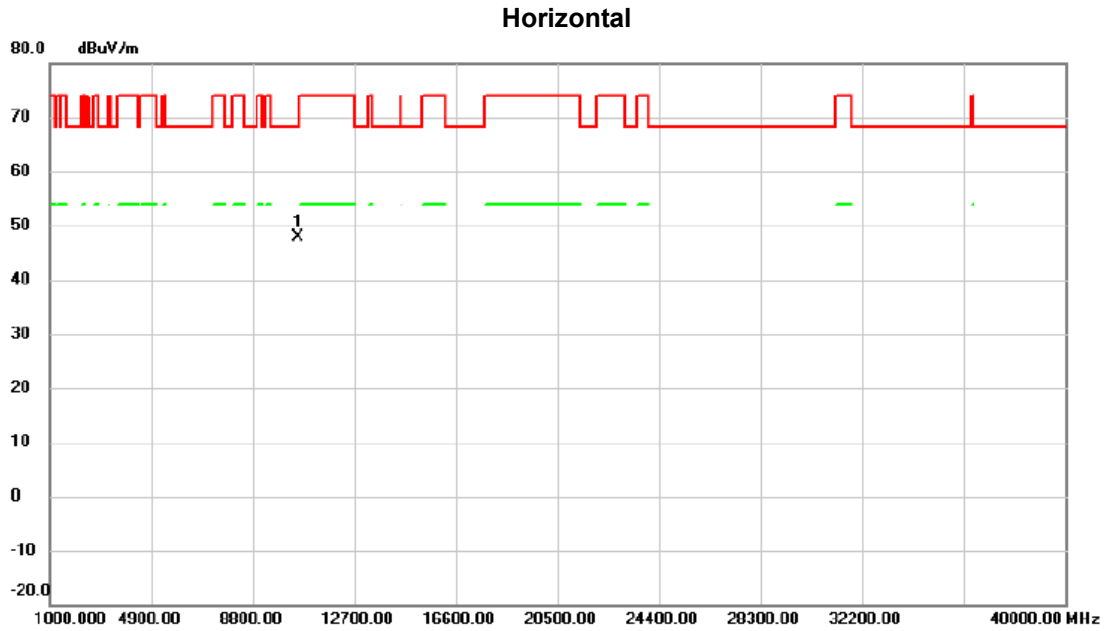


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10540.00	46.01	1.86	47.87	68.20	-20.33	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE40) Mode 5310 MHz

### Vertical

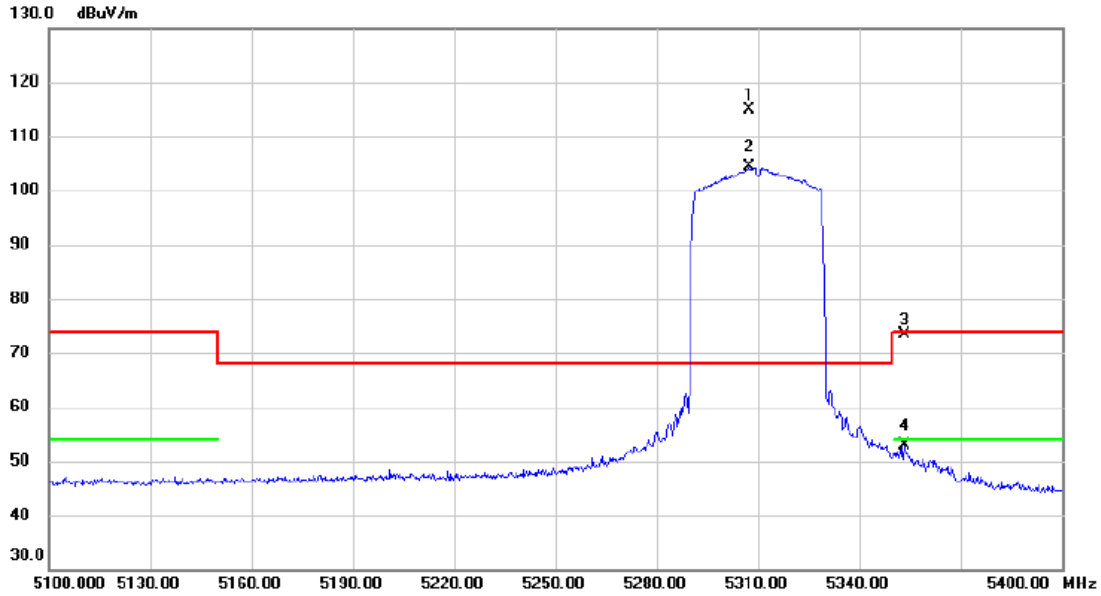


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5307.300	77.20	37.56	114.76	68.20	46.56	peak	
2	X	5307.300	66.78	37.56	104.34	68.20	36.14	AVG	
3		5353.350	35.65	37.76	73.41	74.00	-0.59	peak	
4		5353.350	15.22	37.76	52.98	54.00	-1.02	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE40) Mode 5310 MHz

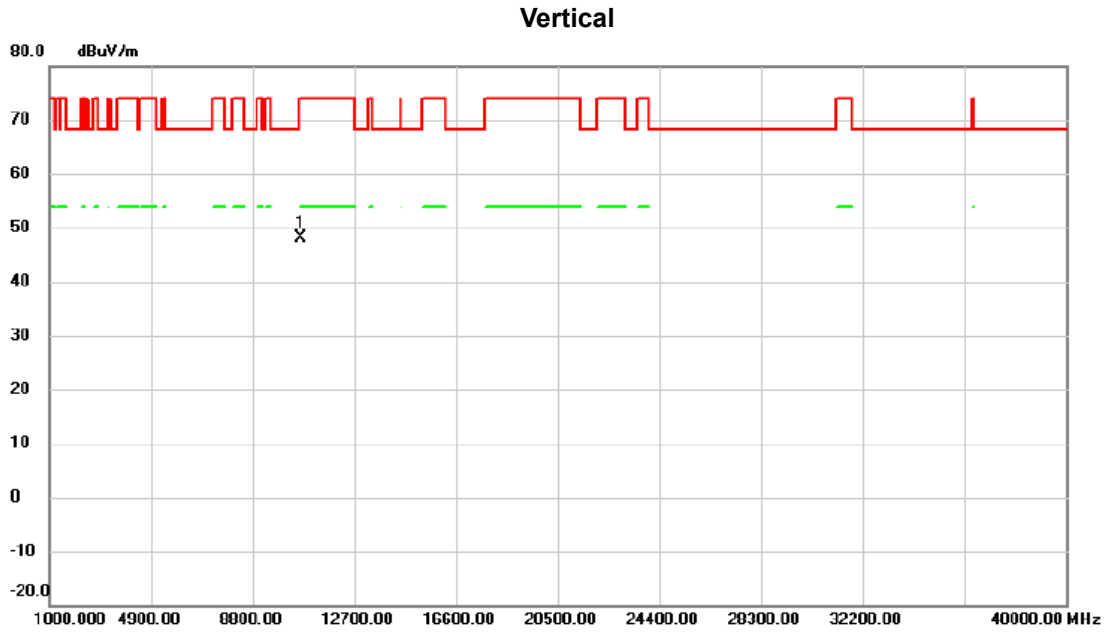


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10620.00	46.22	1.92	48.14	74.00	-25.86	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE40) Mode 5310 MHz

### Horizontal

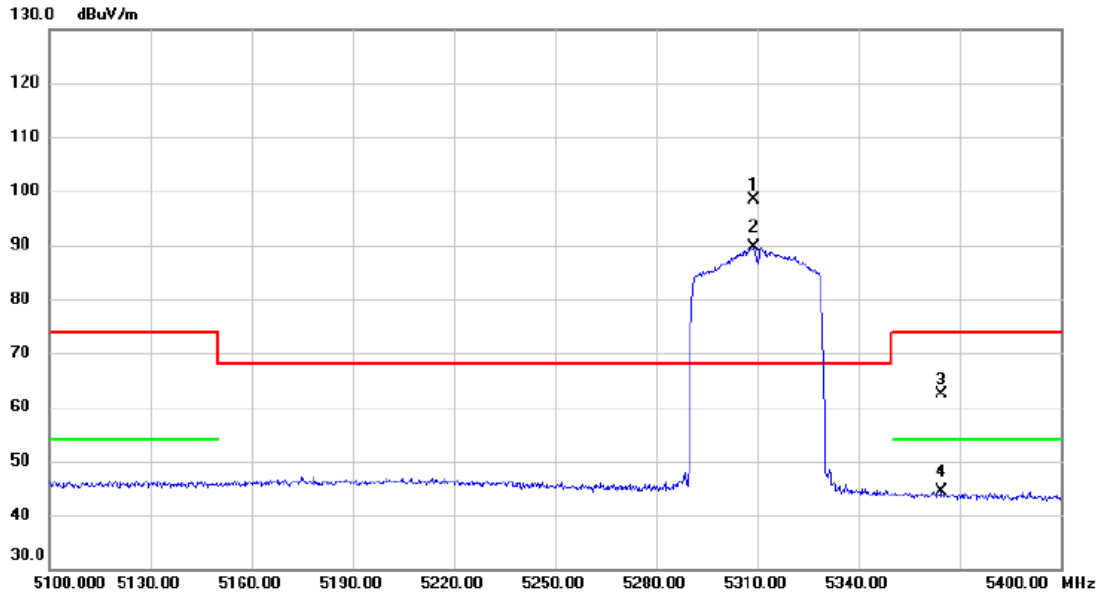


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5309.100	60.87	37.57	98.44	68.20	30.24	peak	
2	X	5309.100	52.11	37.57	89.68	68.20	21.48	AVG	
3		5364.450	24.69	37.80	62.49	74.00	-11.51	peak	
4		5364.450	6.68	37.80	44.48	54.00	-9.52	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE40) Mode 5310 MHz

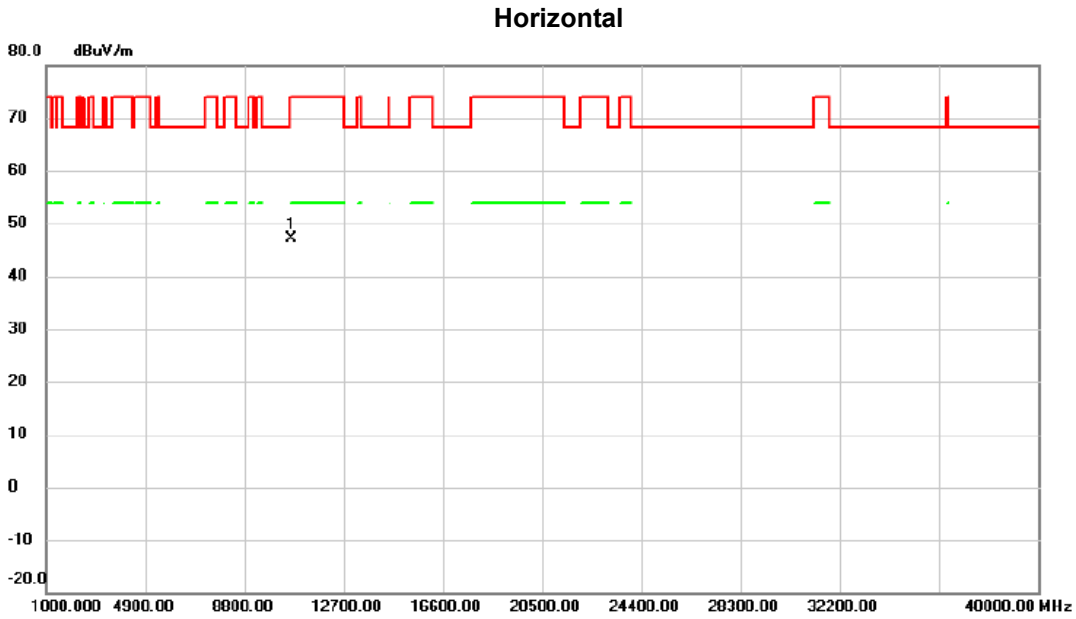


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10620.00	45.17	1.92	47.09	74.00	-26.91	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE80) Mode 5290 MHz

### Vertical

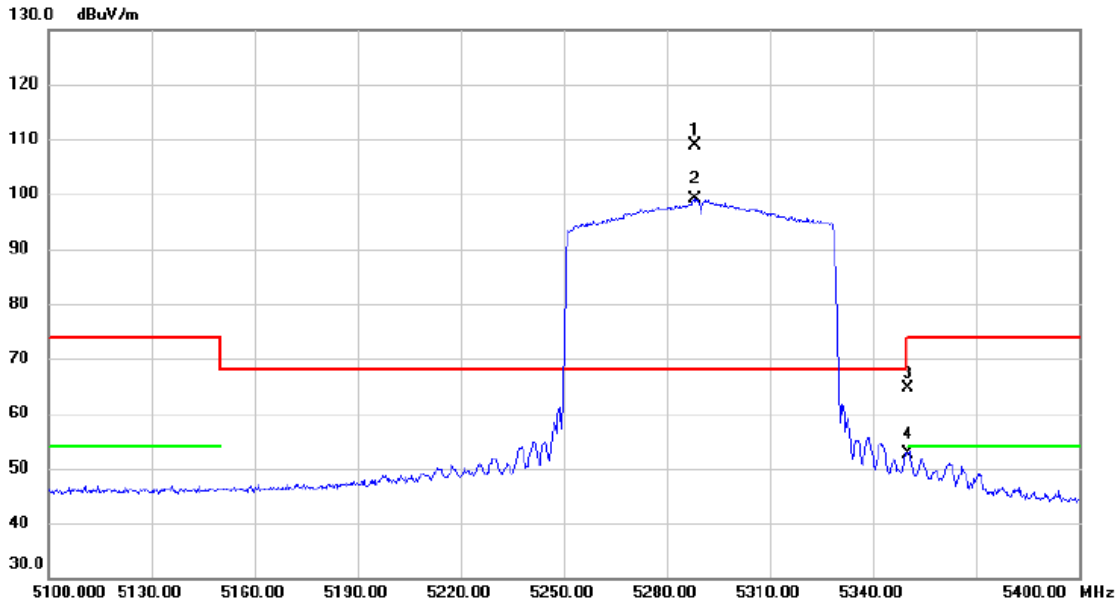


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5288.100	71.32	37.55	108.87	68.20	40.67	peak	
2	X	5288.100	61.61	37.55	99.16	68.20	30.96	AVG	
3		5350.000	26.81	37.73	64.54	74.00	-9.46	peak	
4		5350.000	14.90	37.73	52.63	54.00	-1.37	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE80) Mode 5290 MHz

### Vertical

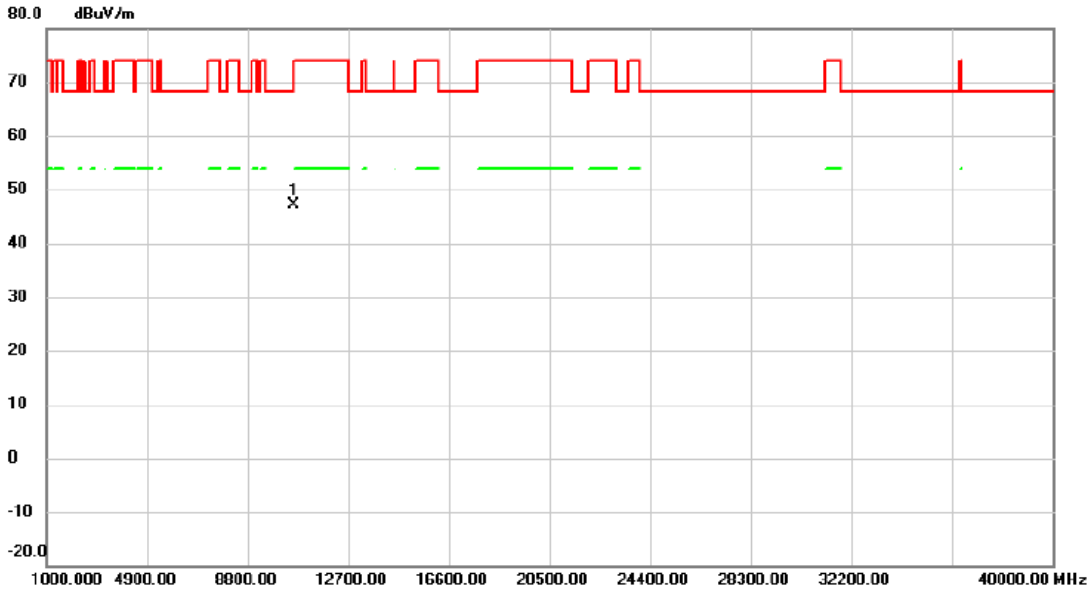


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10580.00	45.15	1.90	47.05	68.20	-21.15	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE80) Mode 5290 MHz

### Horizontal

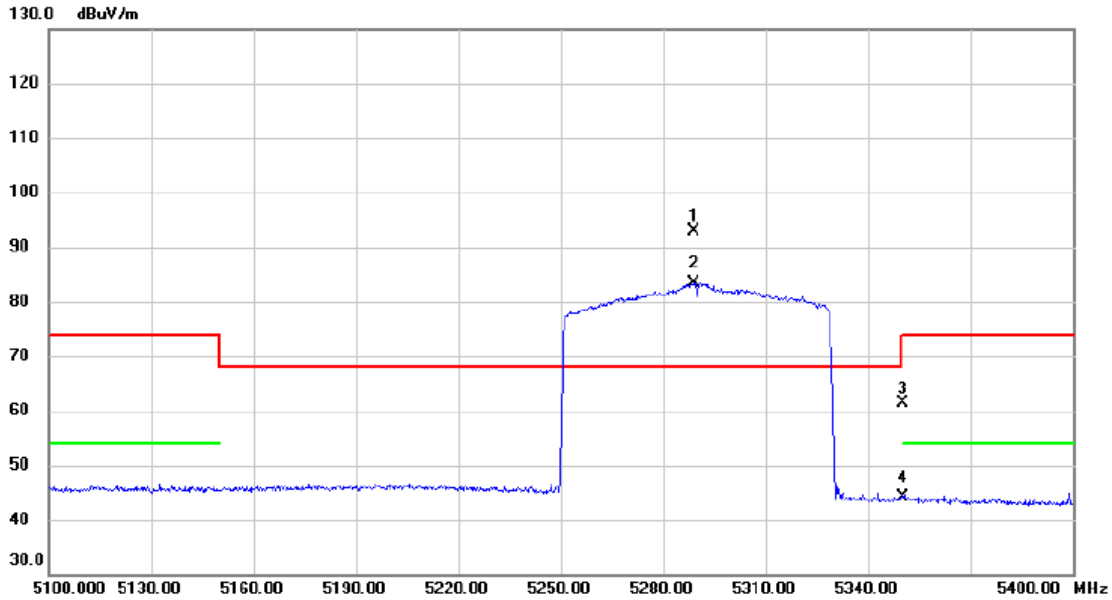


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5289.150	55.22	37.55	92.77	68.20	24.57	peak	
2	X	5289.150	45.80	37.55	83.35	68.20	15.15	AVG	
3		5350.000	23.67	37.73	61.40	74.00	-12.60	peak	
4		5350.000	6.31	37.73	44.04	54.00	-9.96	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-2A_TX ax (HE80) Mode 5290 MHz

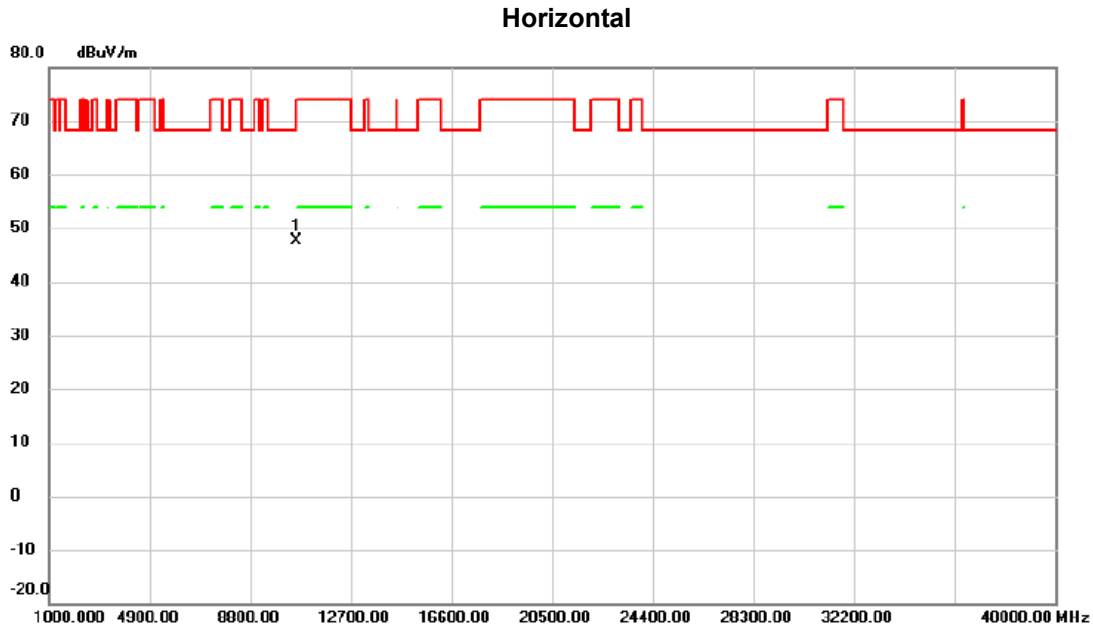


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10580.00	45.76	1.90	47.66	68.20	-20.54	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE20) Mode 5500 MHz

### Vertical

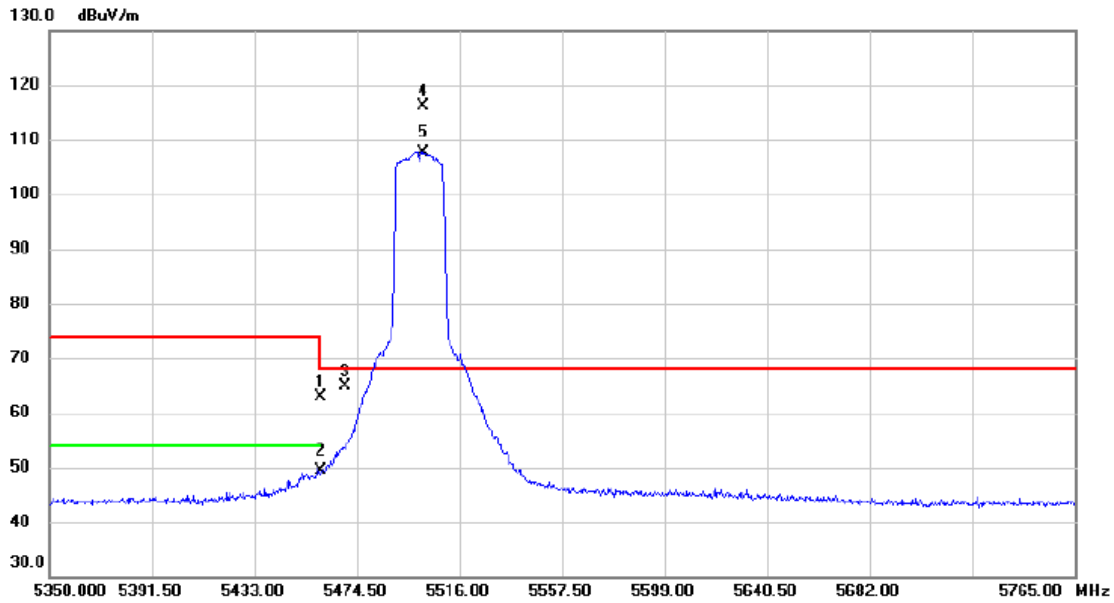


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	24.76	38.12	62.88	74.00	-11.12	peak	
2		5460.000	11.16	38.12	49.28	54.00	-4.72	AVG	
3		5470.000	26.69	38.15	64.84	68.20	-3.36	peak	
4	*	5501.060	77.81	38.24	116.05	68.20	47.85	peak	
5	X	5501.060	69.46	38.24	107.70	68.20	39.50	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE20) Mode 5500 MHz

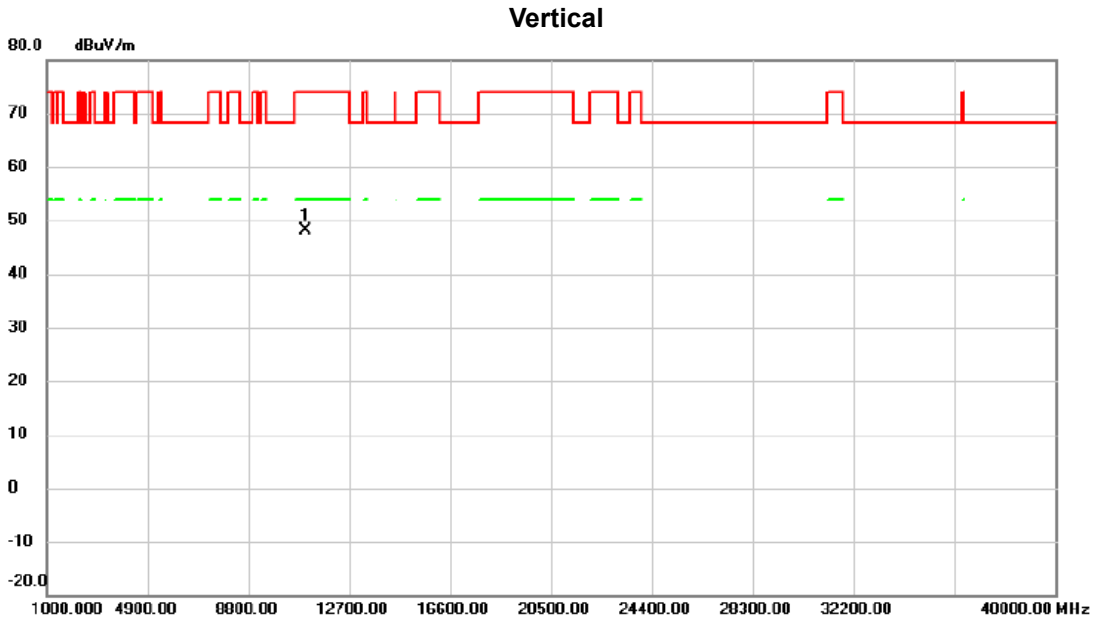


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11000.00	45.90	2.34	48.24	74.00	-25.76	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE20) Mode 5500 MHz

### Horizontal

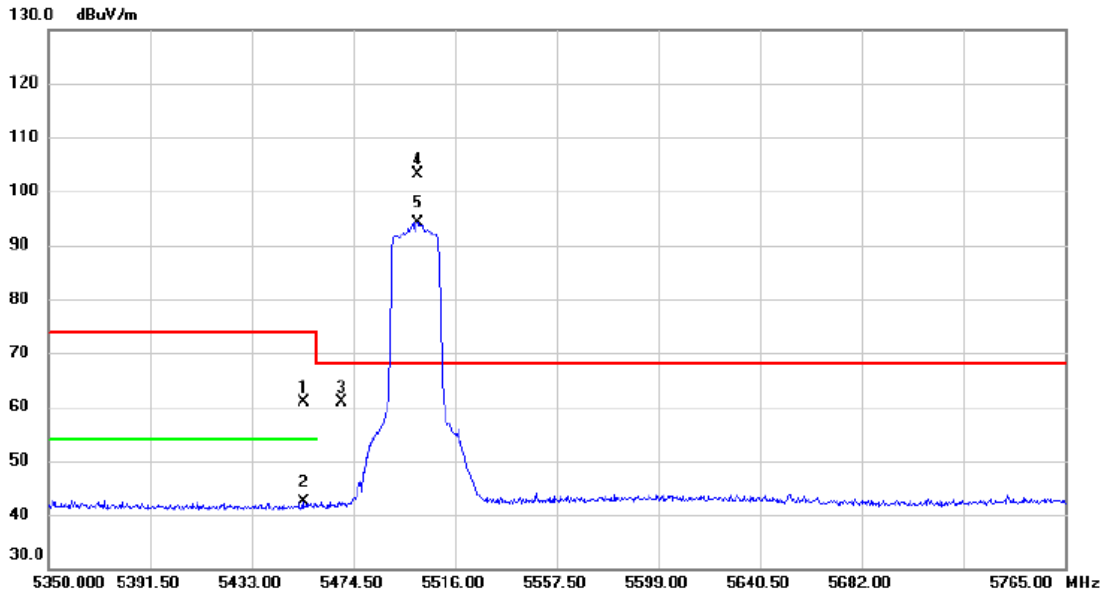


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5454.373	22.80	38.10	60.90	74.00	-13.10	peak	
2		5454.373	4.28	38.10	42.38	54.00	-11.62	AVG	
3		5470.000	22.69	38.15	60.84	68.20	-7.36	peak	
4	*	5500.852	64.97	38.24	103.21	68.20	35.01	peak	
5	X	5500.852	55.91	38.24	94.15	68.20	25.95	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE20) Mode 5500 MHz

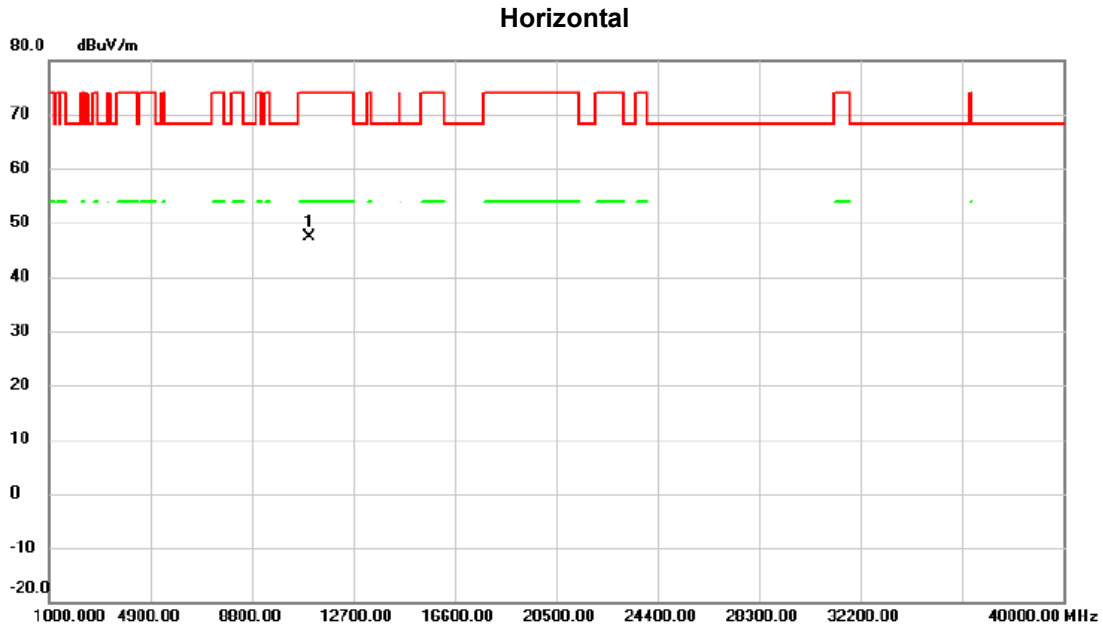


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	11000.00	45.07	2.34	47.41	74.00	-26.59	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE20) Mode 5580 MHz

### Vertical

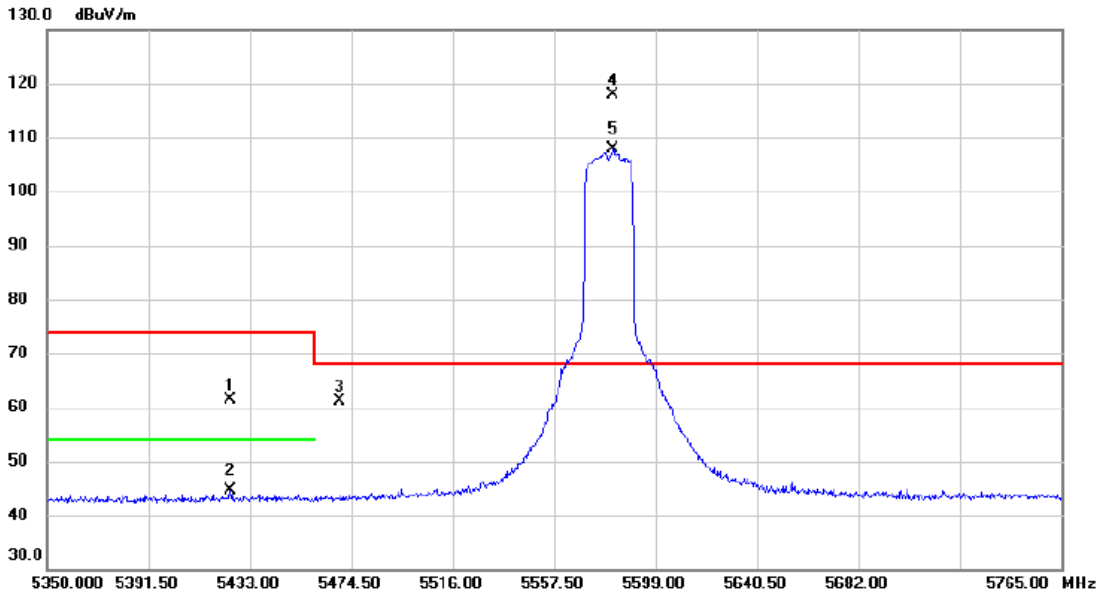


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5424.908	23.41	38.01	61.42	74.00	-12.58	peak	
2		5424.908	6.51	38.01	44.52	54.00	-9.48	AVG	
3		5470.000	23.02	38.15	61.17	68.20	-7.03	peak	
4	*	5581.570	79.58	38.32	117.90	68.20	49.70	peak	
5	X	5581.570	69.53	38.32	107.85	68.20	39.65	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE20) Mode 5580 MHz

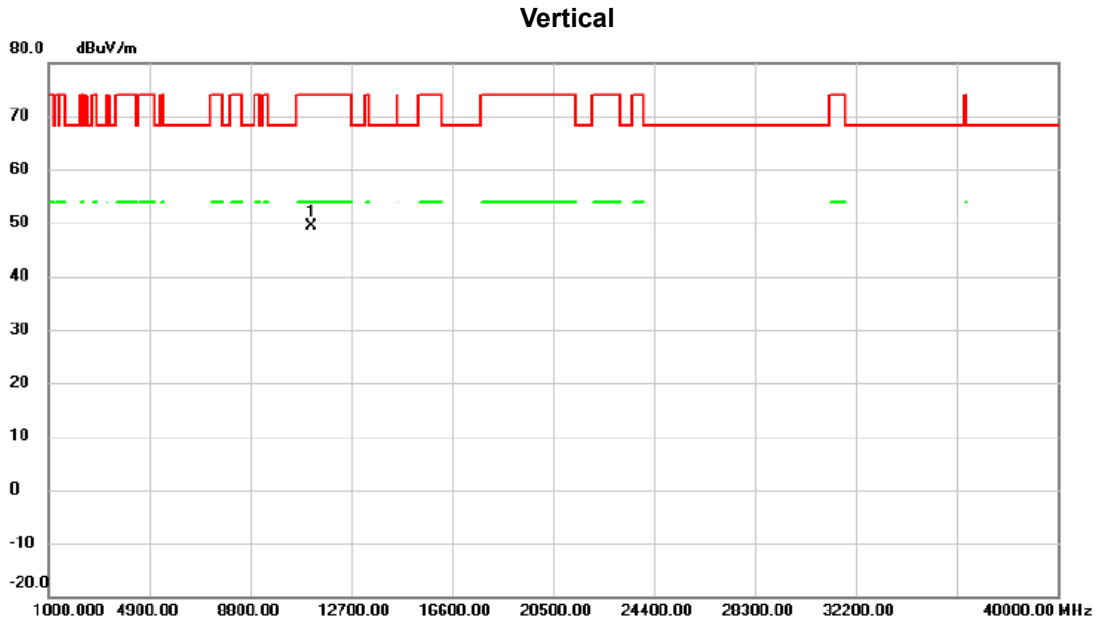


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11160.00	47.27	2.04	49.31	74.00	-24.69	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE20) Mode 5580 MHz

### Horizontal

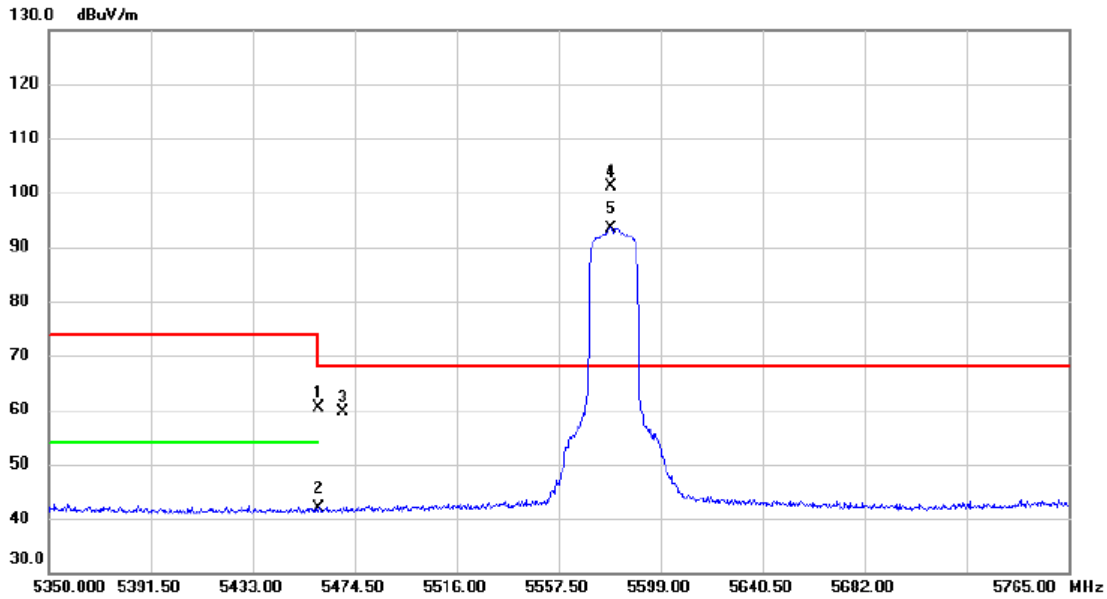

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	22.30	38.12	60.42	74.00	-13.58	peak	
2		5460.000	3.86	38.12	41.98	54.00	-12.02	AVG	
3		5470.000	21.44	38.15	59.59	68.20	-8.61	peak	
4	*	5578.873	62.73	38.32	101.05	68.20	32.85	peak	
5	X	5578.873	55.18	38.32	93.50	68.20	25.30	AVG	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE20) Mode 5580 MHz

### Horizontal

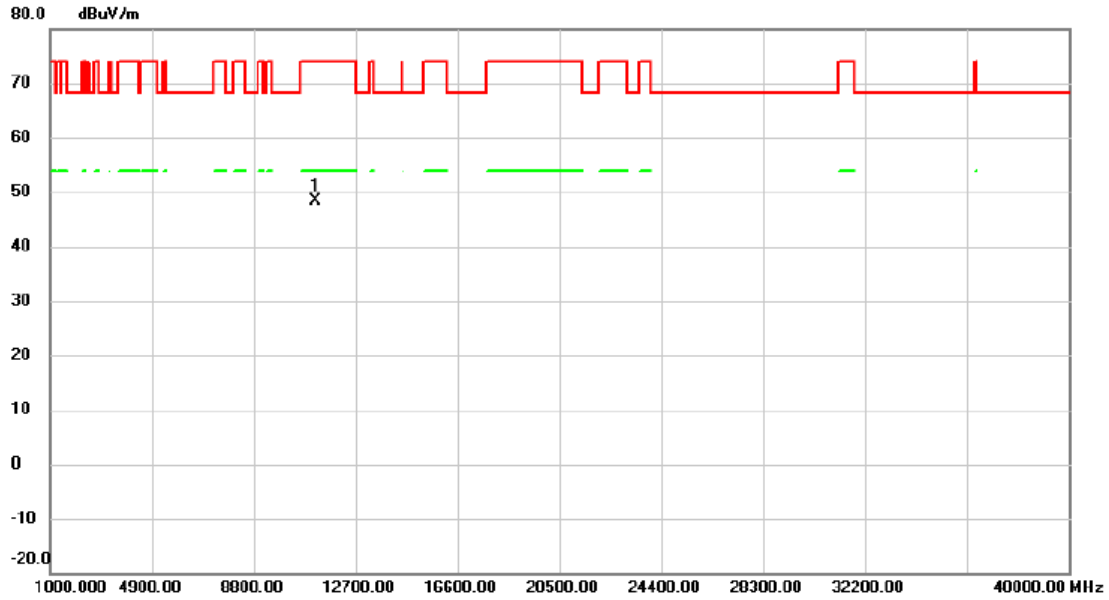


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11160.00	46.27	2.04	48.31	74.00	-25.69	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE20) Mode 5700 MHz

### Vertical

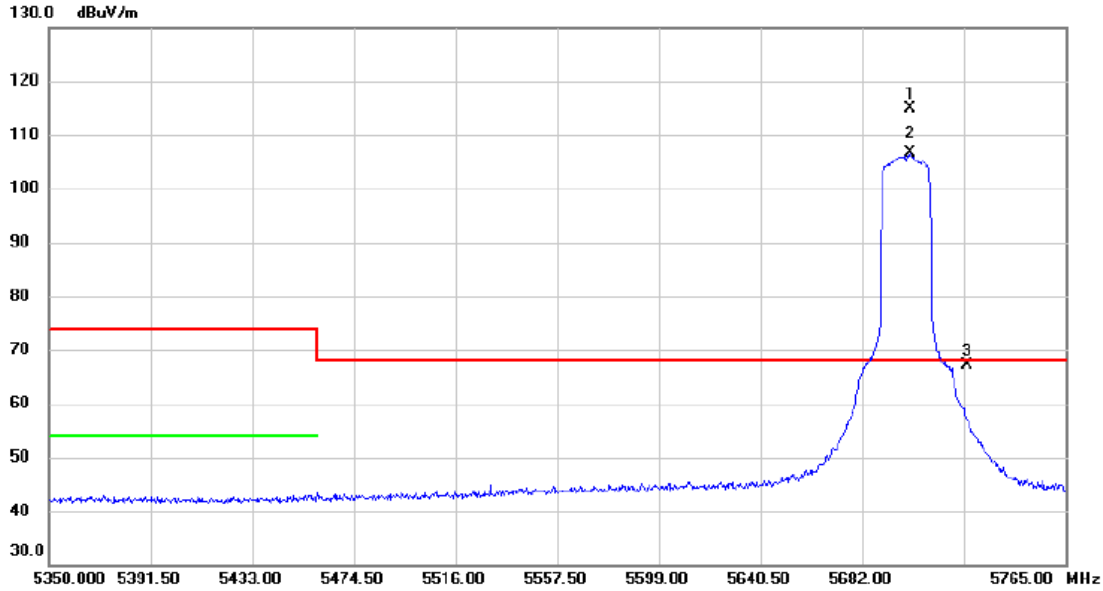


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5701.712	76.54	38.42	114.96	68.20	46.76	peak	
2	X	5701.712	68.11	38.42	106.53	68.20	38.33	AVG	
3		5725.000	28.63	38.50	67.13	68.20	-1.07	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE20) Mode 5700 MHz

### Vertical

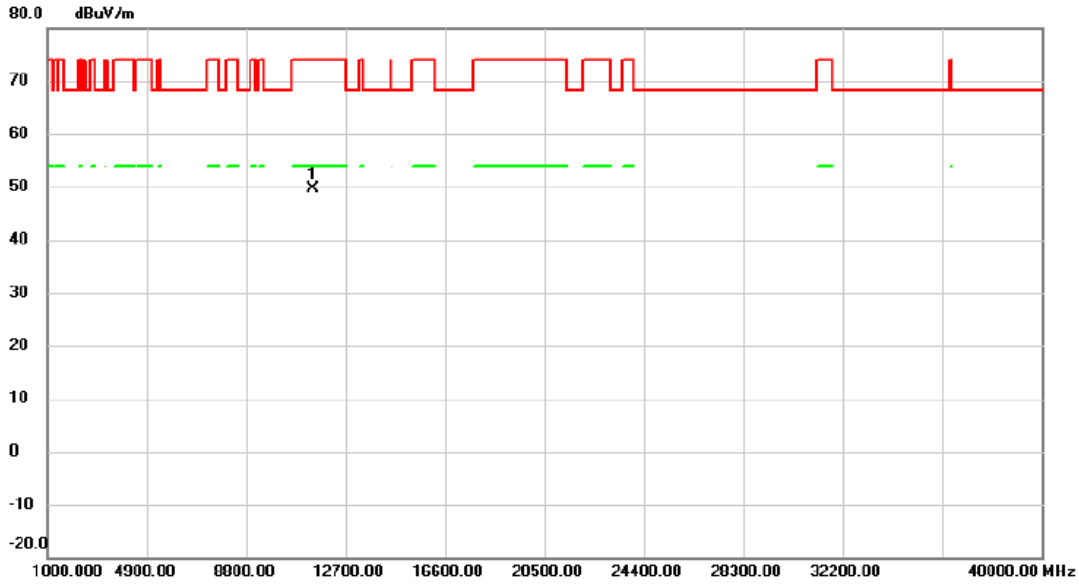


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11400.00	47.40	2.13	49.53	74.00	-24.47	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE20) Mode 5700 MHz

### Horizontal

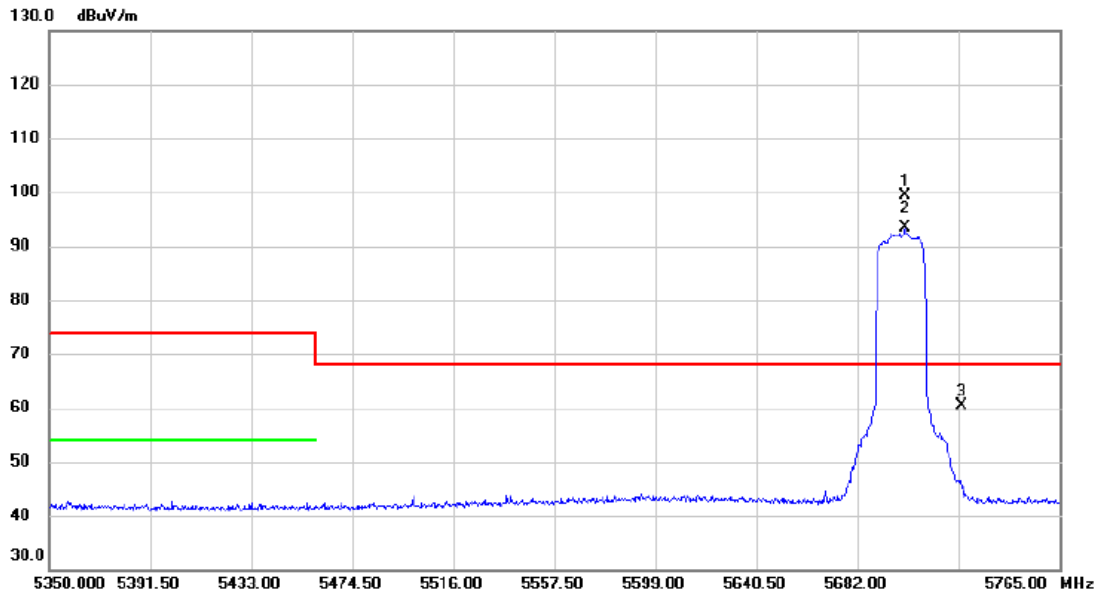


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5701.505	60.92	38.42	99.34	68.20	31.14	peak	
2	X	5701.505	54.94	38.42	93.36	68.20	25.16	AVG	
3		5725.000	21.95	38.50	60.45	68.20	-7.75	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE20) Mode 5700 MHz

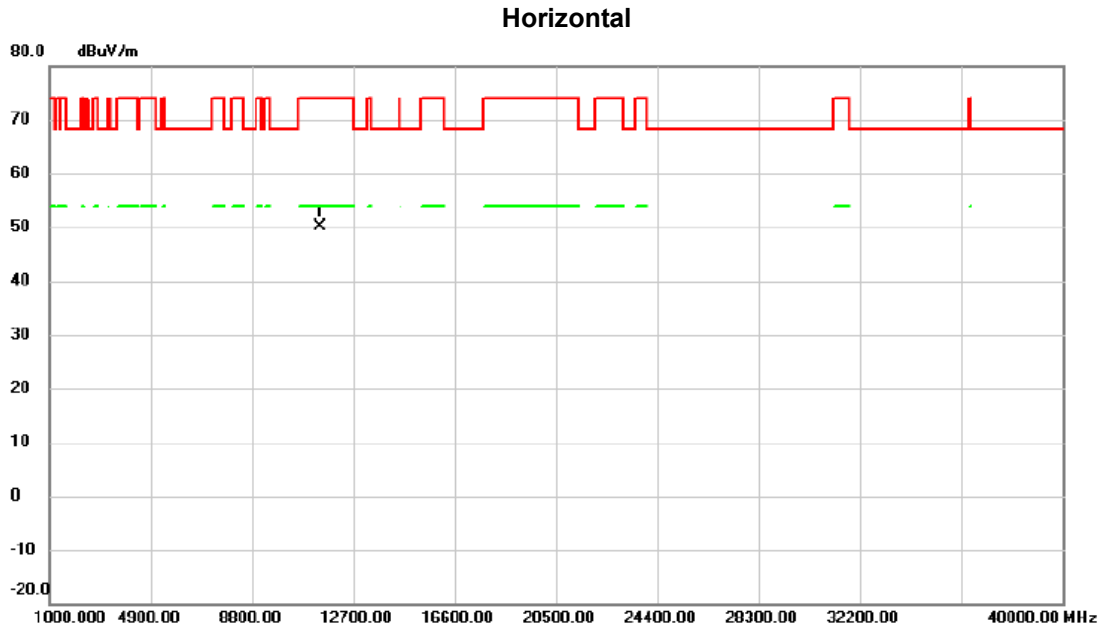


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11407.15	48.01	2.14	50.15	74.00	-23.85	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE40) Mode 5510 MHz

### Vertical

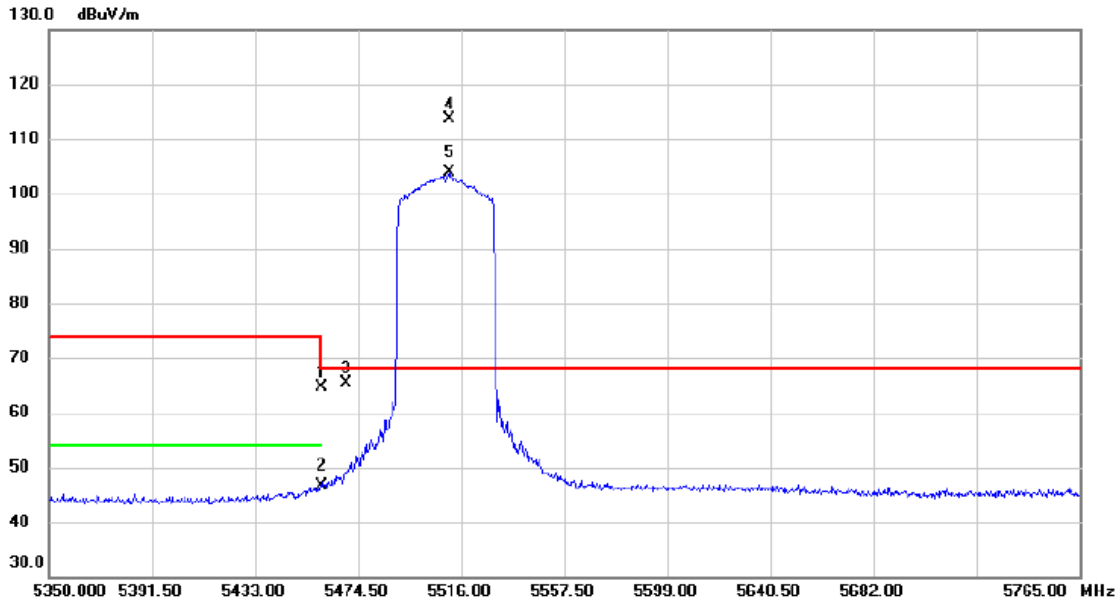


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	26.63	38.12	64.75	74.00	-9.25	peak	
2		5460.000	8.59	38.12	46.71	54.00	-7.29	AVG	
3		5470.000	27.28	38.15	65.43	68.20	-2.77	peak	
4	*	5511.020	75.36	38.25	113.61	68.20	45.41	peak	
5	X	5511.020	65.52	38.25	103.77	68.20	35.57	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE40) Mode 5510 MHz

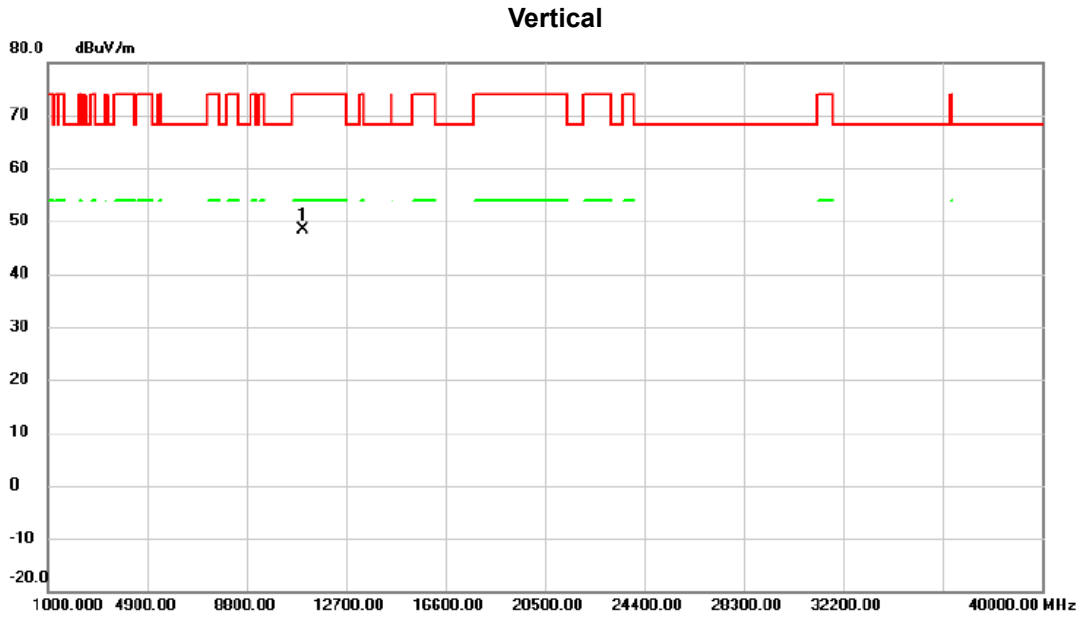


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11020.00	46.04	2.30	48.34	74.00	-25.66	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE40) Mode 5510 MHz

### Horizontal

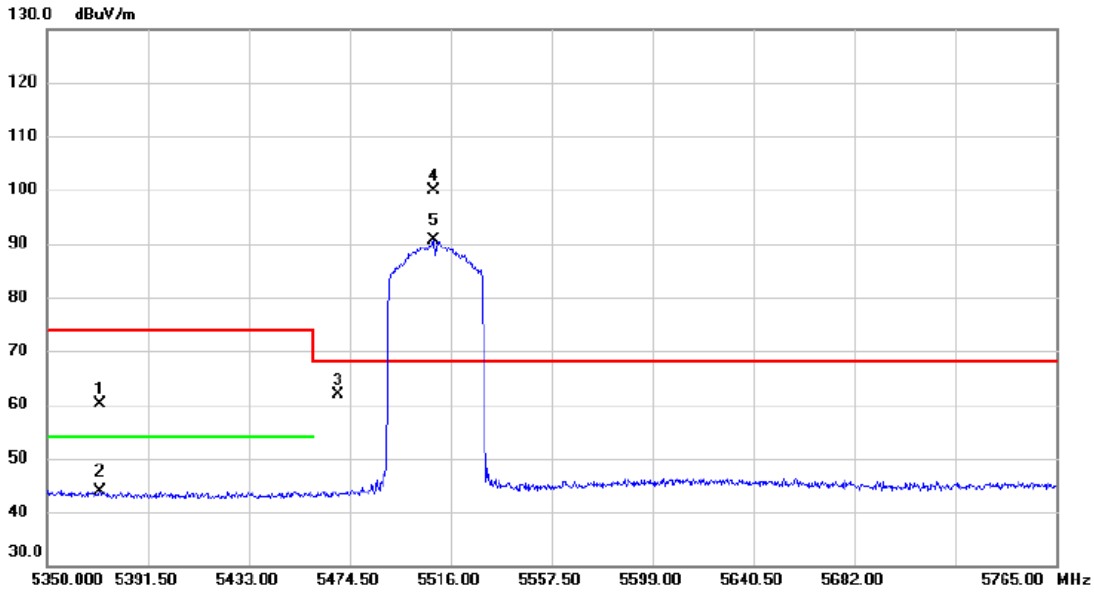


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	X	5371.995	22.29	37.82	60.11	74.00	-13.89	peak	
2	X	5371.995	6.08	37.82	43.90	54.00	-10.10	AVG	
3	X	5470.000	23.71	38.15	61.86	68.20	-6.34	peak	
4	*	5509.153	61.73	38.25	99.98	68.20	31.78	peak	
5	X	5509.153	52.43	38.25	90.68	68.20	22.48	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE40) Mode 5510 MHz

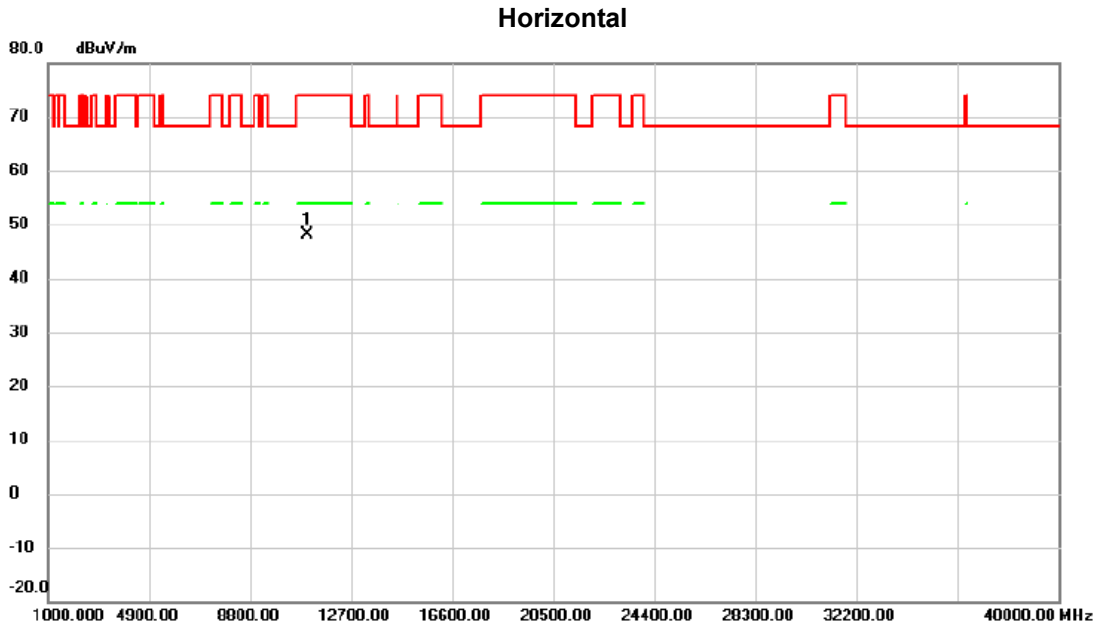


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11020.00	45.93	2.30	48.23	74.00	-25.77	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE40) Mode 5550 MHz

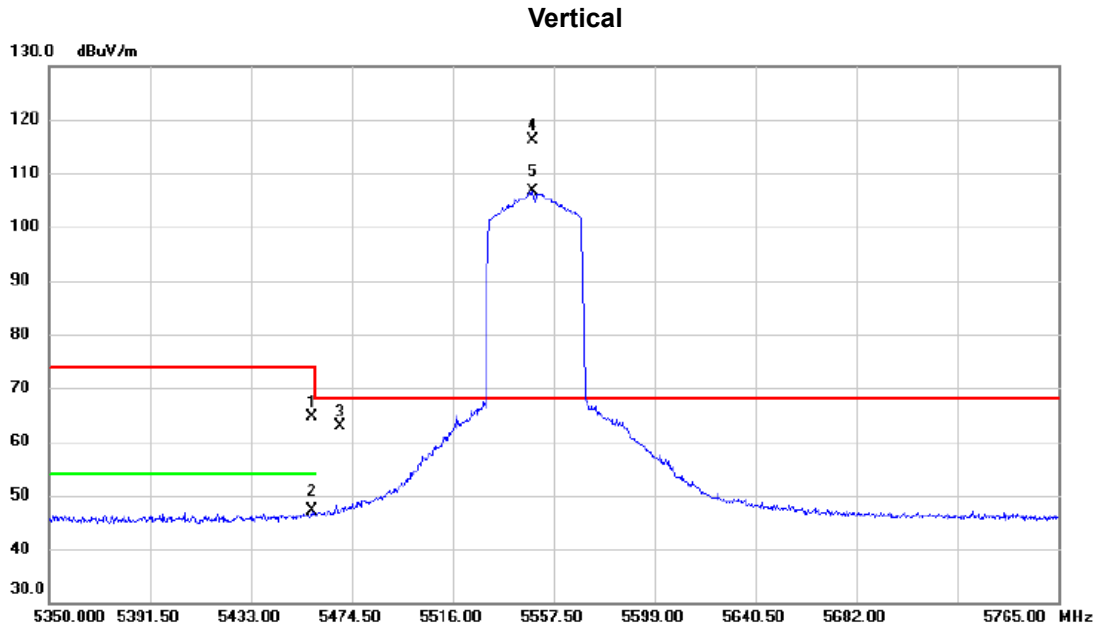


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5458.108	26.52	38.11	64.63	74.00	-9.37	peak	
2		5458.108	9.01	38.11	47.12	54.00	-6.88	AVG	
3		5470.000	24.73	38.15	62.88	68.20	-5.32	peak	
4	*	5548.785	77.89	38.28	116.17	68.20	47.97	peak	
5	X	5548.785	68.45	38.28	106.73	68.20	38.53	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE40) Mode 5550 MHz

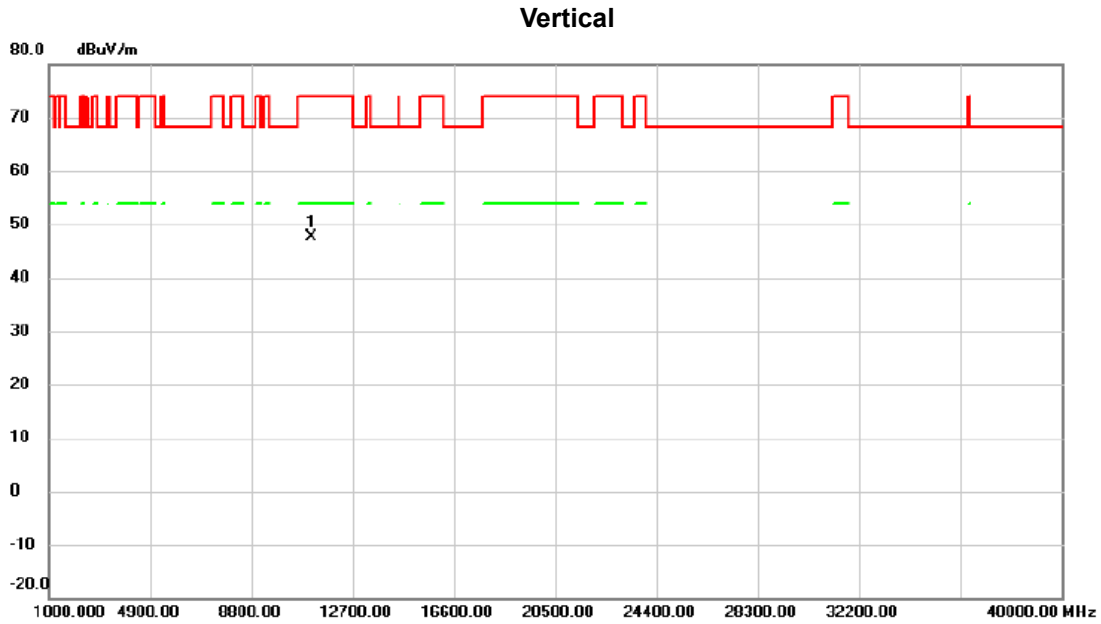


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11100.00	45.47	2.16	47.63	74.00	-26.37	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE40) Mode 5550 MHz

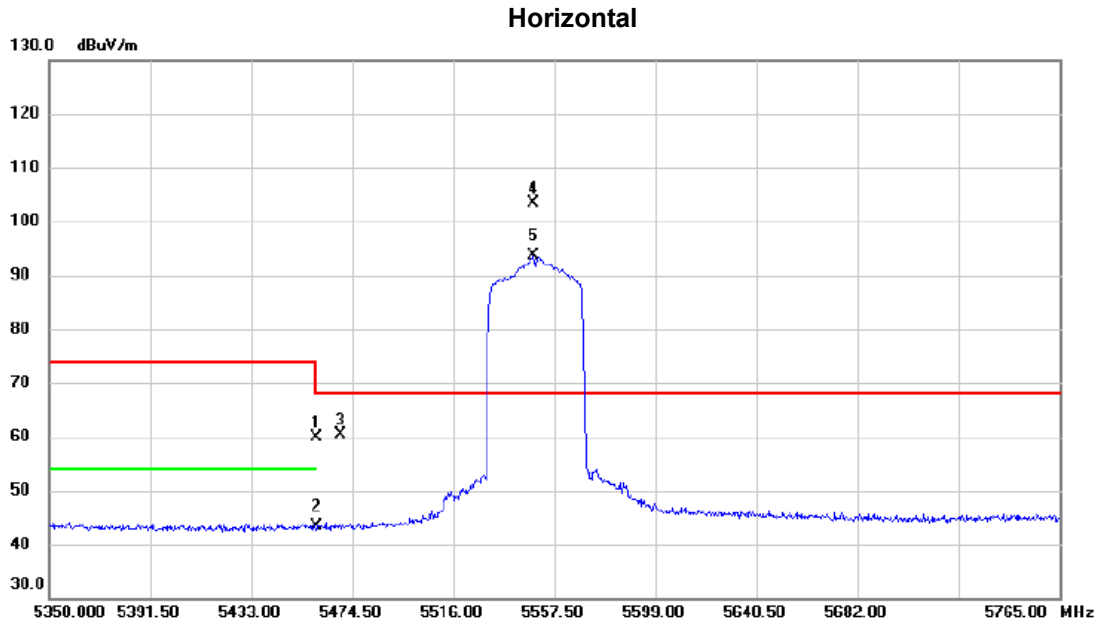


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	21.86	38.12	59.98	74.00	-14.02	peak	
2		5460.000	5.18	38.12	43.30	54.00	-10.70	AVG	
3		5470.000	22.15	38.15	60.30	68.20	-7.90	peak	
4	*	5549.200	65.11	38.28	103.39	68.20	35.19	peak	
5	X	5549.200	55.38	38.28	93.66	68.20	25.46	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE40) Mode 5550 MHz

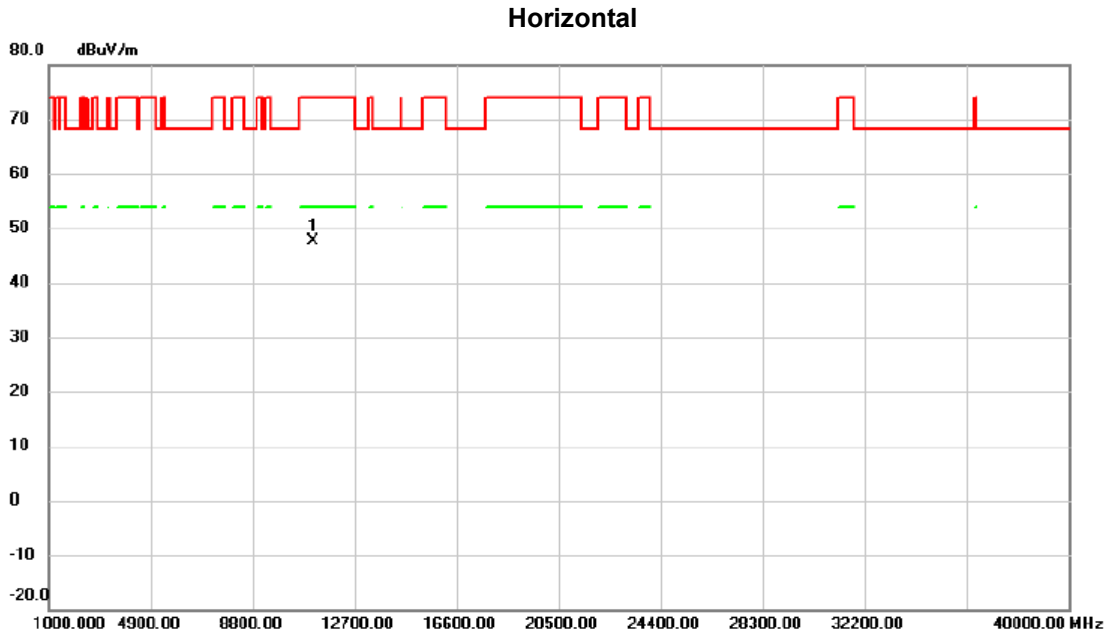


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11100.00	45.54	2.16	47.70	74.00	-26.30	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE40) Mode 5670 MHz

### Vertical

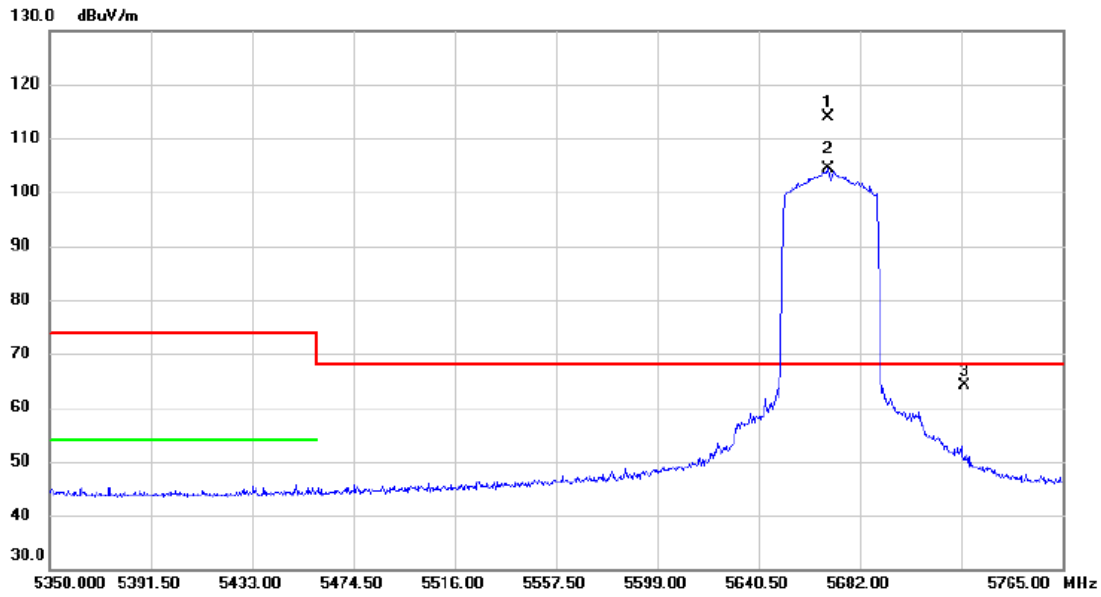


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5669.135	75.56	38.39	113.95	68.20	45.75	peak	
2	X	5669.135	65.98	38.39	104.37	68.20	36.17	AVG	
3		5725.000	25.70	38.50	64.20	68.20	-4.00	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE40) Mode 5670 MHz

### Vertical

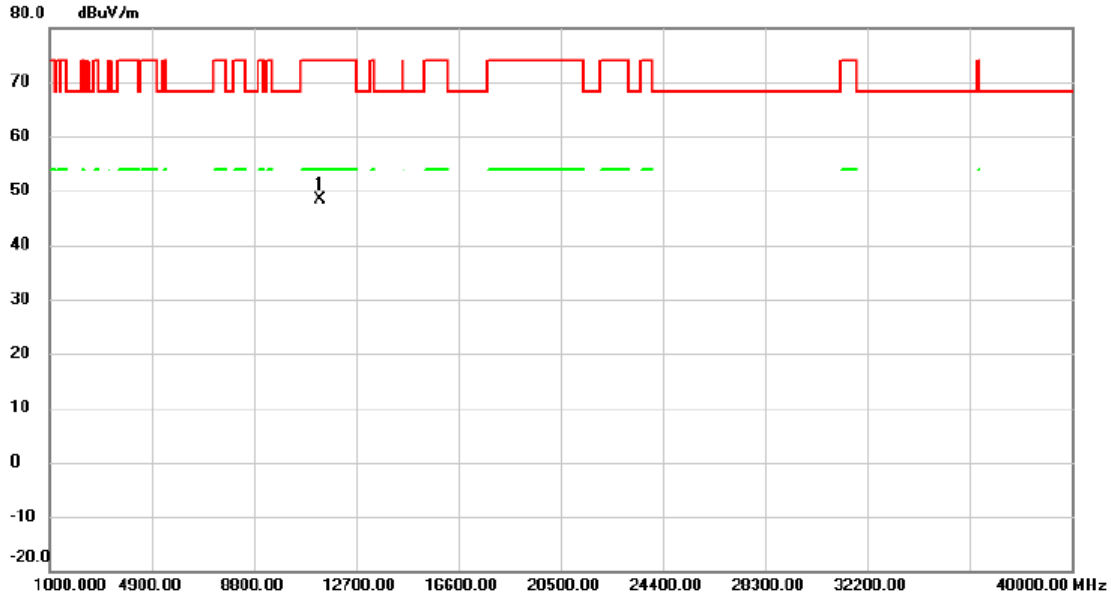


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11340.00	46.33	2.08	48.41	74.00	-25.59	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE40) Mode 5670 MHz

### Horizontal

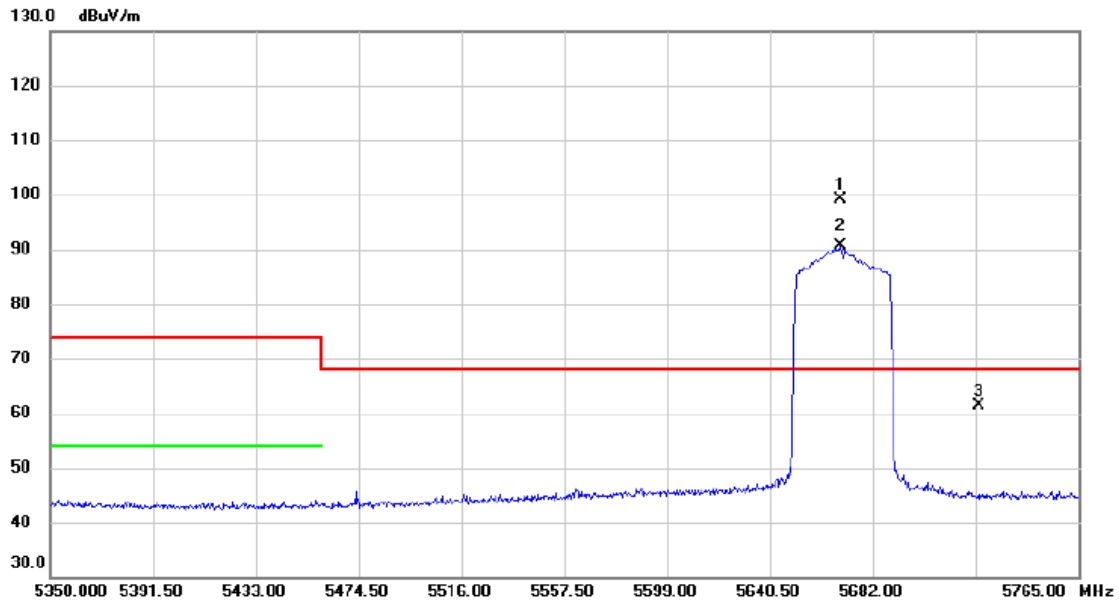


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5669.135	60.62	38.39	99.01	68.20	30.81	peak	
2	X	5669.135	52.20	38.39	90.59	68.20	22.39	AVG	
3		5725.000	22.78	38.50	61.28	68.20	-6.92	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE40) Mode 5670 MHz

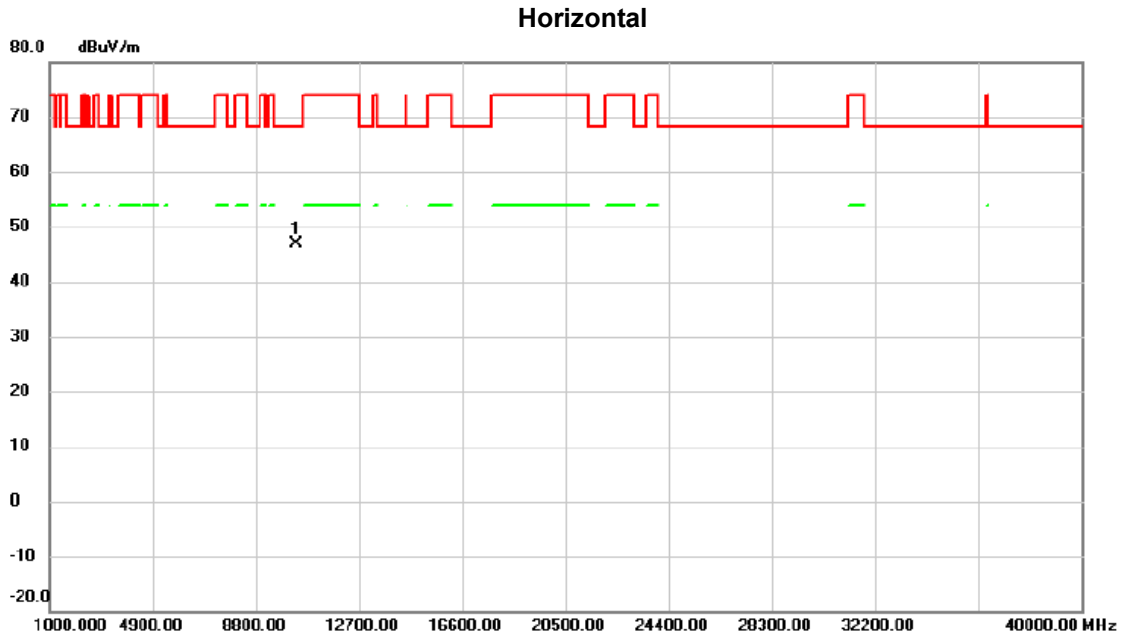

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	10340.00	45.31	1.61	46.92	68.20	-21.28	peak	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE80) Mode 5530 MHz

### Vertical

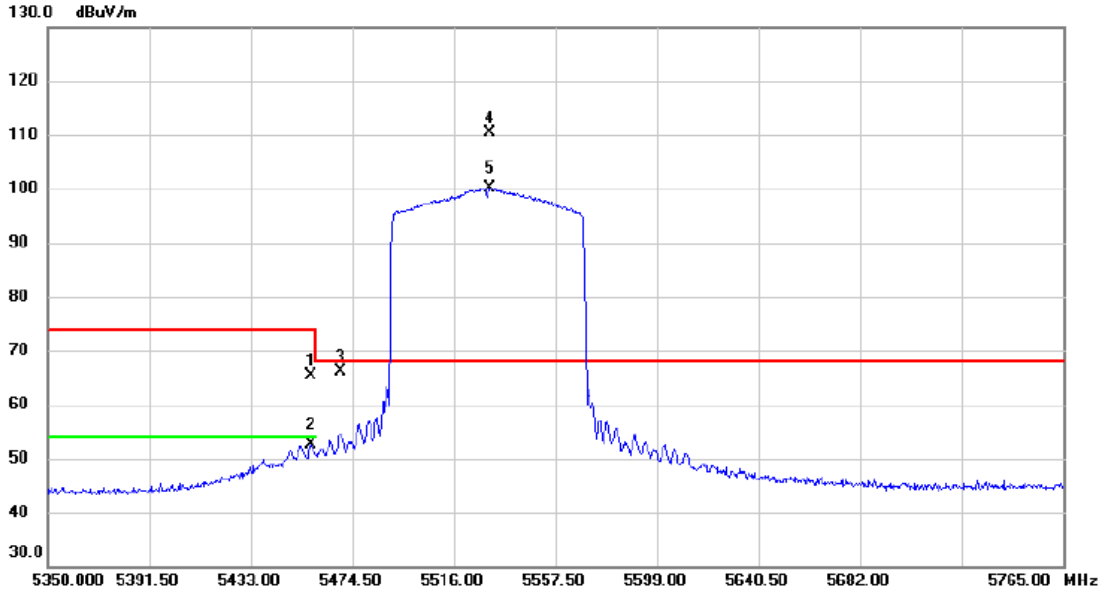


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5457.693	27.18	38.11	65.29	74.00	-8.71	peak	
2		5457.693	14.62	38.11	52.73	54.00	-1.27	AVG	
3		5470.000	27.99	38.15	66.14	68.20	-2.06	peak	
4	*	5530.940	72.08	38.27	110.35	68.20	42.15	peak	
5	X	5530.940	61.89	38.27	100.16	68.20	31.96	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE80) Mode 5530 MHz

### Vertical

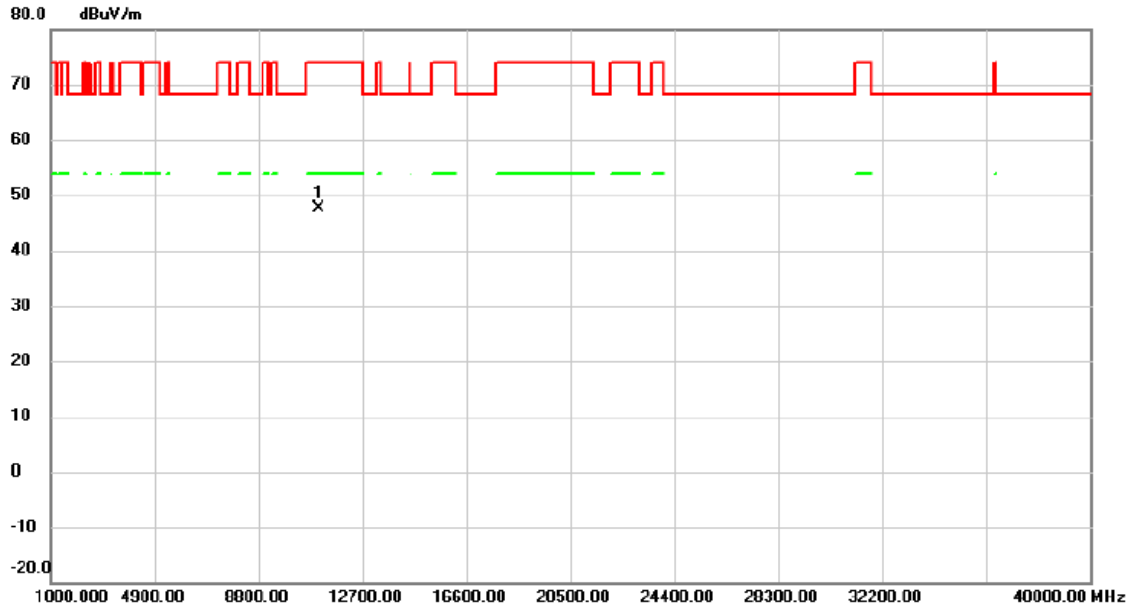


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11060.00	45.42	2.23	47.65	74.00	-26.35	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE80) Mode 5530 MHz

### Horizontal

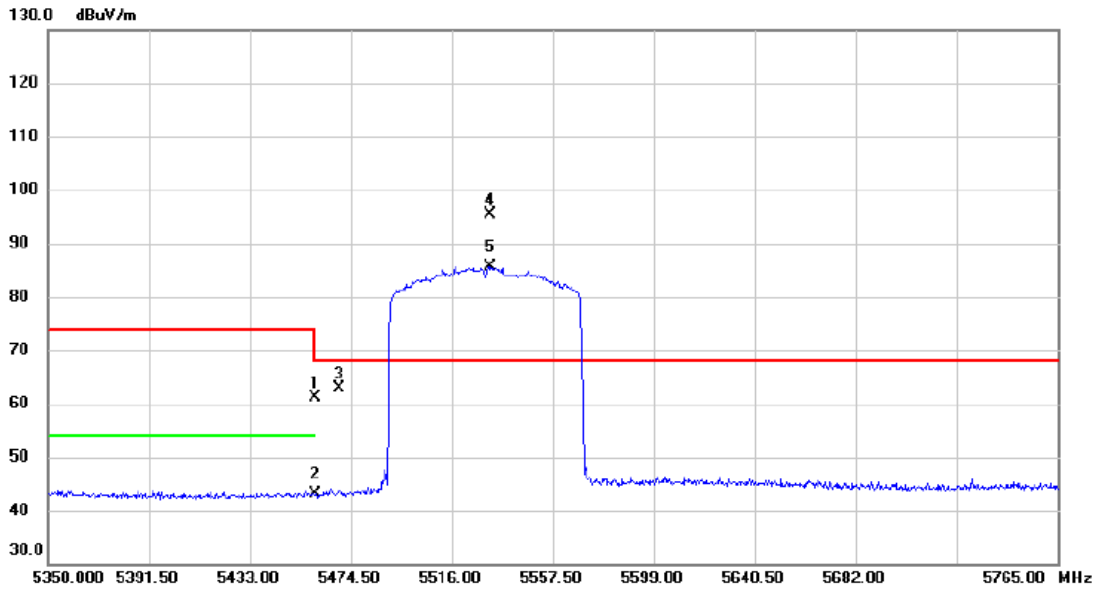


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5460.000	23.09	38.12	61.21	74.00	-12.79	peak	
2		5460.000	4.99	38.12	43.11	54.00	-10.89	AVG	
3		5470.000	24.73	38.15	62.88	68.20	-5.32	peak	
4	*	5531.977	57.11	38.27	95.38	68.20	27.18	peak	
5	X	5531.977	47.41	38.27	85.68	68.20	17.48	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-2C_TX ax (HE80) Mode 5530 MHz

### Horizontal

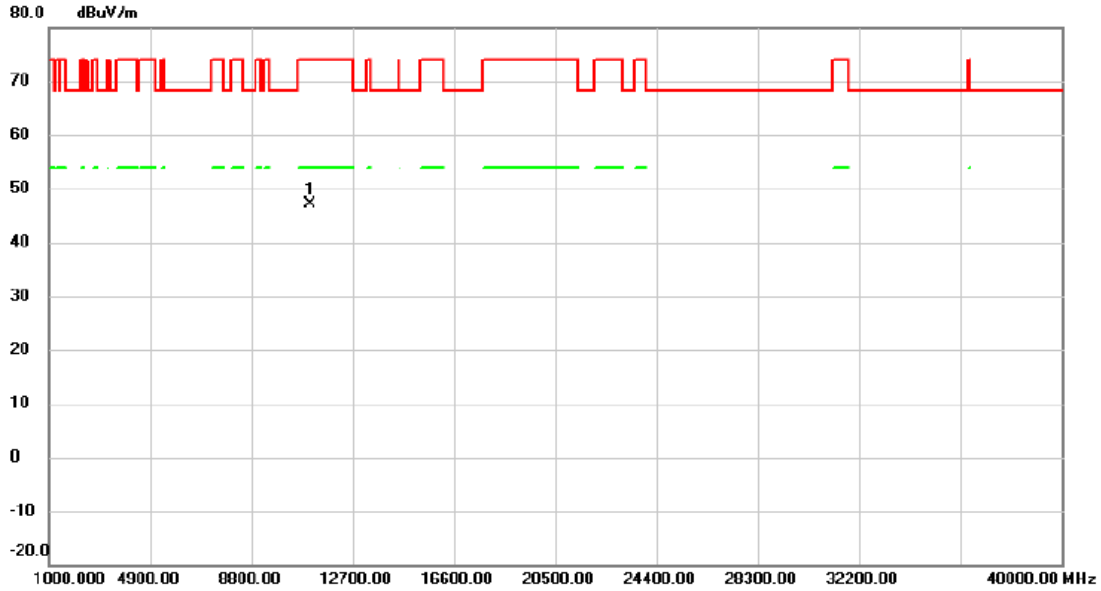


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11060.00	44.84	2.23	47.07	74.00	-26.93	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE20) Mode 5745 MHz

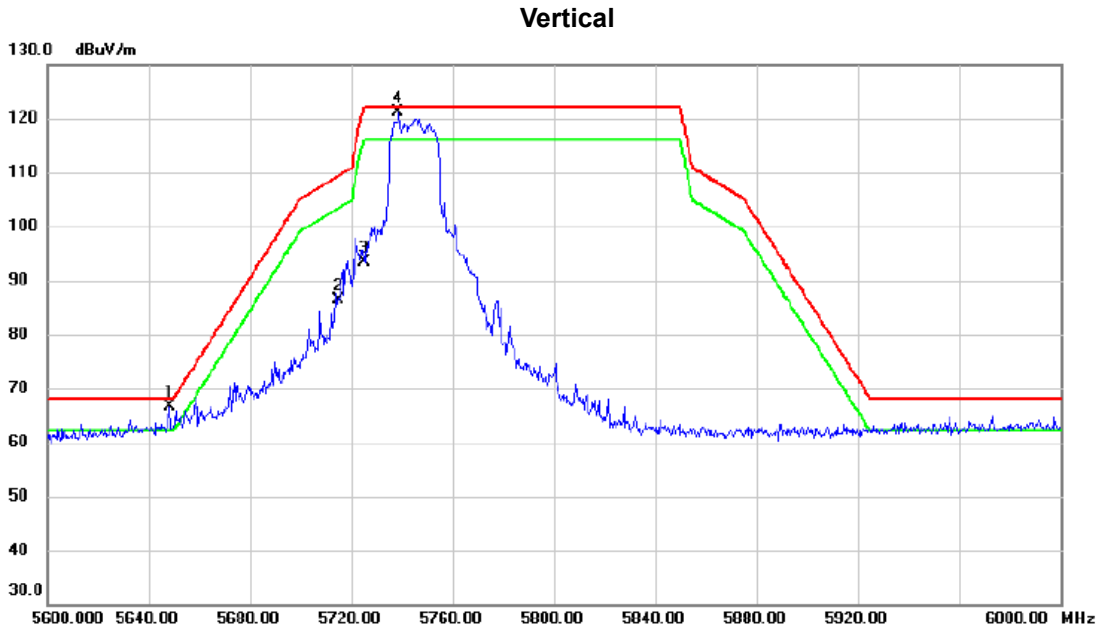


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	5648.200	28.24	38.37	66.61	68.20	-1.59	peak	
2		5715.000	47.86	38.46	86.32	109.40	-23.08	peak	
3		5725.000	54.93	38.50	93.43	122.20	-28.77	peak	
4	*	5738.600	82.62	38.55	121.17	122.20	-1.03	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE20) Mode 5745 MHz

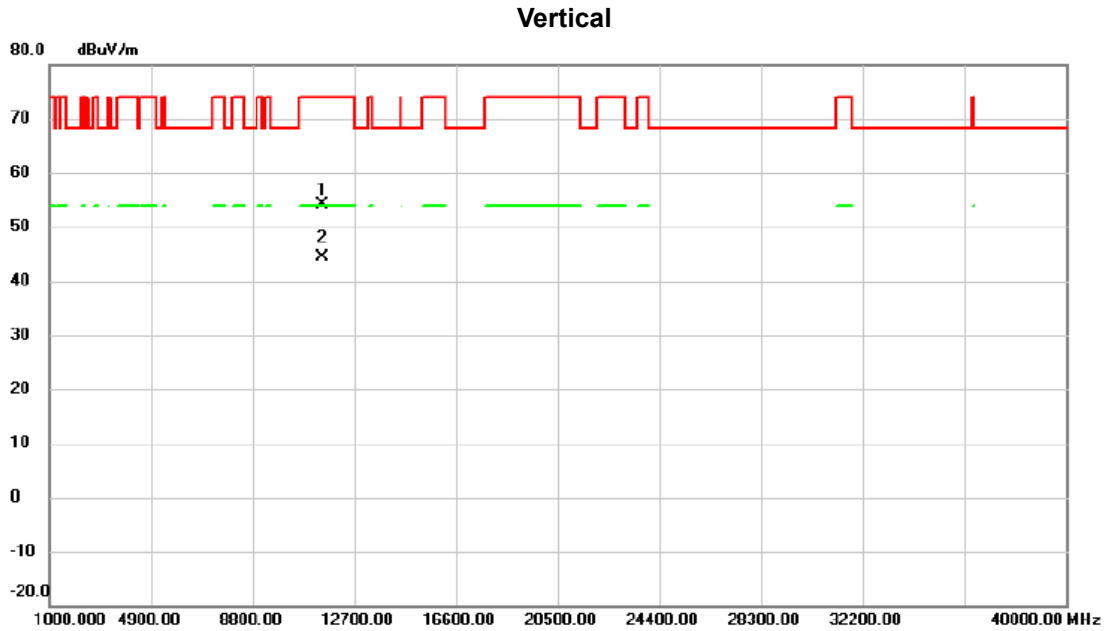


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11487.10	51.98	2.21	54.19	74.00	-19.81	peak	
2	*	11489.28	42.12	2.20	44.32	54.00	-9.68	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE20) Mode 5745 MHz

### Vertical

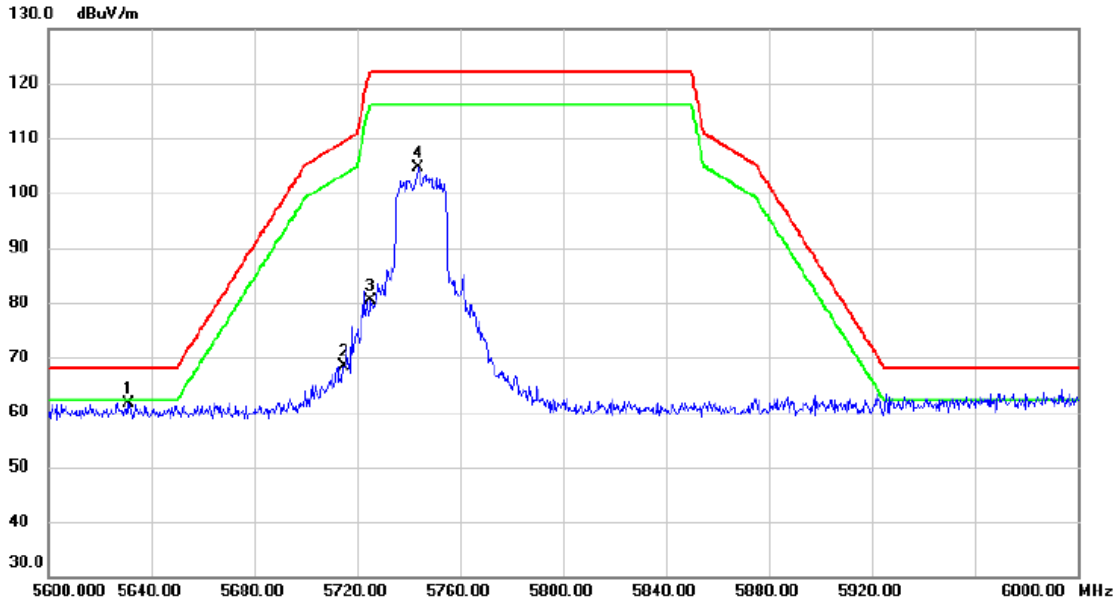

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5631.000	23.20	38.36	61.56	68.20	-6.64	peak	
2		5715.000	29.89	38.46	68.35	109.40	-41.05	peak	
3		5725.000	41.84	38.50	80.34	122.20	-41.86	peak	
4		5743.800	66.17	38.57	104.74	122.20	-17.46	peak	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE20) Mode 5745 MHz

### Horizontal

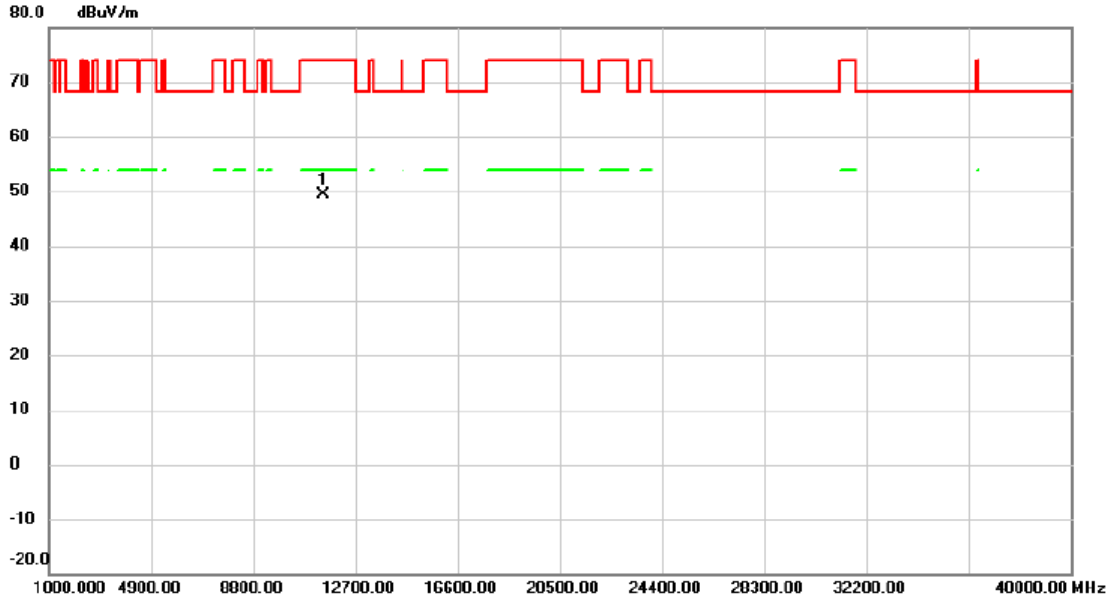


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11500.75	47.23	2.21	49.44	74.00	-24.56	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE20) Mode 5785 MHz

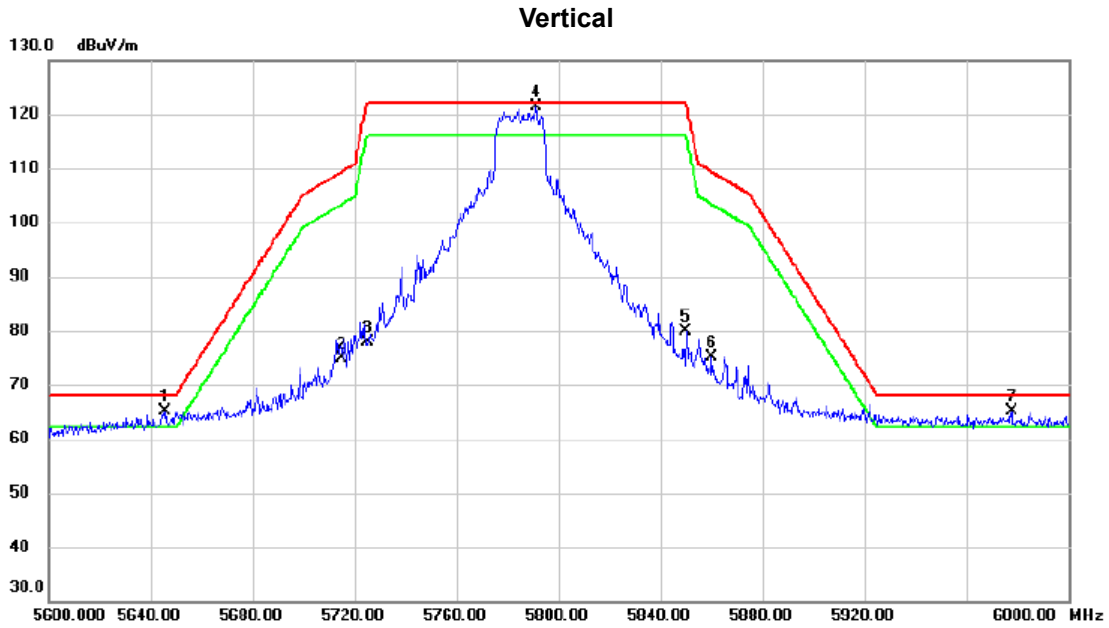


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	5645.600	26.83	38.37	65.20	68.20	-3.00	peak	
2		5715.000	36.35	38.46	74.81	109.40	-34.59	peak	
3		5725.000	39.35	38.50	77.85	122.20	-44.35	peak	
4	*	5791.200	82.60	38.75	121.35	122.20	-0.85	peak	
5		5850.000	41.05	38.91	79.96	122.20	-42.24	peak	
6		5860.000	36.11	38.95	75.06	109.40	-34.34	peak	
7	!	5977.600	25.96	39.21	65.17	68.20	-3.03	peak	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE20) Mode 5785 MHz

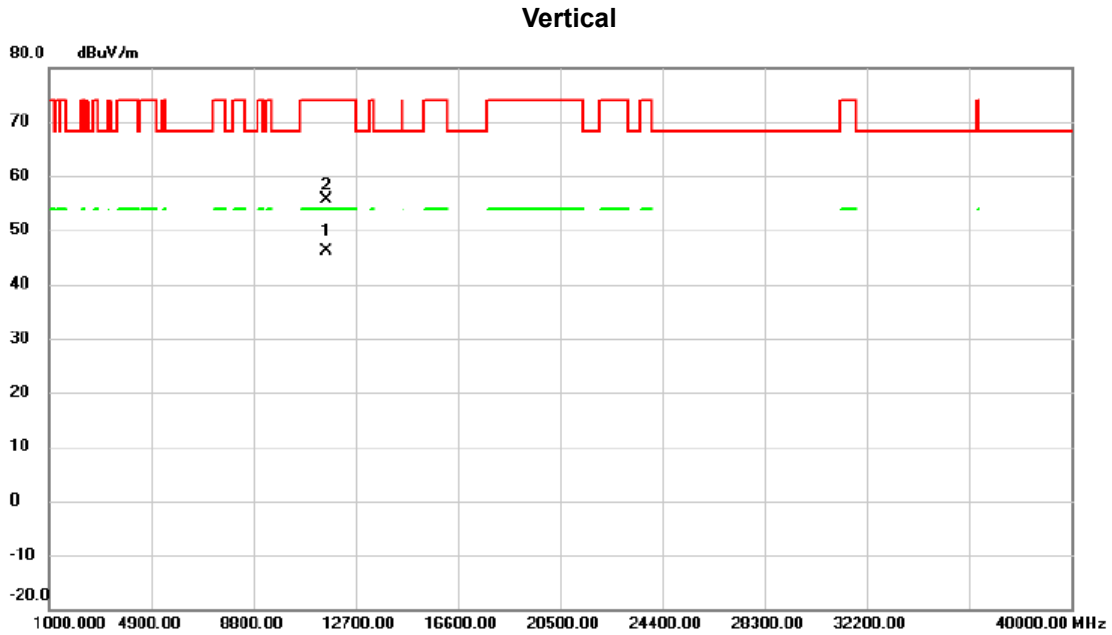


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11569.40	43.74	2.27	46.01	54.00	-7.99	AVG	
2		11576.80	53.32	2.29	55.61	74.00	-18.39	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE20) Mode 5785 MHz

### Horizontal

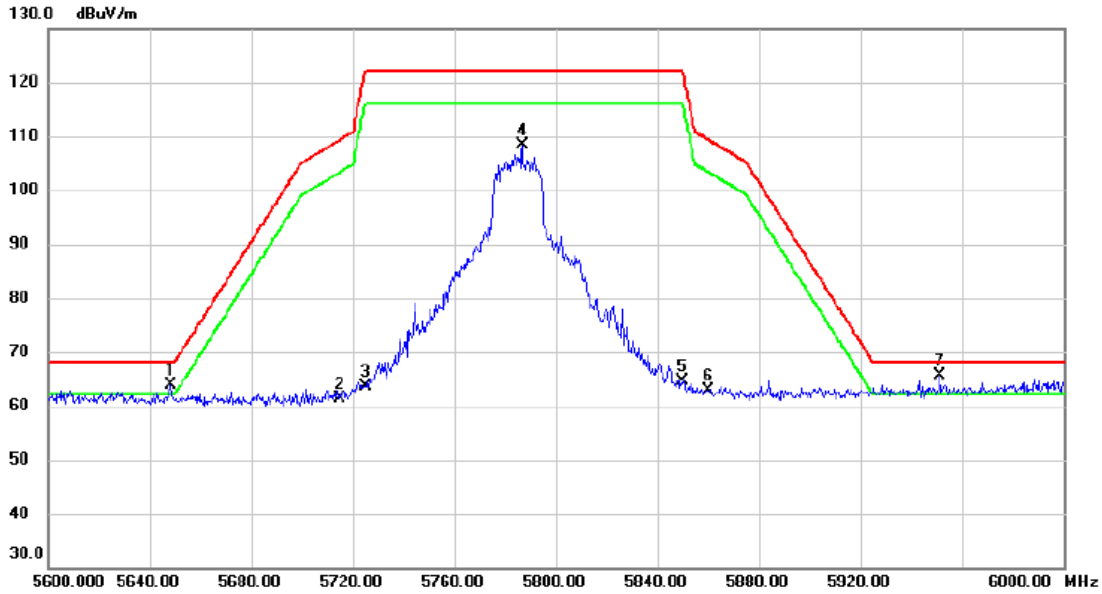


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	5648.000	25.48	38.37	63.85	68.20	-4.35	peak	
2		5715.000	22.97	38.46	61.43	109.40	-47.97	peak	
3		5725.000	25.05	38.50	63.55	122.20	-58.65	peak	
4		5786.800	69.58	38.73	108.31	122.20	-13.89	peak	
5		5850.000	25.64	38.91	64.55	122.20	-57.65	peak	
6		5860.000	23.90	38.95	62.85	109.40	-46.55	peak	
7	*	5951.200	26.48	39.16	65.64	68.20	-2.56	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE20) Mode 5785 MHz

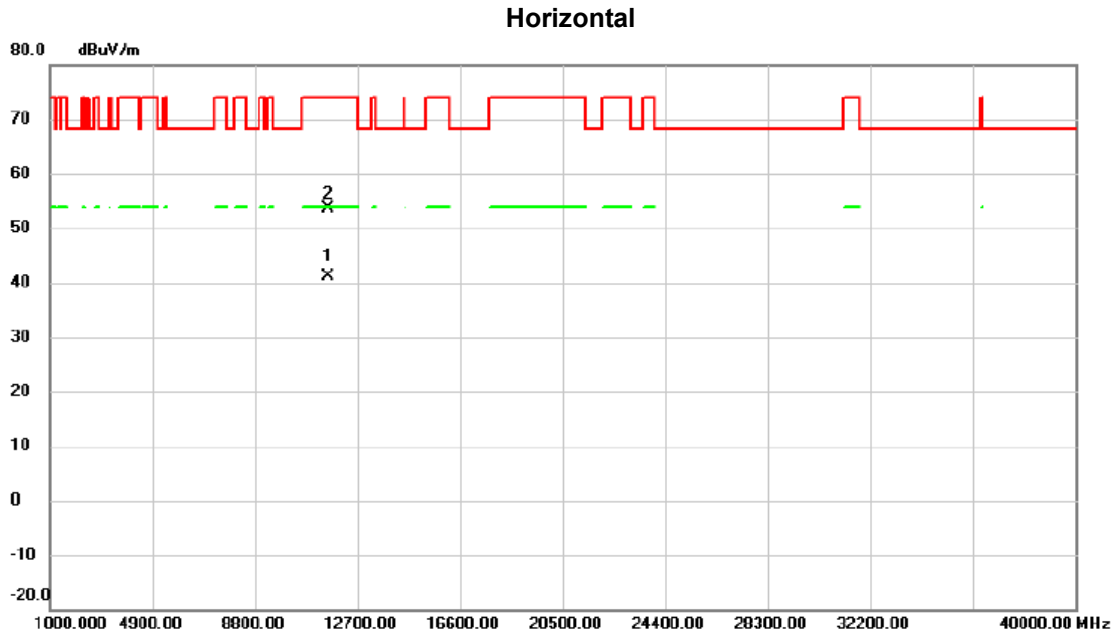


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11570.97	38.79	2.28	41.07	54.00	-12.93	AVG	
2		11578.75	51.30	2.29	53.59	74.00	-20.41	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE20) Mode 5825 MHz

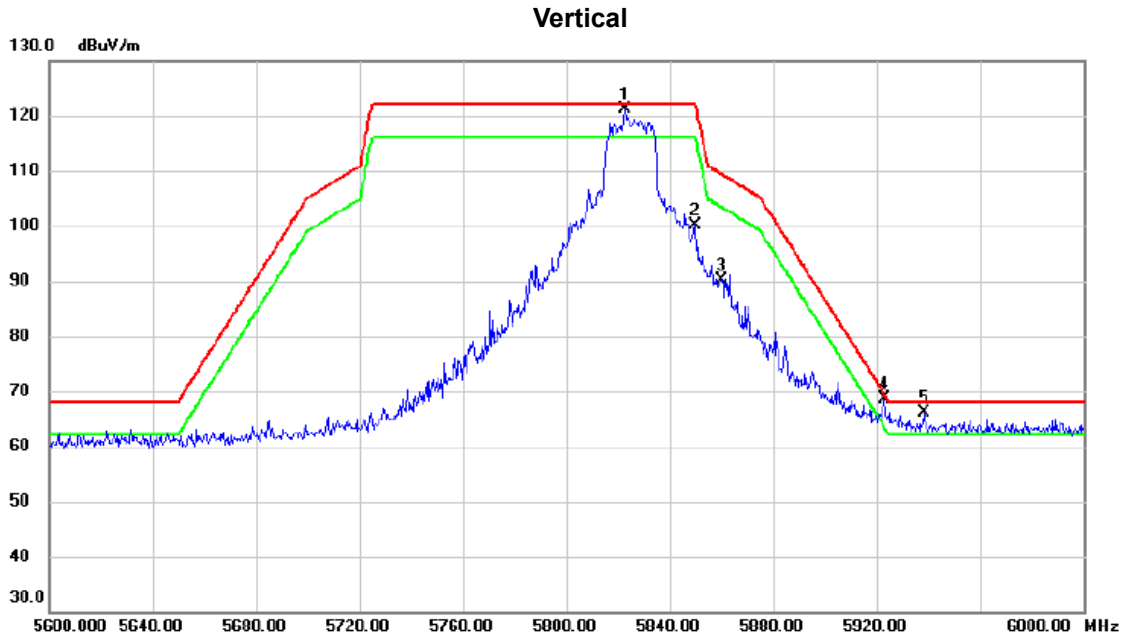


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	5822.800	82.29	38.85	121.14	122.20	-1.06	peak	
2		5850.000	61.10	38.91	100.01	122.20	-22.19	peak	
3		5860.000	51.20	38.95	90.15	109.40	-19.25	peak	
4	*	5923.200	29.54	39.10	68.64	69.53	-0.89	peak	
5	!	5938.200	27.13	39.12	66.25	68.20	-1.95	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE20) Mode 5825 MHz

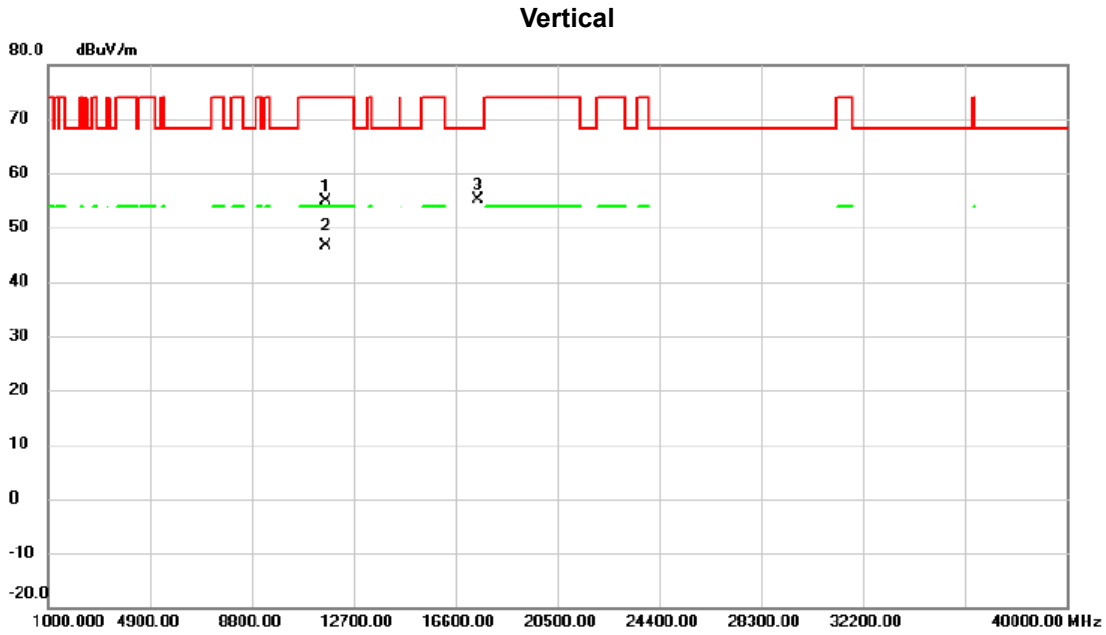


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11648.95	52.89	2.11	55.00	74.00	-19.00	peak	
2 *	11648.99	44.56	2.11	46.67	54.00	-7.33	AVG	
3	17471.65	47.07	8.01	55.08	68.20	-13.12	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE20) Mode 5825 MHz

### Horizontal

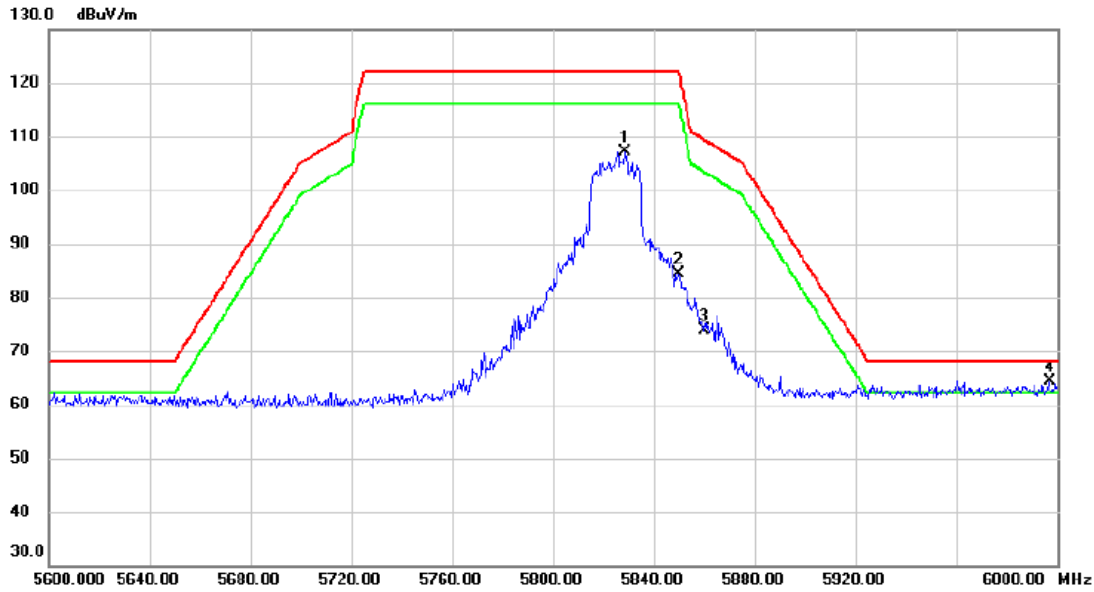


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5828.600	68.19	38.86	107.05	122.20	-15.15	peak	
2	5850.000	45.47	38.91	84.38	122.20	-37.82	peak	
3	5860.000	34.93	38.95	73.88	109.40	-35.52	peak	
4 *	5996.800	25.16	39.25	64.41	68.20	-3.79	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE20) Mode 5825 MHz

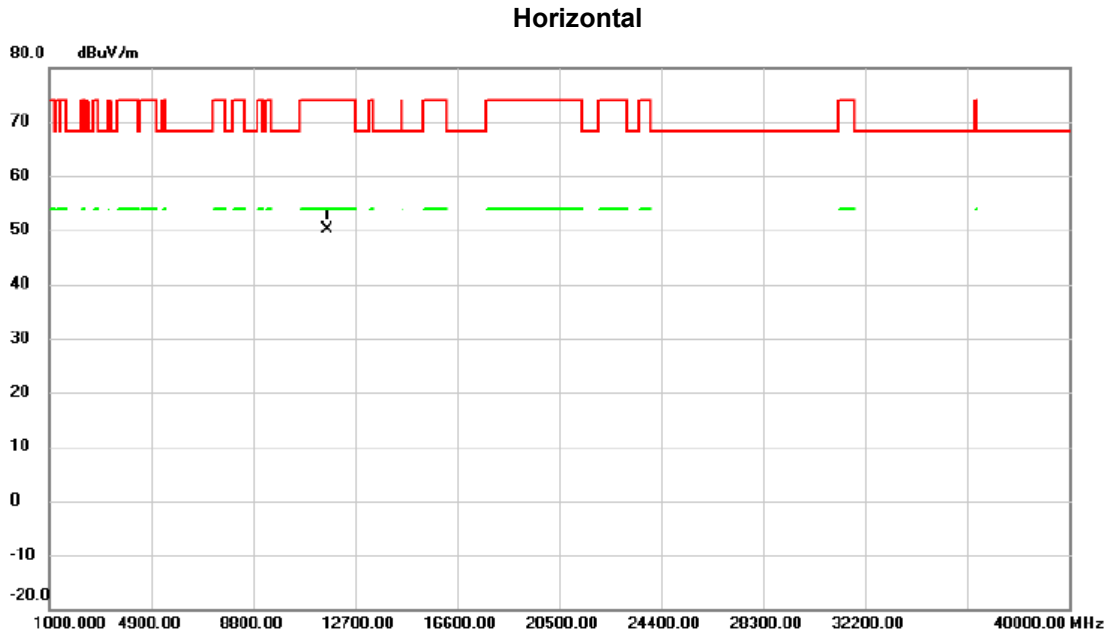


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11647.00	48.01	2.12	50.13	74.00	-23.87	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE40) Mode 5755 MHz

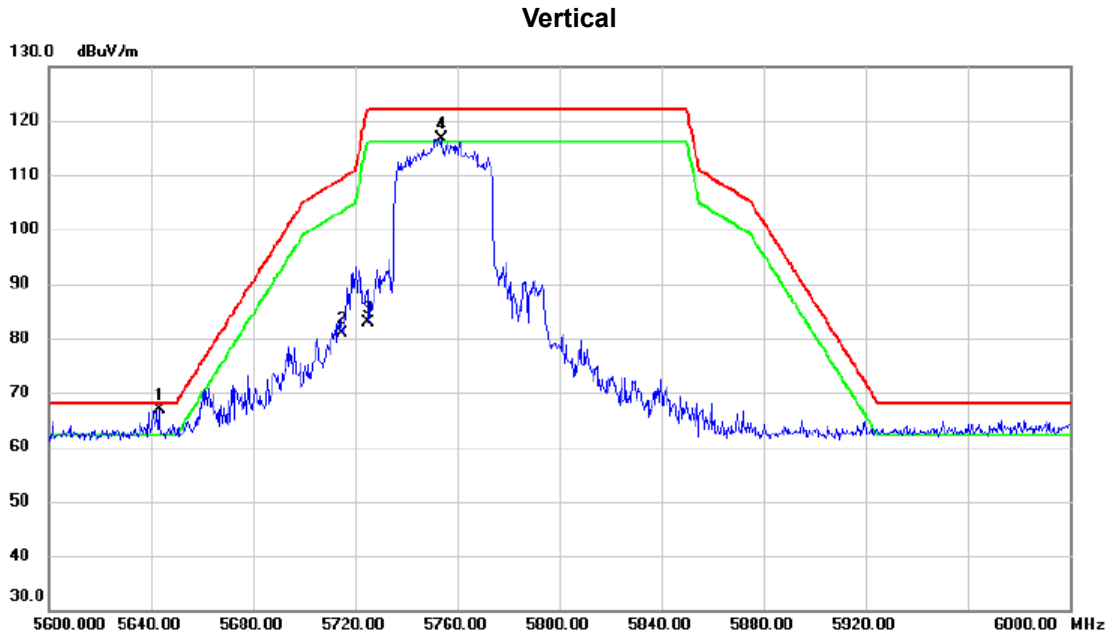


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	5643.400	28.41	38.37	66.78	68.20	-1.42	peak	
2		5715.000	42.45	38.46	80.91	109.40	-28.49	peak	
3		5725.000	44.45	38.50	82.95	122.20	-39.25	peak	
4	!	5753.600	78.13	38.61	116.74	122.20	-5.46	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE40) Mode 5755 MHz

### Vertical

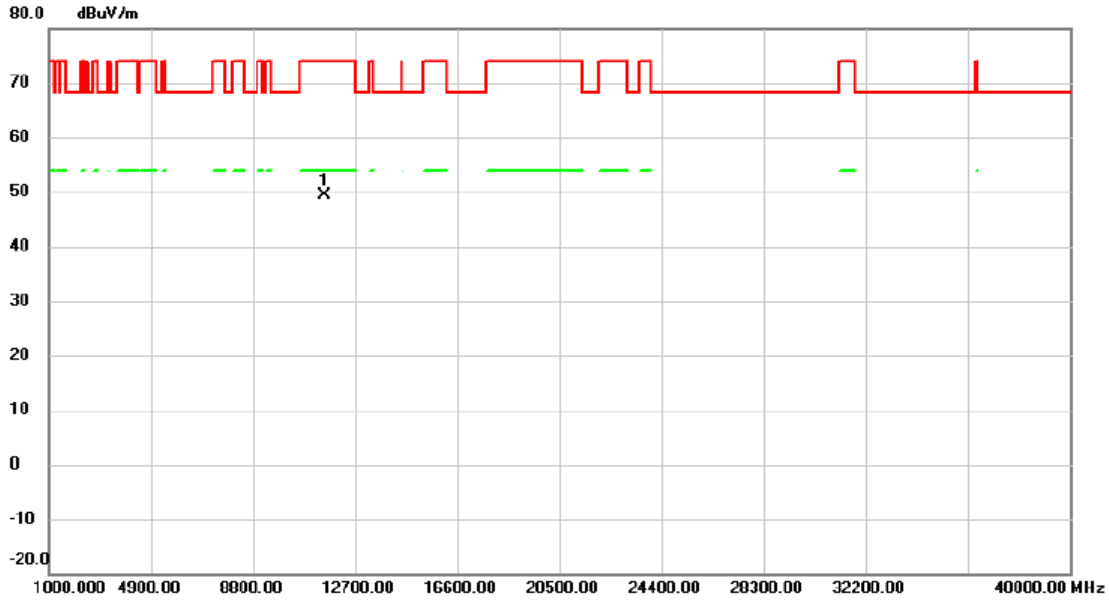


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11510.00	47.17	2.23	49.40	74.00	-24.60	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE40) Mode 5755 MHz

### Horizontal

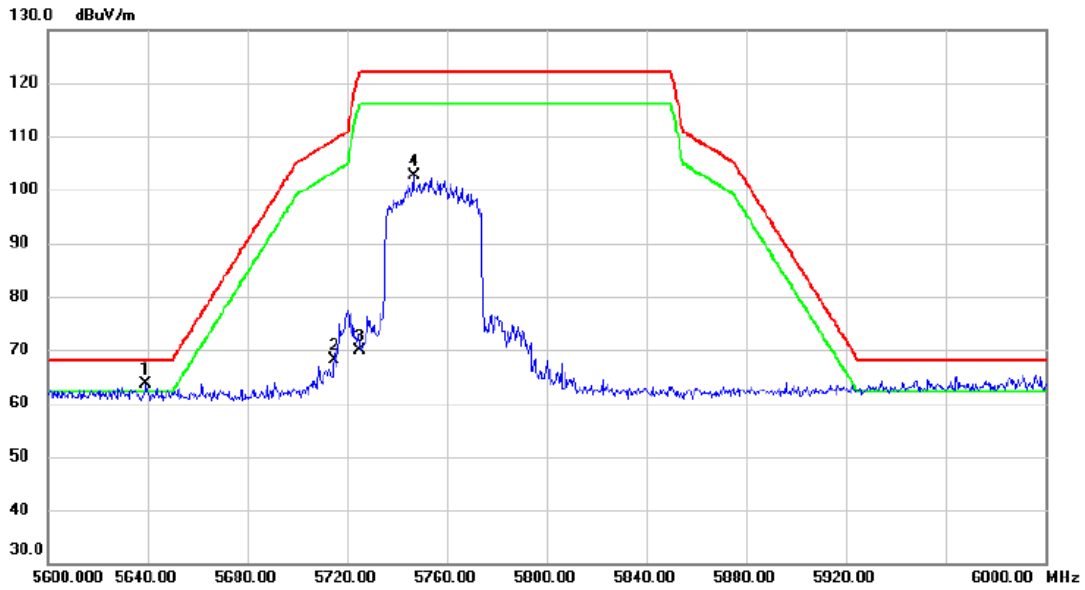


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5639.200	25.27	38.37	63.64	68.20	-4.56	peak	
2		5715.000	29.69	38.46	68.15	109.40	-41.25	peak	
3		5725.000	31.46	38.50	69.96	122.20	-52.24	peak	
4		5747.000	64.04	38.58	102.62	122.20	-19.58	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE40) Mode 5755 MHz

### Horizontal

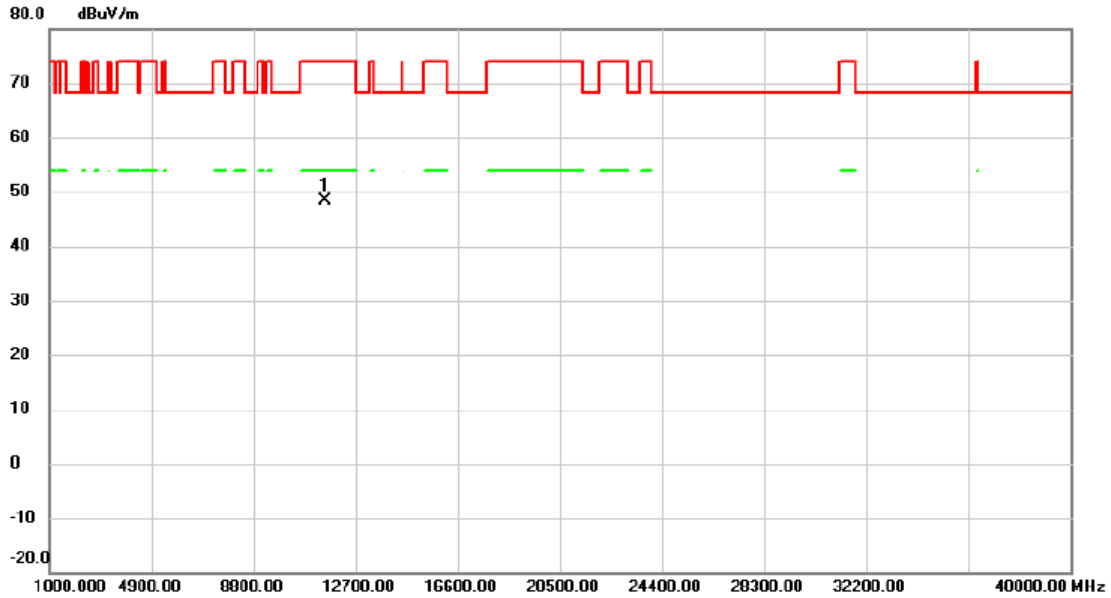


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11510.00	46.19	2.23	48.42	74.00	-25.58	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE40) Mode 5795 MHz

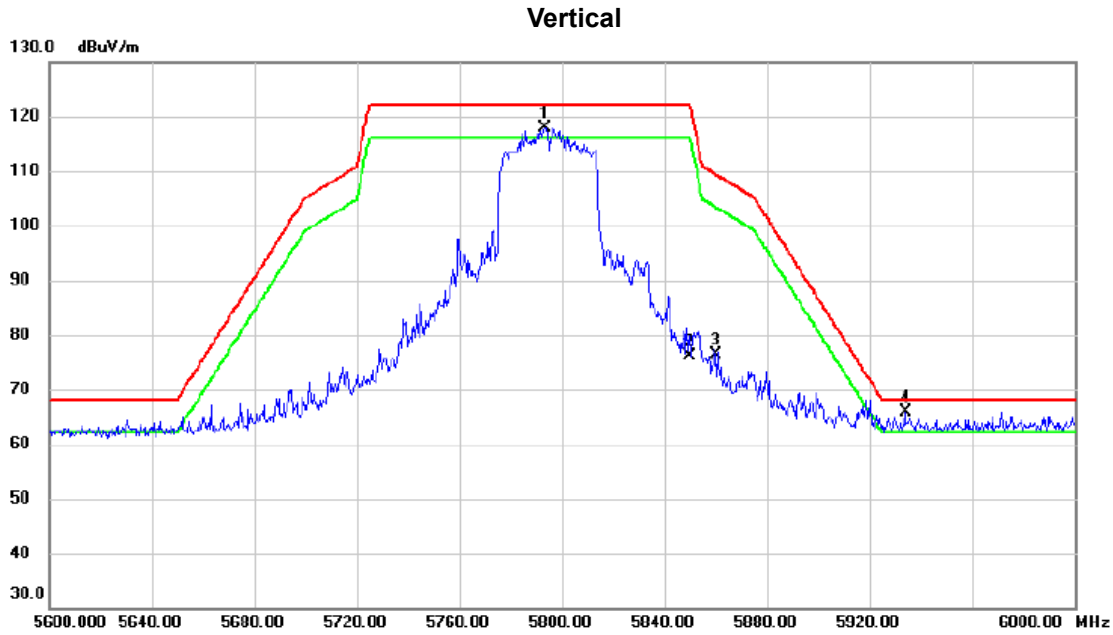


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	!	5793.400	79.09	38.76	117.85	122.20	-4.35	peak	
2		5850.000	37.34	38.91	76.25	122.20	-45.95	peak	
3		5860.000	37.52	38.95	76.47	109.40	-32.93	peak	
4	*	5934.200	26.70	39.12	65.82	68.20	-2.38	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE40) Mode 5795 MHz

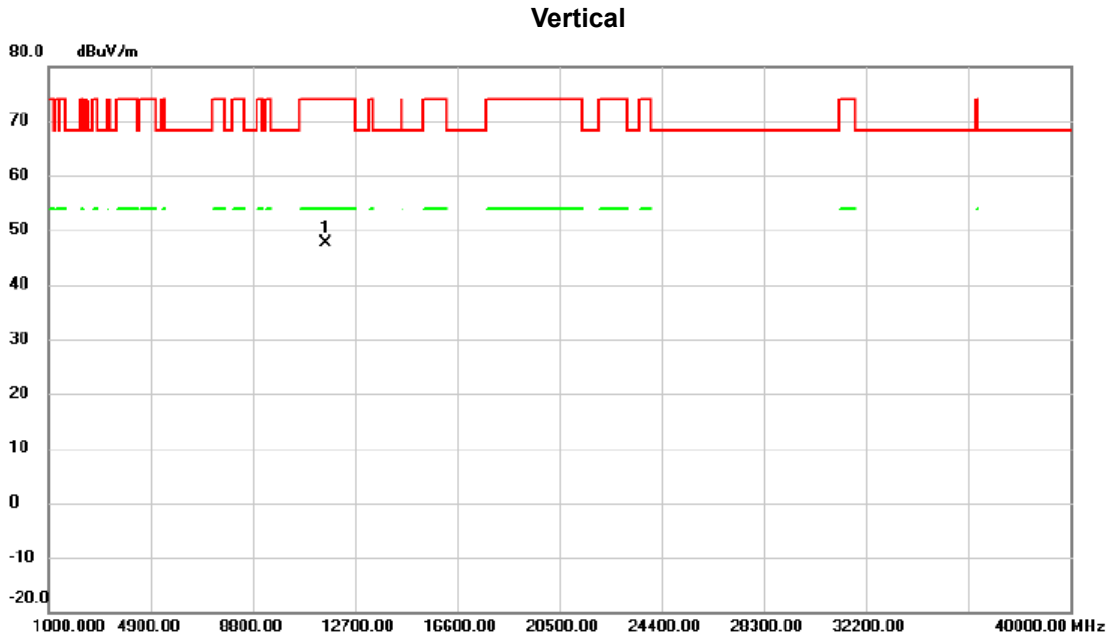


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11590.00	45.38	2.28	47.66	74.00	-26.34	peak	

**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE40) Mode 5795 MHz

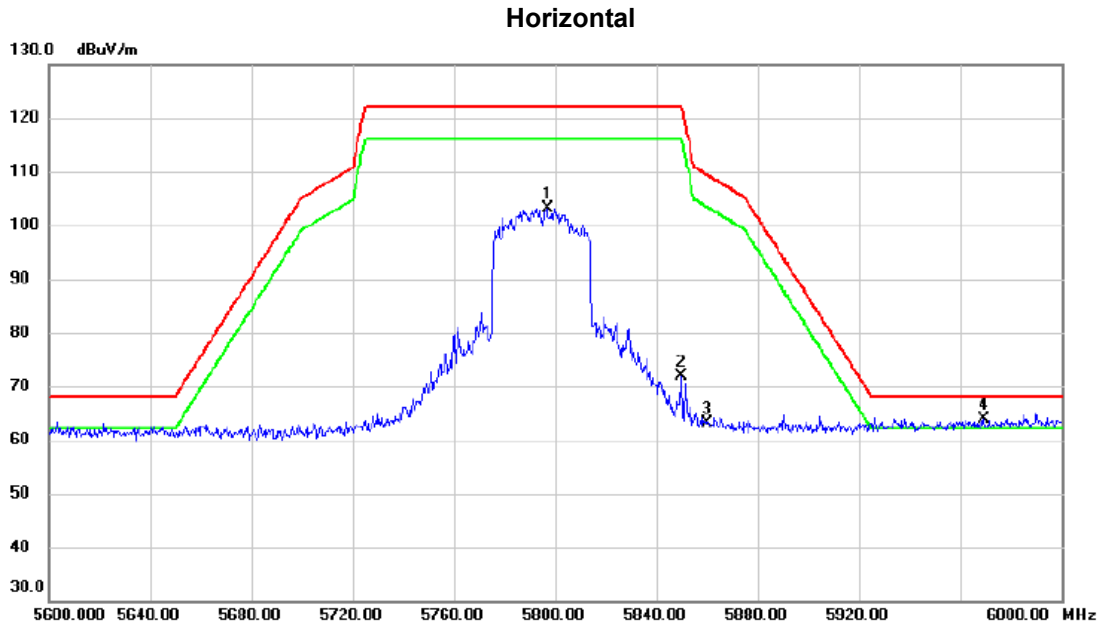

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5796.800	64.41	38.77	103.18	122.20	-19.02	peak	
2		5850.000	32.92	38.91	71.83	122.20	-50.37	peak	
3		5860.000	24.21	38.95	63.16	109.40	-46.24	peak	
4	*	5969.200	24.65	39.19	63.84	68.20	-4.36	peak	


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE40) Mode 5795 MHz

### Horizontal

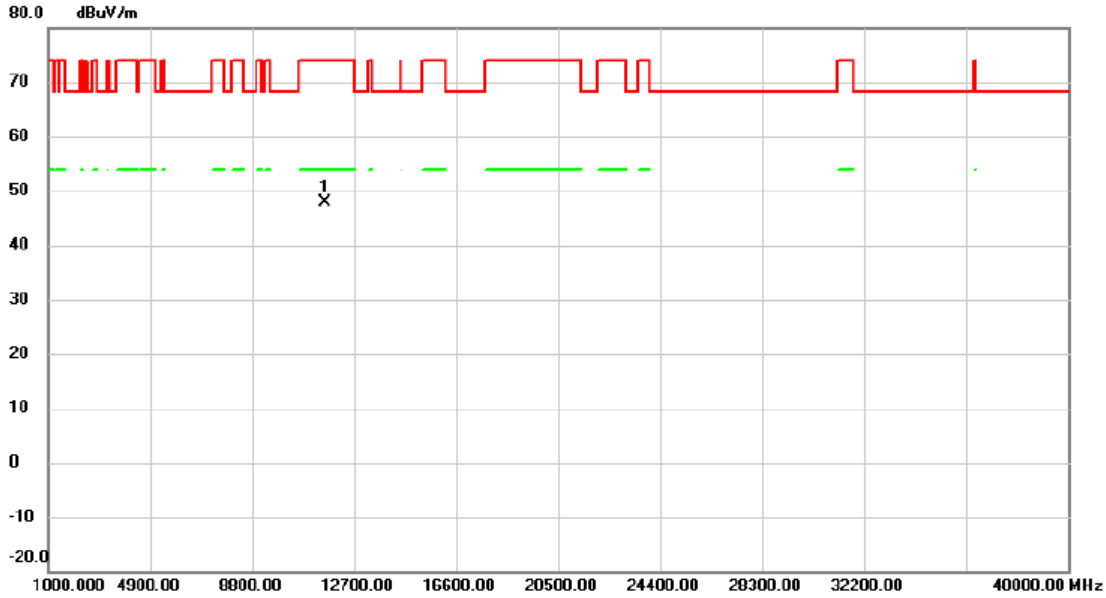


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11590.00	45.53	2.28	47.81	74.00	-26.19	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE80) Mode 5775 MHz

### Vertical

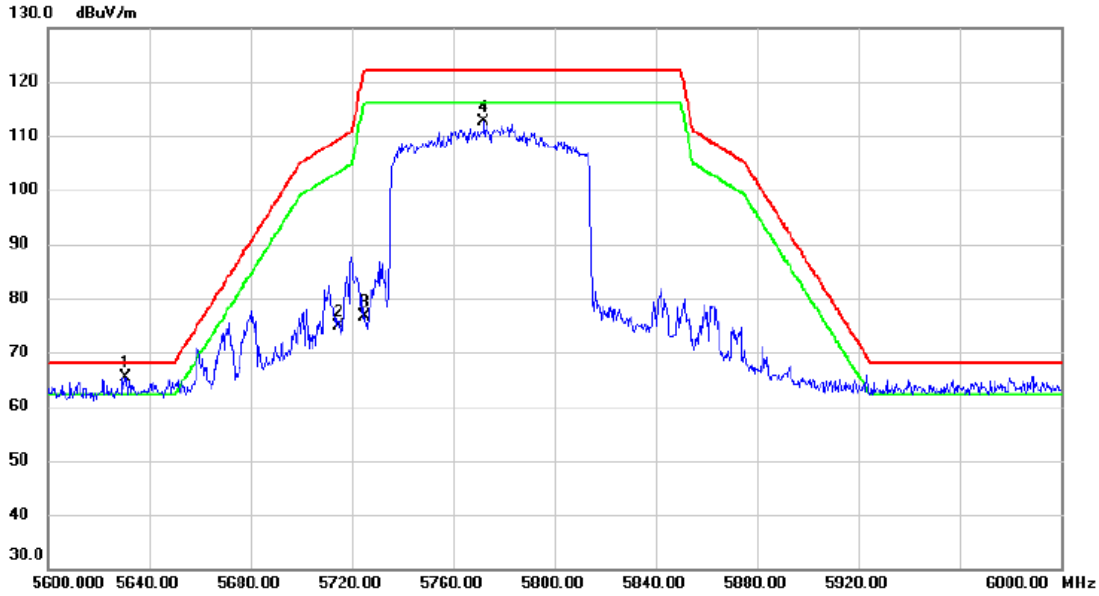


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5630.800	27.04	38.36	65.40	68.20	-2.80	peak	
2		5715.000	36.41	38.46	74.87	109.40	-34.53	peak	
3		5725.000	38.24	38.50	76.74	122.20	-45.46	peak	
4		5772.000	73.84	38.67	112.51	122.20	-9.69	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE80) Mode 5775 MHz

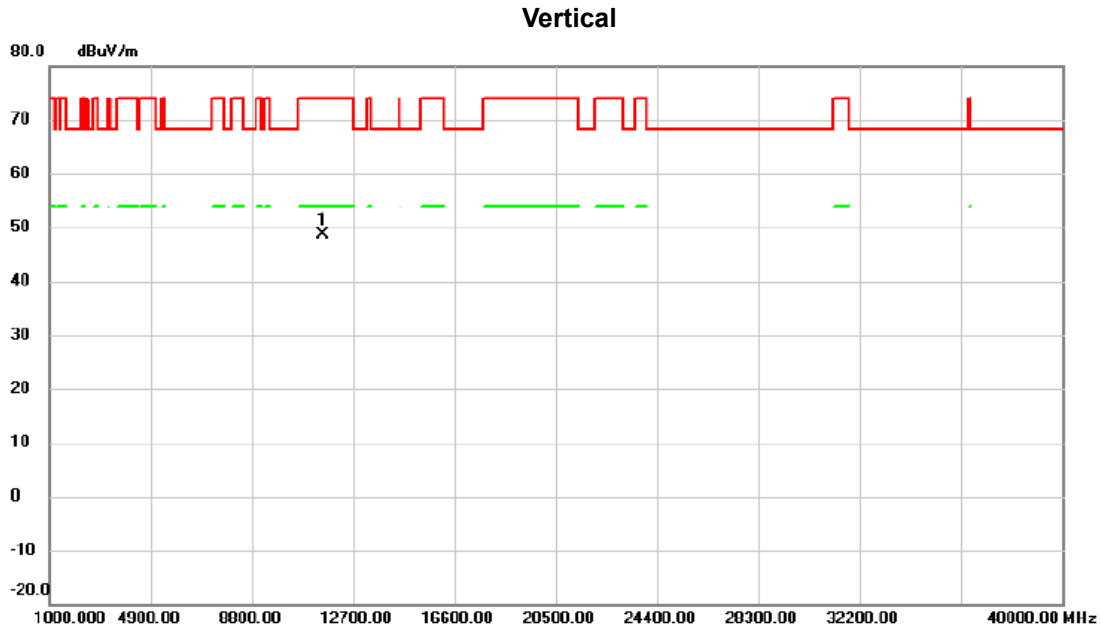


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	*	11550.00	46.48	2.26	48.74	74.00	-25.26	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE80) Mode 5775 MHz

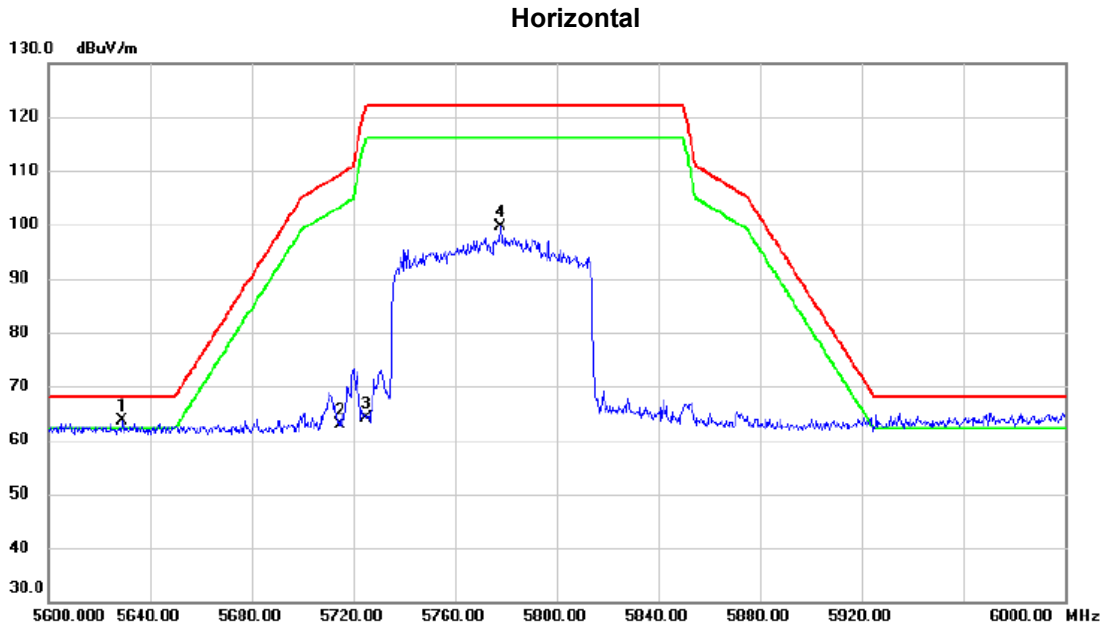


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5629.200	25.37	38.36	63.73	68.20	-4.47	peak	
2		5715.000	24.31	38.46	62.77	109.40	-46.63	peak	
3		5725.000	25.66	38.50	64.16	122.20	-58.04	peak	
4		5777.800	60.91	38.69	99.60	122.20	-22.60	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX ax (HE80) Mode 5775 MHz

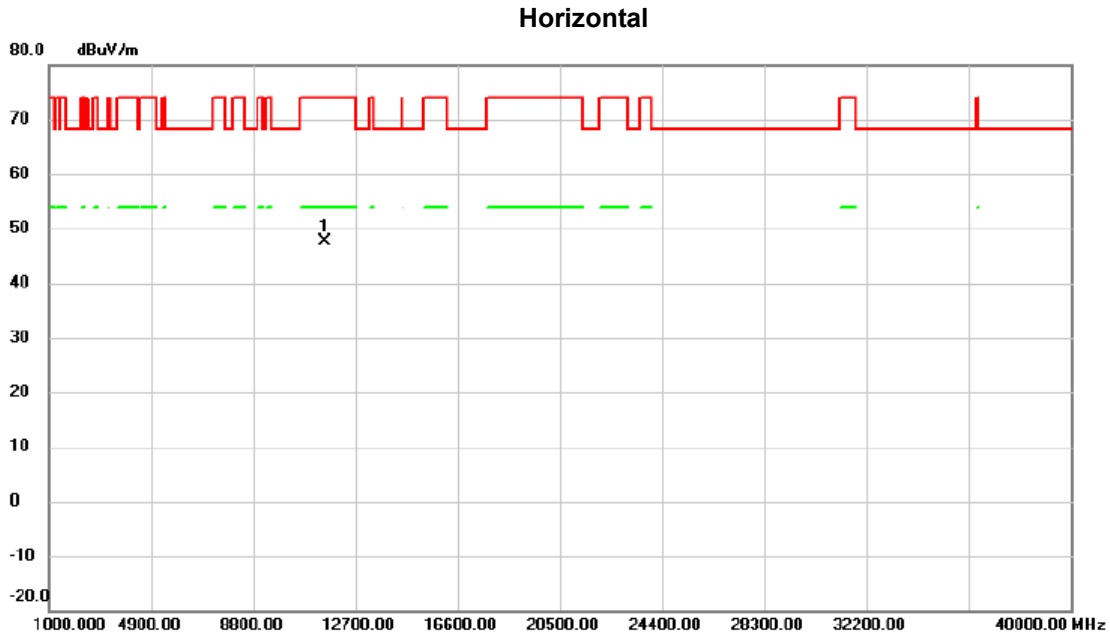


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11550.00	45.43	2.26	47.69	74.00	-26.31	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX ac (VHT80+80) Mode 5210 MHz (Ant.1/2) +5290 MHz (Ant.3/4)

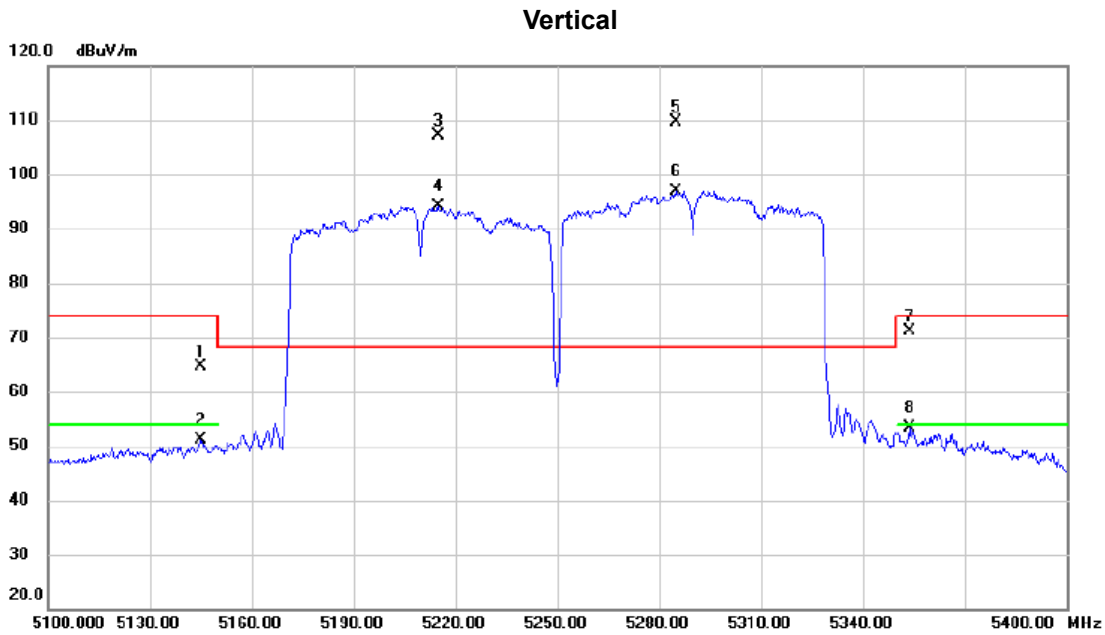


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5145.000	26.84	37.89	64.73	74.00	-9.27	peak	
2		5145.000	13.29	37.89	51.18	54.00	-2.82	AVG	
3	X	5214.900	69.59	37.65	107.24	68.20	39.04	peak	
4	X	5214.900	56.59	37.65	94.24	68.20	26.04	AVG	
5	*	5284.800	71.96	37.56	109.52	68.20	41.32	peak	
6	X	5284.800	59.37	37.56	96.93	68.20	28.73	AVG	
7		5353.650	33.44	37.76	71.20	74.00	-2.80	peak	
8		5353.650	15.51	37.76	53.27	54.00	-0.73	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX ac (VHT80+80) Mode 5210 MHz (Ant.1/2) +5290 MHz (Ant.3/4)

### Vertical

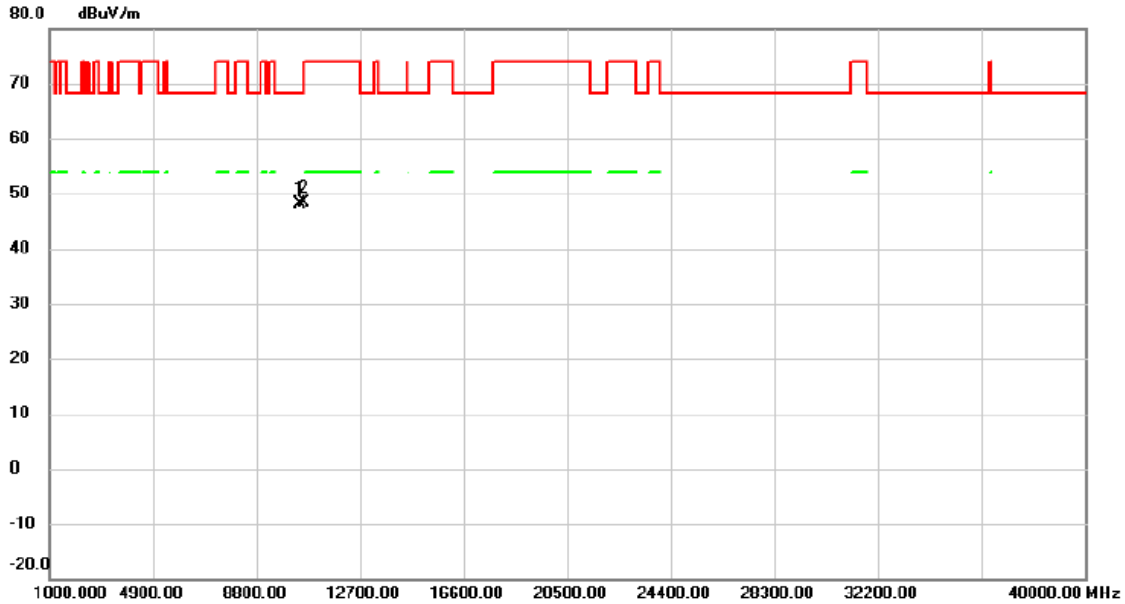


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10420.00	46.33	1.74	48.07	68.20	-20.13	peak	
2	*	10580.00	46.41	1.90	48.31	68.20	-19.89	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX ac (VHT80+80) Mode 5210 MHz (Ant.1/2) +5290 MHz (Ant.3/4)

### Horizontal

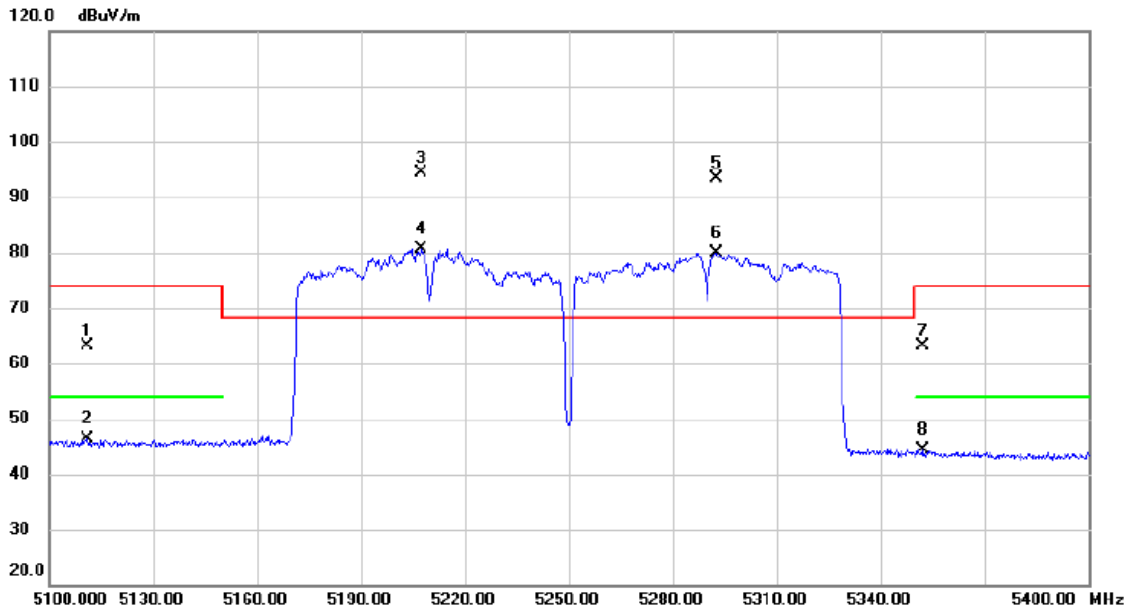


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5110.950	25.09	38.03	63.12	74.00	-10.88	peak	
2	X	5110.950	8.41	38.03	46.44	54.00	-7.56	AVG	
3	*	5207.550	56.61	37.67	94.28	68.20	26.08	peak	
4	X	5207.550	42.95	37.67	80.62	68.20	12.42	AVG	
5	X	5292.450	55.84	37.55	93.39	68.20	25.19	peak	
6	X	5292.450	42.39	37.55	79.94	68.20	11.74	AVG	
7		5352.000	25.28	37.74	63.02	74.00	-10.98	peak	
8	X	5352.000	6.58	37.74	44.32	54.00	-9.68	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.



Orthogonal Axis	X
Test Mode	TX ac (VHT80+80) Mode 5210 MHz (Ant.1/2) +5290 MHz (Ant.3/4)

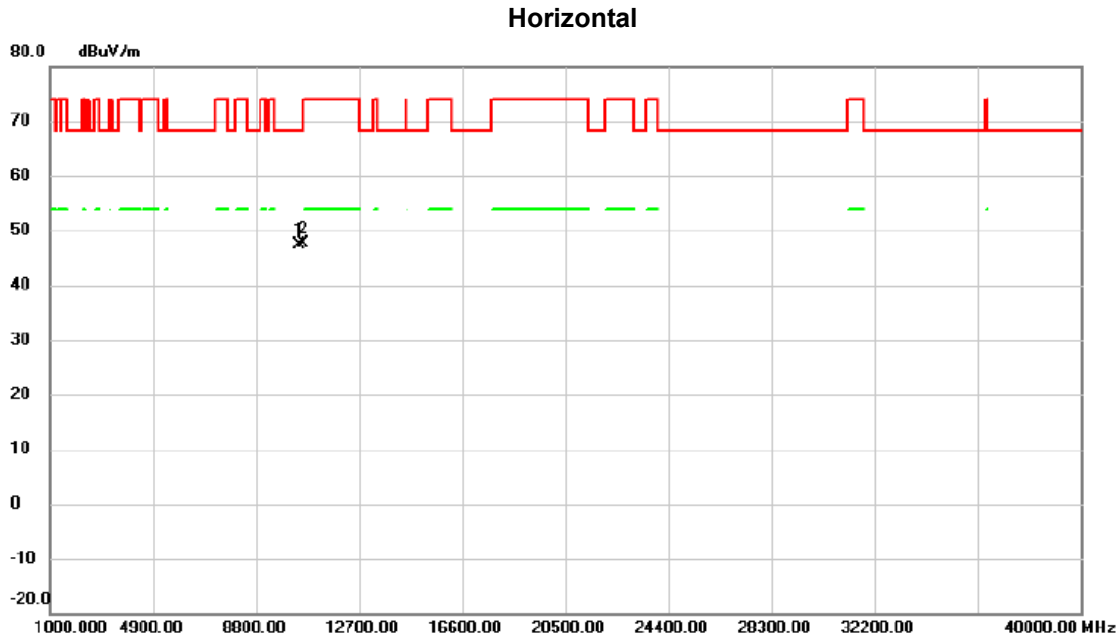


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10420.00	45.76	1.74	47.50	68.20	-20.70	peak	
2	*	10580.00	45.82	1.90	47.72	68.20	-20.48	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX ax (HE80+80) Mode 5210 MHz (Ant.1/2) +5290 MHz (Ant.3/4)

### Vertical

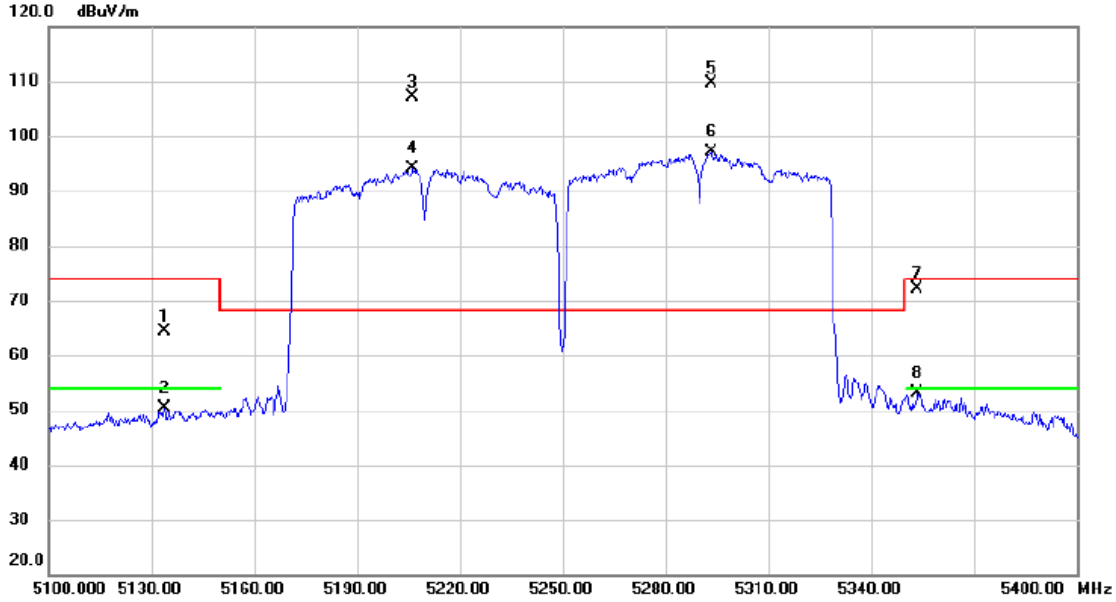

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5133.600	26.53	37.94	64.47	74.00	-9.53	peak	
2		5133.600	12.43	37.94	50.37	54.00	-3.63	AVG	
3	X	5206.350	69.38	37.67	107.05	68.20	38.85	peak	
4	X	5206.350	56.39	37.67	94.06	68.20	25.86	AVG	
5	*	5293.350	72.00	37.55	109.55	68.20	41.35	peak	
6	X	5293.350	59.48	37.55	97.03	68.20	28.83	AVG	
7		5353.500	34.31	37.76	72.07	74.00	-1.93	peak	
8		5353.500	15.26	37.76	53.02	54.00	-0.98	AVG	


**REMARKS:**

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX ax (HE80+80) Mode 5210 MHz (Ant.1/2) +5290 MHz (Ant.3/4)

### Vertical

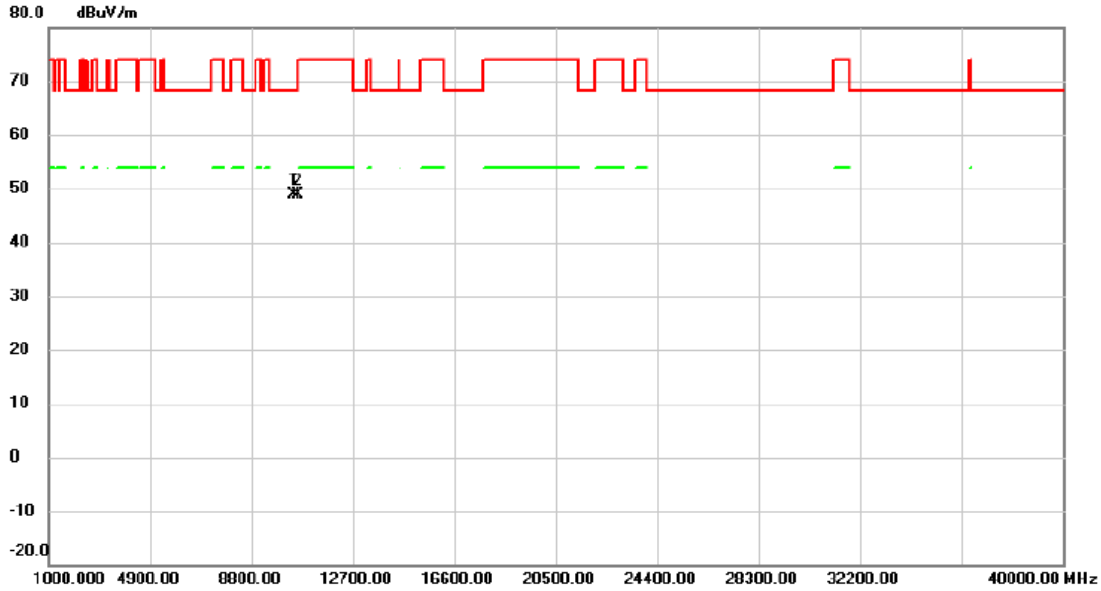


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1		10420.00	47.09	1.74	48.83	68.20	-19.37	peak	
2	*	10580.00	47.01	1.90	48.91	68.20	-19.29	peak	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX ax (HE80+80) Mode 5210 MHz (Ant.1/2) +5290 MHz (Ant.3/4)

### Horizontal

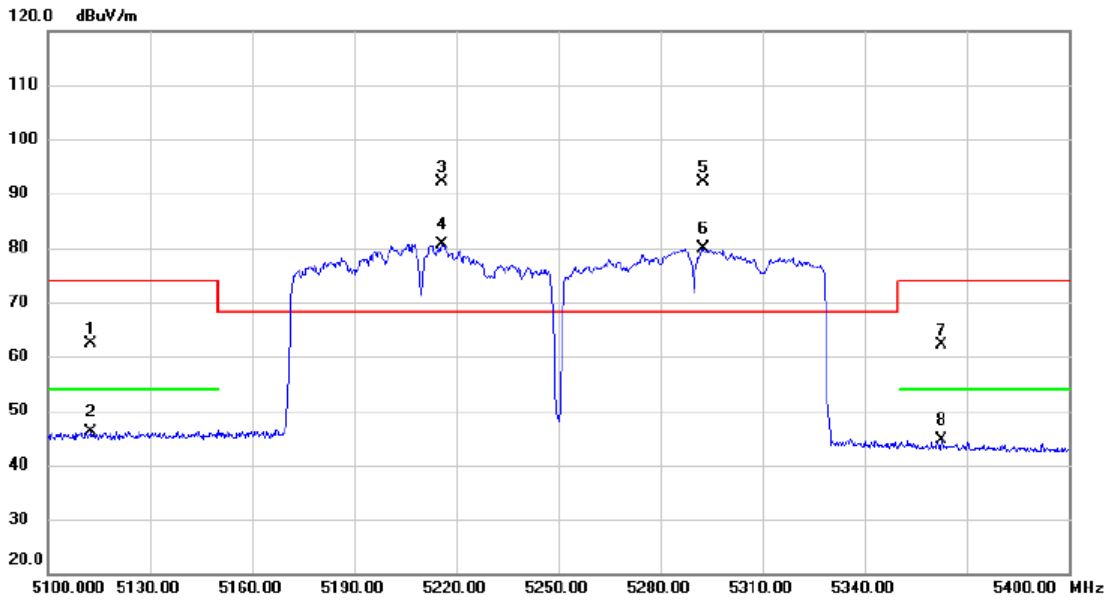


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5112.600	24.34	38.02	62.36	74.00	-11.64	peak	
2		5112.600	8.20	38.02	46.22	54.00	-7.78	AVG	
3	X	5215.950	54.36	37.66	92.02	68.20	23.82	peak	
4	X	5215.950	42.94	37.66	80.60	68.20	12.40	AVG	
5	*	5292.600	54.57	37.55	92.12	68.20	23.92	peak	
6	X	5292.600	42.34	37.55	79.89	68.20	11.69	AVG	
7		5362.650	24.29	37.78	62.07	74.00	-11.93	peak	
8		5362.650	6.79	37.78	44.57	54.00	-9.43	AVG	

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	TX ax (HE80+80) Mode 5210 MHz (Ant.1/2) +5290 MHz (Ant.3/4)

### Horizontal

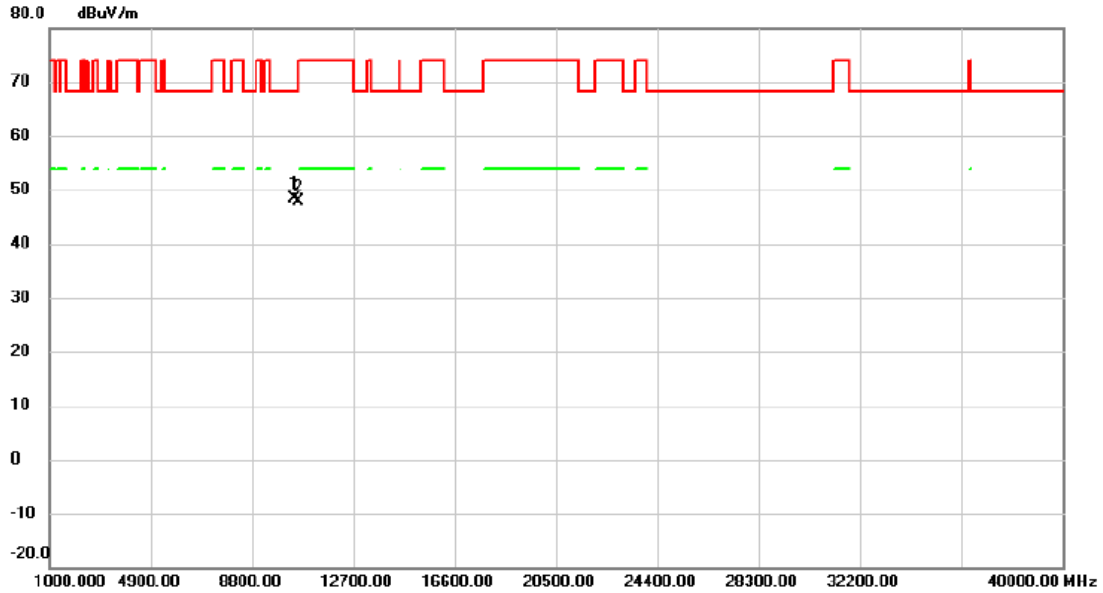

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10420.00	46.67	1.74	48.41	68.20	-19.79	peak	
2		10580.00	46.05	1.90	47.95	68.20	-20.25	peak	

**REMARKS:**


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

## APPENDIX E - BANDWIDTH

Test Mode	UNII-1_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Emission Bandwidth (MHz)
36	5180	25.60	17.20
40	5200	37.69	18.20
48	5240	64.79	38.50

**CH36**

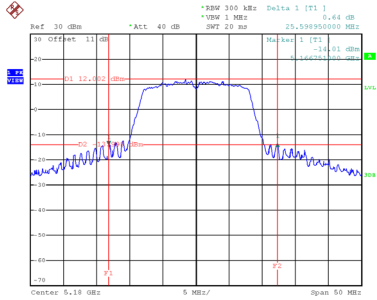


Date: 6.MAR.2021 11:34:31

**CH40**

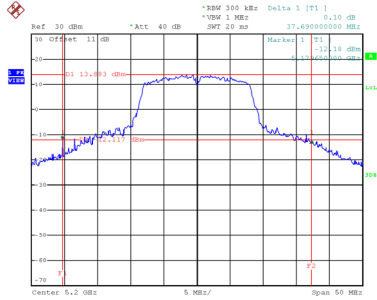

Date: 6.MAR.2021 11:40:02


**CH48**

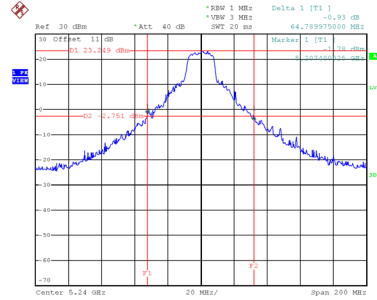

Date: 6.MAR.2021 11:47:06


**99 % Emission Bandwidth**

**CH36**

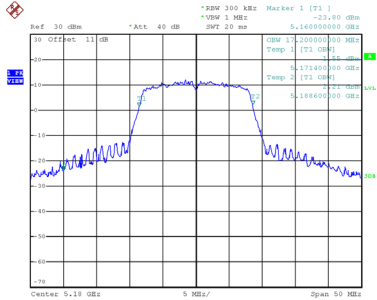


Date: 6.MAR.2021 11:34:00

**CH40**

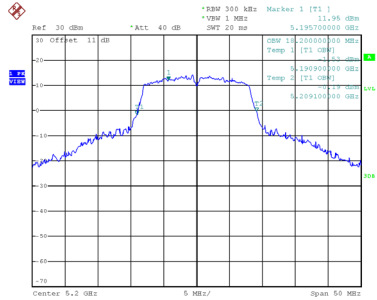

Date: 6.MAR.2021 11:39:41

**CH48**

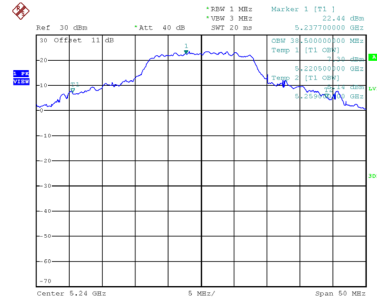

Date: 6.MAR.2021 11:45:13