# DFS Test Report

| | | |
|---|---|---|
| Applicant | : | D-Link Corporation |
| Product Name | : | BE9500 Wi-Fi 7 Smart Mesh Router<br>Wi-Fi 7 BE9500 Mesh Router |
| Trade Name | : | D-Link |
| Model Number | : | M95 |
| Applicable Standard | : | FCC 47 CFR PART 15 SUBPART E<br>ANSI C63.10:2013 |
| Received Date | : | Jul. 02, 2024 |
| Test Period | : | Sep. 25, 2024 ~ Oct. 16, 2024 |
| Issued Date | : | Nov. 19, 2024 |

**Issued by**

Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City 334025, Taiwan (R.O.C.)
Tel：+886-3-2710188 / Fax：+886-3-2710190

Testing Laboratory
1330

Taiwan Accreditation Foundation accreditation number: 1330
Bade test site：
Test Firm Registration Number: 226252
Test Firm Designation Number: TW0010
Wugu test site：
Test Firm Registration Number: 191812
Test Firm Designation Number: TW0034

***Note:***

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

# Revision History

| Rev. | Issued Date | Description | Revised By |
|---|---|---|---|
| 00 | Nov. 19, 2024 | Initial Issue | Snow Wang |
| | | | |
| | | | |
| | | | |

# Verification of Compliance

| | | |
|---|---|---|
| Applicant | : | D-Link Corporation |
| Product Name | : | BE9500 Wi-Fi 7 Smart Mesh Router<br>Wi-Fi 7 BE9500 Mesh Router |
| Trade Name | : | D-Link |
| Model Number | : | M95 |
| FCC ID | : | KA2M95A1 |
| Applicable Standard | : | FCC 47 CFR PART 15 SUBPART E<br>ANSI C63.10:2013 |
| Test Result | : | Complied |
| Performing Lab. | : | Eurofins E&E Wireless Taiwan Co., Ltd.<br>No. 140-1, Changan Street, Bade District,<br>Taoyuan City 334025, Taiwan (R.O.C.)<br>Tel：+886-3-2710188 / Fax：+886-3-2710190<br>Taiwan Accreditation Foundation accreditation number: 1330 |

Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : Kai Yu Yang

# TABLE OF CONTENTS

# 1 General Information

## 1.1. Summary of Test Result

| Standard | Item | Result | Remark |
|---|---|---|---|
| 15.407(h)(2) | Channel Availability Check Time | PASS | --- |
| 15.407(h)(2) | Channel Move Time | PASS | --- |
| 15.407(h)(2) | Channel Closing Transmission Time | PASS | --- |
| 15.407(h)(2) | Non-Occupancy Period | PASS | --- |
| 15.407(h)(2) | Non-Associated Test | N/A | --- |
| 15.407(h)(2) | U-NII Detection Bandwidth | PASS | --- |
| 15.407(h)(2) | Statistical Performance check | PASS | --- |

Decision Rule

■ Uncertainty is not included.

□ Uncertainty is included.

| Standard | Description |
|---|---|
| CFR47, Part 15, Subpart E | Unlicensed National Information Infrastructure Devices |
| Canada RSS-247 Issue 3 | Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices |
| ANSI C63. 10: 2013 | American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices |
| KDB789033: D02 | Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E |
| KDB 662911 D01 v02r01 | Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc) |

## 1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address: ☐ No. 140-1, Changan Street, Bade District, Taoyuan City 334025, Taiwan (R.O.C.)

Site Address: ■ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

## 1.3. Test Site Environment

| Items | Required (IEC 60068-1) | Interval(*) |
|---|---|---|
| Temperature (°C) | 15-35 | 20-30 |
| Humidity (%RH) | 25-75 | 45-75 |

(*)The measurement ambient temperature is within this range.

# 2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity.

| | | | | | |
|---|---|---|---|---|---|
| Applicant | D-Link Corporation<br>14420 Myford Road Suite 100 Irvine California United States 92606 | | | | |
| Product Name | BE9500 Wi-Fi 7 Smart Mesh Router<br>Wi-Fi 7 BE9500 Mesh Router | | | | |
| Product Name different description | Different product name is for marketing purpose. No physical difference. | | | | |
| Trade Name | D-Link | | | | |
| Model Number | M95 | | | | |
| FCC ID | KA2M95A1 | | | | |
| Operate Frequency | Frequency Band | | Frequency Range (MHz) | | |
| | 802.11a | U-NII Band 2-A | 5260 – 5320 | | |
| | | U-NII Band 2-C | 5500 – 5700 | | |
| | 802.11n HT20/ 802.11ac VHT20/ 802.11ax HE20/ 802.11be EHT20 | U-NII Band 2-A | 5260 – 5320 | | |
| | | U-NII Band 2-C | 5500 – 5700 | | |
| | 802.11n HT40/ 802.11ac VHT40/ 802.11ax HE40/ 802.11be EHT40 | U-NII Band 2-A | 5270 – 5310 | | |
| | | U-NII Band 2-C | 5510 – 5670 | | |
| | 802.11ac VHT80/ 802.11ax HE80/ 802.11be EHT80 | U-NII Band 2-A | 5290 | | |
| | | U-NII Band 2-C | 5530 – 5610 | | |
| | 802.11ac VHT160/ 802.11ax HE160/ 802.11be EHT160 | U-NII Band 2-A | 5250 | | |
| | | U-NII Band 2-C | 5570 | | |
| Modulation Type | OFDM/OFDMA | | | | |
| Antenna information | ANT | Model Number | Type | Max. Gain (dBi) | |
| | ANT-0 (ANT 2) | C3859-M95-EVT1-DUAL2 | Dipole Antenna | U-NII Band 2-A | 1.89 |
| | | | | U-NII Band 2-C | 2.29 |
| | ANT-1 (ANT 1) | C3859-M95-EVT1-DUAL1 | Dipole Antenna | U-NII Band 2-A | 1.07 |
| | | | | U-NII Band 2-C | 2.19 |
| Antenna Delivery | 802.11a: 2TX (CDD)<br>802.11n / ac / ax / be: 2TX (MIMO/Beamforming on) | | | | |
| Operate Temp. Range | 0 ~ +40 ℃ | | | | |
| EUT Power Rating | 12 Vdc | | | | |

| Items | Description | |
|---|---|---|
| Communication Mode | ■IP Based (Load Based) | □Frame Based |
| TPC Function | ■With TPC | □Without TPC |
| Weather Band (5600 ~ 5650 MHz) | ■With 5600 ~ 5650 MHz | □Without 5600 ~ 5650 MHz |
| Beamforming Function | ■With Beamforming | □Without Beamforming |
| Equipment Type | □Outdoor access point (point-to-point) | |
| | □Outdoor access point (point-to-multipoint) | |
| | ■Indoor access point | |
| | □Fixed point-to-point access points | |
| | □Client devices | |
| Operating mode | ■Master | |
| | □Client with radar detection | |
| | ■Client without radar detection | |
| | □Ad-Hoc | |
| | □Bridge | |
| | □MESH | |

Note：DFS controls (hardware or software) related to radar detection are NOT accessible to the user.

Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

# 3 Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

The tests documented in this report were performed in accordance with FCC KDB request:

- FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
- FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

## 3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

| Test Mode |
|---|
| 802.11be EHT20 |
| 802.11be EHT40 |
| 802.11be EHT80 |
| 802.11be EHT160 |

## 3.2. EUT Test Step

| | |
|---|---|
| 1. | Setup the EUT shown on 3.2. |
| 2. | Turn on the power of all equipment. |
| 3. | Turn on Wi-Fi function link to Access Point. |
| 4. | The EUT is operated in the normal mode to the purposes of measurement. |

## 3.3. Test Instruments

For Conducted
Test Period: Sep. 25, 2024 ~ Oct. 16, 2024
Testing Engineer: An Wu

| Test Site | | RF02-WG | | | | |
|---|---|---|---|---|---|---|
| Use | Equipment | Manufacturer | Model Number | Serial Number | Cal. Date | Cal. Period |
| ☒ | Spectrum Analyzer (10 Hz~26.5 GHz) | Keysight | N9010B | MY63460164 | Mar. 8, 2024 | 1 year |
| ☒ | Spectrum Analyzer (10 Hz~44 GHz) | R&S | FSV3044 | 101255 | Nov. 30, 2023 | 1 year |
| ☒ | Signal Generator | R&S | SMM100A | 101740 | Jan. 26, 2024 | 1 year |

Note: N.C.R. = No Calibration Request.

# 4 Dynamic Frequency Selection

## 4.1. Limits

§15.407 (h) and FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 Compliance measurement procedures for unlicensed-national information infrastructure devcies operating in the 5250-5350 MHZ and 5470-5725 MHZ bands incorporating dynamic frequency selection.

**Table 1: Applicability of DFS Requirements Prior to Use of a Channel**

| Requirement | Operational Mode | | |
|---|---|---|---|
| | Master | Client (without Radar Detection) | Client (with Radar Detection) |
| Non-Occupancy Period | Yes | Not required | Yes |
| DFS Detection Threshold | Yes | Not required | Yes |
| Channel Availability Check Time | Yes | Not required | Not required |
| U-NII Detection Bandwidth | Yes | Not required | Yes |

**Table 2: Applicability of DFS requirements during normal operation**

| Requirement | Operational Mode | |
|---|---|---|
| | Master Device or Client With Radar Detection | Client without Radar Detection |
| DFS Detection Threshold | Yes | Not required |
| Channel Closing Transmission Time | Yes | Yes |
| Channel Move Time | Yes | Yes |
| U-NII Detection Bandwidth | Yes | Not required |

| Additional requirements for devices with multiple bandwidth modes | Master Device or Client With Radar Detection | Client without Radar Detection |
|---|---|---|
| U-NII Detection Bandwidth and Statistical Performance Check | All BW modes must be tested | Not required |
| Channel Move Time and Channel Closing Transmission Time | Test using widest BW mode available | Test using the widest BW mode available for the link |
| All other tests | Any single BW mode | Not required |
| Note : Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequencies between the bonded 20 MHz channel blocks | | |

| Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection | |
|---|---|
| Maximum Transmit Power | U-NII Band 2-Aalue (See Notes 1,2 and 3) |
| EIRP ≥ 200 milliwatt | -64 dBm |
| EIRP < 200 milliwatt and<br>Power spectral density < 10 dBm/MHz | -62 dBm |
| EIRP < 200 milliwatt that do not meet the power spectral density requirement | -64 dBm |
| Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.<br>Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.<br>Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to FCC KDB Publication 662911 D01. | |

| Table 4: DFS Response Requirement U-NII Band 2-Aalues | |
|---|---|
| Parameter | U-NII Band 2-Aalue |
| Non-occupancy period | Minimum 30 minutes |
| Channel Availability Check Time | 60 seconds |
| Channel Move Time | 10 seconds<br>See Note 1. |
| Channel Closing Transmission Time | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period.<br>See Notes 1 and 2. |
| U-NII Detection Bandwidth | Minimum 100 % of the U-NII 99 % transmission power bandwidth. See Note 3. |
| Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.<br>Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.<br>Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic. | |

| Table 5: Short Pulse Radar Test Waveforms | | | | | |
|---|---|---|---|---|---|
| Radar Type | Pulse Width (μsec) | PRI (μsec) | Number of Pulses | Minimum Percentage of Successful Detection | Minimum Number of Trials |
| 0 | 1 | 1428 | 18 | See Note 1 | See Note 1 |
| 1 | 1 | Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a<br>Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A | $\text{Roundup}\left\{\left(\frac{1}{360}\right)\cdot\left(\frac{19\cdot 10^6}{\text{PRI}_{\mu\text{sec}}}\right)\right\}$ | 60 % | 30 |
| 2 | 1-5 | 150-230 | 23-29 | 60 % | 30 |
| 3 | 6-10 | 200-500 | 16-18 | 60 % | 30 |
| 4 | 11-20 | 200-500 | 12-16 | 60 % | 30 |
| Aggregate (Radar Types 1-4) | | | | 80 % | 120 |
| Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. | | | | | |

| Table 5a: Pulse Repetition Intervals U-NII Band 2-Aalues for Test A | | |
|---|---|---|
| Pulse Repetition Frequency Number | Pulse Repetition Frequency (Pulses Per Second) | Pulse Repetition Interval (Microseconds) |
| 1 | 1930.5 | 518 |
| 2 | 1858.7 | 538 |
| 3 | 1792.1 | 558 |
| 4 | 1730.1 | 578 |
| 5 | 1672.2 | 598 |
| 6 | 1618.1 | 618 |
| 7 | 1567.4 | 638 |
| 8 | 1519.8 | 658 |
| 9 | 1474.9 | 678 |
| 10 | 1432.7 | 698 |
| 11 | 1392.8 | 718 |
| 12 | 1355 | 738 |
| 13 | 1319.3 | 758 |
| 14 | 1285.3 | 778 |
| 15 | 1253.1 | 798 |
| 16 | 1222.5 | 818 |
| 17 | 1193.3 | 838 |
| 18 | 1165.6 | 858 |
| 19 | 1139 | 878 |
| 20 | 1113.6 | 898 |
| 21 | 1089.3 | 918 |
| 22 | 1066.1 | 938 |
| 23 | 326.2 | 3066 |

| Table 6 – Long Pulse Radar Test Signal | | | | | | | |
|---|---|---|---|---|---|---|---|
| Radar Waveform | Bursts | Pulses per Burst | Pulse Width (µsec) | Chirp Width (MHz) | PRI (µsec) | Minimum Percentage of Successful Detection | Minimum Trials |
| 5 | 8-20 | 1-3 | 50-100 | 5-20 | 1000-2000 | 80 % | 30 |

| Table 7 – Frequency Hopping Radar Test Signal | | | | | | | |
|---|---|---|---|---|---|---|---|
| Radar Waveform | Pulse Width (µsec) | PRI (µsec) | Burst Length (ms) | Pulses per Hop | Hopping Rate (kHz) | Minimum Percentage of Successful Detection | Minimum Trials |
| 6 | 1 | 333 | 300 | 9 | 0.333 | 70 % | 30 |

## 4.2. Test and Measurement System

### 4.2.1. Setup for Master with injection at the Master

Example Radiated Setup where UUT is a Master and Radar Test Waveforms are injected into the Master

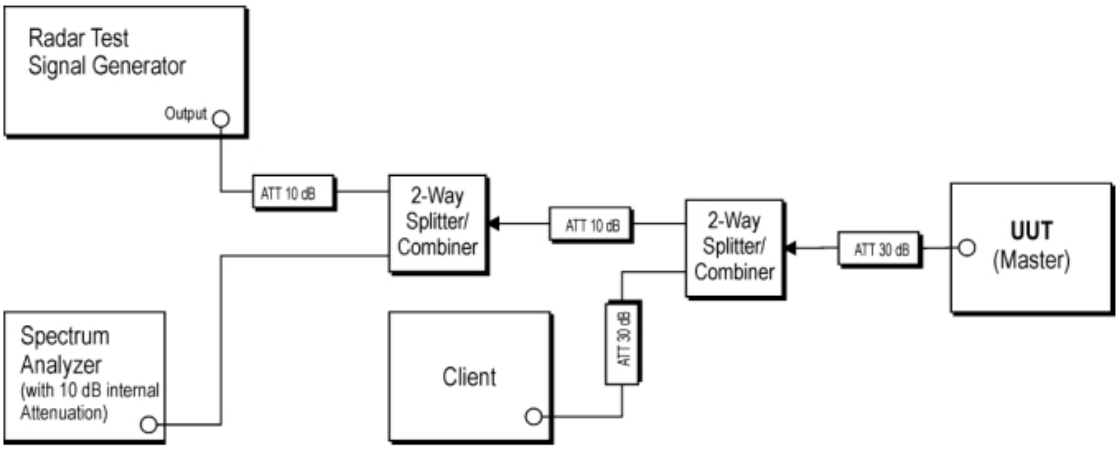


**Tested System Details**

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

| | Product | Manufacturer | Model No. | ID |
|---|---|---|---|---|
| 1. | Access Point | D-Link | M95 | FCC ID:KA2M95A1 |

### 4.2.2. Setup for Client with injection at the Master

Example Radiated Setup where UUT is a Client and Radar Test Waveforms are injected into the Master

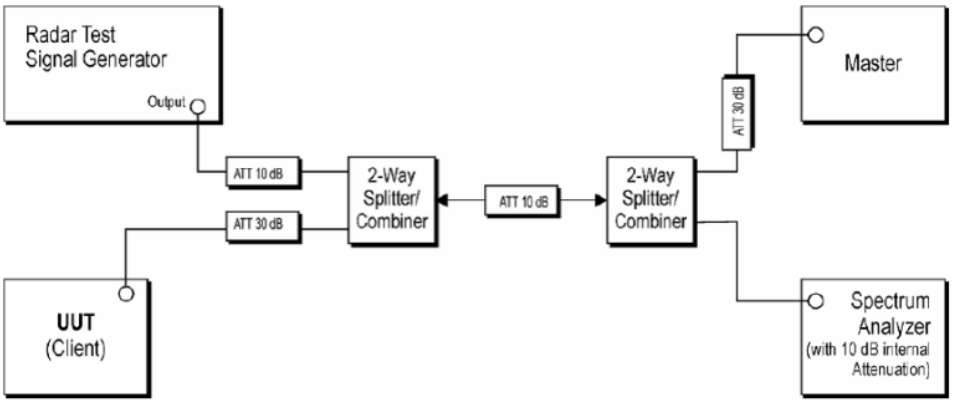


**Tested System Details**

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

| | Product | Manufacturer | Model No. | ID |
|---|---|---|---|---|
| 1. | Access Point | D-Link | M95 | FCC ID:KA2M95A1 |

### 4.2.3. System Calibration

The short pulse types 0,1,2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time. The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the May 2014 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.
The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

### 4.2.4. System Calibration

The Interference Radar Detection Threshold Level is (-63 dBm), The above equipment setup was used to calibrate the radiated Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50 ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used.The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (U-NII Band 2-ABW) were set to at least 3 MHz.
The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was (-63 dBm). Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.

### 4.2.5. Adjustment of Displayed Traffic Level

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. Software to ping the client is permitted to simulate data transfer but must have random ping intervals. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.

# 5 Test Results

## 5.1. Radar Waveforms and Traffic

| 802.11be EHT20_ 5300 MHz | |
|---|---|
| Short Pulse Radar<br>Type 0 | 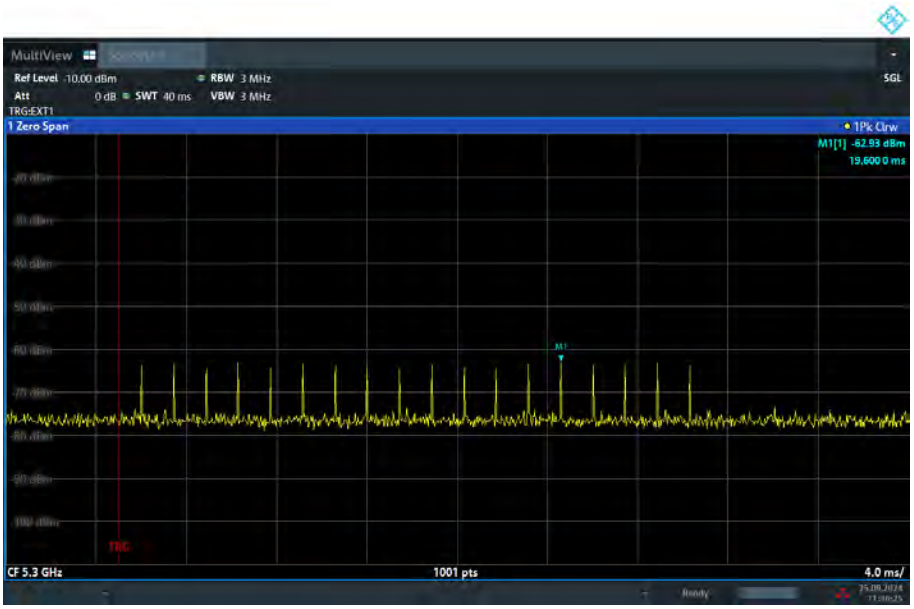 |
| Short Pulse Radar<br>Type 1 | 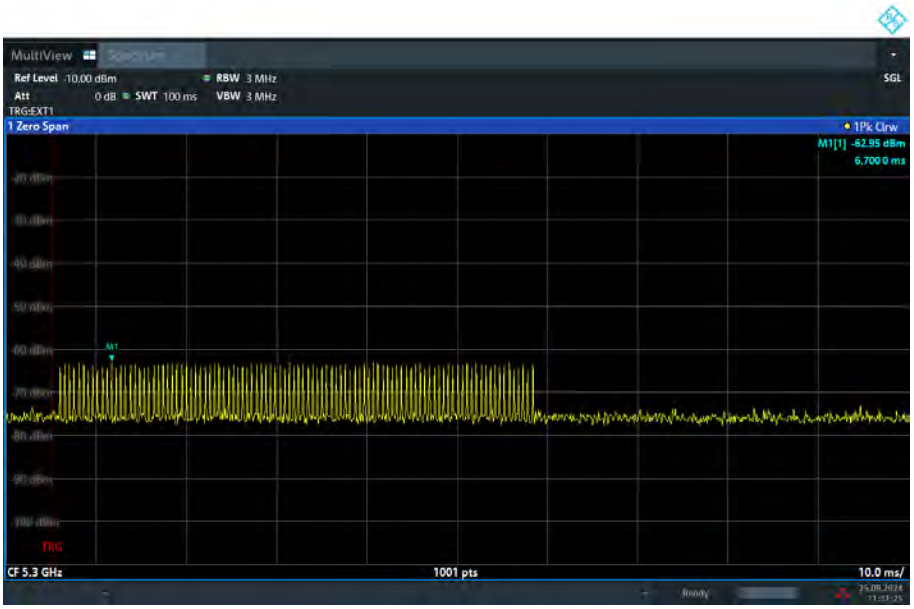 |

| 802.11be EHT20_ 5300 MHz | |
|---|---|
| Short Pulse Radar<br>Type 2 | 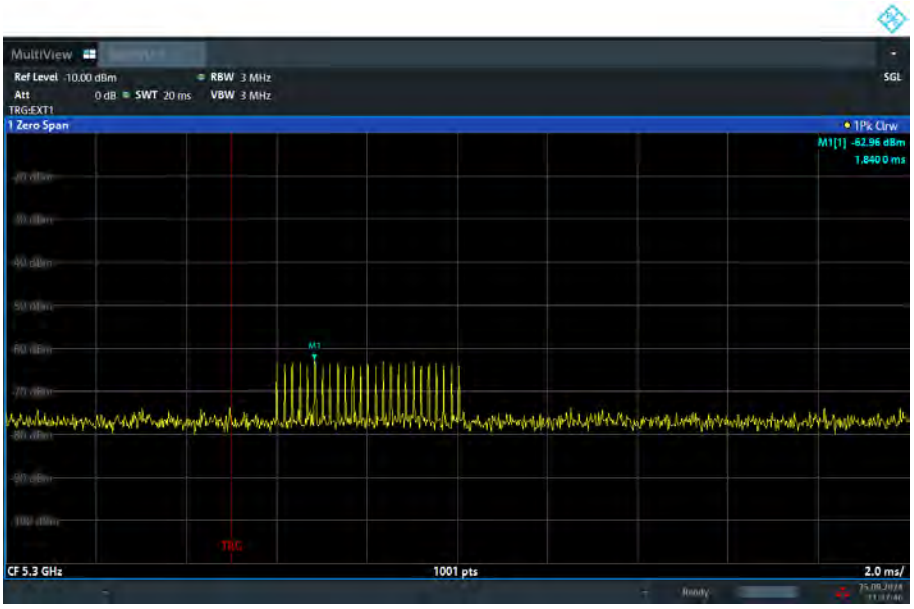 |
| Short Pulse Radar<br>Type 3 | 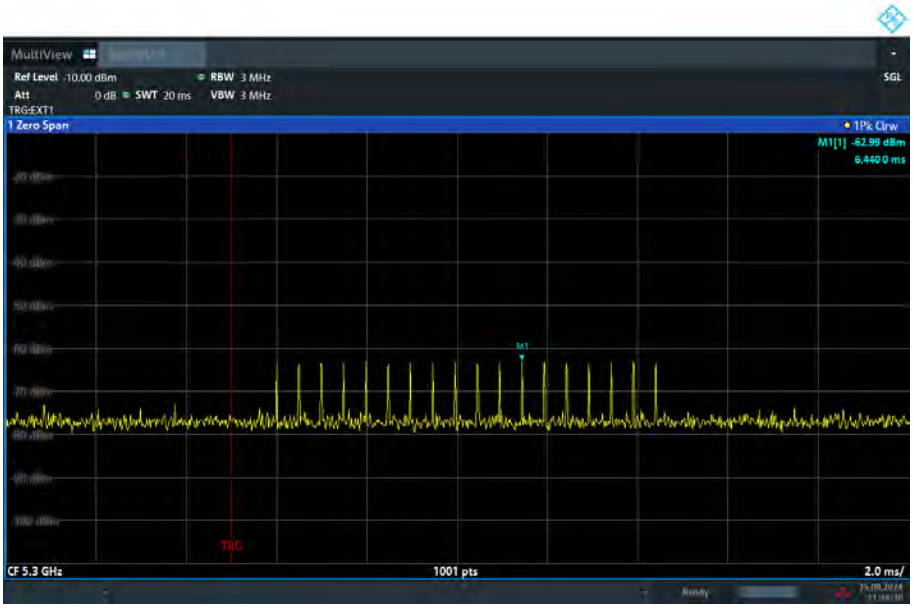 |

| 802.11be EHT20_ 5300 MHz | |
|---|---|
| Short Pulse Radar<br>Type 4 | 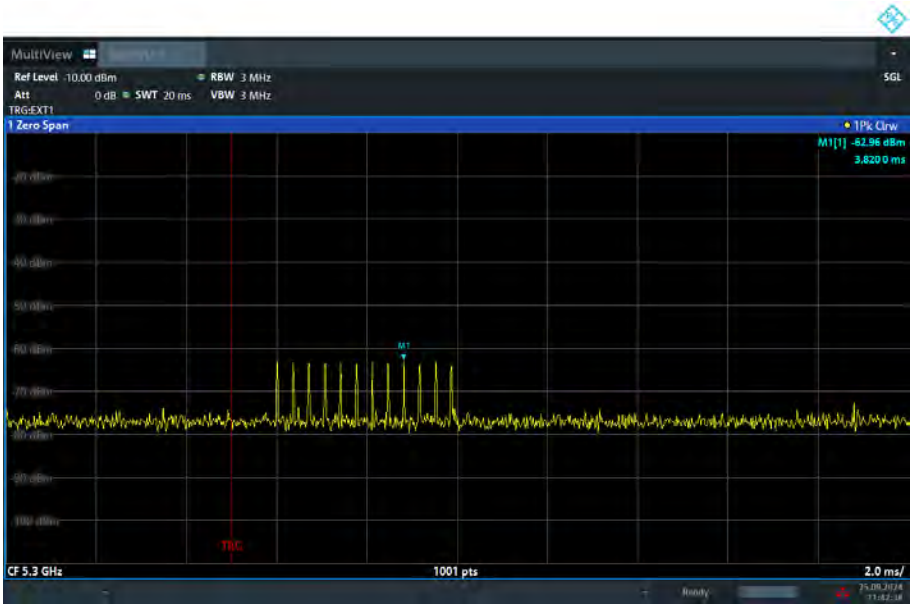 |
| Long Pulse Radar<br>Type 5 | 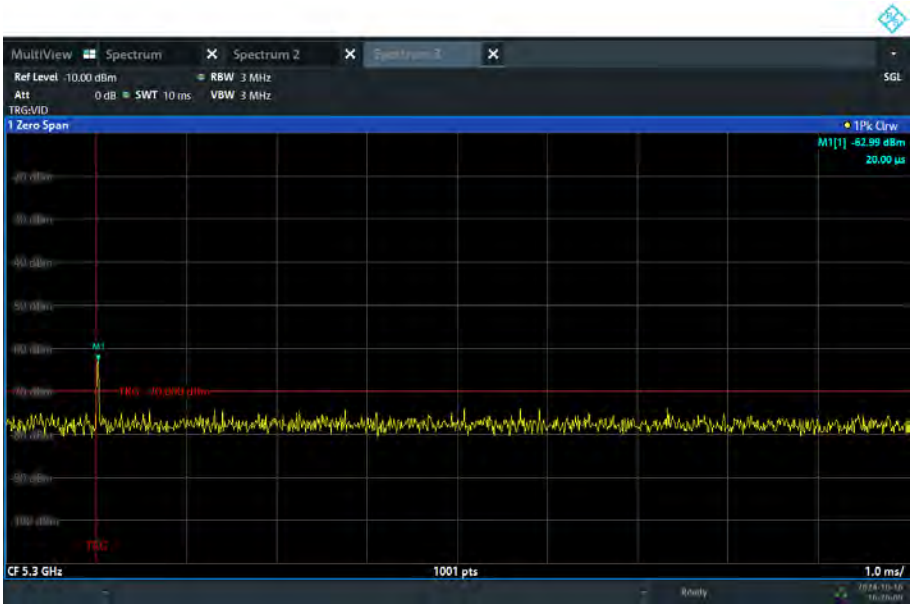 |

| 802.11be EHT20_ 5300 MHz | |
|---|---|
| Frequency Hopping<br>Radar<br>Type 6 | 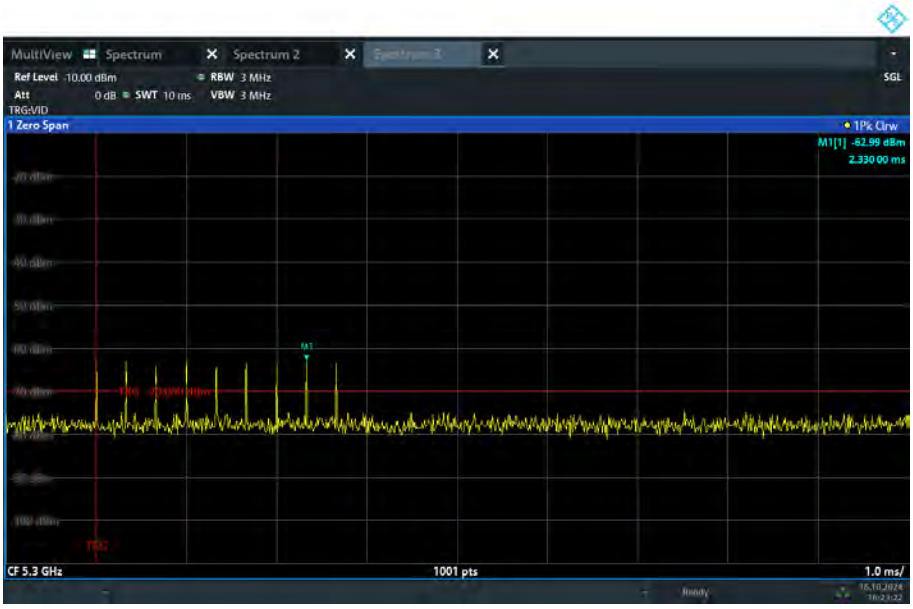 |

| 802.11be EHT40_ 5310 MHz | |
|---|---|
| Short Pulse Radar<br>Type 0 | 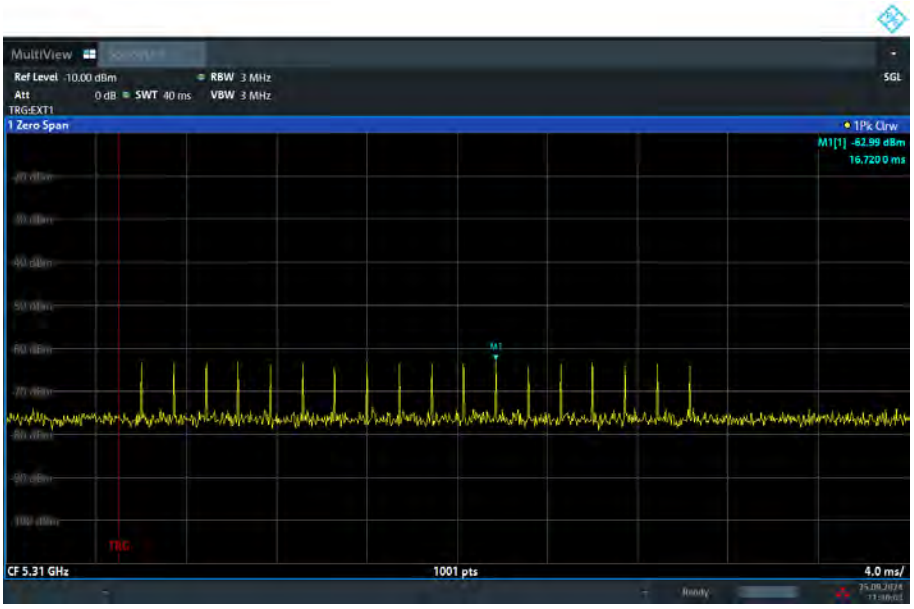 |
| Short Pulse Radar<br>Type 1 | 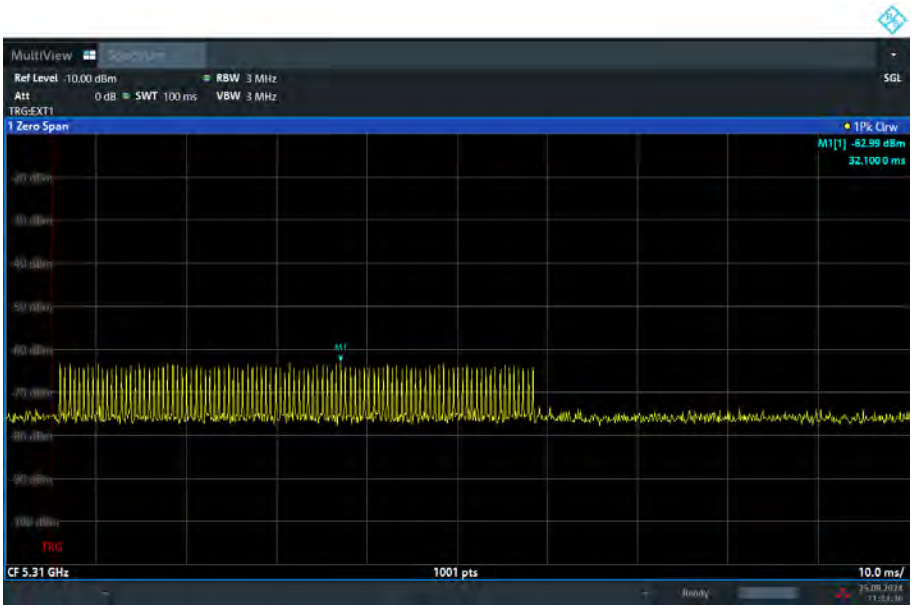 |

| 802.11be EHT40_ 5310 MHz | |
|---|---|
| Short Pulse Radar<br>Type 2 | 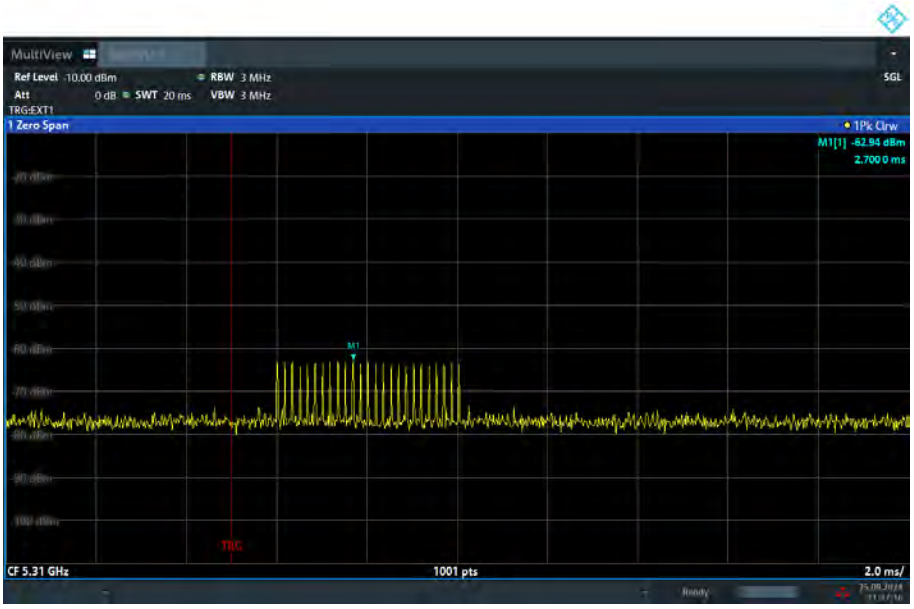 |
| Short Pulse Radar<br>Type 3 | 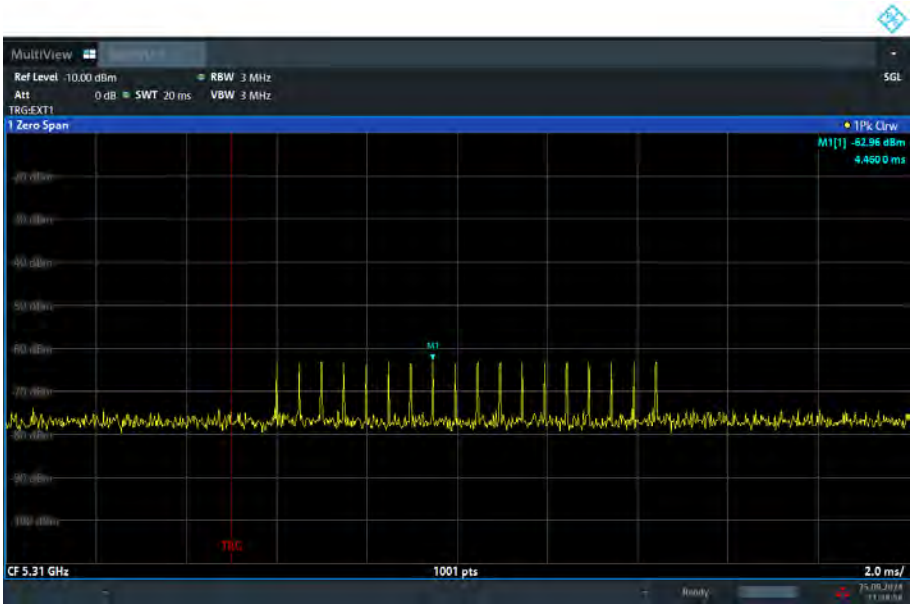 |

| 802.11be EHT40_ 5310 MHz | |
|---|---|
| Short Pulse Radar<br>Type 4 | 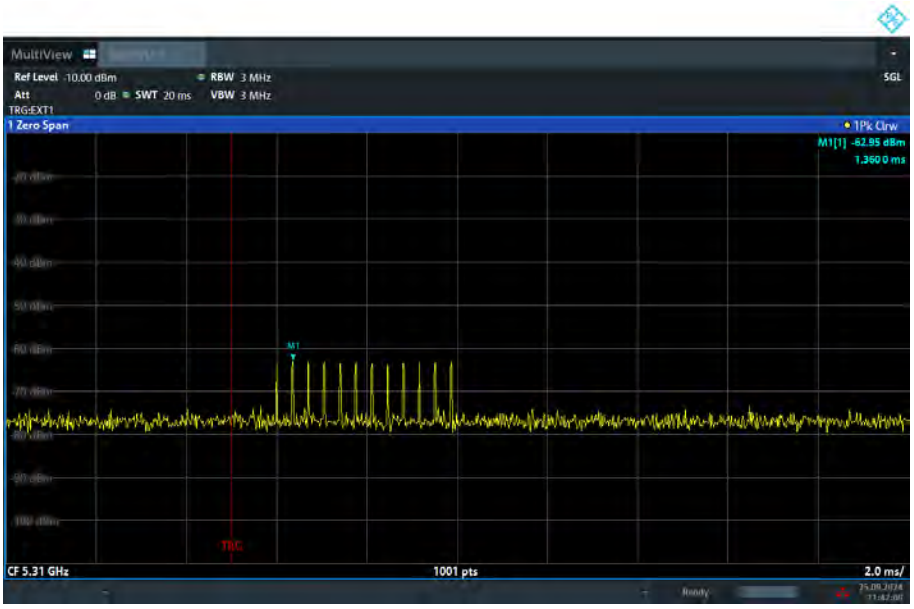 |
| Long Pulse Radar<br>Type 5 | 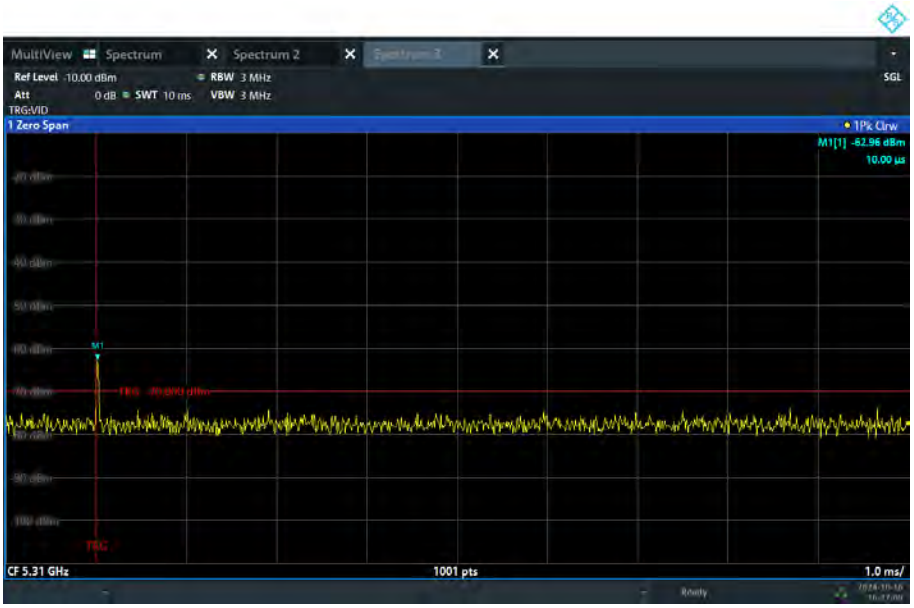 |

| 802.11be EHT40_ 5310 MHz | |
|---|---|
| Frequency Hopping<br>Radar<br>Type 6 | 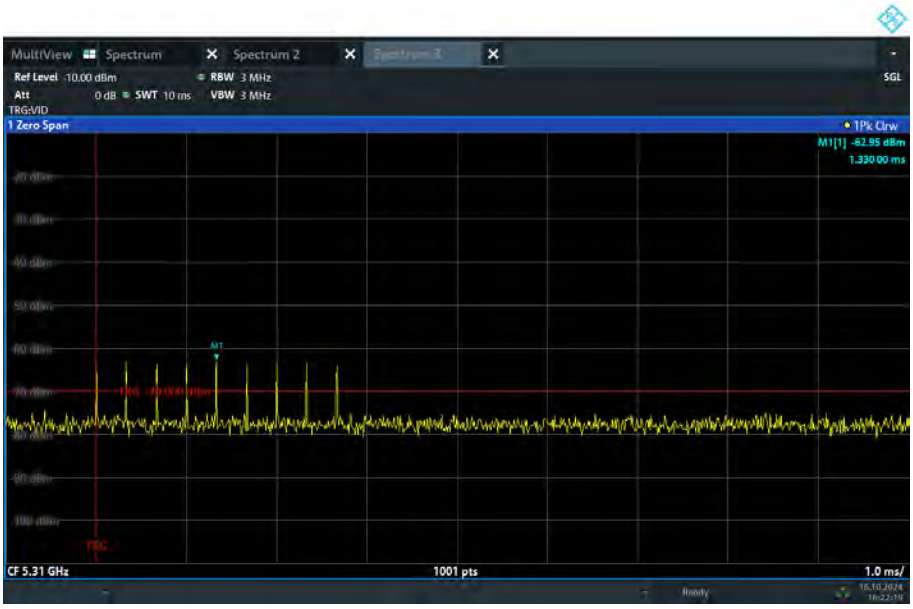 |

| 802.11be EHT80_ 5290 MHz | |
|---|---|
| Short Pulse Radar<br>Type 0 | 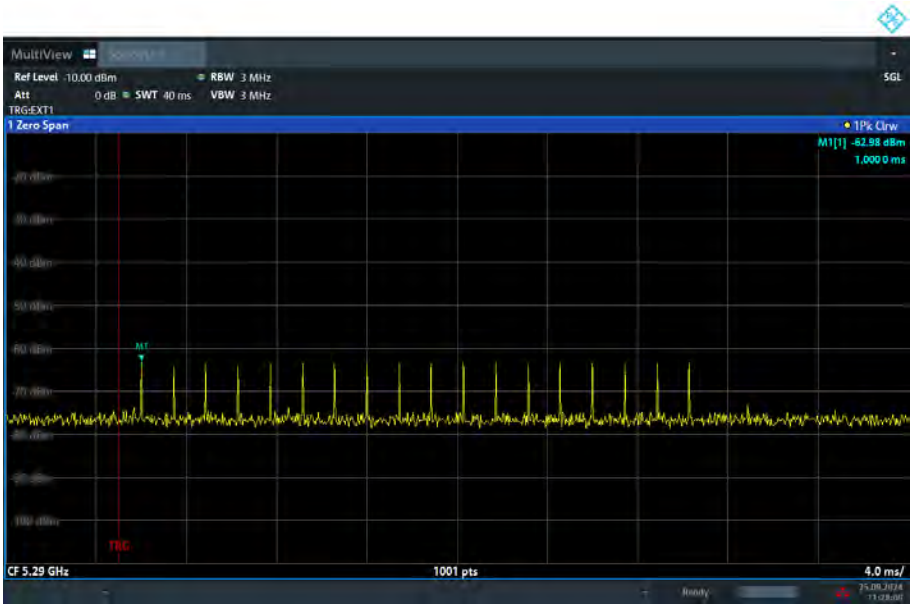 |
| Short Pulse Radar<br>Type 1 | 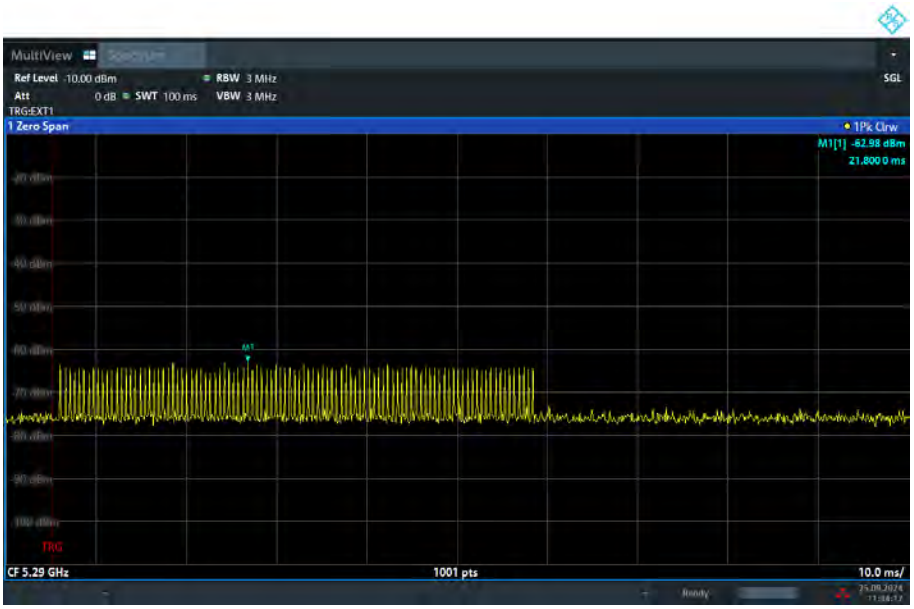 |

| 802.11be EHT80_ 5290 MHz | |
|---|---|
| Short Pulse Radar<br>Type 2 | 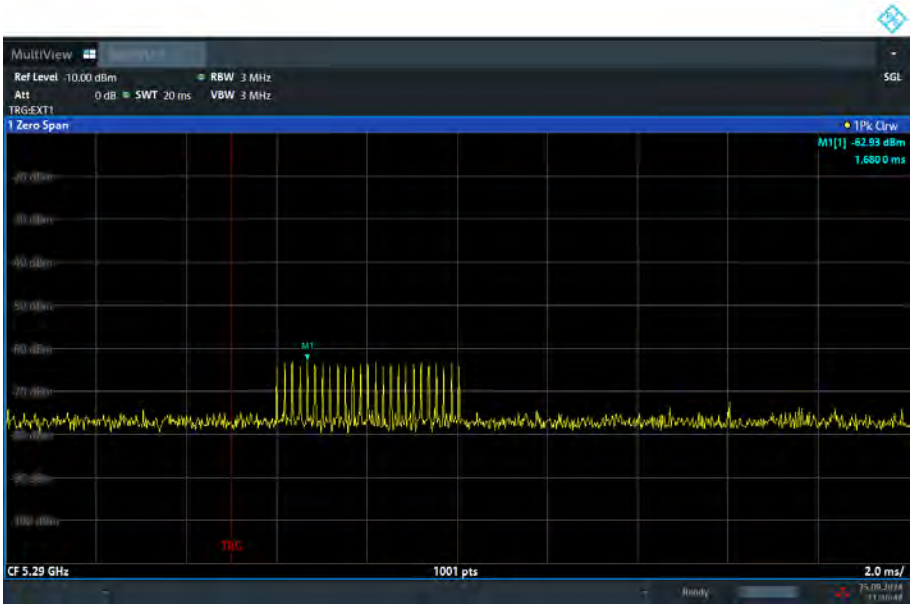 |
| Short Pulse Radar<br>Type 3 | 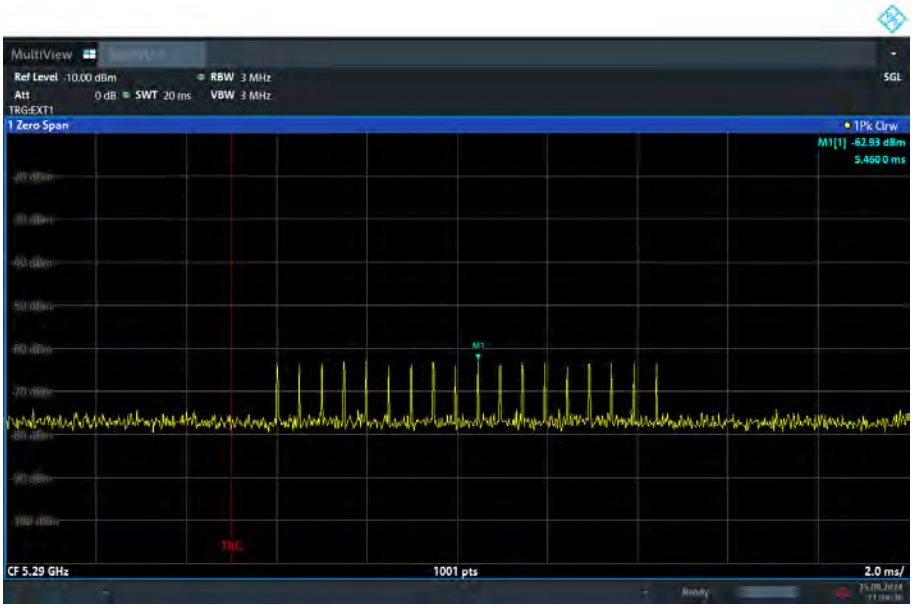 |

| 802.11be EHT80_ 5290 MHz | |
|---|---|
| Short Pulse Radar<br>Type 4 | 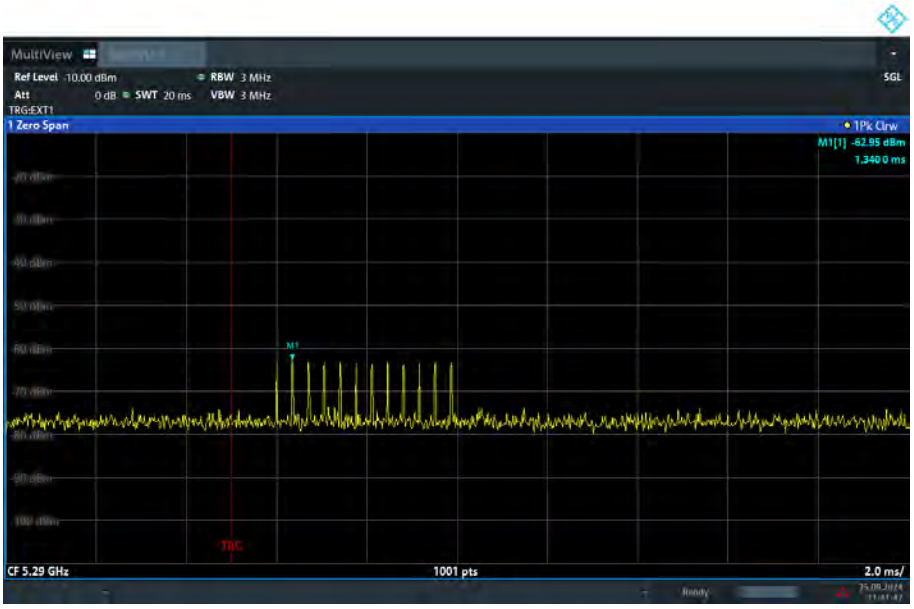 |
| Long Pulse Radar<br>Type 5 | 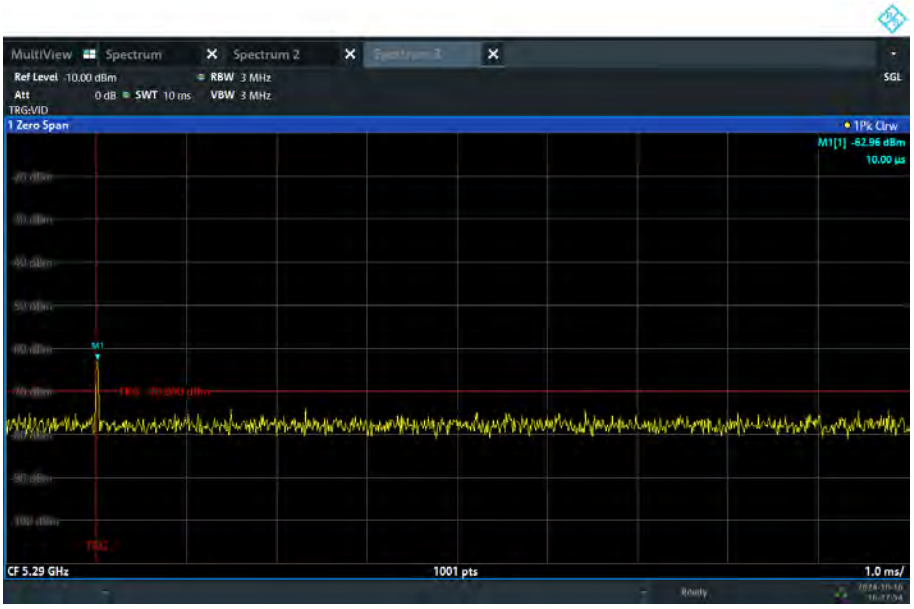 |

| 802.11be EHT80_ 5290 MHz | |
|---|---|
| Frequency Hopping<br>Radar<br>Type 6 | 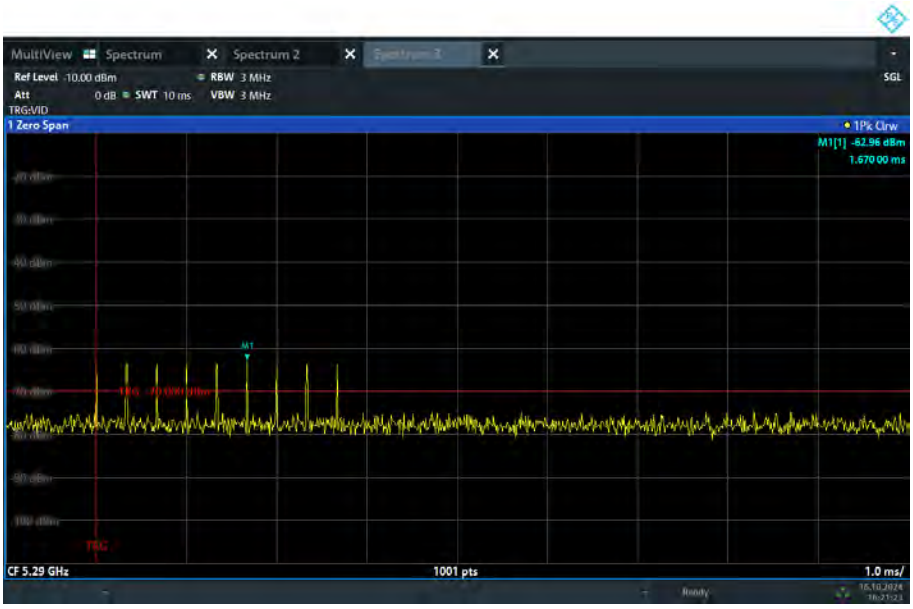 |

| 802.11be EHT160_ 5250 MHz | |
|---|---|
| Short Pulse Radar<br>Type 0 | 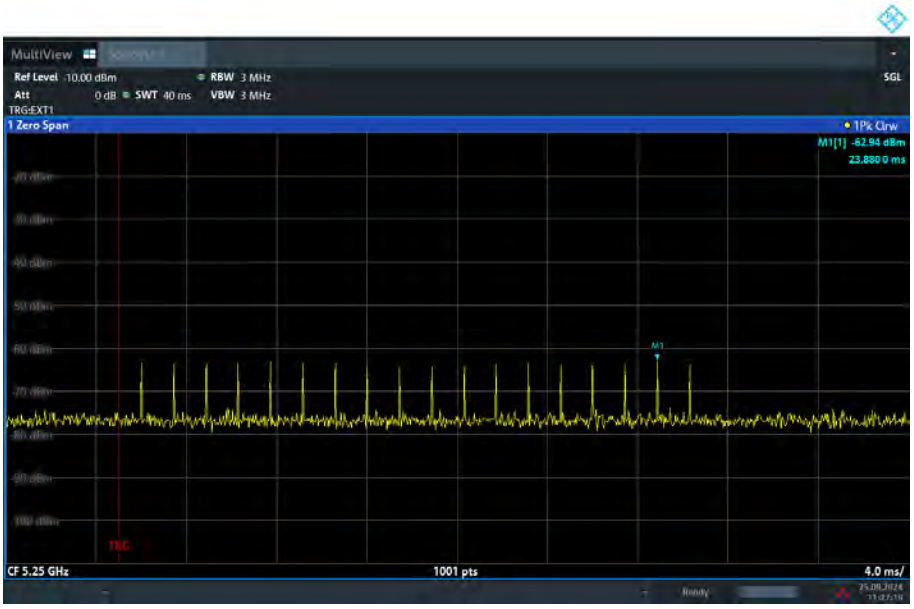 |
| Short Pulse Radar<br>Type 1 | 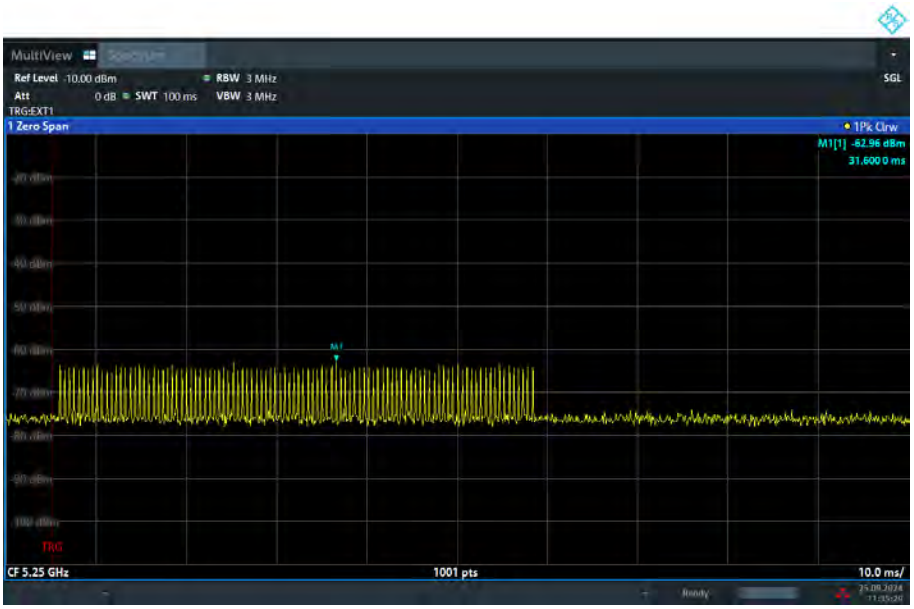 |

| 802.11be EHT160_ 5250 MHz | |
|---|---|
| Short Pulse Radar<br>Type 2 | 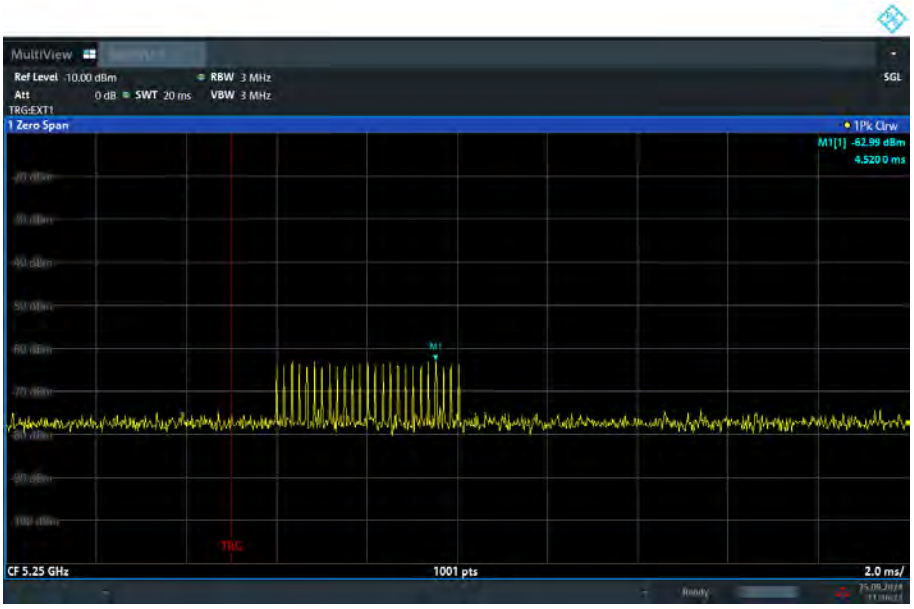 |
| Short Pulse Radar<br>Type 3 | 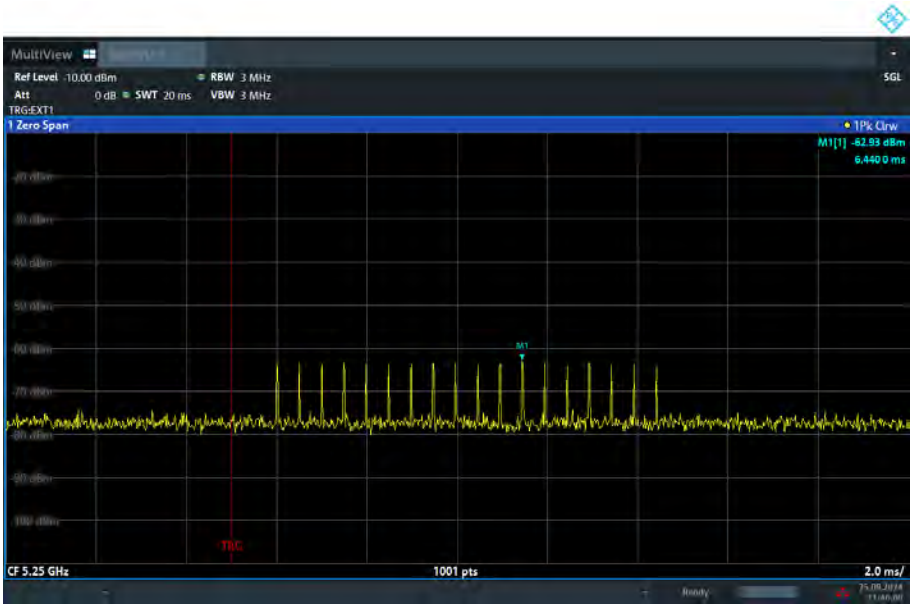 |

| 802.11be EHT160_ 5250 MHz | |
|---|---|
| Short Pulse Radar<br>Type 4 | 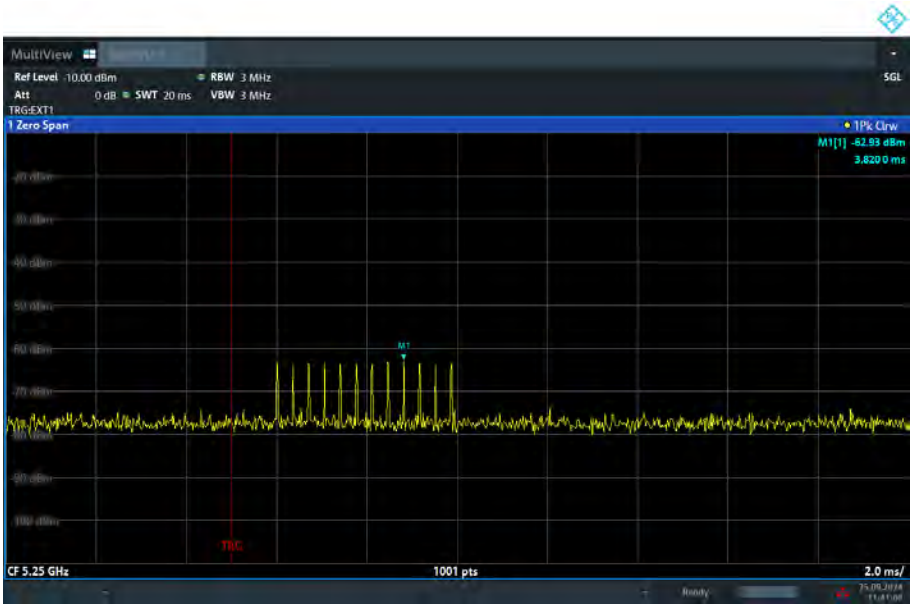 |
| Long Pulse Radar<br>Type 5 | 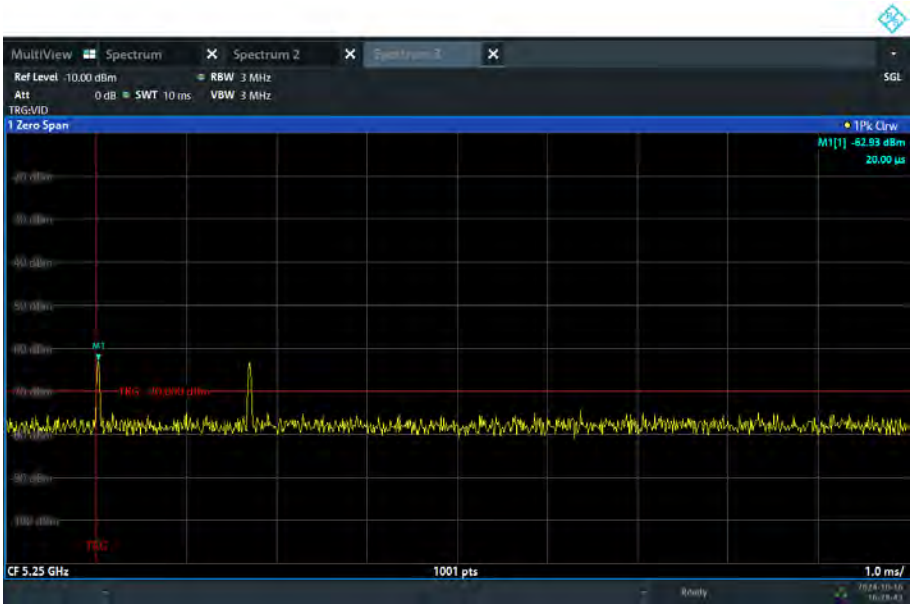 |

| 802.11be EHT160_ 5250 MHz | |
|---|---|
| Frequency Hopping<br>Radar<br>Type 6 | 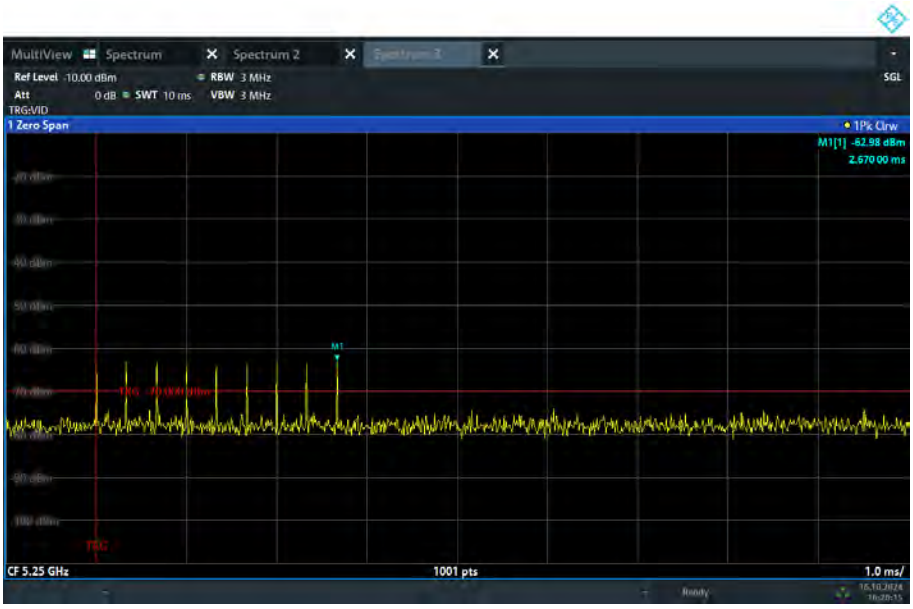 |

| 802.11be EHT160_ 5250 MHz | |
|---|---|
| Traffic |  |

## 5.2. Channel Loading

■ **Duty cycle≧17 %**

802.11be EHT20

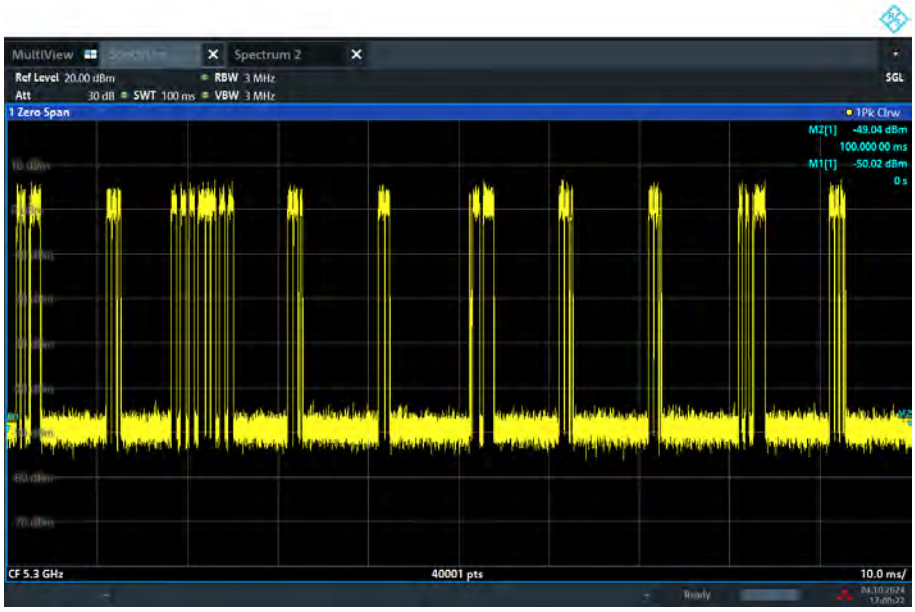


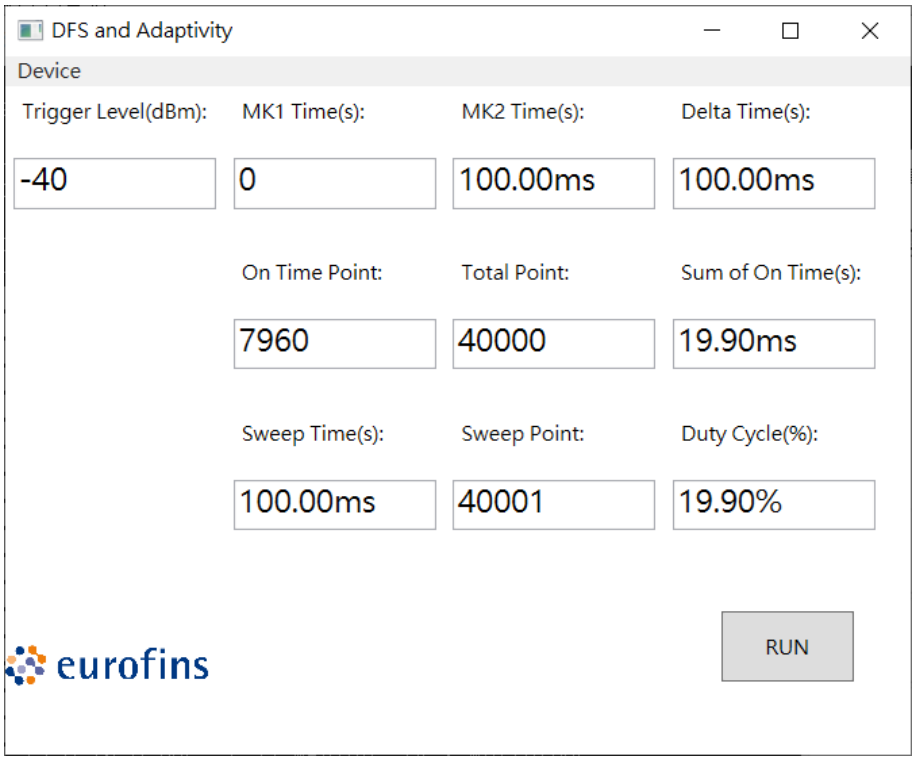

802.11be EHT40


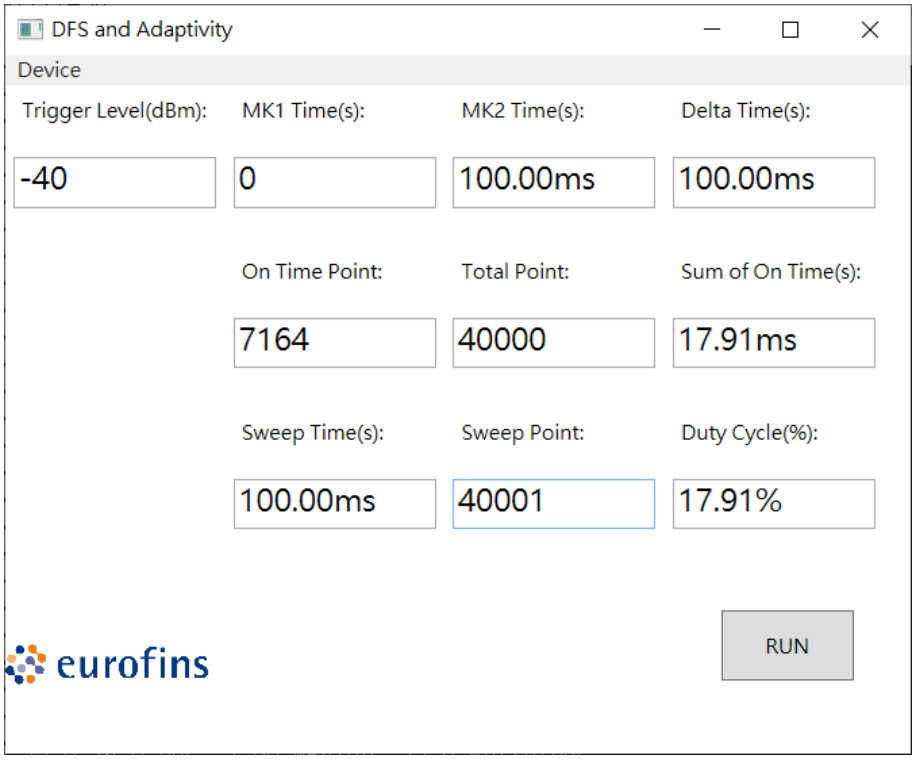

802.11be EHT80


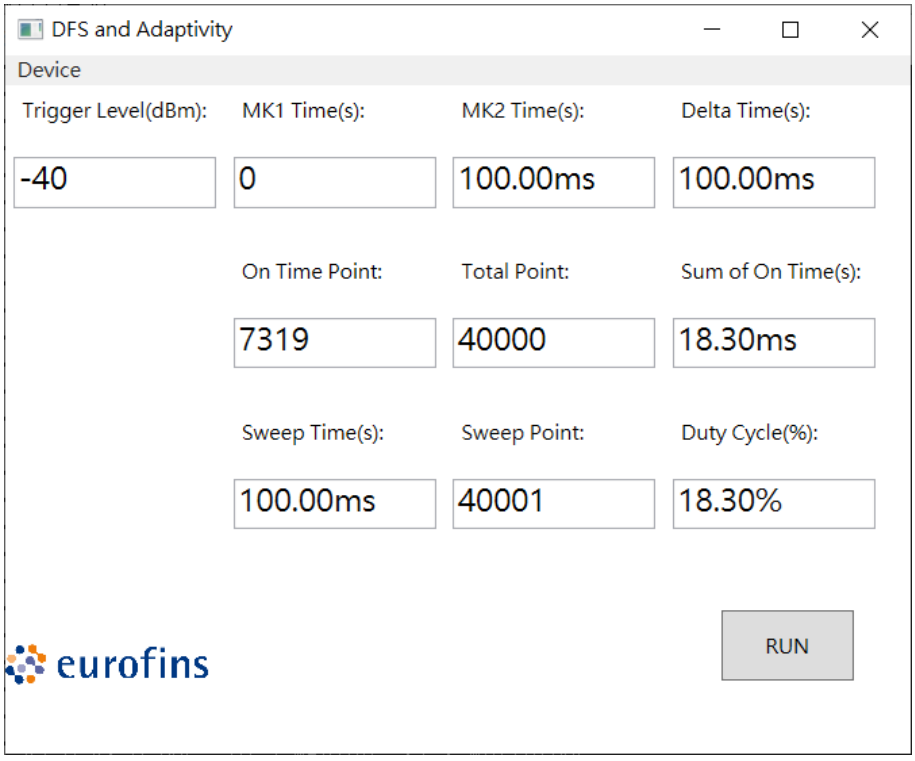

802.11be EHT160

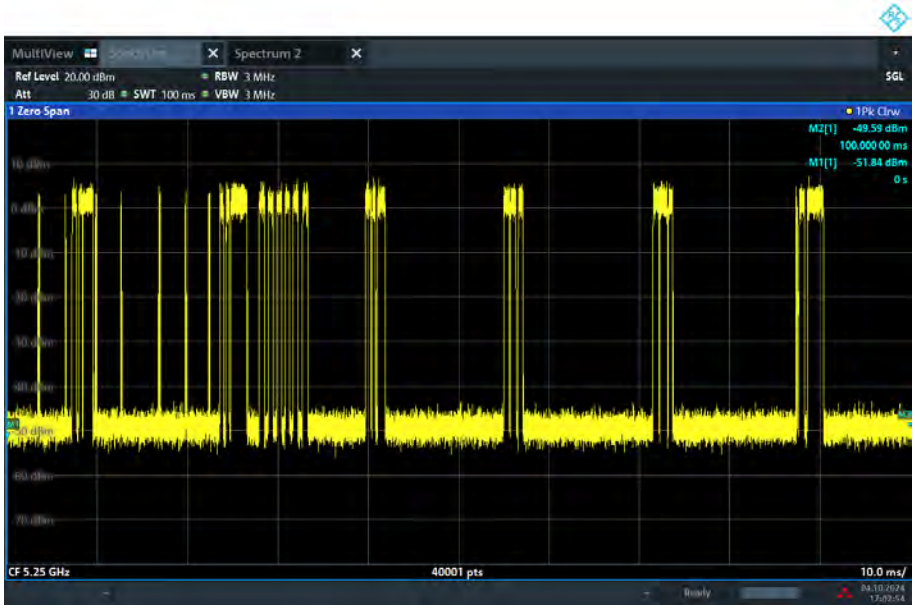


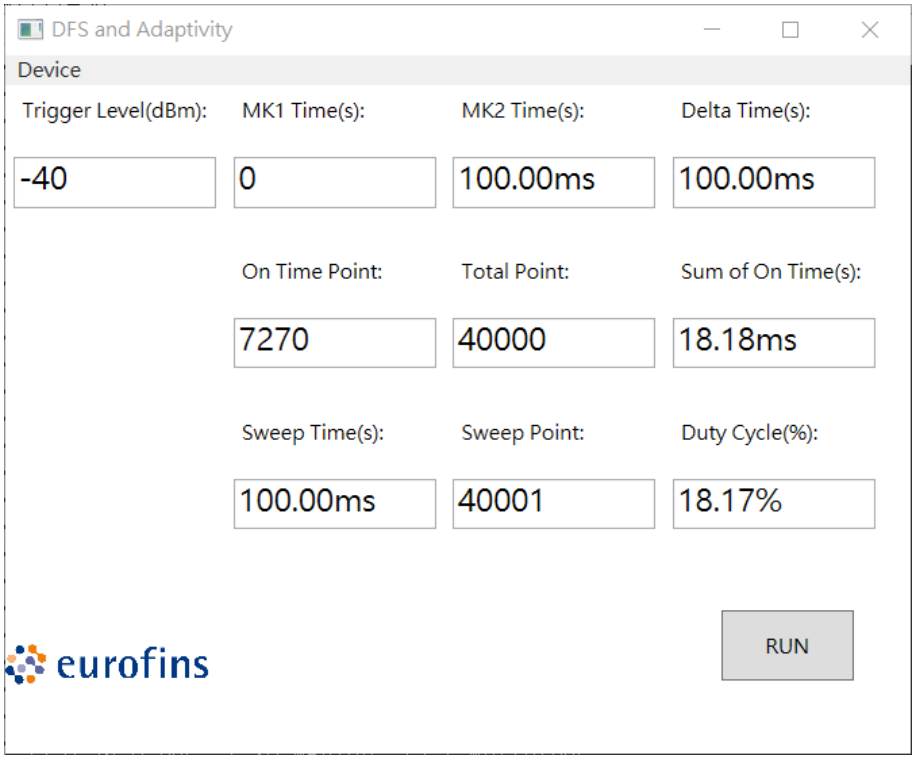

## 5.3. Channel Availability Check Time

### 5.3.1. Procedure to Determine Initial Power-Up Cycle Time

A link was established on channel then the EUT was rebooted. The time from the cessation of traffic to the re-initialization of traffic was measured as the time required for the EUT to complete the total power-up cycle. The time to complete the initial power-up period is 60 seconds less than this total power-up time.

### 5.3.2. Procedure for Timing Of Radar Burst

With a link established on channel, the EUT was rebooted. A radar signal was triggered within 0 to 6 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.
The Non-Occupancy list was cleared. With a link established on channel, the EUT was rebooted. A radar signal was triggered within 54 to 60 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

### 5.3.3. Qualitative Results

| Timing of Radar Burst | Display on Control Computer | Spectrum Analyzer Display |
|---|---|---|
| No Radar Triggered | EUT marks Channel as active | Transmissions begin on channel after completion of the initial power-up cycle and the CAC |
| Within 0 to 6 second window | EUT indicates radar detected | No transmissions on channel |
| Within 54 to 60 second window | EUT indicates radar detected | No transmissions on channel |

| 802.11be EHT160_ 5250 MHz | |
|---|---|
| Initial Channel Availability Check |  |
| Initial Channel Availability Check Begin | 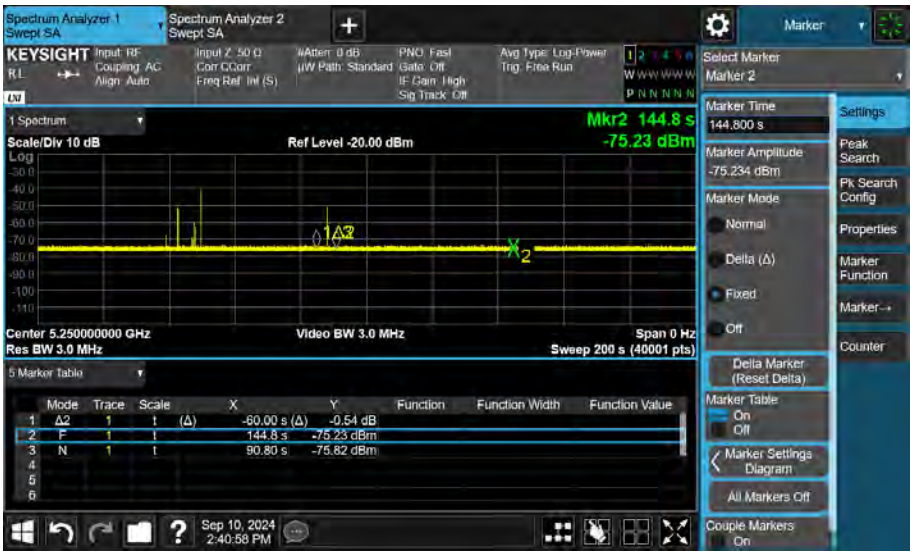 |

| 802.11be EHT160_ 5250 MHz | |
|---|---|
| Initial Channel Availability Check End |  |

## 5.4. Channel Move Time and Channel Closing Transmission Time

### 5.4.1. Reporting Notes

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse.
This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:
Aggregate Transmission Time = (Number of analyzer bins showing transmission) * (dwell time per bin)

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Results

| Frequency (MHz) | Radar Type | Channel Move Time (msec) | | Limit (sec) |
|---|---|---|---|---|
| | | Master | Client | |
| 5250 | Type 0 | 499.5 | 829.5 | 10 |

| Frequency (MHz) | Radar Type | Aggregate Channel Closing Transmission Time (msec) | | Limit (msec) |
|---|---|---|---|---|
| | | Master | Client | |
| 5250 | Type 0 | 8.5 | 35 | 60 |

**Master**

| 802.11be EHT160_ 5250 MHz | |
|---|---|
| Channel Move and Closing Time | 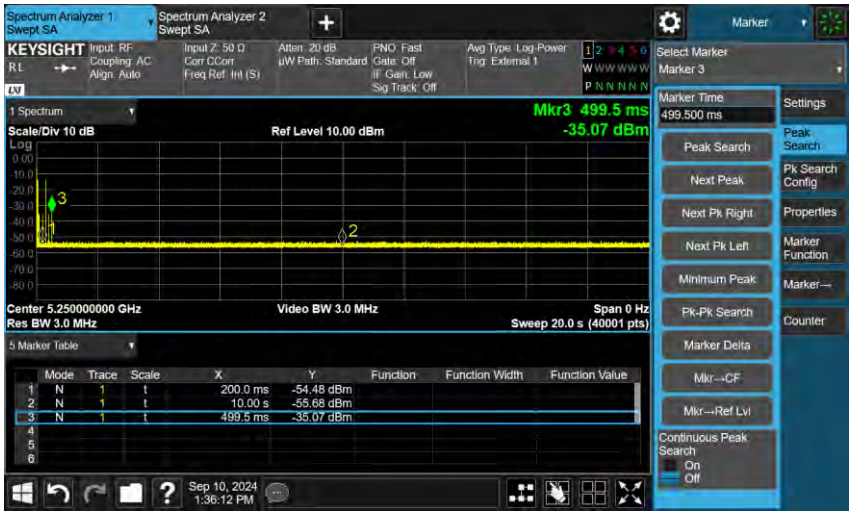 <br> 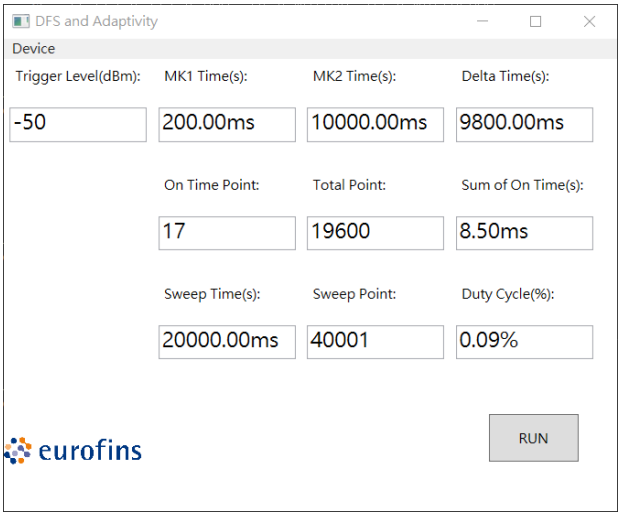 |

**Client**

| 802.11be EHT160_ 5250 MHz | |
|---|---|
| Channel Move and Closing Time |  <br> 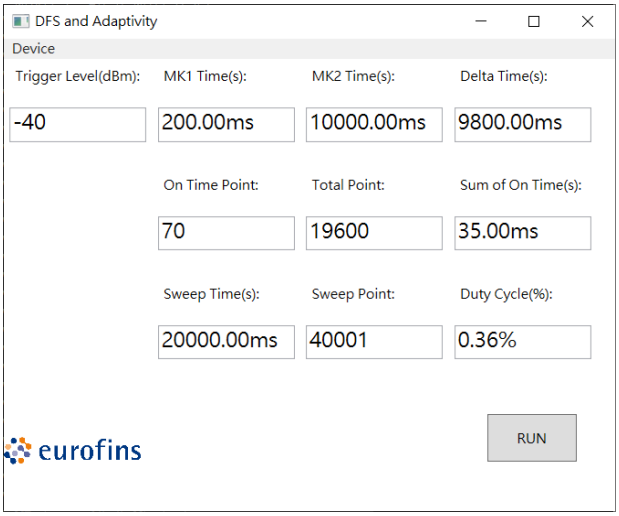 |

## 5.5. Non-Occupancy Period

802.11be EHT160_ 5250 MHz

Master


Client

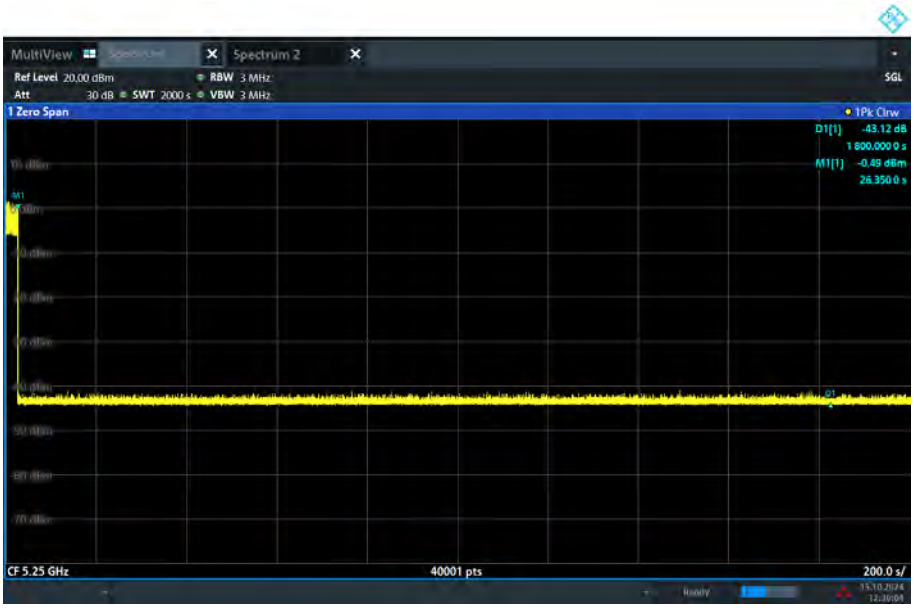


Note: Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.

## 5.6. U-NII Detection Bandwidth

■ **Test Results**

| Test Mode | 802.11be EHT20 | | | | | |
|---|---|---|---|---|---|---|
| Frequency (MHz) | FL (MHz) | FH (MHz) | Detection Bandwidth (MHz) | 99 % Power Bandwidth (MHz) | Ratio of Detection BW to 99 % Power BW (%) | Minimum Limit (%) |
| 5300 | 5290 | 5310 | 20 | 19.0784405 | 104.83 | ≧100 |

| Test Mode | 802.11be EHT40 | | | | | |
|---|---|---|---|---|---|---|
| Frequency (MHz) | FL (MHz) | FH (MHz) | Detection Bandwidth (MHz) | 99 % Power Bandwidth (MHz) | Ratio of Detection BW to 99 % Power BW (%) | Minimum Limit (%) |
| 5310 | 5530 | 5570 | 40 | 38.7293865 | 103.28 | ≧100 |

| Test Mode | 802.11be EHT80 | | | | | |
|---|---|---|---|---|---|---|
| Frequency (MHz) | FL (MHz) | FH (MHz) | Detection Bandwidth (MHz) | 99 % Power Bandwidth (MHz) | Ratio of Detection BW to 99 % Power BW (%) | Minimum Limit (%) |
| 5290 | 5250 | 5330 | 80 | 77.5572828 | 103.15 | ≧100 |

| Test Mode | 802.11be EHT160 | | | | | |
|---|---|---|---|---|---|---|
| Frequency (MHz) | FL (MHz) | FH (MHz) | Detection Bandwidth (MHz) | 99 % Power Bandwidth (MHz) | Ratio of Detection BW to 99 % Power BW (%) | Minimum Limit (%) |
| 5250 | 5250 | 5330 | 80 | 78.3288107 | 102.13 | ≧100 |

■ **Test Graphs**

802.11be EHT20_ 5300 MHz


802.11be EHT40_ 5310 MHz

802.11be EHT80_ 5290 MHz


802.11be EHT160_ 5250 MHz

## 5.7. Statistical Performance check

■ **Test Results**

| Test Mode | 802.11be EHT20 | | | | | | |
|---|---|---|---|---|---|---|---|
| Frequency (MHz) | Radar Signal | PRI (Msec) | Pulse width W (μs) | Pass Times | Fail Times | Probability | Limit |
| 5300 | Type1 | Table 5a | 1 | 26 | 4 | 86.67% | ≧ 60% |
| | Type2 | Random | Random | 27 | 3 | 90.00% | ≧ 60% |
| | Type3 | Random | Random | 26 | 4 | 86.67% | ≧ 60% |
| | Type4 | Random | Random | 27 | 3 | 90.00% | ≧ 60% |
| | Type1~4 | | | | | 88.33% | ≧ 80% |
| | Type5 | Random | Random | 29 | 1 | 96.67% | ≧ 80% |
| | Type6 | Hopping | 1 | 30 | 0 | 100.00% | ≧ 70% |

| Test Mode | 802.11be EHT40 | | | | | | |
|---|---|---|---|---|---|---|---|
| Frequency (MHz) | Radar Signal | PRI (Msec) | Pulse width W (μs) | Pass Times | Fail Times | Probability | Limit |
| 5310 | Type1 | Table 5a | 1 | 28 | 2 | 93.33% | ≧ 60% |
| | Type2 | Random | Random | 27 | 3 | 90.00% | ≧ 60% |
| | Type3 | Random | Random | 26 | 4 | 86.67% | ≧ 60% |
| | Type4 | Random | Random | 25 | 5 | 83.33% | ≧ 60% |
| | Type1~4 | | | | | 88.33% | ≧ 80% |
| | Type5 | Random | Random | 27 | 3 | 90.00% | ≧ 80% |
| | Type6 | Hopping | 1 | 30 | 0 | 100.00% | ≧ 70% |

| Test Mode | 802.11be EHT80 | | | | | | |
|---|---|---|---|---|---|---|---|
| Frequency (MHz) | Radar Signal | PRI (Msec) | Pulse width W (μs) | Pass Times | Fail Times | Probability | Limit |
| 5290 | Type1 | Table 5a | 1 | 28 | 2 | 93.33% | ≧ 60% |
| | Type2 | Random | Random | 26 | 4 | 86.67% | ≧ 60% |
| | Type3 | Random | Random | 28 | 2 | 93.33% | ≧ 60% |
| | Type4 | Random | Random | 26 | 4 | 86.67% | ≧ 60% |
| | Type1~4 | | | | | 90.00% | ≧ 80% |
| | Type5 | Random | Random | 25 | 5 | 83.33% | ≧ 80% |
| | Type6 | Hopping | 1 | 30 | 0 | 100.00% | ≧ 70% |

| Test Mode | 802.11be EHT160 | | | | | | |
|---|---|---|---|---|---|---|---|
| Frequency (MHz) | Radar Signal | PRI (Msec) | Pulse width W (μs) | Pass Times | Fail Times | Probability | Limit |
| 5250 | Type1 | Table 5a | 1 | 26 | 4 | 86.67% | ≧ 60% |
| | Type2 | Random | Random | 25 | 5 | 83.33% | ≧ 60% |
| | Type3 | Random | Random | 27 | 3 | 90.00% | ≧ 60% |
| | Type4 | Random | Random | 26 | 4 | 86.67% | ≧ 60% |
| | Type1~4 | | | | | 86.67% | ≧ 80% |
| | Type5 | Random | Random | 26 | 4 | 86.67% | ≧ 80% |
| | Type6 | Hopping | 1 | 30 | 0 | 100.00% | ≧ 70% |

| Test Mode | 802.11be EHT20 | | | | | |
|---|---|---|---|---|---|---|
| Frequency | 5300 MHz | | | | | |
| Radar Signal | Type 1 | | | | | |
| Trial # | Test Frequency (MHz) | Pulse Width (us) | PRI (us) | Number of Pluse | PRF (Hz) | 1=Detection ; 0=No Detection |
| 1 | 5300 | 1 | 798 | 67 | 1253 | 1 |
| 2 | 5300 | 1 | 558 | 95 | 1792 | 1 |
| 3 | 5300 | 1 | 578 | 92 | 1730 | 1 |
| 4 | 5300 | 1 | 878 | 61 | 1139 | 1 |
| 5 | 5300 | 1 | 918 | 58 | 1089 | 1 |
| 6 | 5300 | 1 | 578 | 92 | 1730 | 1 |
| 7 | 5300 | 1 | 718 | 74 | 1393 | 1 |
| 8 | 5300 | 1 | 798 | 67 | 1253 | 0 |
| 9 | 5300 | 1 | 538 | 99 | 1859 | 0 |
| 10 | 5300 | 1 | 878 | 61 | 1139 | 1 |
| 11 | 5300 | 1 | 738 | 72 | 1355 | 1 |
| 12 | 5300 | 1 | 678 | 78 | 1475 | 1 |
| 13 | 5300 | 1 | 718 | 74 | 1393 | 1 |
| 14 | 5300 | 1 | 938 | 57 | 1066 | 1 |
| 15 | 5300 | 1 | 558 | 95 | 1792 | 1 |
| 16 | 5300 | 1 | 3018 | 18 | 331 | 1 |
| 17 | 5300 | 1 | 2069 | 26 | 483 | 1 |
| 18 | 5300 | 1 | 2131 | 25 | 469 | 1 |
| 19 | 5300 | 1 | 2817 | 19 | 355 | 1 |
| 20 | 5300 | 1 | 673 | 79 | 1486 | 1 |
| 21 | 5300 | 1 | 1742 | 31 | 574 | 1 |
| 22 | 5300 | 1 | 1353 | 40 | 739 | 0 |
| 23 | 5300 | 1 | 2231 | 24 | 448 | 1 |
| 24 | 5300 | 1 | 1882 | 29 | 531 | 0 |
| 25 | 5300 | 1 | 1865 | 29 | 536 | 1 |
| 26 | 5300 | 1 | 760 | 70 | 1316 | 1 |
| 27 | 5300 | 1 | 1020 | 52 | 980 | 1 |
| 28 | 5300 | 1 | 699 | 76 | 1431 | 1 |
| 29 | 5300 | 1 | 603 | 88 | 1658 | 1 |
| 30 | 5300 | 1 | 2961 | 18 | 338 | 1 |
| Detection Percentage (%) | | | | | | 86.67 |

| Test Mode | 802.11be EHT20 |
|---|---|
| Frequency | 5300 MHz |
| Radar Signal | Type 2 |

| Trial # | Test Frequency (MHz) | Pulse Width (us) | PRI (us) | Number of Pluse | PRF (Hz) | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|
| 1 | 5300 | 2.20 | 190.70 | 28 | 5244 | 1 |
| 2 | 5300 | 3.50 | 181.70 | 23 | 5504 | 1 |
| 3 | 5300 | 2.50 | 194.60 | 23 | 5139 | 0 |
| 4 | 5300 | 3.50 | 177.20 | 25 | 5643 | 1 |
| 5 | 5300 | 3.10 | 217.60 | 24 | 4596 | 1 |
| 6 | 5300 | 4.60 | 200.10 | 25 | 4998 | 0 |
| 7 | 5300 | 4.60 | 160.90 | 29 | 6215 | 1 |
| 8 | 5300 | 1.20 | 210.60 | 27 | 4748 | 1 |
| 9 | 5300 | 1.10 | 164.70 | 24 | 6072 | 1 |
| 10 | 5300 | 4.30 | 207.70 | 23 | 4815 | 1 |
| 11 | 5300 | 4.90 | 200.30 | 27 | 4993 | 1 |
| 12 | 5300 | 3.20 | 178.40 | 26 | 5605 | 0 |
| 13 | 5300 | 3.30 | 197.40 | 28 | 5066 | 1 |
| 14 | 5300 | 4.60 | 204.40 | 24 | 4892 | 1 |
| 15 | 5300 | 2.50 | 158.50 | 28 | 6309 | 1 |
| 16 | 5300 | 3.90 | 175.20 | 28 | 5708 | 1 |
| 17 | 5300 | 3.40 | 226.90 | 26 | 4407 | 1 |
| 18 | 5300 | 3.30 | 185.30 | 26 | 5397 | 1 |
| 19 | 5300 | 4.80 | 159.70 | 27 | 6262 | 1 |
| 20 | 5300 | 3.30 | 156.90 | 28 | 6373 | 1 |
| 21 | 5300 | 2.10 | 198.80 | 23 | 5030 | 1 |
| 22 | 5300 | 3.10 | 189.40 | 25 | 5280 | 1 |
| 23 | 5300 | 2.10 | 218.50 | 25 | 4577 | 1 |
| 24 | 5300 | 2.80 | 200.30 | 29 | 4993 | 1 |
| 25 | 5300 | 1.90 | 214.30 | 27 | 4666 | 1 |
| 26 | 5300 | 1.80 | 170.20 | 23 | 5875 | 1 |
| 27 | 5300 | 2.70 | 208.50 | 25 | 4796 | 1 |
| 28 | 5300 | 1.30 | 182.70 | 23 | 5473 | 1 |
| 29 | 5300 | 1.60 | 229.80 | 24 | 4352 | 1 |
| 30 | 5300 | 2.90 | 184.50 | 29 | 5420 | 1 |
| Detection Percentage (%) | | | | | | 90.00 |

| Test Mode | 802.11be EHT20 |
|---|---|
| Frequency | 5300 MHz |
| Radar Signal | Type 3 |

| Trial # | Test Frequency (MHz) | Pulse Width (us) | PRI (us) | Number of Pluse | PRF (Hz) | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|
| 1 | 5300 | 7.50 | 302.80 | 18 | 3302.51 | 1 |
| 2 | 5300 | 6.20 | 356.80 | 16 | 2802.69 | 1 |
| 3 | 5300 | 7.60 | 276.80 | 16 | 3612.72 | 1 |
| 4 | 5300 | 8.00 | 469.10 | 18 | 2131.74 | 1 |
| 5 | 5300 | 6.40 | 333.50 | 16 | 2998.50 | 1 |
| 6 | 5300 | 9.50 | 469.70 | 16 | 2129.02 | 0 |
| 7 | 5300 | 9.00 | 460.30 | 17 | 2172.50 | 1 |
| 8 | 5300 | 9.60 | 380.80 | 18 | 2626.05 | 1 |
| 9 | 5300 | 6.80 | 489.90 | 18 | 2041.23 | 1 |
| 10 | 5300 | 7.80 | 347.30 | 17 | 2879.36 | 1 |
| 11 | 5300 | 7.90 | 430.00 | 16 | 2325.58 | 1 |
| 12 | 5300 | 7.50 | 268.20 | 17 | 3728.56 | 0 |
| 13 | 5300 | 7.90 | 271.00 | 18 | 3690.04 | 1 |
| 14 | 5300 | 6.40 | 310.80 | 18 | 3217.50 | 1 |
| 15 | 5300 | 8.50 | 393.60 | 18 | 2540.65 | 1 |
| 16 | 5300 | 7.10 | 291.40 | 17 | 3431.71 | 1 |
| 17 | 5300 | 9.20 | 307.20 | 16 | 3255.21 | 1 |
| 18 | 5300 | 8.50 | 381.20 | 16 | 2623.29 | 1 |
| 19 | 5300 | 7.20 | 495.80 | 16 | 2016.94 | 1 |
| 20 | 5300 | 6.60 | 223.90 | 16 | 4466.28 | 1 |
| 21 | 5300 | 6.90 | 441.90 | 18 | 2262.96 | 0 |
| 22 | 5300 | 9.30 | 211.60 | 18 | 4725.90 | 1 |
| 23 | 5300 | 7.00 | 445.10 | 18 | 2246.69 | 1 |
| 24 | 5300 | 8.80 | 408.50 | 17 | 2447.98 | 1 |
| 25 | 5300 | 7.30 | 283.00 | 16 | 3533.57 | 1 |
| 26 | 5300 | 9.30 | 466.20 | 17 | 2145.00 | 1 |
| 27 | 5300 | 6.30 | 213.00 | 17 | 4694.84 | 1 |
| 28 | 5300 | 6.70 | 394.60 | 18 | 2534.21 | 0 |
| 29 | 5300 | 7.60 | 293.50 | 18 | 3407.16 | 1 |
| 30 | 5300 | 6.00 | 402.10 | 17 | 2486.94 | 1 |
| Detection Percentage (%) | | | | | | 86.67 |

| Test Mode | 802.11be EHT20 | | | | | |
|---|---|---|---|---|---|---|
| Frequency | 5300 MHz | | | | | |
| Radar Signal | Type 4 | | | | | |
| Trial # | Test Frequency (MHz) | Pulse Width (us) | PRI (us) | Number of Pluse | PRF (Hz) | 1=Detection ; 0=No Detection |
| 1 | 5300 | 16.20 | 407.60 | 13 | 2453 | 1 |
| 2 | 5300 | 15.10 | 394.70 | 15 | 2534 | 1 |
| 3 | 5300 | 13.50 | 270.10 | 13 | 3702 | 1 |
| 4 | 5300 | 16.80 | 463.90 | 13 | 2156 | 1 |
| 5 | 5300 | 18.00 | 463.30 | 16 | 2158 | 1 |
| 6 | 5300 | 11.40 | 298.00 | 14 | 3356 | 1 |
| 7 | 5300 | 16.30 | 208.90 | 12 | 4787 | 1 |
| 8 | 5300 | 17.70 | 238.60 | 12 | 4191 | 1 |
| 9 | 5300 | 16.30 | 214.90 | 13 | 4653 | 0 |
| 10 | 5300 | 13.40 | 460.60 | 12 | 2171 | 1 |
| 11 | 5300 | 16.50 | 243.20 | 15 | 4112 | 1 |
| 12 | 5300 | 18.10 | 278.20 | 16 | 3595 | 1 |
| 13 | 5300 | 15.00 | 246.20 | 15 | 4062 | 1 |
| 14 | 5300 | 13.50 | 436.00 | 15 | 2294 | 1 |
| 15 | 5300 | 15.60 | 271.10 | 13 | 3689 | 1 |
| 16 | 5300 | 14.70 | 432.20 | 15 | 2314 | 1 |
| 17 | 5300 | 12.90 | 218.60 | 16 | 4575 | 0 |
| 18 | 5300 | 16.10 | 303.50 | 15 | 3295 | 1 |
| 19 | 5300 | 17.60 | 425.00 | 14 | 2353 | 1 |
| 20 | 5300 | 12.60 | 491.00 | 15 | 2037 | 1 |
| 21 | 5300 | 16.40 | 263.10 | 14 | 3801 | 1 |
| 22 | 5300 | 11.70 | 408.50 | 12 | 2448 | 1 |
| 23 | 5300 | 16.80 | 363.40 | 13 | 2752 | 1 |
| 24 | 5300 | 16.80 | 416.00 | 12 | 2404 | 1 |
| 25 | 5300 | 11.50 | 217.80 | 14 | 4591 | 1 |
| 26 | 5300 | 13.80 | 493.30 | 13 | 2027 | 1 |
| 27 | 5300 | 19.60 | 441.60 | 14 | 2264 | 0 |
| 28 | 5300 | 11.70 | 211.30 | 16 | 4733 | 1 |
| 29 | 5300 | 14.00 | 204.70 | 12 | 4885 | 1 |
| 30 | 5300 | 15.10 | 477.60 | 15 | 2094 | 1 |
| Detection Percentage (%) | | | | | | 90.00 |

| Test Mode | 802.11be EHT20 |
|---|---|
| Frequency | 5300 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 1 | 5295 | 1 | 55.4 | 13 | 1081.2 | 3 | 1 |
| | 5298 | 2 | 82.8 | 19 | 1638.0 | 2 | |
| | 5293 | 3 | 78.5 | 8 | 1527.3 | 2 | |
| | 5298 | 4 | 78.4 | 20 | 1177.3 | 1 | |
| | 5293 | 5 | 62.7 | 7 | 1696.3 | 3 | |
| | 5295 | 6 | 65.7 | 13 | 1687.0 | 1 | |
| | 5294 | 7 | 68.2 | 9 | 1591.9 | 2 | |
| | 5293 | 8 | 91.9 | 8 | 1563.1 | 1 | |
| | 5294 | 9 | 91.4 | 9 | 1526.1 | 1 | |
| | 5297 | 10 | 76.2 | 18 | 1322.8 | 2 | |
| | 5292 | 11 | 84.2 | 6 | 1332.1 | 3 | |
| 2 | 5296 | 1 | 65.2 | 16 | 1232.9 | 2 | 1 |
| | 5297 | 2 | 79.2 | 18 | 1967.9 | 1 | |
| | 5296 | 3 | 97.3 | 16 | 1924.2 | 3 | |
| | 5298 | 4 | 55.9 | 19 | 1058.1 | 1 | |
| | 5293 | 5 | 61.9 | 8 | 1131.5 | 2 | |
| | 5292 | 6 | 96.4 | 6 | 1370.0 | 2 | |
| | 5294 | 7 | 76.3 | 9 | 1287.7 | 3 | |
| | 5296 | 8 | 68.1 | 16 | 1562.8 | 2 | |
| | 5292 | 9 | 94.4 | 5 | 1195.8 | 1 | |
| | 5297 | 10 | 89.3 | 17 | 1401.3 | 3 | |
| | 5295 | 11 | 71.8 | 12 | 1411.6 | 1 | |
| | 5294 | 12 | 79.2 | 10 | 1065.9 | 2 | |
| 3 | 5296 | 1 | 66.2 | 14 | 1248.9 | 2 | 1 |
| | 5297 | 2 | 65.8 | 17 | 1302.1 | 1 | |
| | 5293 | 3 | 57.4 | 8 | 1145.7 | 2 | |
| | 5297 | 4 | 98.4 | 17 | 1459.0 | 3 | |
| | 5294 | 5 | 83.2 | 10 | 1658.0 | 1 | |
| | 5296 | 6 | 74.8 | 14 | 1753.0 | 3 | |
| | 5297 | 7 | 61.8 | 17 | 1613.8 | 3 | |
| | 5293 | 8 | 85.0 | 7 | 1505.1 | 2 | |
| | 5298 | 9 | 69.1 | 19 | 1490.4 | 1 | |
| | 5294 | 10 | 95.8 | 11 | 1263.6 | 2 | |
| | 5292 | 11 | 72.0 | 5 | 1128.2 | 3 | |
| | 5296 | 12 | 90.3 | 16 | 1566.2 | 3 | |
| | 5297 | 13 | 73.3 | 17 | 1242.5 | 3 | |

| Test Mode | 802.11be EHT20 |
|---|---|
| Frequency | 5300 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 4 | 5296 | 1 | 78.0 | 14 | 1841.4 | 1 | 1 |
| | 5296 | 2 | 81.2 | 15 | 1170.9 | 3 | |
| | 5293 | 3 | 90.6 | 7 | 1611.1 | 2 | |
| | 5298 | 4 | 91.5 | 19 | 1626.7 | 2 | |
| | 5295 | 5 | 73.1 | 13 | 1632.0 | 3 | |
| | 5298 | 6 | 97.8 | 19 | 1101.4 | 2 | |
| | 5294 | 7 | 75.3 | 10 | 1935.7 | 3 | |
| | 5296 | 8 | 94.6 | 14 | 1724.4 | 1 | |
| | 5296 | 9 | 59.7 | 16 | 1817.5 | 1 | |
| 5 | 5296 | 1 | 91.7 | 15 | 1017.8 | 1 | 1 |
| | 5292 | 2 | 95.9 | 6 | 1813.0 | 3 | |
| | 5296 | 3 | 93.6 | 15 | 1757.0 | 1 | |
| | 5295 | 4 | 91.3 | 13 | 1963.4 | 1 | |
| | 5296 | 5 | 90.1 | 16 | 1987.9 | 2 | |
| | 5294 | 6 | 58.3 | 10 | 1867.3 | 1 | |
| | 5298 | 7 | 60.2 | 19 | 1248.2 | 2 | |
| | 5295 | 8 | 60.8 | 12 | 1522.1 | 1 | |
| | 5298 | 9 | 93.8 | 19 | 1826.5 | 3 | |
| | 5293 | 10 | 67.5 | 7 | 1060.0 | 1 | |
| | 5293 | 11 | 97.9 | 7 | 1997.8 | 3 | |
| | 5294 | 12 | 90.9 | 9 | 1144.9 | 1 | |
| | 5292 | 13 | 83.4 | 6 | 1172.5 | 1 | |
| | 5295 | 14 | 87.2 | 12 | 1171.3 | 2 | |
| | 5293 | 15 | 70.2 | 8 | 1803.2 | 2 | |
| 6 | 5297 | 1 | 67.9 | 18 | 1099.6 | 3 | 1 |
| | 5296 | 2 | 74.9 | 16 | 1433.8 | 2 | |
| | 5298 | 3 | 91.9 | 19 | 1065.9 | 3 | |
| | 5295 | 4 | 80.9 | 12 | 1023.2 | 1 | |
| | 5293 | 5 | 66.4 | 7 | 1139.2 | 2 | |
| | 5293 | 6 | 66.4 | 8 | 1941.1 | 3 | |
| | 5295 | 7 | 81.5 | 12 | 1877.6 | 3 | |
| | 5297 | 8 | 63.7 | 17 | 1140.1 | 1 | |
| | 5293 | 9 | 85.3 | 7 | 1897.1 | 1 | |
| | 5293 | 10 | 54.9 | 8 | 1943.4 | 2 | |
| | 5296 | 11 | 92.6 | 15 | 1757.5 | 3 | |
| | 5294 | 12 | 90.2 | 11 | 1518.4 | 1 | |
| | 5294 | 13 | 59.3 | 10 | 1098.9 | 2 | |
| | 5295 | 14 | 99.9 | 12 | 1346.0 | 3 | |

| Test Mode | 802.11be EHT20 |
|---|---|
| Frequency | 5300 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 7 | 5296 | 1 | 80.0 | 15 | 1025.6 | 1 | 1 |
| | 5298 | 2 | 80.6 | 19 | 1154.6 | 2 | |
| | 5294 | 3 | 54.8 | 9 | 1889.1 | 1 | |
| | 5294 | 4 | 82.5 | 10 | 1402.6 | 1 | |
| | 5298 | 5 | 83.7 | 19 | 1922.8 | 3 | |
| | 5295 | 6 | 83.9 | 12 | 1721.6 | 2 | |
| | 5298 | 7 | 53.1 | 19 | 1314.6 | 1 | |
| | 5296 | 8 | 54.3 | 16 | 1844.5 | 2 | |
| | 5296 | 9 | 77.8 | 15 | 1724.0 | 2 | |
| | 5294 | 10 | 66.8 | 9 | 1004.7 | 1 | |
| | 5293 | 11 | 61.1 | 8 | 1523.4 | 2 | |
| | 5295 | 12 | 88.1 | 13 | 1798.7 | 1 | |
| | 5294 | 13 | 87.9 | 11 | 1642.6 | 2 | |
| | 5295 | 14 | 85.4 | 13 | 1480.7 | 1 | |
| | 5297 | 15 | 64.7 | 17 | 1937.9 | 1 | |
| | 5297 | 16 | 73.9 | 17 | 1460.4 | 3 | |
| | 5295 | 17 | 73.4 | 12 | 1865.0 | 3 | |
| 8 | 5292 | 1 | 94.5 | 6 | 1998.9 | 2 | 1 |
| | 5296 | 2 | 88.2 | 16 | 1962.4 | 3 | |
| | 5297 | 3 | 60.8 | 18 | 1680.9 | 2 | |
| | 5298 | 4 | 74.6 | 19 | 1034.0 | 3 | |
| | 5296 | 5 | 73.3 | 16 | 1799.1 | 1 | |
| | 5298 | 6 | 62.2 | 19 | 1207.6 | 2 | |
| | 5295 | 7 | 62.4 | 12 | 1665.2 | 1 | |
| | 5297 | 8 | 59.0 | 17 | 1701.9 | 2 | |
| | 5294 | 9 | 52.5 | 10 | 1729.0 | 3 | |
| | 5296 | 10 | 90.9 | 14 | 1221.7 | 3 | |
| | 5293 | 11 | 62.3 | 8 | 1879.0 | 1 | |
| | 5296 | 12 | 56.0 | 16 | 1351.0 | 3 | |
| | 5294 | 13 | 50.4 | 11 | 1269.4 | 2 | |
| | 5296 | 14 | 64.5 | 15 | 1298.8 | 3 | |
| | 5296 | 15 | 57.9 | 16 | 1627.2 | 1 | |
| | 5294 | 16 | 53.1 | 9 | 1745.6 | 1 | |
| | 5298 | 17 | 53.5 | 19 | 1621.1 | 1 | |
| | 5295 | 18 | 96.9 | 12 | 1175.9 | 1 | |

| Test Mode | 802.11be EHT20 |
|---|---|
| Frequency | 5300 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 9 | 5296 | 1 | 56.2 | 14 | 1604.0 | 1 | 1 |
| | 5297 | 2 | 83.9 | 18 | 1169.4 | 3 | |
| | 5294 | 3 | 68.8 | 9 | 1839.3 | 2 | |
| | 5297 | 4 | 64.8 | 17 | 1428.5 | 1 | |
| | 5296 | 5 | 81.7 | 15 | 1062.2 | 2 | |
| | 5295 | 6 | 76.3 | 13 | 1009.9 | 2 | |
| | 5297 | 7 | 68.6 | 17 | 1737.9 | 1 | |
| | 5294 | 8 | 65.4 | 11 | 1122.2 | 2 | |
| | 5292 | 9 | 65.1 | 5 | 1168.9 | 3 | |
| | 5292 | 10 | 76.2 | 6 | 1635.7 | 2 | |
| | 5294 | 11 | 79.1 | 11 | 1787.8 | 3 | |
| | 5296 | 12 | 54.2 | 14 | 1960.3 | 3 | |
| | 5293 | 13 | 73.6 | 7 | 1245.6 | 2 | |
| | 5296 | 14 | 56.2 | 14 | 1965.6 | 2 | |
| | 5298 | 15 | 89.8 | 20 | 1078.9 | 2 | |
| | 5294 | 16 | 61.6 | 11 | 1108.1 | 2 | |
| | 5296 | 17 | 98.2 | 16 | 1071.8 | 2 | |
| | 5294 | 18 | 55.6 | 10 | 1399.2 | 3 | |
| | 5295 | 19 | 82.3 | 13 | 1836.3 | 1 | |
| 10 | 5295 | 1 | 53.3 | 13 | 1231.9 | 3 | 1 |
| | 5294 | 2 | 90.9 | 10 | 1605.6 | 2 | |
| | 5298 | 3 | 71.0 | 20 | 1097.5 | 2 | |
| | 5292 | 4 | 85.2 | 6 | 1194.1 | 2 | |
| | 5293 | 5 | 91.0 | 7 | 1467.2 | 3 | |
| | 5296 | 6 | 90.0 | 15 | 1211.1 | 2 | |
| | 5293 | 7 | 91.5 | 7 | 1235.0 | 3 | |
| | 5294 | 8 | 60.2 | 9 | 1530.9 | 1 | |

| Test Mode | 802.11be EHT20 |
|---|---|
| Frequency | 5300 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 11 | 5300 | 1 | 79.3 | 13 | 1935.9 | 2 | 1 |
| | 5300 | 2 | 72.3 | 12 | 1825.8 | 2 | |
| | 5300 | 3 | 95.5 | 16 | 1948.0 | 3 | |
| | 5300 | 4 | 81.4 | 11 | 1971.0 | 3 | |
| | 5300 | 5 | 76.1 | 11 | 1569.0 | 2 | |
| | 5300 | 6 | 73.1 | 6 | 1257.9 | 3 | |
| | 5300 | 7 | 84.9 | 9 | 1734.9 | 3 | |
| | 5300 | 8 | 58.7 | 11 | 1486.4 | 1 | |
| | 5300 | 9 | 74.5 | 18 | 1937.5 | 2 | |
| | 5300 | 10 | 74.2 | 12 | 1424.8 | 3 | |
| | 5300 | 11 | 85.3 | 10 | 1587.6 | 2 | |
| | 5300 | 12 | 77.2 | 10 | 1343.3 | 2 | |
| | 5300 | 13 | 71.4 | 17 | 1158.0 | 2 | |
| | 5300 | 14 | 68.6 | 6 | 1545.1 | 2 | |
| | 5300 | 15 | 56.4 | 8 | 1126.7 | 3 | |
| | 5300 | 16 | 76.9 | 9 | 1929.1 | 1 | |
| 12 | 5300 | 1 | 97.4 | 6 | 1677.1 | 3 | 0 |
| | 5300 | 2 | 86.7 | 10 | 1136.7 | 3 | |
| | 5300 | 3 | 63.7 | 19 | 1426.4 | 3 | |
| | 5300 | 4 | 85.4 | 6 | 1124.1 | 3 | |
| | 5300 | 5 | 52.8 | 18 | 1923.8 | 1 | |
| | 5300 | 6 | 97.8 | 19 | 1968.6 | 2 | |
| | 5300 | 7 | 72.2 | 9 | 1038.8 | 1 | |
| | 5300 | 8 | 91.4 | 18 | 1841.0 | 3 | |
| | 5300 | 9 | 84.1 | 14 | 1752.3 | 2 | |
| | 5300 | 10 | 94.8 | 7 | 1218.0 | 3 | |
| | 5300 | 11 | 78.7 | 17 | 1488.4 | 1 | |
| | 5300 | 12 | 98.8 | 15 | 1125.4 | 2 | |
| | 5300 | 13 | 67.9 | 9 | 1736.4 | 1 | |
| | 5300 | 14 | 84.9 | 16 | 1695.9 | 2 | |
| | 5300 | 15 | 85.6 | 18 | 1474.3 | 3 | |
| | 5300 | 16 | 72.4 | 19 | 1290.0 | 3 | |
| | 5300 | 17 | 52.1 | 17 | 1312.6 | 3 | |
| | 5300 | 18 | 66.4 | 10 | 1220.0 | 1 | |
| | 5300 | 19 | 92.9 | 14 | 1158.1 | 1 | |
| | 5300 | 20 | 56.6 | 17 | 1909.1 | 3 | |

| Test Mode | 802.11be EHT20 |
|---|---|
| Frequency | 5300 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 13 | 5300 | 1 | 52.4 | 5 | 1346.7 | 3 | 1 |
| | 5300 | 2 | 81.0 | 19 | 1609.7 | 1 | |
| | 5300 | 3 | 62.3 | 10 | 1273.6 | 3 | |
| | 5300 | 4 | 98.6 | 19 | 1428.2 | 3 | |
| | 5300 | 5 | 77.6 | 16 | 1642.5 | 1 | |
| | 5300 | 6 | 69.1 | 9 | 1298.6 | 3 | |
| | 5300 | 7 | 69.3 | 16 | 1093.5 | 1 | |
| | 5300 | 8 | 92.7 | 6 | 1984.0 | 3 | |
| | 5300 | 9 | 58.8 | 18 | 1756.7 | 3 | |
| | 5300 | 10 | 59.9 | 13 | 1970.7 | 3 | |
| 14 | 5300 | 1 | 80.1 | 9 | 1499.6 | 3 | 1 |
| | 5300 | 2 | 92.6 | 10 | 1191.0 | 3 | |
| | 5300 | 3 | 66.2 | 5 | 1601.7 | 1 | |
| | 5300 | 4 | 59.6 | 10 | 1587.9 | 1 | |
| | 5300 | 5 | 65.2 | 10 | 1646.0 | 3 | |
| | 5300 | 6 | 75.4 | 14 | 1156.2 | 3 | |
| | 5300 | 7 | 95.4 | 18 | 1644.1 | 2 | |
| | 5300 | 8 | 90.8 | 14 | 1992.8 | 1 | |
| | 5300 | 9 | 60.9 | 10 | 1828.4 | 2 | |
| | 5300 | 10 | 87.2 | 18 | 1742.0 | 3 | |
| | 5300 | 11 | 86.7 | 6 | 1187.7 | 2 | |
| | 5300 | 12 | 61.7 | 11 | 1868.9 | 3 | |
| | 5300 | 13 | 81.0 | 16 | 1404.3 | 2 | |
| | 5300 | 14 | 96.5 | 5 | 1281.2 | 1 | |
| | 5300 | 15 | 96.3 | 14 | 1948.9 | 1 | |
| | 5300 | 16 | 78.1 | 6 | 1690.7 | 3 | |
| | 5300 | 17 | 90.7 | 16 | 1242.2 | 3 | |
| | 5300 | 18 | 76.8 | 11 | 1771.1 | 1 | |
| | 5300 | 19 | 94.1 | 6 | 1895.3 | 2 | |
| | 5300 | 20 | 76.0 | 15 | 1049.9 | 2 | |

| Test Mode | 802.11be EHT20 |
|---|---|
| Frequency | 5300 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 15 | 5300 | 1 | 73.1 | 13 | 1973.7 | 2 | 1 |
| | 5300 | 2 | 95.7 | 6 | 1199.5 | 1 | |
| | 5300 | 3 | 95.4 | 18 | 1273.1 | 3 | |
| | 5300 | 4 | 59.9 | 8 | 1651.0 | 3 | |
| | 5300 | 5 | 56.0 | 19 | 1328.2 | 1 | |
| | 5300 | 6 | 73.0 | 11 | 1742.9 | 1 | |
| | 5300 | 7 | 66.1 | 9 | 1956.8 | 2 | |
| | 5300 | 8 | 92.6 | 5 | 1264.2 | 3 | |
| | 5300 | 9 | 95.4 | 6 | 1524.4 | 1 | |
| | 5300 | 10 | 54.8 | 11 | 1221.9 | 2 | |
| | 5300 | 11 | 91.8 | 12 | 1987.5 | 2 | |
| | 5300 | 12 | 73.5 | 17 | 1616.3 | 3 | |
| | 5300 | 13 | 68.7 | 19 | 1365.3 | 3 | |
| | 5300 | 14 | 99.5 | 14 | 1379.6 | 3 | |
| | 5300 | 15 | 99.1 | 20 | 1106.9 | 2 | |
| | 5300 | 16 | 95.2 | 5 | 1807.9 | 3 | |
| | 5300 | 17 | 73.0 | 13 | 1361.0 | 1 | |
| | 5300 | 18 | 52.9 | 20 | 1787.6 | 1 | |
| | 5300 | 19 | 76.0 | 14 | 1730.2 | 1 | |
| 16 | 5300 | 1 | 89.7 | 6 | 1933.3 | 3 | 1 |
| | 5300 | 2 | 75.3 | 14 | 1529.1 | 1 | |
| | 5300 | 3 | 78.3 | 10 | 1526.3 | 2 | |
| | 5300 | 4 | 81.4 | 19 | 1298.0 | 2 | |
| | 5300 | 5 | 89.9 | 18 | 1033.0 | 3 | |
| | 5300 | 6 | 63.3 | 7 | 1645.0 | 2 | |
| | 5300 | 7 | 97.1 | 14 | 1302.6 | 3 | |
| | 5300 | 8 | 67.6 | 18 | 1806.6 | 2 | |
| | 5300 | 9 | 98.6 | 13 | 1477.9 | 3 | |
| | 5300 | 10 | 56.7 | 17 | 1668.4 | 1 | |
| | 5300 | 11 | 50.9 | 7 | 1895.9 | 2 | |
| | 5300 | 12 | 85.5 | 6 | 1773.7 | 2 | |
| | 5300 | 13 | 94.2 | 18 | 1045.4 | 1 | |
| | 5300 | 14 | 61.2 | 18 | 1855.5 | 3 | |
| | 5300 | 15 | 54.3 | 10 | 1873.7 | 2 | |
| | 5300 | 16 | 84.6 | 6 | 1563.2 | 1 | |
| | 5300 | 17 | 52.0 | 16 | 1640.7 | 1 | |
| | 5300 | 18 | 53.4 | 13 | 1362.8 | 1 | |

| Test Mode | 802.11be EHT20 |
|---|---|
| Frequency | 5300 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 17 | 5300 | 1 | 56.0 | 14 | 1900.1 | 1 | 1 |
| | 5300 | 2 | 97.1 | 20 | 1369.8 | 1 | |
| | 5300 | 3 | 97.7 | 19 | 1565.7 | 3 | |
| | 5300 | 4 | 64.7 | 20 | 1689.4 | 1 | |
| | 5300 | 5 | 82.4 | 7 | 1179.9 | 1 | |
| | 5300 | 6 | 55.9 | 17 | 1998.4 | 3 | |
| | 5300 | 7 | 90.9 | 8 | 1994.3 | 1 | |
| | 5300 | 8 | 91.1 | 8 | 1218.8 | 3 | |
| | 5300 | 9 | 87.0 | 10 | 1351.6 | 2 | |
| | 5300 | 10 | 72.2 | 8 | 1922.9 | 1 | |
| | 5300 | 11 | 54.9 | 17 | 1672.4 | 2 | |
| | 5300 | 12 | 73.7 | 13 | 1293.6 | 2 | |
| | 5300 | 13 | 53.8 | 18 | 1699.3 | 1 | |
| | 5300 | 14 | 85.0 | 20 | 1437.2 | 1 | |
| | 5300 | 15 | 55.8 | 14 | 1250.2 | 3 | |
| | 5300 | 16 | 92.5 | 6 | 1544.0 | 2 | |
| | 5300 | 17 | 60.8 | 19 | 1430.0 | 2 | |
| 18 | 5300 | 1 | 73.8 | 13 | 1555.4 | 2 | 1 |
| | 5300 | 2 | 54.8 | 8 | 1326.3 | 1 | |
| | 5300 | 3 | 74.4 | 17 | 1479.6 | 2 | |
| | 5300 | 4 | 83.1 | 18 | 1963.3 | 2 | |
| | 5300 | 5 | 89.3 | 10 | 1155.6 | 2 | |
| | 5300 | 6 | 51.9 | 18 | 1070.7 | 1 | |
| | 5300 | 7 | 94.1 | 14 | 1929.7 | 1 | |
| | 5300 | 8 | 72.4 | 19 | 1430.5 | 2 | |
| | 5300 | 9 | 75.0 | 20 | 1860.9 | 2 | |
| | 5300 | 10 | 88.2 | 6 | 1236.6 | 2 | |
| | 5300 | 11 | 93.8 | 13 | 1079.0 | 3 | |
| | 5300 | 12 | 69.8 | 15 | 1649.0 | 1 | |
| | 5300 | 13 | 54.3 | 9 | 1512.7 | 2 | |
| | 5300 | 14 | 87.8 | 17 | 1338.6 | 1 | |
| | 5300 | 15 | 54.4 | 12 | 1260.5 | 1 | |

| Test Mode | 802.11be EHT20 |
|---|---|
| Frequency | 5300 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 19 | 5300 | 1 | 51.0 | 13 | 1036.0 | 2 | 1 |
| | 5300 | 2 | 86.1 | 11 | 1281.3 | 1 | |
| | 5300 | 3 | 66.5 | 9 | 1424.5 | 1 | |
| | 5300 | 4 | 63.2 | 19 | 1084.5 | 3 | |
| | 5300 | 5 | 92.0 | 6 | 1859.8 | 3 | |
| | 5300 | 6 | 63.7 | 13 | 1189.1 | 2 | |
| | 5300 | 7 | 60.2 | 9 | 1807.9 | 1 | |
| | 5300 | 8 | 94.1 | 7 | 1506.9 | 2 | |
| | 5300 | 9 | 51.0 | 20 | 1920.9 | 3 | |
| | 5300 | 10 | 84.0 | 9 | 1617.4 | 2 | |
| | 5300 | 11 | 70.9 | 17 | 1998.4 | 3 | |
| | 5300 | 12 | 66.1 | 16 | 1739.9 | 2 | |
| | 5300 | 13 | 86.8 | 14 | 1018.5 | 3 | |
| | 5300 | 14 | 65.2 | 17 | 1731.0 | 2 | |
| 20 | 5300 | 1 | 79.9 | 11 | 1406.3 | 2 | 1 |
| | 5300 | 2 | 83.6 | 8 | 1961.1 | 2 | |
| | 5300 | 3 | 66.2 | 18 | 1059.2 | 1 | |
| | 5300 | 4 | 79.4 | 13 | 1409.6 | 2 | |
| | 5300 | 5 | 74.4 | 6 | 1545.1 | 1 | |
| | 5300 | 6 | 73.5 | 11 | 1350.1 | 1 | |
| | 5300 | 7 | 66.3 | 13 | 1054.9 | 3 | |
| | 5300 | 8 | 53.1 | 10 | 1990.9 | 1 | |
| | 5300 | 9 | 62.6 | 15 | 1839.7 | 3 | |
| | 5300 | 10 | 52.7 | 7 | 1859.9 | 1 | |
| 21 | 5307 | 1 | 99.0 | 8 | 1447.0 | 3 | 1 |
| | 5303 | 2 | 70.3 | 18 | 1052.3 | 3 | |
| | 5306 | 3 | 71.0 | 10 | 1691.4 | 3 | |
| | 5308 | 4 | 91.9 | 6 | 1159.4 | 2 | |
| | 5305 | 5 | 91.2 | 13 | 1471.2 | 1 | |
| | 5303 | 6 | 59.0 | 18 | 1580.1 | 3 | |
| | 5306 | 7 | 94.7 | 11 | 1478.9 | 3 | |
| | 5304 | 8 | 65.3 | 16 | 1548.9 | 1 | |
| | 5304 | 9 | 70.5 | 15 | 1380.4 | 1 | |
| | 5305 | 10 | 89.1 | 12 | 1931.3 | 2 | |
| | 5306 | 11 | 76.2 | 11 | 1919.0 | 2 | |
| | 5306 | 12 | 94.9 | 10 | 1748.2 | 2 | |

| Test Mode | 802.11be EHT20 |
|---|---|
| Frequency | 5300 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 22 | 5304 | 1 | 99.3 | 15 | 1838.5 | 2 | 1 |
| | 5306 | 2 | 51.1 | 11 | 1247.9 | 2 | |
| | 5307 | 3 | 57.0 | 7 | 1182.3 | 2 | |
| | 5303 | 4 | 50.9 | 18 | 1739.5 | 1 | |
| | 5304 | 5 | 85.1 | 16 | 1594.6 | 3 | |
| | 5303 | 6 | 57.1 | 18 | 1785.3 | 3 | |
| | 5304 | 7 | 63.0 | 16 | 1976.0 | 2 | |
| | 5304 | 8 | 71.5 | 15 | 1473.2 | 1 | |
| | 5303 | 9 | 87.4 | 18 | 1764.0 | 2 | |
| 23 | 5305 | 1 | 76.5 | 13 | 1891.5 | 2 | 1 |
| | 5308 | 2 | 52.6 | 6 | 1901.4 | 1 | |
| | 5304 | 3 | 73.5 | 14 | 1524.5 | 1 | |
| | 5307 | 4 | 91.7 | 7 | 1564.4 | 1 | |
| | 5303 | 5 | 83.4 | 17 | 1142.0 | 2 | |
| | 5307 | 6 | 82.6 | 8 | 1582.3 | 2 | |
| | 5308 | 7 | 88.5 | 6 | 1616.6 | 2 | |
| | 5304 | 8 | 66.9 | 14 | 1529.5 | 3 | |
| | 5306 | 9 | 74.1 | 11 | 1859.8 | 1 | |
| | 5305 | 10 | 81.8 | 13 | 1967.9 | 2 | |
| | 5306 | 11 | 58.3 | 9 | 1458.3 | 2 | |
| | 5305 | 12 | 84.3 | 12 | 1888.0 | 3 | |
| | 5307 | 13 | 84.2 | 7 | 1553.4 | 3 | |
| | 5303 | 14 | 87.2 | 18 | 1914.6 | 3 | |
| | 5307 | 15 | 54.2 | 7 | 1793.6 | 1 | |
| 24 | 5304 | 1 | 51.7 | 16 | 1829.1 | 3 | 1 |
| | 5307 | 2 | 87.5 | 8 | 1468.5 | 1 | |
| | 5305 | 3 | 85.0 | 13 | 1097.8 | 1 | |
| | 5304 | 4 | 80.6 | 15 | 1157.4 | 1 | |
| | 5307 | 5 | 96.2 | 7 | 1954.1 | 3 | |
| | 5306 | 6 | 84.6 | 11 | 1193.1 | 3 | |
| | 5306 | 7 | 50.1 | 10 | 1009.7 | 3 | |
| | 5307 | 8 | 95.3 | 8 | 1315.7 | 2 | |
| | 5304 | 9 | 83.5 | 16 | 1346.7 | 1 | |
| | 5308 | 10 | 67.4 | 5 | 1198.7 | 3 | |
| | 5305 | 11 | 76.0 | 12 | 1486.0 | 2 | |
| | 5305 | 12 | 72.6 | 12 | 1523.8 | 3 | |
| | 5302 | 13 | 63.3 | 19 | 1232.9 | 3 | |
| | 5304 | 14 | 61.1 | 15 | 1146.7 | 3 | |

| Test Mode | 802.11be EHT20 |
|---|---|
| Frequency | 5300 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 25 | 5302 | 1 | 82.5 | 20 | 1040.3 | 2 | 1 |
| | 5304 | 2 | 74.9 | 15 | 1858.5 | 3 | |
| | 5303 | 3 | 85.8 | 18 | 1230.7 | 1 | |
| | 5307 | 4 | 99.5 | 7 | 1201.6 | 2 | |
| | 5302 | 5 | 91.7 | 20 | 1482.7 | 1 | |
| | 5307 | 6 | 98.8 | 8 | 1358.8 | 3 | |
| | 5306 | 7 | 57.3 | 9 | 1207.5 | 3 | |
| | 5305 | 8 | 69.4 | 12 | 1699.7 | 1 | |
| | 5304 | 9 | 91.8 | 16 | 1684.0 | 3 | |
| | 5303 | 10 | 83.9 | 17 | 1404.9 | 2 | |
| | 5306 | 11 | 77.7 | 11 | 1034.6 | 3 | |
| | 5306 | 12 | 98.3 | 9 | 1414.9 | 2 | |
| | 5307 | 13 | 57.1 | 8 | 1081.5 | 2 | |
| | 5306 | 14 | 61.1 | 9 | 1229.8 | 1 | |
| | 5304 | 15 | 55.7 | 15 | 1406.9 | 2 | |
| | 5303 | 16 | 55.3 | 17 | 1014.3 | 1 | |
| | 5306 | 17 | 67.9 | 10 | 1274.2 | 1 | |
| | 5308 | 18 | 58.0 | 6 | 1548.9 | 1 | |
| 26 | 5306 | 1 | 53.2 | 9 | 1434.0 | 2 | 1 |
| | 5307 | 2 | 88.1 | 7 | 1605.4 | 1 | |
| | 5302 | 3 | 54.9 | 20 | 1793.4 | 1 | |
| | 5304 | 4 | 51.1 | 16 | 1267.1 | 2 | |
| | 5304 | 5 | 80.0 | 14 | 1024.0 | 1 | |
| | 5308 | 6 | 79.1 | 6 | 1576.2 | 1 | |
| | 5304 | 7 | 73.9 | 15 | 1988.0 | 1 | |
| | 5308 | 8 | 97.0 | 6 | 1835.7 | 1 | |
| | 5306 | 9 | 90.6 | 11 | 1579.0 | 1 | |
| | 5306 | 10 | 71.3 | 9 | 1395.2 | 3 | |
| | 5306 | 11 | 67.3 | 10 | 1441.1 | 2 | |
| | 5303 | 12 | 60.8 | 17 | 1655.1 | 1 | |
| | 5303 | 13 | 71.8 | 18 | 1343.7 | 3 | |
| | 5304 | 14 | 69.6 | 14 | 1831.7 | 3 | |
| | 5306 | 15 | 61.3 | 11 | 1528.1 | 1 | |
| | 5304 | 16 | 53.6 | 14 | 1449.0 | 3 | |

| Test Mode | 802.11be EHT20 |
|---|---|
| Frequency | 5300 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 27 | 5305 | 1 | 74.6 | 13 | 1151.2 | 1 | 1 |
| | 5305 | 2 | 98.4 | 12 | 1026.0 | 2 | |
| | 5306 | 3 | 61.5 | 10 | 1622.9 | 2 | |
| | 5306 | 4 | 76.1 | 11 | 1030.4 | 2 | |
| | 5303 | 5 | 61.1 | 17 | 1069.0 | 2 | |
| | 5302 | 6 | 76.3 | 19 | 1095.5 | 1 | |
| | 5307 | 7 | 95.0 | 7 | 1366.6 | 1 | |
| | 5307 | 8 | 93.5 | 7 | 1768.5 | 1 | |
| | 5307 | 9 | 95.2 | 8 | 1077.7 | 3 | |
| | 5308 | 10 | 65.1 | 6 | 1123.5 | 3 | |
| | 5303 | 11 | 94.3 | 18 | 1064.0 | 2 | |
| | 5307 | 12 | 76.1 | 7 | 1126.5 | 3 | |
| | 5306 | 13 | 65.6 | 11 | 1335.7 | 1 | |
| | 5304 | 14 | 55.2 | 16 | 1727.8 | 1 | |
| | 5302 | 15 | 83.6 | 19 | 1654.3 | 2 | |
| | 5304 | 16 | 61.9 | 15 | 1148.1 | 3 | |
| | 5306 | 17 | 75.7 | 10 | 1871.2 | 1 | |
| | 5304 | 18 | 95.4 | 16 | 1810.1 | 2 | |
| | 5308 | 19 | 54.9 | 6 | 1371.1 | 3 | |
| | 5307 | 20 | 70.2 | 7 | 1914.6 | 3 | |

| Test Mode | 802.11be EHT20 |
|---|---|
| Frequency | 5300 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 28 | 5302 | 1 | 75.4 | 19 | 1319.1 | 1 | 1 |
| | 5304 | 2 | 87.5 | 14 | 1671.2 | 2 | |
| | 5303 | 3 | 55.5 | 18 | 1380.6 | 2 | |
| | 5303 | 4 | 67.0 | 17 | 1434.5 | 2 | |
| | 5306 | 5 | 69.6 | 9 | 1067.0 | 1 | |
| | 5307 | 6 | 61.9 | 8 | 1319.4 | 2 | |
| | 5304 | 7 | 56.9 | 16 | 1375.4 | 3 | |
| | 5302 | 8 | 73.6 | 19 | 1976.8 | 1 | |
| | 5304 | 9 | 88.9 | 15 | 1992.8 | 3 | |
| | 5305 | 10 | 78.4 | 12 | 1351.6 | 3 | |
| | 5307 | 11 | 84.5 | 8 | 1539.3 | 1 | |
| | 5307 | 12 | 75.0 | 8 | 1164.3 | 1 | |
| | 5302 | 13 | 81.4 | 20 | 1184.1 | 2 | |
| | 5304 | 14 | 82.4 | 16 | 1534.4 | 2 | |
| | 5306 | 15 | 85.0 | 11 | 1477.0 | 1 | |
| | 5302 | 16 | 92.0 | 20 | 1023.3 | 3 | |
| | 5304 | 17 | 87.0 | 16 | 1208.1 | 1 | |
| | 5307 | 18 | 92.5 | 8 | 1437.9 | 2 | |
| | 5304 | 19 | 50.2 | 14 | 1056.6 | 2 | |
| | 5306 | 20 | 91.7 | 11 | 1491.9 | 2 | |

| Test Mode | 802.11be EHT20 | | | | | | |
|---|---|---|---|---|---|---|---|
| Frequency | 5300 MHz | | | | | | |
| Radar Signal | Type 5 | | | | | | |
| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
| 29 | 5307 | 1 | 84.0 | 8 | 1243.8 | 1 | 1 |
| | 5302 | 2 | 66.9 | 19 | 1465.7 | 1 | |
| | 5306 | 3 | 74.6 | 11 | 1966.7 | 1 | |
| | 5308 | 4 | 76.6 | 5 | 1544.2 | 3 | |
| | 5304 | 5 | 77.7 | 14 | 1895.1 | 1 | |
| | 5305 | 6 | 79.0 | 12 | 1973.4 | 1 | |
| | 5306 | 7 | 61.2 | 9 | 1486.9 | 2 | |
| | 5305 | 8 | 58.8 | 12 | 1100.5 | 3 | |
| | 5304 | 9 | 95.6 | 14 | 1719.5 | 2 | |
| | 5308 | 10 | 92.2 | 5 | 1487.5 | 3 | |
| | 5303 | 11 | 57.8 | 18 | 1433.5 | 2 | |
| | 5304 | 12 | 53.7 | 16 | 1152.1 | 3 | |
| | 5303 | 13 | 57.7 | 18 | 1464.9 | 2 | |
| | 5305 | 14 | 87.0 | 12 | 1204.2 | 3 | |
| | 5304 | 15 | 87.5 | 15 | 1530.8 | 3 | |
| | 5307 | 16 | 82.9 | 7 | 1104.9 | 3 | |
| | 5303 | 17 | 71.2 | 18 | 1884.7 | 3 | |
| 30 | 5304 | 1 | 96.2 | 16 | 1648.9 | 1 | 1 |
| | 5302 | 2 | 96.5 | 20 | 1045.7 | 1 | |
| | 5302 | 3 | 79.6 | 20 | 1598.7 | 2 | |
| | 5303 | 4 | 91.1 | 18 | 1462.1 | 3 | |
| | 5304 | 5 | 74.0 | 16 | 1835.8 | 3 | |
| | 5306 | 6 | 89.1 | 10 | 1578.0 | 1 | |
| | 5304 | 7 | 60.4 | 14 | 1860.1 | 3 | |
| | 5307 | 8 | 60.3 | 8 | 1258.9 | 1 | |
| | 5307 | 9 | 87.7 | 7 | 1463.3 | 1 | |
| | 5306 | 10 | 71.7 | 9 | 1441.0 | 2 | |
| | 5308 | 11 | 81.7 | 6 | 1814.4 | 3 | |
| | 5306 | 12 | 97.8 | 11 | 1336.5 | 2 | |
| | 5303 | 13 | 96.7 | 18 | 1038.5 | 2 | |
| | 5302 | 14 | 97.2 | 19 | 1870.1 | 2 | |
| Detection Percentage (%) | | | | | | | 96.67 |

| Test Mode | 802.11be EHT20 | | | | | |
|---|---|---|---|---|---|---|
| Frequency | 5300 MHz | | | | | |
| Radar Signal | Type 6 | | | | | |
| Trial # | Pulse Width (us) | PRI (us) | Pulses / Hop | Hopping Rate (kHz) | Hopping Sequence Length (ms) | 1=Detection ; 0=No Detection |
| 1 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 2 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 3 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 4 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 5 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 6 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 7 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 8 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 9 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 10 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 11 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 12 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 13 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 14 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 15 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 16 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 17 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 18 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 19 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 20 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 21 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 22 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 23 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 24 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 25 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 26 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 27 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 28 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 29 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 30 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| Detection Percentage (%) | | | | | | 100.00 |

| Test Mode | 802.11be EHT40 | | | | | |
|---|---|---|---|---|---|---|
| Frequency | 5310 MHz | | | | | |
| Radar Signal | Type 1 | | | | | |
| Trial # | Test Frequency (MHz) | Pulse Width (us) | PRI (us) | Number of Pluse | PRF (Hz) | 1=Detection ; 0=No Detection |
| 1 | 5310 | 1 | 678 | 78 | 1475 | 1 |
| 2 | 5310 | 1 | 818 | 65 | 1222 | 1 |
| 3 | 5310 | 1 | 898 | 59 | 1114 | 1 |
| 4 | 5310 | 1 | 618 | 86 | 1618 | 1 |
| 5 | 5310 | 1 | 758 | 70 | 1319 | 1 |
| 6 | 5310 | 1 | 698 | 76 | 1433 | 1 |
| 7 | 5310 | 1 | 838 | 63 | 1193 | 1 |
| 8 | 5310 | 1 | 798 | 67 | 1253 | 1 |
| 9 | 5310 | 1 | 678 | 78 | 1475 | 1 |
| 10 | 5310 | 1 | 658 | 81 | 1520 | 1 |
| 11 | 5310 | 1 | 838 | 63 | 1193 | 1 |
| 12 | 5310 | 1 | 798 | 67 | 1253 | 1 |
| 13 | 5310 | 1 | 878 | 61 | 1139 | 1 |
| 14 | 5310 | 1 | 518 | 102 | 1931 | 1 |
| 15 | 5310 | 1 | 778 | 68 | 1285 | 1 |
| 16 | 5310 | 1 | 839 | 63 | 1192 | 0 |
| 17 | 5310 | 1 | 2139 | 25 | 468 | 1 |
| 18 | 5310 | 1 | 2507 | 22 | 399 | 1 |
| 19 | 5310 | 1 | 1358 | 39 | 736 | 0 |
| 20 | 5310 | 1 | 1481 | 36 | 675 | 1 |
| 21 | 5310 | 1 | 916 | 58 | 1092 | 1 |
| 22 | 5310 | 1 | 905 | 59 | 1105 | 1 |
| 23 | 5310 | 1 | 2148 | 25 | 466 | 1 |
| 24 | 5310 | 1 | 1670 | 32 | 599 | 1 |
| 25 | 5310 | 1 | 1278 | 42 | 782 | 1 |
| 26 | 5310 | 1 | 1826 | 29 | 548 | 1 |
| 27 | 5310 | 1 | 786 | 68 | 1272 | 1 |
| 28 | 5310 | 1 | 2680 | 20 | 373 | 1 |
| 29 | 5310 | 1 | 1377 | 39 | 726 | 1 |
| 30 | 5310 | 1 | 2724 | 20 | 367 | 1 |
| Detection Percentage (%) | | | | | | 93.33 |

| Test Mode | 802.11be EHT40 | | | | | |
|---|---|---|---|---|---|---|
| Frequency | 5310 MHz | | | | | |
| Radar Signal | Type 2 | | | | | |
| Trial # | Test Frequency (MHz) | Pulse Width (us) | PRI (us) | Number of Pluse | PRF (Hz) | 1=Detection ; 0=No Detection |
| 1 | 5310 | 2.40 | 200.20 | 23 | 4995 | 0 |
| 2 | 5310 | 2.90 | 190.20 | 25 | 5258 | 1 |
| 3 | 5310 | 4.40 | 157.40 | 23 | 6353 | 1 |
| 4 | 5310 | 2.50 | 153.10 | 27 | 6532 | 1 |
| 5 | 5310 | 1.30 | 222.30 | 27 | 4498 | 1 |
| 6 | 5310 | 4.70 | 153.60 | 26 | 6510 | 1 |
| 7 | 5310 | 1.10 | 221.60 | 24 | 4513 | 0 |
| 8 | 5310 | 3.70 | 159.30 | 23 | 6277 | 1 |
| 9 | 5310 | 2.80 | 157.40 | 26 | 6353 | 1 |
| 10 | 5310 | 4.90 | 207.00 | 26 | 4831 | 1 |
| 11 | 5310 | 1.60 | 224.70 | 29 | 4450 | 1 |
| 12 | 5310 | 2.90 | 171.70 | 23 | 5824 | 1 |
| 13 | 5310 | 3.70 | 168.10 | 29 | 5949 | 1 |
| 14 | 5310 | 4.70 | 213.60 | 26 | 4682 | 1 |
| 15 | 5310 | 4.60 | 196.10 | 28 | 5099 | 1 |
| 16 | 5310 | 1.50 | 228.30 | 29 | 4380 | 1 |
| 17 | 5310 | 1.10 | 203.20 | 29 | 4921 | 1 |
| 18 | 5310 | 1.50 | 228.10 | 23 | 4384 | 1 |
| 19 | 5310 | 3.70 | 208.50 | 26 | 4796 | 1 |
| 20 | 5310 | 1.40 | 182.60 | 24 | 5476 | 1 |
| 21 | 5310 | 4.60 | 184.70 | 29 | 5414 | 1 |
| 22 | 5310 | 3.80 | 188.80 | 26 | 5297 | 1 |
| 23 | 5310 | 3.50 | 155.60 | 24 | 6427 | 1 |
| 24 | 5310 | 2.60 | 216.20 | 29 | 4625 | 1 |
| 25 | 5310 | 2.40 | 204.50 | 25 | 4890 | 1 |
| 26 | 5310 | 3.00 | 201.20 | 23 | 4970 | 0 |
| 27 | 5310 | 4.00 | 223.90 | 25 | 4466 | 1 |
| 28 | 5310 | 3.70 | 176.60 | 28 | 5663 | 1 |
| 29 | 5310 | 2.70 | 226.80 | 27 | 4409 | 1 |
| 30 | 5310 | 4.90 | 222.60 | 23 | 4492 | 1 |
| Detection Percentage (%) | | | | | | 90.00 |

| Test Mode | 802.11be EHT40 |
|---|---|
| Frequency | 5310 MHz |
| Radar Signal | Type 3 |

| Trial # | Test Frequency (MHz) | Pulse Width (us) | PRI (us) | Number of Pluse | PRF (Hz) | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|
| 1 | 5310 | 8.90 | 326.20 | 18 | 3065.60 | 1 |
| 2 | 5310 | 6.60 | 250.50 | 18 | 3992.02 | 1 |
| 3 | 5310 | 8.70 | 289.90 | 16 | 3449.47 | 1 |
| 4 | 5310 | 7.60 | 206.30 | 16 | 4847.31 | 0 |
| 5 | 5310 | 7.00 | 427.90 | 16 | 2336.99 | 1 |
| 6 | 5310 | 8.60 | 317.00 | 17 | 3154.57 | 1 |
| 7 | 5310 | 9.30 | 346.90 | 18 | 2882.68 | 1 |
| 8 | 5310 | 9.70 | 477.30 | 18 | 2095.12 | 0 |
| 9 | 5310 | 6.40 | 463.90 | 18 | 2155.64 | 1 |
| 10 | 5310 | 8.70 | 269.70 | 16 | 3707.82 | 1 |
| 11 | 5310 | 7.10 | 298.60 | 17 | 3348.96 | 1 |
| 12 | 5310 | 7.80 | 356.50 | 17 | 2805.05 | 1 |
| 13 | 5310 | 9.70 | 336.70 | 16 | 2970.00 | 1 |
| 14 | 5310 | 9.60 | 234.60 | 18 | 4262.57 | 1 |
| 15 | 5310 | 6.40 | 325.80 | 16 | 3069.37 | 1 |
| 16 | 5310 | 7.30 | 414.00 | 16 | 2415.46 | 1 |
| 17 | 5310 | 9.90 | 280.00 | 17 | 3571.43 | 1 |
| 18 | 5310 | 8.50 | 309.80 | 18 | 3227.89 | 1 |
| 19 | 5310 | 6.50 | 382.70 | 16 | 2613.01 | 1 |
| 20 | 5310 | 6.30 | 216.40 | 17 | 4621.07 | 1 |
| 21 | 5310 | 6.40 | 461.60 | 18 | 2166.38 | 1 |
| 22 | 5310 | 6.90 | 291.00 | 18 | 3436.43 | 1 |
| 23 | 5310 | 8.60 | 311.60 | 18 | 3209.24 | 0 |
| 24 | 5310 | 8.60 | 394.30 | 16 | 2536.14 | 1 |
| 25 | 5310 | 6.80 | 303.40 | 16 | 3295.98 | 1 |
| 26 | 5310 | 7.10 | 396.00 | 16 | 2525.25 | 0 |
| 27 | 5310 | 6.50 | 399.60 | 18 | 2502.50 | 1 |
| 28 | 5310 | 6.50 | 272.00 | 17 | 3676.47 | 1 |
| 29 | 5310 | 9.00 | 305.40 | 16 | 3274.39 | 1 |
| 30 | 5310 | 8.50 | 285.80 | 17 | 3498.95 | 1 |
| Detection Percentage (%) | | | | | | 86.67 |

| Test Mode | 802.11be EHT40 | | | | | |
|---|---|---|---|---|---|---|
| Frequency | 5310 MHz | | | | | |
| Radar Signal | Type 4 | | | | | |
| Trial # | Test Frequency (MHz) | Pulse Width (us) | PRI (us) | Number of Pluse | PRF (Hz) | 1=Detection ; 0=No Detection |
| 1 | 5310 | 19.50 | 332.50 | 14 | 3008 | 1 |
| 2 | 5310 | 17.90 | 224.20 | 13 | 4460 | 1 |
| 3 | 5310 | 12.90 | 213.60 | 16 | 4682 | 1 |
| 4 | 5310 | 17.80 | 365.50 | 16 | 2736 | 0 |
| 5 | 5310 | 17.90 | 253.10 | 16 | 3951 | 1 |
| 6 | 5310 | 18.70 | 482.90 | 12 | 2071 | 1 |
| 7 | 5310 | 19.50 | 272.80 | 13 | 3666 | 1 |
| 8 | 5310 | 12.40 | 274.70 | 14 | 3640 | 1 |
| 9 | 5310 | 14.90 | 489.10 | 13 | 2045 | 1 |
| 10 | 5310 | 18.40 | 465.60 | 13 | 2148 | 1 |
| 11 | 5310 | 16.60 | 346.50 | 14 | 2886 | 1 |
| 12 | 5310 | 14.90 | 410.70 | 14 | 2435 | 1 |
| 13 | 5310 | 13.30 | 440.80 | 16 | 2269 | 1 |
| 14 | 5310 | 14.90 | 207.20 | 15 | 4826 | 1 |
| 15 | 5310 | 19.70 | 294.70 | 16 | 3393 | 0 |
| 16 | 5310 | 11.40 | 240.30 | 14 | 4161 | 1 |
| 17 | 5310 | 17.40 | 228.40 | 13 | 4378 | 1 |
| 18 | 5310 | 11.10 | 405.70 | 14 | 2465 | 1 |
| 19 | 5310 | 14.10 | 345.60 | 14 | 2894 | 1 |
| 20 | 5310 | 13.50 | 497.20 | 14 | 2011 | 1 |
| 21 | 5310 | 12.80 | 240.10 | 14 | 4165 | 1 |
| 22 | 5310 | 18.00 | 241.70 | 16 | 4137 | 1 |
| 23 | 5310 | 18.00 | 423.70 | 12 | 2360 | 0 |
| 24 | 5310 | 15.10 | 369.30 | 16 | 2708 | 0 |
| 25 | 5310 | 12.10 | 366.00 | 13 | 2732 | 1 |
| 26 | 5310 | 18.20 | 440.80 | 12 | 2269 | 1 |
| 27 | 5310 | 11.60 | 444.50 | 12 | 2250 | 1 |
| 28 | 5310 | 11.50 | 306.40 | 15 | 3264 | 1 |
| 29 | 5310 | 19.70 | 213.60 | 15 | 4682 | 0 |
| 30 | 5310 | 19.20 | 412.00 | 12 | 2427 | 1 |
| Detection Percentage (%) | | | | | | 83.33 |

| Test Mode | 802.11be EHT40 |
|---|---|
| Frequency | 5310 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 1 | 5294.5 | 1 | 70.3 | 10 | 1205.1 | 3 | 1 |
| | 5294.5 | 2 | 92.5 | 11 | 1347.3 | 2 | |
| | 5292.5 | 3 | 53.1 | 5 | 1611.5 | 2 | |
| | 5295.5 | 4 | 77.0 | 12 | 1172.1 | 3 | |
| | 5294.5 | 5 | 95.8 | 9 | 1003.2 | 1 | |
| | 5296.5 | 6 | 91.2 | 16 | 1763.9 | 1 | |
| | 5297.5 | 7 | 86.8 | 17 | 1505.3 | 1 | |
| | 5296.5 | 8 | 62.0 | 14 | 1762.6 | 3 | |
| | 5295.5 | 9 | 88.6 | 12 | 1533.1 | 2 | |
| | 5296.5 | 10 | 85.6 | 16 | 1994.9 | 1 | |
| | 5292.5 | 11 | 79.3 | 6 | 1051.7 | 3 | |
| 2 | 5292.5 | 1 | 83.8 | 5 | 1979.3 | 2 | 1 |
| | 5295.5 | 2 | 99.3 | 12 | 1936.0 | 1 | |
| | 5292.5 | 3 | 81.0 | 6 | 1702.9 | 1 | |
| | 5293.5 | 4 | 87.7 | 7 | 1475.6 | 2 | |
| | 5296.5 | 5 | 62.4 | 15 | 1780.9 | 1 | |
| | 5296.5 | 6 | 86.8 | 14 | 1309.1 | 3 | |
| | 5298.5 | 7 | 89.0 | 19 | 1604.5 | 2 | |
| | 5298.5 | 8 | 82.5 | 20 | 1341.3 | 1 | |
| | 5295.5 | 9 | 66.9 | 13 | 1511.0 | 2 | |
| | 5294.5 | 10 | 99.4 | 11 | 1709.2 | 3 | |
| | 5296.5 | 11 | 98.0 | 14 | 1125.1 | 2 | |
| | 5293.5 | 12 | 75.6 | 7 | 1992.4 | 1 | |
| 3 | 5296.5 | 1 | 61.9 | 15 | 1252.0 | 3 | 1 |
| | 5297.5 | 2 | 95.8 | 17 | 1645.7 | 1 | |
| | 5294.5 | 3 | 69.1 | 9 | 1780.5 | 1 | |
| | 5296.5 | 4 | 63.9 | 14 | 1532.8 | 1 | |
| | 5295.5 | 5 | 87.1 | 12 | 1649.3 | 1 | |
| | 5296.5 | 6 | 79.7 | 14 | 1062.3 | 1 | |
| | 5296.5 | 7 | 81.4 | 16 | 1772.1 | 1 | |
| | 5292.5 | 8 | 62.4 | 6 | 1908.7 | 3 | |
| | 5296.5 | 9 | 62.4 | 14 | 1065.1 | 2 | |
| | 5293.5 | 10 | 91.7 | 7 | 1968.0 | 3 | |
| | 5297.5 | 11 | 89.9 | 18 | 1781.4 | 2 | |
| | 5296.5 | 12 | 73.8 | 14 | 1890.5 | 1 | |
| | 5297.5 | 13 | 68.8 | 18 | 1205.7 | 3 | |

| Test Mode | 802.11be EHT40 |
|---|---|
| Frequency | 5310 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 4 | 5293.5 | 1 | 85.2 | 8 | 1166.3 | 3 | 1 |
| | 5292.5 | 2 | 57.4 | 6 | 1166.3 | 3 | |
| | 5294.5 | 3 | 73.1 | 11 | 1886.8 | 3 | |
| | 5294.5 | 4 | 66.7 | 11 | 1855.4 | 1 | |
| | 5293.5 | 5 | 57.6 | 8 | 1502.4 | 2 | |
| | 5294.5 | 6 | 87.4 | 11 | 1145.4 | 3 | |
| | 5296.5 | 7 | 93.8 | 16 | 1908.2 | 1 | |
| | 5295.5 | 8 | 68.9 | 12 | 1640.5 | 2 | |
| | 5294.5 | 9 | 89.4 | 11 | 1531.2 | 1 | |
| 5 | 5293.5 | 1 | 61.7 | 8 | 1290.6 | 1 | 1 |
| | 5296.5 | 2 | 55.1 | 15 | 1651.4 | 2 | |
| | 5298.5 | 3 | 91.0 | 19 | 1679.0 | 2 | |
| | 5293.5 | 4 | 62.9 | 7 | 1788.5 | 3 | |
| | 5293.5 | 5 | 63.5 | 7 | 1270.8 | 1 | |
| | 5296.5 | 6 | 72.4 | 16 | 1634.7 | 2 | |
| | 5292.5 | 7 | 81.6 | 6 | 1744.9 | 2 | |
| | 5294.5 | 8 | 54.0 | 9 | 1563.5 | 3 | |
| | 5293.5 | 9 | 86.5 | 7 | 1772.3 | 3 | |
| | 5295.5 | 10 | 75.6 | 13 | 1056.8 | 2 | |
| | 5294.5 | 11 | 53.8 | 10 | 1705.9 | 3 | |
| | 5294.5 | 12 | 85.0 | 10 | 1552.1 | 3 | |
| | 5295.5 | 13 | 88.8 | 12 | 1466.4 | 1 | |
| | 5295.5 | 14 | 94.6 | 12 | 1693.8 | 1 | |
| | 5294.5 | 15 | 88.5 | 10 | 1195.8 | 1 | |
| 6 | 5293.5 | 1 | 86.1 | 7 | 1539.7 | 3 | 1 |
| | 5297.5 | 2 | 75.9 | 18 | 1637.0 | 2 | |
| | 5293.5 | 3 | 54.2 | 7 | 1973.5 | 1 | |
| | 5293.5 | 4 | 76.3 | 7 | 1370.4 | 2 | |
| | 5294.5 | 5 | 58.3 | 10 | 1904.6 | 3 | |
| | 5294.5 | 6 | 65.5 | 11 | 1938.2 | 1 | |
| | 5292.5 | 7 | 84.6 | 5 | 1412.8 | 3 | |
| | 5293.5 | 8 | 70.9 | 8 | 1592.5 | 2 | |
| | 5294.5 | 9 | 68.8 | 11 | 1896.1 | 1 | |
| | 5295.5 | 10 | 91.7 | 12 | 1326.7 | 1 | |
| | 5294.5 | 11 | 76.2 | 10 | 1992.4 | 2 | |
| | 5296.5 | 12 | 55.9 | 16 | 1486.6 | 3 | |
| | 5293.5 | 13 | 61.2 | 7 | 1096.2 | 3 | |
| | 5295.5 | 14 | 63.1 | 13 | 1391.9 | 2 | |

| Test Mode | 802.11be EHT40 |
|---|---|
| Frequency | 5310 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 7 | 5295.5 | 1 | 55.9 | 13 | 1841.7 | 2 | 1 |
| | 5293.5 | 2 | 79.4 | 7 | 1546.2 | 2 | |
| | 5296.5 | 3 | 53.6 | 15 | 1635.9 | 2 | |
| | 5293.5 | 4 | 66.7 | 8 | 1988.4 | 1 | |
| | 5297.5 | 5 | 65.8 | 18 | 1432.0 | 1 | |
| | 5296.5 | 6 | 80.0 | 14 | 1435.4 | 2 | |
| | 5296.5 | 7 | 76.0 | 15 | 1105.7 | 2 | |
| | 5293.5 | 8 | 76.2 | 7 | 1670.4 | 3 | |
| | 5298.5 | 9 | 82.8 | 20 | 1515.5 | 3 | |
| | 5294.5 | 10 | 98.3 | 10 | 1128.0 | 3 | |
| | 5294.5 | 11 | 80.4 | 10 | 1349.1 | 2 | |
| | 5293.5 | 12 | 79.1 | 7 | 1345.3 | 1 | |
| | 5293.5 | 13 | 51.5 | 8 | 1962.2 | 3 | |
| | 5293.5 | 14 | 63.8 | 8 | 1909.2 | 3 | |
| | 5297.5 | 15 | 98.6 | 18 | 1602.9 | 1 | |
| | 5297.5 | 16 | 91.5 | 18 | 1045.2 | 2 | |
| | 5296.5 | 17 | 94.4 | 16 | 1661.5 | 2 | |
| 8 | 5295.5 | 1 | 60.4 | 12 | 1604.2 | 3 | 1 |
| | 5297.5 | 2 | 81.0 | 18 | 1298.6 | 3 | |
| | 5294.5 | 3 | 77.5 | 9 | 1323.6 | 1 | |
| | 5294.5 | 4 | 58.7 | 11 | 1255.1 | 2 | |
| | 5293.5 | 5 | 89.0 | 7 | 1908.8 | 3 | |
| | 5294.5 | 6 | 52.0 | 9 | 1884.8 | 2 | |
| | 5296.5 | 7 | 56.9 | 14 | 1856.5 | 1 | |
| | 5293.5 | 8 | 86.0 | 8 | 1427.0 | 1 | |
| | 5295.5 | 9 | 99.8 | 12 | 1332.4 | 2 | |
| | 5294.5 | 10 | 65.0 | 11 | 1587.7 | 1 | |
| | 5294.5 | 11 | 65.7 | 11 | 1544.7 | 1 | |
| | 5296.5 | 12 | 72.5 | 15 | 1437.6 | 2 | |
| | 5297.5 | 13 | 80.1 | 17 | 1523.6 | 3 | |
| | 5296.5 | 14 | 62.4 | 14 | 1491.4 | 1 | |
| | 5296.5 | 15 | 74.2 | 14 | 1500.8 | 3 | |
| | 5294.5 | 16 | 78.8 | 9 | 1199.6 | 1 | |
| | 5297.5 | 17 | 99.0 | 18 | 1955.5 | 1 | |
| | 5295.5 | 18 | 55.5 | 13 | 1615.8 | 2 | |

| Test Mode | 802.11be EHT40 |
|---|---|
| Frequency | 5310 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 9 | 5293.5 | 1 | 50.0 | 8 | 1769.3 | 2 | 1 |
| | 5297.5 | 2 | 51.7 | 17 | 1240.9 | 2 | |
| | 5294.5 | 3 | 58.8 | 11 | 1678.4 | 2 | |
| | 5292.5 | 4 | 73.5 | 6 | 1310.6 | 2 | |
| | 5297.5 | 5 | 97.9 | 17 | 1740.7 | 1 | |
| | 5293.5 | 6 | 88.8 | 7 | 1741.4 | 3 | |
| | 5294.5 | 7 | 57.4 | 11 | 1387.1 | 1 | |
| | 5295.5 | 8 | 55.5 | 12 | 1621.5 | 1 | |
| | 5297.5 | 9 | 81.7 | 17 | 1558.3 | 3 | |
| | 5293.5 | 10 | 75.2 | 7 | 1987.2 | 1 | |
| | 5297.5 | 11 | 59.3 | 17 | 1674.2 | 1 | |
| | 5294.5 | 12 | 52.3 | 11 | 1176.8 | 3 | |
| | 5297.5 | 13 | 64.7 | 18 | 1325.7 | 1 | |
| | 5294.5 | 14 | 65.2 | 10 | 1115.6 | 2 | |
| | 5296.5 | 15 | 88.8 | 15 | 1905.7 | 1 | |
| | 5294.5 | 16 | 65.2 | 11 | 1684.9 | 3 | |
| | 5294.5 | 17 | 95.1 | 10 | 1780.9 | 3 | |
| | 5296.5 | 18 | 78.3 | 16 | 1476.0 | 2 | |
| | 5294.5 | 19 | 86.0 | 9 | 1966.9 | 3 | |
| 10 | 5294.5 | 1 | 81.5 | 10 | 1632.3 | 2 | 1 |
| | 5295.5 | 2 | 52.9 | 13 | 1935.4 | 1 | |
| | 5297.5 | 3 | 92.1 | 18 | 1370.2 | 3 | |
| | 5295.5 | 4 | 97.4 | 12 | 1999.2 | 2 | |
| | 5297.5 | 5 | 81.8 | 18 | 1638.3 | 1 | |
| | 5297.5 | 6 | 54.2 | 18 | 1868.9 | 3 | |
| | 5296.5 | 7 | 63.5 | 16 | 1065.1 | 2 | |
| | 5293.5 | 8 | 94.8 | 7 | 1318.8 | 2 | |

| Test Mode | 802.11be EHT40 |
|---|---|
| Frequency | 5310 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 11 | 5310 | 1 | 76.9 | 17 | 1154.7 | 2 | 1 |
| | 5310 | 2 | 63.4 | 13 | 1928.9 | 3 | |
| | 5310 | 3 | 63.5 | 14 | 1899.1 | 1 | |
| | 5310 | 4 | 53.8 | 11 | 1955.3 | 1 | |
| | 5310 | 5 | 63.2 | 11 | 1838.3 | 3 | |
| | 5310 | 6 | 72.3 | 6 | 1865.8 | 2 | |
| | 5310 | 7 | 98.0 | 12 | 1243.5 | 1 | |
| | 5310 | 8 | 58.7 | 19 | 1816.6 | 3 | |
| | 5310 | 9 | 64.6 | 18 | 1692.9 | 2 | |
| | 5310 | 10 | 95.4 | 6 | 1937.8 | 3 | |
| | 5310 | 11 | 53.3 | 9 | 1491.0 | 3 | |
| | 5310 | 12 | 93.2 | 6 | 1226.6 | 3 | |
| | 5310 | 13 | 54.2 | 6 | 1971.7 | 3 | |
| | 5310 | 14 | 88.3 | 12 | 1415.3 | 3 | |
| | 5310 | 15 | 67.4 | 6 | 1743.0 | 2 | |
| | 5310 | 16 | 89.2 | 16 | 1881.6 | 3 | |
| 12 | 5310 | 1 | 96.5 | 18 | 1849.5 | 2 | 1 |
| | 5310 | 2 | 65.3 | 11 | 1088.4 | 2 | |
| | 5310 | 3 | 89.4 | 8 | 1713.5 | 1 | |
| | 5310 | 4 | 90.3 | 5 | 1246.6 | 1 | |
| | 5310 | 5 | 93.3 | 15 | 1531.9 | 2 | |
| | 5310 | 6 | 75.2 | 14 | 1180.7 | 1 | |
| | 5310 | 7 | 85.1 | 6 | 1187.7 | 3 | |
| | 5310 | 8 | 83.9 | 16 | 1600.3 | 3 | |
| | 5310 | 9 | 69.1 | 10 | 1836.6 | 1 | |
| | 5310 | 10 | 56.5 | 12 | 1621.2 | 1 | |
| | 5310 | 11 | 95.3 | 10 | 1305.6 | 2 | |
| | 5310 | 12 | 92.4 | 6 | 1461.1 | 1 | |
| | 5310 | 13 | 87.4 | 10 | 1260.9 | 2 | |
| | 5310 | 14 | 52.0 | 8 | 1109.0 | 3 | |
| | 5310 | 15 | 63.3 | 7 | 1811.5 | 3 | |
| | 5310 | 16 | 72.5 | 16 | 1028.4 | 1 | |
| | 5310 | 17 | 72.2 | 17 | 1536.3 | 2 | |
| | 5310 | 18 | 70.8 | 9 | 1202.4 | 2 | |
| | 5310 | 19 | 66.2 | 17 | 1275.0 | 3 | |
| | 5310 | 20 | 92.0 | 20 | 1611.4 | 2 | |

| Test Mode | 802.11be EHT40 |
|---|---|
| Frequency | 5310 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 13 | 5310 | 1 | 80.9 | 13 | 1941.7 | 3 | 1 |
| | 5310 | 2 | 98.0 | 6 | 1133.9 | 1 | |
| | 5310 | 3 | 96.0 | 11 | 1500.2 | 2 | |
| | 5310 | 4 | 77.8 | 19 | 1301.8 | 2 | |
| | 5310 | 5 | 94.4 | 17 | 1925.0 | 3 | |
| | 5310 | 6 | 91.4 | 11 | 1054.0 | 3 | |
| | 5310 | 7 | 56.7 | 15 | 1665.1 | 3 | |
| | 5310 | 8 | 54.0 | 19 | 1932.3 | 3 | |
| | 5310 | 9 | 94.0 | 11 | 1688.9 | 3 | |
| | 5310 | 10 | 68.8 | 17 | 1249.8 | 1 | |
| 14 | 5310 | 1 | 61.6 | 9 | 1630.0 | 3 | 0 |
| | 5310 | 2 | 68.8 | 17 | 1735.0 | 2 | |
| | 5310 | 3 | 95.3 | 8 | 1232.5 | 2 | |
| | 5310 | 4 | 79.2 | 15 | 1054.6 | 2 | |
| | 5310 | 5 | 86.4 | 14 | 1021.4 | 3 | |
| | 5310 | 6 | 80.0 | 8 | 1849.9 | 3 | |
| | 5310 | 7 | 80.8 | 5 | 1764.0 | 3 | |
| | 5310 | 8 | 61.2 | 16 | 1290.2 | 2 | |
| | 5310 | 9 | 79.0 | 8 | 1770.0 | 1 | |
| | 5310 | 10 | 77.2 | 12 | 1894.3 | 3 | |
| | 5310 | 11 | 95.2 | 19 | 1664.4 | 1 | |
| | 5310 | 12 | 52.2 | 14 | 1055.2 | 1 | |
| | 5310 | 13 | 55.4 | 9 | 1407.5 | 2 | |
| | 5310 | 14 | 87.2 | 6 | 1501.8 | 1 | |
| | 5310 | 15 | 56.2 | 6 | 1766.8 | 3 | |
| | 5310 | 16 | 85.8 | 13 | 1339.4 | 3 | |
| | 5310 | 17 | 67.5 | 7 | 1603.9 | 1 | |
| | 5310 | 18 | 96.2 | 15 | 1969.8 | 1 | |
| | 5310 | 19 | 80.3 | 6 | 1349.0 | 2 | |
| | 5310 | 20 | 69.5 | 12 | 1378.4 | 2 | |

| Test Mode | 802.11be EHT40 |
|---|---|
| Frequency | 5310 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 15 | 5310 | 1 | 62.8 | 6 | 1359.7 | 2 | 1 |
| | 5310 | 2 | 74.4 | 17 | 1166.6 | 2 | |
| | 5310 | 3 | 94.5 | 14 | 1901.1 | 2 | |
| | 5310 | 4 | 88.0 | 12 | 1320.4 | 2 | |
| | 5310 | 5 | 81.4 | 12 | 1058.6 | 3 | |
| | 5310 | 6 | 56.5 | 14 | 1041.7 | 1 | |
| | 5310 | 7 | 65.5 | 13 | 1169.8 | 2 | |
| | 5310 | 8 | 62.6 | 13 | 1748.4 | 1 | |
| | 5310 | 9 | 90.0 | 19 | 1652.2 | 3 | |
| | 5310 | 10 | 51.3 | 11 | 1921.8 | 2 | |
| | 5310 | 11 | 81.0 | 12 | 1501.4 | 2 | |
| | 5310 | 12 | 58.9 | 5 | 1134.9 | 3 | |
| | 5310 | 13 | 85.7 | 12 | 1707.7 | 3 | |
| | 5310 | 14 | 61.2 | 10 | 1779.9 | 2 | |
| | 5310 | 15 | 95.4 | 13 | 1195.8 | 3 | |
| | 5310 | 16 | 64.5 | 15 | 1212.0 | 1 | |
| | 5310 | 17 | 74.9 | 14 | 1753.5 | 2 | |
| | 5310 | 18 | 84.7 | 18 | 1495.6 | 3 | |
| | 5310 | 19 | 95.2 | 10 | 1781.1 | 2 | |
| 16 | 5310 | 1 | 63.8 | 10 | 1566.9 | 2 | 0 |
| | 5310 | 2 | 67.6 | 10 | 1535.4 | 3 | |
| | 5310 | 3 | 89.8 | 12 | 1490.7 | 2 | |
| | 5310 | 4 | 88.6 | 20 | 1291.5 | 2 | |
| | 5310 | 5 | 89.8 | 9 | 1945.7 | 2 | |
| | 5310 | 6 | 81.4 | 8 | 1552.2 | 1 | |
| | 5310 | 7 | 86.8 | 13 | 1107.0 | 1 | |
| | 5310 | 8 | 84.0 | 12 | 1499.5 | 3 | |
| | 5310 | 9 | 72.3 | 10 | 1601.4 | 2 | |
| | 5310 | 10 | 99.4 | 15 | 1212.4 | 2 | |
| | 5310 | 11 | 77.8 | 18 | 1918.8 | 2 | |
| | 5310 | 12 | 80.4 | 11 | 1585.1 | 1 | |
| | 5310 | 13 | 65.5 | 8 | 1204.9 | 1 | |
| | 5310 | 14 | 74.2 | 16 | 1365.1 | 2 | |
| | 5310 | 15 | 70.0 | 7 | 1788.0 | 1 | |
| | 5310 | 16 | 86.7 | 10 | 1006.3 | 2 | |
| | 5310 | 17 | 78.5 | 11 | 1125.6 | 1 | |
| | 5310 | 18 | 65.2 | 9 | 1761.9 | 2 | |

| Test Mode | 802.11be EHT40 |
|---|---|
| Frequency | 5310 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 17 | 5310 | 1 | 54.7 | 6 | 1529.8 | 1 | 1 |
| | 5310 | 2 | 58.6 | 11 | 1808.6 | 3 | |
| | 5310 | 3 | 95.6 | 11 | 1691.3 | 2 | |
| | 5310 | 4 | 54.0 | 18 | 1201.2 | 2 | |
| | 5310 | 5 | 91.6 | 16 | 1785.8 | 3 | |
| | 5310 | 6 | 52.9 | 17 | 1628.1 | 1 | |
| | 5310 | 7 | 53.8 | 19 | 1878.8 | 1 | |
| | 5310 | 8 | 63.3 | 19 | 1226.1 | 3 | |
| | 5310 | 9 | 86.4 | 19 | 1130.8 | 1 | |
| | 5310 | 10 | 81.0 | 10 | 1238.5 | 2 | |
| | 5310 | 11 | 52.9 | 9 | 1603.9 | 1 | |
| | 5310 | 12 | 58.1 | 6 | 1985.6 | 3 | |
| | 5310 | 13 | 99.0 | 16 | 1313.1 | 3 | |
| | 5310 | 14 | 50.3 | 9 | 1342.7 | 1 | |
| | 5310 | 15 | 76.0 | 11 | 1047.7 | 1 | |
| | 5310 | 16 | 73.4 | 10 | 1107.8 | 1 | |
| | 5310 | 17 | 95.3 | 17 | 1395.8 | 3 | |
| 18 | 5310 | 1 | 67.7 | 9 | 1170.0 | 2 | 1 |
| | 5310 | 2 | 97.5 | 11 | 1487.5 | 2 | |
| | 5310 | 3 | 66.9 | 18 | 1200.1 | 3 | |
| | 5310 | 4 | 74.2 | 7 | 1123.4 | 2 | |
| | 5310 | 5 | 73.8 | 11 | 1584.2 | 3 | |
| | 5310 | 6 | 63.3 | 5 | 1599.9 | 2 | |
| | 5310 | 7 | 94.5 | 6 | 1096.3 | 2 | |
| | 5310 | 8 | 62.9 | 12 | 1029.9 | 1 | |
| | 5310 | 9 | 50.2 | 12 | 1044.0 | 3 | |
| | 5310 | 10 | 67.2 | 19 | 1285.7 | 3 | |
| | 5310 | 11 | 54.7 | 11 | 1439.1 | 3 | |
| | 5310 | 12 | 52.3 | 10 | 1640.9 | 2 | |
| | 5310 | 13 | 60.2 | 18 | 1032.5 | 3 | |
| | 5310 | 14 | 58.3 | 14 | 1671.4 | 3 | |
| | 5310 | 15 | 70.4 | 15 | 1777.4 | 2 | |

| Test Mode | 802.11be EHT40 |
|---|---|
| Frequency | 5310 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 19 | 5310 | 1 | 70.6 | 7 | 1819.7 | 1 | 0 |
| | 5310 | 2 | 67.1 | 7 | 1092.6 | 1 | |
| | 5310 | 3 | 87.3 | 14 | 1489.4 | 3 | |
| | 5310 | 4 | 75.9 | 15 | 1040.6 | 2 | |
| | 5310 | 5 | 67.8 | 8 | 1440.6 | 1 | |
| | 5310 | 6 | 75.4 | 11 | 1764.6 | 1 | |
| | 5310 | 7 | 99.3 | 6 | 1595.7 | 1 | |
| | 5310 | 8 | 72.0 | 11 | 1043.3 | 3 | |
| | 5310 | 9 | 63.3 | 16 | 1822.5 | 3 | |
| | 5310 | 10 | 65.3 | 12 | 1815.9 | 2 | |
| | 5310 | 11 | 93.9 | 16 | 1705.7 | 3 | |
| | 5310 | 12 | 62.6 | 17 | 1222.7 | 2 | |
| | 5310 | 13 | 93.2 | 12 | 1793.5 | 3 | |
| | 5310 | 14 | 80.5 | 9 | 1036.9 | 2 | |
| 20 | 5310 | 1 | 88.0 | 12 | 1042.9 | 1 | 1 |
| | 5310 | 2 | 90.1 | 13 | 1668.8 | 2 | |
| | 5310 | 3 | 76.3 | 9 | 1338.4 | 2 | |
| | 5310 | 4 | 54.8 | 14 | 1451.6 | 2 | |
| | 5310 | 5 | 82.4 | 7 | 1101.7 | 1 | |
| | 5310 | 6 | 58.5 | 10 | 1196.4 | 2 | |
| | 5310 | 7 | 55.8 | 11 | 1812.6 | 2 | |
| | 5310 | 8 | 70.2 | 15 | 1915.0 | 3 | |
| | 5310 | 9 | 72.4 | 9 | 1280.3 | 1 | |
| | 5310 | 10 | 92.1 | 19 | 1469.9 | 3 | |
| 21 | 5325.5 | 1 | 69.7 | 11 | 1463.0 | 2 | 1 |
| | 5325.5 | 2 | 87.3 | 11 | 1900.8 | 2 | |
| | 5326.5 | 3 | 73.5 | 8 | 1584.1 | 1 | |
| | 5325.5 | 4 | 99.1 | 10 | 1716.8 | 1 | |
| | 5327.5 | 5 | 53.3 | 5 | 1096.0 | 2 | |
| | 5327.5 | 6 | 69.8 | 5 | 1785.4 | 3 | |
| | 5323.5 | 7 | 88.4 | 14 | 1149.4 | 3 | |
| | 5322.5 | 8 | 74.9 | 17 | 1911.1 | 3 | |
| | 5322.5 | 9 | 76.5 | 18 | 1724.9 | 2 | |
| | 5324.5 | 10 | 80.7 | 13 | 1008.4 | 2 | |
| | 5323.5 | 11 | 92.8 | 15 | 1635.2 | 1 | |
| | 5323.5 | 12 | 94.3 | 15 | 1419.7 | 2 | |

| Test Mode | 802.11be EHT40 |
|---|---|
| Frequency | 5310 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 22 | 5323.5 | 1 | 68.7 | 15 | 1159.1 | 1 | 1 |
| | 5325.5 | 2 | 53.6 | 9 | 1003.8 | 1 | |
| | 5327.5 | 3 | 88.2 | 5 | 1089.9 | 3 | |
| | 5325.5 | 4 | 66.5 | 10 | 1267.5 | 3 | |
| | 5327.5 | 5 | 85.1 | 5 | 1546.2 | 3 | |
| | 5325.5 | 6 | 91.5 | 10 | 1422.2 | 2 | |
| | 5321.5 | 7 | 70.3 | 19 | 1040.5 | 1 | |
| | 5321.5 | 8 | 90.3 | 19 | 1111.1 | 2 | |
| | 5323.5 | 9 | 71.6 | 15 | 1059.1 | 2 | |
| 23 | 5323.5 | 1 | 57.6 | 16 | 1166.0 | 3 | 1 |
| | 5321.5 | 2 | 71.4 | 19 | 1594.2 | 3 | |
| | 5325.5 | 3 | 57.4 | 9 | 1452.8 | 3 | |
| | 5326.5 | 4 | 68.2 | 8 | 1398.8 | 2 | |
| | 5322.5 | 5 | 72.4 | 18 | 1515.6 | 1 | |
| | 5323.5 | 6 | 56.7 | 15 | 1017.4 | 3 | |
| | 5323.5 | 7 | 63.4 | 14 | 1322.5 | 2 | |
| | 5325.5 | 8 | 96.8 | 9 | 1264.1 | 2 | |
| | 5325.5 | 9 | 90.2 | 10 | 1630.9 | 1 | |
| | 5323.5 | 10 | 76.1 | 15 | 1147.5 | 1 | |
| | 5325.5 | 11 | 66.8 | 11 | 1387.6 | 3 | |
| | 5325.5 | 12 | 61.0 | 11 | 1668.8 | 3 | |
| | 5321.5 | 13 | 86.7 | 19 | 1828.3 | 3 | |
| | 5323.5 | 14 | 74.2 | 16 | 1528.6 | 3 | |
| | 5325.5 | 15 | 94.7 | 10 | 1347.4 | 3 | |
| 24 | 5326.5 | 1 | 74.7 | 7 | 1698.3 | 3 | 1 |
| | 5324.5 | 2 | 94.7 | 13 | 1340.3 | 1 | |
| | 5323.5 | 3 | 75.8 | 15 | 1933.2 | 3 | |
| | 5325.5 | 4 | 95.7 | 11 | 1182.6 | 3 | |
| | 5321.5 | 5 | 76.1 | 20 | 1836.5 | 1 | |
| | 5325.5 | 6 | 57.6 | 9 | 1725.4 | 1 | |
| | 5325.5 | 7 | 69.5 | 9 | 1931.9 | 3 | |
| | 5327.5 | 8 | 59.6 | 6 | 1083.1 | 1 | |
| | 5324.5 | 9 | 59.0 | 13 | 1432.1 | 1 | |
| | 5325.5 | 10 | 99.2 | 9 | 1147.2 | 3 | |
| | 5322.5 | 11 | 72.1 | 18 | 1511.5 | 2 | |
| | 5327.5 | 12 | 56.9 | 5 | 1606.8 | 1 | |
| | 5325.5 | 13 | 91.7 | 10 | 1805.4 | 3 | |
| | 5321.5 | 14 | 53.8 | 19 | 1409.2 | 3 | |

| Test Mode | 802.11be EHT40 |
|---|---|
| Frequency | 5310 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 25 | 5325.5 | 1 | 97.2 | 11 | 1755.1 | 2 | 1 |
| | 5322.5 | 2 | 60.1 | 17 | 1905.8 | 1 | |
| | 5326.5 | 3 | 65.4 | 7 | 1332.2 | 3 | |
| | 5324.5 | 4 | 50.3 | 13 | 1333.2 | 3 | |
| | 5325.5 | 5 | 53.1 | 11 | 1251.3 | 2 | |
| | 5323.5 | 6 | 88.8 | 15 | 1029.5 | 2 | |
| | 5321.5 | 7 | 73.5 | 19 | 1930.7 | 3 | |
| | 5325.5 | 8 | 92.0 | 9 | 1303.7 | 2 | |
| | 5324.5 | 9 | 69.9 | 13 | 1649.0 | 2 | |
| | 5323.5 | 10 | 74.0 | 16 | 1148.0 | 1 | |
| | 5327.5 | 11 | 88.8 | 6 | 1534.7 | 1 | |
| | 5323.5 | 12 | 82.1 | 16 | 1860.1 | 1 | |
| | 5323.5 | 13 | 72.6 | 14 | 1549.3 | 1 | |
| | 5324.5 | 14 | 88.6 | 12 | 1436.7 | 1 | |
| | 5325.5 | 15 | 83.3 | 10 | 1172.8 | 3 | |
| | 5325.5 | 16 | 73.6 | 10 | 1447.7 | 2 | |
| | 5323.5 | 17 | 76.2 | 15 | 1167.0 | 1 | |
| | 5325.5 | 18 | 74.1 | 10 | 1396.8 | 1 | |
| 26 | 5322.5 | 1 | 68.0 | 18 | 1453.2 | 3 | 1 |
| | 5325.5 | 2 | 88.6 | 11 | 1048.3 | 2 | |
| | 5323.5 | 3 | 91.3 | 14 | 1417.3 | 3 | |
| | 5326.5 | 4 | 89.1 | 8 | 1025.3 | 1 | |
| | 5324.5 | 5 | 77.5 | 12 | 1689.0 | 2 | |
| | 5323.5 | 6 | 67.7 | 16 | 1501.0 | 1 | |
| | 5326.5 | 7 | 80.3 | 8 | 1019.8 | 3 | |
| | 5322.5 | 8 | 70.0 | 18 | 1516.7 | 2 | |
| | 5324.5 | 9 | 86.0 | 13 | 1663.3 | 3 | |
| | 5324.5 | 10 | 99.8 | 12 | 1065.5 | 1 | |
| | 5322.5 | 11 | 60.1 | 18 | 1999.7 | 3 | |
| | 5322.5 | 12 | 55.5 | 18 | 1872.6 | 1 | |
| | 5325.5 | 13 | 66.1 | 9 | 1693.4 | 2 | |
| | 5323.5 | 14 | 50.0 | 16 | 1522.1 | 2 | |
| | 5325.5 | 15 | 83.5 | 10 | 1734.6 | 1 | |
| | 5326.5 | 16 | 81.7 | 7 | 1242.8 | 1 | |

| Test Mode | 802.11be EHT40 |
|---|---|
| Frequency | 5310 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 27 | 5325.5 | 1 | 88.0 | 11 | 1484.9 | 3 | 1 |
| | 5324.5 | 2 | 77.9 | 13 | 1804.7 | 2 | |
| | 5325.5 | 3 | 71.4 | 10 | 1960.1 | 1 | |
| | 5322.5 | 4 | 85.7 | 17 | 1009.0 | 2 | |
| | 5325.5 | 5 | 85.0 | 10 | 1208.4 | 2 | |
| | 5321.5 | 6 | 86.1 | 19 | 1262.2 | 1 | |
| | 5323.5 | 7 | 58.9 | 16 | 1031.0 | 2 | |
| | 5323.5 | 8 | 62.3 | 16 | 1616.5 | 1 | |
| | 5323.5 | 9 | 81.0 | 15 | 1254.4 | 1 | |
| | 5324.5 | 10 | 58.4 | 12 | 1059.4 | 2 | |
| | 5327.5 | 11 | 58.1 | 6 | 1704.5 | 3 | |
| | 5325.5 | 12 | 78.9 | 10 | 1681.2 | 3 | |
| | 5323.5 | 13 | 82.9 | 16 | 1449.9 | 3 | |
| | 5323.5 | 14 | 97.2 | 14 | 1676.9 | 2 | |
| | 5325.5 | 15 | 52.8 | 11 | 1984.6 | 2 | |
| | 5326.5 | 16 | 70.2 | 8 | 1175.2 | 1 | |
| | 5327.5 | 17 | 53.1 | 6 | 1958.1 | 2 | |
| | 5322.5 | 18 | 61.8 | 18 | 1957.3 | 3 | |
| | 5322.5 | 19 | 73.3 | 18 | 1160.9 | 2 | |
| | 5321.5 | 20 | 90.3 | 19 | 1588.8 | 1 | |

| Test Mode | 802.11be EHT40 |
|---|---|
| Frequency | 5310 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 28 | 5324.5 | 1 | 67.9 | 13 | 1479.1 | 1 | 1 |
| | 5323.5 | 2 | 82.6 | 14 | 1907.1 | 3 | |
| | 5321.5 | 3 | 50.3 | 19 | 1773.6 | 2 | |
| | 5322.5 | 4 | 89.8 | 17 | 1936.5 | 3 | |
| | 5323.5 | 5 | 61.6 | 16 | 1628.8 | 2 | |
| | 5327.5 | 6 | 97.6 | 6 | 1953.2 | 3 | |
| | 5322.5 | 7 | 92.5 | 18 | 1896.8 | 1 | |
| | 5325.5 | 8 | 74.2 | 10 | 1397.5 | 2 | |
| | 5323.5 | 9 | 96.7 | 14 | 1534.9 | 1 | |
| | 5323.5 | 10 | 73.7 | 14 | 1828.5 | 1 | |
| | 5323.5 | 11 | 99.2 | 15 | 1712.1 | 1 | |
| | 5322.5 | 12 | 74.6 | 17 | 1054.6 | 3 | |
| | 5322.5 | 13 | 70.7 | 18 | 1162.1 | 3 | |
| | 5326.5 | 14 | 86.6 | 8 | 1144.9 | 3 | |
| | 5323.5 | 15 | 85.0 | 14 | 1535.8 | 1 | |
| | 5323.5 | 16 | 84.7 | 15 | 1744.0 | 1 | |
| | 5324.5 | 17 | 97.1 | 13 | 1263.4 | 2 | |
| | 5323.5 | 18 | 52.2 | 16 | 1663.1 | 2 | |
| | 5321.5 | 19 | 78.2 | 19 | 1154.3 | 2 | |
| | 5327.5 | 20 | 84.3 | 5 | 1706.7 | 1 | |

| Test Mode | 802.11be EHT40 |
|---|---|
| Frequency | 5310 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 29 | 5322.5 | 1 | 90.2 | 17 | 1798.6 | 1 | 1 |
| | 5323.5 | 2 | 83.6 | 15 | 1409.1 | 1 | |
| | 5321.5 | 3 | 60.2 | 19 | 1735.6 | 3 | |
| | 5326.5 | 4 | 58.3 | 7 | 1573.9 | 1 | |
| | 5326.5 | 5 | 93.6 | 7 | 1884.7 | 2 | |
| | 5326.5 | 6 | 64.2 | 7 | 1142.8 | 3 | |
| | 5326.5 | 7 | 62.3 | 8 | 1956.6 | 1 | |
| | 5325.5 | 8 | 63.7 | 9 | 1955.5 | 2 | |
| | 5323.5 | 9 | 61.7 | 14 | 1755.9 | 1 | |
| | 5323.5 | 10 | 93.1 | 15 | 1241.2 | 2 | |
| | 5323.5 | 11 | 75.4 | 14 | 1691.0 | 2 | |
| | 5324.5 | 12 | 57.4 | 13 | 1661.3 | 2 | |
| | 5324.5 | 13 | 91.5 | 12 | 1774.5 | 1 | |
| | 5326.5 | 14 | 98.5 | 8 | 1638.1 | 3 | |
| | 5322.5 | 15 | 52.1 | 17 | 1445.8 | 1 | |
| | 5322.5 | 16 | 75.6 | 17 | 1467.7 | 3 | |
| | 5322.5 | 17 | 90.3 | 18 | 1943.4 | 1 | |
| 30 | 5326.5 | 1 | 58.4 | 7 | 1535.2 | 3 | 1 |
| | 5326.5 | 2 | 71.6 | 7 | 1264.3 | 2 | |
| | 5325.5 | 3 | 64.2 | 10 | 1115.7 | 3 | |
| | 5325.5 | 4 | 60.4 | 9 | 1717.8 | 2 | |
| | 5327.5 | 5 | 98.2 | 5 | 1050.9 | 3 | |
| | 5324.5 | 6 | 76.7 | 12 | 1158.3 | 2 | |
| | 5327.5 | 7 | 84.8 | 5 | 1639.8 | 1 | |
| | 5324.5 | 8 | 67.5 | 13 | 1376.8 | 2 | |
| | 5327.5 | 9 | 67.5 | 6 | 1294.6 | 1 | |
| | 5325.5 | 10 | 81.8 | 11 | 1490.6 | 3 | |
| | 5326.5 | 11 | 90.6 | 7 | 1953.2 | 1 | |
| | 5322.5 | 12 | 63.7 | 17 | 1704.5 | 3 | |
| | 5323.5 | 13 | 76.7 | 15 | 1187.4 | 1 | |
| | 5325.5 | 14 | 91.3 | 10 | 1893.3 | 2 | |
| Detection Percentage (%) | | | | | | | 90.00 |

| Test Mode | 802.11be EHT40 | | | | | |
|---|---|---|---|---|---|---|
| Frequency | 5310 MHz | | | | | |
| Radar Signal | Type 6 | | | | | |
| Trial # | Pulse Width (us) | PRI (us) | Pulses / Hop | Hopping Rate (kHz) | Hopping Sequence Length (ms) | 1=Detection ; 0=No Detection |
| 1 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 2 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 3 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 4 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 5 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 6 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 7 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 8 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 9 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 10 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 11 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 12 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 13 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 14 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 15 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 16 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 17 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 18 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 19 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 20 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 21 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 22 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 23 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 24 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 25 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 26 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 27 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 28 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 29 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 30 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| Detection Percentage (%) | | | | | | 100.00 |

| Test Mode | 802.11be EHT80 | | | | | |
|---|---|---|---|---|---|---|
| Frequency | 5290 MHz | | | | | |
| Radar Signal | Type 1 | | | | | |
| Trial # | Test Frequency (MHz) | Pulse Width (us) | PRI (us) | Number of Pluse | PRF (Hz) | 1=Detection ; 0=No Detection |
| 1 | 5290 | 1 | 638 | 83 | 1567 | 1 |
| 2 | 5290 | 1 | 798 | 67 | 1253 | 0 |
| 3 | 5290 | 1 | 778 | 68 | 1285 | 1 |
| 4 | 5290 | 1 | 938 | 57 | 1066 | 1 |
| 5 | 5290 | 1 | 598 | 89 | 1672 | 1 |
| 6 | 5290 | 1 | 758 | 70 | 1319 | 1 |
| 7 | 5290 | 1 | 858 | 62 | 1166 | 0 |
| 8 | 5290 | 1 | 818 | 65 | 1222 | 1 |
| 9 | 5290 | 1 | 858 | 62 | 1166 | 1 |
| 10 | 5290 | 1 | 778 | 68 | 1285 | 1 |
| 11 | 5290 | 1 | 858 | 62 | 1166 | 1 |
| 12 | 5290 | 1 | 558 | 95 | 1792 | 1 |
| 13 | 5290 | 1 | 638 | 83 | 1567 | 1 |
| 14 | 5290 | 1 | 838 | 63 | 1193 | 1 |
| 15 | 5290 | 1 | 658 | 81 | 1520 | 1 |
| 16 | 5290 | 1 | 1948 | 28 | 513 | 1 |
| 17 | 5290 | 1 | 2912 | 19 | 343 | 1 |
| 18 | 5290 | 1 | 2363 | 23 | 423 | 1 |
| 19 | 5290 | 1 | 2382 | 23 | 420 | 1 |
| 20 | 5290 | 1 | 931 | 57 | 1074 | 1 |
| 21 | 5290 | 1 | 2550 | 21 | 392 | 1 |
| 22 | 5290 | 1 | 1036 | 51 | 965 | 1 |
| 23 | 5290 | 1 | 2894 | 19 | 346 | 1 |
| 24 | 5290 | 1 | 2092 | 26 | 478 | 1 |
| 25 | 5290 | 1 | 1324 | 40 | 755 | 1 |
| 26 | 5290 | 1 | 1521 | 35 | 657 | 1 |
| 27 | 5290 | 1 | 1225 | 44 | 816 | 1 |
| 28 | 5290 | 1 | 1545 | 35 | 647 | 1 |
| 29 | 5290 | 1 | 2024 | 27 | 494 | 1 |
| 30 | 5290 | 1 | 2263 | 24 | 442 | 1 |
| Detection Percentage (%) | | | | | | 93.33 |

| Test Mode | 802.11be EHT80 | | | | | |
|---|---|---|---|---|---|---|
| Frequency | 5290 MHz | | | | | |
| Radar Signal | Type 2 | | | | | |
| Trial # | Test Frequency (MHz) | Pulse Width (us) | PRI (us) | Number of Pluse | PRF (Hz) | 1=Detection ; 0=No Detection |
| 1 | 5290 | 1.50 | 194.90 | 29 | 5131 | 1 |
| 2 | 5290 | 1.50 | 202.90 | 24 | 4929 | 1 |
| 3 | 5290 | 1.80 | 175.10 | 29 | 5711 | 1 |
| 4 | 5290 | 1.30 | 222.70 | 26 | 4490 | 1 |
| 5 | 5290 | 3.40 | 175.50 | 26 | 5698 | 1 |
| 6 | 5290 | 2.80 | 184.30 | 23 | 5426 | 1 |
| 7 | 5290 | 1.30 | 178.20 | 25 | 5612 | 1 |
| 8 | 5290 | 2.90 | 165.90 | 27 | 6028 | 1 |
| 9 | 5290 | 4.10 | 157.50 | 27 | 6349 | 0 |
| 10 | 5290 | 3.00 | 158.20 | 25 | 6321 | 1 |
| 11 | 5290 | 3.80 | 212.40 | 29 | 4708 | 1 |
| 12 | 5290 | 4.30 | 229.80 | 23 | 4352 | 1 |
| 13 | 5290 | 1.70 | 211.20 | 26 | 4735 | 1 |
| 14 | 5290 | 1.90 | 189.10 | 29 | 5288 | 1 |
| 15 | 5290 | 2.80 | 179.10 | 25 | 5583 | 1 |
| 16 | 5290 | 4.50 | 156.60 | 25 | 6386 | 1 |
| 17 | 5290 | 3.40 | 168.30 | 29 | 5942 | 1 |
| 18 | 5290 | 2.40 | 159.60 | 27 | 6266 | 1 |
| 19 | 5290 | 1.50 | 208.30 | 23 | 4801 | 1 |
| 20 | 5290 | 1.90 | 183.20 | 29 | 5459 | 1 |
| 21 | 5290 | 2.80 | 163.30 | 28 | 6124 | 0 |
| 22 | 5290 | 3.70 | 191.20 | 24 | 5230 | 1 |
| 23 | 5290 | 5.00 | 220.70 | 24 | 4531 | 1 |
| 24 | 5290 | 4.70 | 195.30 | 28 | 5120 | 1 |
| 25 | 5290 | 1.50 | 216.30 | 27 | 4623 | 1 |
| 26 | 5290 | 4.40 | 215.00 | 25 | 4651 | 1 |
| 27 | 5290 | 1.70 | 167.60 | 24 | 5967 | 1 |
| 28 | 5290 | 3.10 | 222.60 | 27 | 4492 | 0 |
| 29 | 5290 | 1.30 | 162.10 | 25 | 6169 | 0 |
| 30 | 5290 | 2.40 | 176.20 | 23 | 5675 | 1 |
| Detection Percentage (%) | | | | | | 86.67 |

| Test Mode | 802.11be EHT80 | | | | | |
|---|---|---|---|---|---|---|
| Frequency | 5290 MHz | | | | | |
| Radar Signal | Type 3 | | | | | |
| Trial # | Test Frequency (MHz) | Pulse Width (us) | PRI (us) | Number of Pluse | PRF (Hz) | 1=Detection ; 0=No Detection |
| 1 | 5290 | 6.80 | 361.50 | 16 | 2766.25 | 1 |
| 2 | 5290 | 6.20 | 202.40 | 17 | 4940.71 | 1 |
| 3 | 5290 | 8.10 | 306.70 | 18 | 3260.52 | 0 |
| 4 | 5290 | 8.10 | 237.30 | 18 | 4214.08 | 1 |
| 5 | 5290 | 7.30 | 401.90 | 18 | 2488.18 | 1 |
| 6 | 5290 | 6.90 | 221.90 | 16 | 4506.53 | 1 |
| 7 | 5290 | 9.20 | 326.30 | 16 | 3064.66 | 1 |
| 8 | 5290 | 9.40 | 201.80 | 17 | 4955.40 | 0 |
| 9 | 5290 | 10.00 | 251.90 | 18 | 3969.83 | 1 |
| 10 | 5290 | 7.50 | 488.20 | 16 | 2048.34 | 1 |
| 11 | 5290 | 9.00 | 232.20 | 17 | 4306.63 | 1 |
| 12 | 5290 | 7.30 | 365.80 | 18 | 2733.73 | 1 |
| 13 | 5290 | 9.20 | 382.20 | 17 | 2616.43 | 1 |
| 14 | 5290 | 6.80 | 306.80 | 16 | 3259.45 | 1 |
| 15 | 5290 | 7.20 | 343.90 | 16 | 2907.82 | 1 |
| 16 | 5290 | 6.60 | 328.80 | 16 | 3041.36 | 1 |
| 17 | 5290 | 9.80 | 346.00 | 17 | 2890.17 | 1 |
| 18 | 5290 | 9.40 | 437.90 | 17 | 2283.63 | 1 |
| 19 | 5290 | 9.40 | 480.60 | 18 | 2080.73 | 1 |
| 20 | 5290 | 7.40 | 297.20 | 17 | 3364.74 | 1 |
| 21 | 5290 | 6.00 | 372.20 | 18 | 2686.73 | 1 |
| 22 | 5290 | 7.50 | 366.60 | 18 | 2727.77 | 1 |
| 23 | 5290 | 9.50 | 228.00 | 16 | 4385.96 | 1 |
| 24 | 5290 | 7.50 | 443.80 | 16 | 2253.27 | 1 |
| 25 | 5290 | 7.60 | 247.10 | 17 | 4046.94 | 1 |
| 26 | 5290 | 7.00 | 270.10 | 16 | 3702.33 | 1 |
| 27 | 5290 | 7.10 | 284.90 | 17 | 3510.00 | 1 |
| 28 | 5290 | 9.00 | 301.60 | 18 | 3315.65 | 1 |
| 29 | 5290 | 10.00 | 238.50 | 16 | 4192.87 | 1 |
| 30 | 5290 | 9.80 | 374.20 | 17 | 2672.37 | 1 |
| Detection Percentage (%) | | | | | | 93.33 |

| Test Mode | 802.11be EHT80 | | | | | |
|---|---|---|---|---|---|---|
| Frequency | 5290 MHz | | | | | |
| Radar Signal | Type 4 | | | | | |
| Trial # | Test Frequency (MHz) | Pulse Width (us) | PRI (us) | Number of Pluse | PRF (Hz) | 1=Detection ; 0=No Detection |
| 1 | 5290 | 19.70 | 380.30 | 14 | 2630 | 1 |
| 2 | 5290 | 16.50 | 444.30 | 14 | 2251 | 1 |
| 3 | 5290 | 12.40 | 329.10 | 15 | 3039 | 1 |
| 4 | 5290 | 19.70 | 282.10 | 15 | 3545 | 1 |
| 5 | 5290 | 18.00 | 477.40 | 13 | 2095 | 0 |
| 6 | 5290 | 18.30 | 445.50 | 13 | 2245 | 1 |
| 7 | 5290 | 14.80 | 398.90 | 15 | 2507 | 1 |
| 8 | 5290 | 16.60 | 237.60 | 14 | 4209 | 0 |
| 9 | 5290 | 11.70 | 350.10 | 15 | 2856 | 1 |
| 10 | 5290 | 15.60 | 468.50 | 13 | 2134 | 1 |
| 11 | 5290 | 12.10 | 257.80 | 12 | 3879 | 1 |
| 12 | 5290 | 19.00 | 319.50 | 14 | 3130 | 0 |
| 13 | 5290 | 12.50 | 404.10 | 15 | 2475 | 1 |
| 14 | 5290 | 14.60 | 401.50 | 12 | 2491 | 1 |
| 15 | 5290 | 16.10 | 349.40 | 13 | 2862 | 1 |
| 16 | 5290 | 18.40 | 206.10 | 15 | 4852 | 1 |
| 17 | 5290 | 17.60 | 241.20 | 14 | 4146 | 1 |
| 18 | 5290 | 16.60 | 203.10 | 13 | 4924 | 1 |
| 19 | 5290 | 14.50 | 478.20 | 15 | 2091 | 1 |
| 20 | 5290 | 11.90 | 431.90 | 12 | 2315 | 1 |
| 21 | 5290 | 12.00 | 364.10 | 13 | 2746 | 1 |
| 22 | 5290 | 19.70 | 227.60 | 14 | 4394 | 1 |
| 23 | 5290 | 14.60 | 496.50 | 16 | 2014 | 1 |
| 24 | 5290 | 13.50 | 410.40 | 13 | 2437 | 1 |
| 25 | 5290 | 11.10 | 297.30 | 12 | 3364 | 1 |
| 26 | 5290 | 14.30 | 478.30 | 12 | 2091 | 1 |
| 27 | 5290 | 20.00 | 232.80 | 14 | 4296 | 0 |
| 28 | 5290 | 19.20 | 217.10 | 12 | 4606 | 1 |
| 29 | 5290 | 18.30 | 366.20 | 12 | 2731 | 1 |
| 30 | 5290 | 16.40 | 398.70 | 16 | 2508 | 1 |
| Detection Percentage (%) | | | | | | 86.67 |

| Test Mode | 802.11be EHT80 |
|---|---|
| Frequency | 5290 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 1 | 5254 | 1 | 60.3 | 7 | 1916.4 | 1 | 0 |
| | 5257 | 2 | 63.5 | 14 | 1337.1 | 3 | |
| | 5257 | 3 | 80.0 | 15 | 1881.4 | 3 | |
| | 5255 | 4 | 61.3 | 11 | 1188.5 | 1 | |
| | 5257 | 5 | 81.7 | 14 | 1589.8 | 2 | |
| | 5257 | 6 | 93.1 | 14 | 1550.2 | 1 | |
| | 5254 | 7 | 94.8 | 7 | 1614.5 | 1 | |
| | 5258 | 8 | 67.0 | 18 | 1689.0 | 1 | |
| | 5257 | 9 | 83.2 | 15 | 1261.3 | 2 | |
| | 5255 | 10 | 85.2 | 9 | 1258.8 | 3 | |
| | 5257 | 11 | 56.4 | 15 | 1611.8 | 1 | |
| 2 | 5258 | 1 | 99.9 | 17 | 1486.9 | 1 | 1 |
| | 5254 | 2 | 59.2 | 7 | 1102.6 | 2 | |
| | 5255 | 3 | 89.3 | 10 | 1443.0 | 3 | |
| | 5257 | 4 | 90.1 | 15 | 1762.3 | 1 | |
| | 5255 | 5 | 65.3 | 9 | 1097.2 | 2 | |
| | 5259 | 6 | 97.1 | 19 | 1006.3 | 1 | |
| | 5258 | 7 | 81.8 | 17 | 1799.3 | 2 | |
| | 5258 | 8 | 50.1 | 18 | 1263.8 | 1 | |
| | 5258 | 9 | 88.3 | 18 | 1166.6 | 3 | |
| | 5259 | 10 | 83.0 | 19 | 1839.7 | 1 | |
| | 5258 | 11 | 71.5 | 18 | 1945.9 | 3 | |
| | 5258 | 12 | 71.0 | 18 | 1909.2 | 2 | |
| 3 | 5253 | 1 | 52.2 | 6 | 1722.6 | 1 | 1 |
| | 5258 | 2 | 55.2 | 18 | 1396.7 | 3 | |
| | 5258 | 3 | 65.8 | 17 | 1586.4 | 1 | |
| | 5257 | 4 | 64.5 | 14 | 1856.2 | 2 | |
| | 5255 | 5 | 76.7 | 9 | 1424.0 | 3 | |
| | 5259 | 6 | 74.1 | 19 | 1880.7 | 2 | |
| | 5253 | 7 | 80.9 | 5 | 1260.4 | 2 | |
| | 5257 | 8 | 54.8 | 14 | 1587.9 | 1 | |
| | 5254 | 9 | 65.5 | 8 | 1791.5 | 2 | |
| | 5258 | 10 | 81.3 | 17 | 1960.1 | 2 | |
| | 5256 | 11 | 82.0 | 12 | 1145.2 | 2 | |
| | 5254 | 12 | 82.3 | 8 | 1040.7 | 1 | |
| | 5253 | 13 | 59.0 | 5 | 1924.3 | 3 | |

| Test Mode | 802.11be EHT80 |
|---|---|
| Frequency | 5290 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 4 | 5259 | 1 | 71.2 | 19 | 1438.4 | 2 | 1 |
| | 5258 | 2 | 67.0 | 18 | 1189.3 | 2 | |
| | 5253 | 3 | 88.4 | 6 | 1654.0 | 3 | |
| | 5257 | 4 | 93.3 | 14 | 1675.5 | 3 | |
| | 5253 | 5 | 88.3 | 5 | 1402.5 | 1 | |
| | 5257 | 6 | 77.1 | 14 | 1990.0 | 3 | |
| | 5255 | 7 | 81.7 | 9 | 1791.2 | 3 | |
| | 5258 | 8 | 68.2 | 17 | 1889.2 | 3 | |
| | 5256 | 9 | 71.4 | 12 | 1679.9 | 1 | |
| 5 | 5253 | 1 | 74.6 | 6 | 1392.2 | 2 | 1 |
| | 5256 | 2 | 97.7 | 13 | 1745.2 | 2 | |
| | 5256 | 3 | 53.7 | 12 | 1964.1 | 1 | |
| | 5254 | 4 | 83.3 | 8 | 1513.5 | 2 | |
| | 5255 | 5 | 74.8 | 11 | 1594.6 | 2 | |
| | 5257 | 6 | 77.4 | 15 | 1598.1 | 2 | |
| | 5259 | 7 | 63.4 | 20 | 1472.8 | 2 | |
| | 5259 | 8 | 94.2 | 19 | 1745.0 | 3 | |
| | 5253 | 9 | 60.2 | 5 | 1068.2 | 3 | |
| | 5258 | 10 | 93.5 | 18 | 1866.8 | 3 | |
| | 5257 | 11 | 60.0 | 14 | 1529.7 | 1 | |
| | 5257 | 12 | 99.8 | 14 | 1810.0 | 1 | |
| | 5258 | 13 | 64.4 | 18 | 1270.3 | 2 | |
| | 5257 | 14 | 63.8 | 15 | 1433.4 | 1 | |
| | 5253 | 15 | 81.4 | 6 | 1592.4 | 1 | |
| 6 | 5255 | 1 | 95.3 | 11 | 1815.9 | 2 | 1 |
| | 5256 | 2 | 93.9 | 13 | 1870.2 | 2 | |
| | 5259 | 3 | 54.9 | 20 | 1459.8 | 2 | |
| | 5255 | 4 | 59.9 | 11 | 1709.7 | 1 | |
| | 5257 | 5 | 76.8 | 15 | 1353.6 | 3 | |
| | 5255 | 6 | 99.7 | 11 | 1967.8 | 3 | |
| | 5253 | 7 | 99.0 | 6 | 1203.4 | 3 | |
| | 5258 | 8 | 92.7 | 18 | 1700.5 | 1 | |
| | 5258 | 9 | 93.4 | 17 | 1800.9 | 1 | |
| | 5253 | 10 | 77.8 | 5 | 1779.7 | 3 | |
| | 5259 | 11 | 91.3 | 19 | 1090.1 | 2 | |
| | 5255 | 12 | 93.7 | 11 | 1215.6 | 2 | |
| | 5257 | 13 | 56.5 | 15 | 1253.5 | 3 | |
| | 5255 | 14 | 81.2 | 11 | 1325.8 | 1 | |

| Test Mode | 802.11be EHT80 |
|---|---|
| Frequency | 5290 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 7 | 5259 | 1 | 58.7 | 20 | 1794.1 | 3 | 1 |
| | 5258 | 2 | 50.7 | 18 | 1774.2 | 1 | |
| | 5258 | 3 | 78.7 | 18 | 1055.1 | 1 | |
| | 5258 | 4 | 73.6 | 18 | 1806.8 | 2 | |
| | 5257 | 5 | 99.6 | 14 | 1901.2 | 2 | |
| | 5258 | 6 | 80.9 | 18 | 1509.8 | 2 | |
| | 5257 | 7 | 62.6 | 16 | 1135.7 | 1 | |
| | 5255 | 8 | 89.3 | 11 | 1095.6 | 3 | |
| | 5256 | 9 | 97.9 | 13 | 1434.7 | 3 | |
| | 5254 | 10 | 89.9 | 8 | 1506.6 | 1 | |
| | 5258 | 11 | 66.6 | 17 | 1934.0 | 2 | |
| | 5256 | 12 | 79.2 | 12 | 1584.7 | 2 | |
| | 5256 | 13 | 89.8 | 13 | 1186.7 | 2 | |
| | 5254 | 14 | 95.7 | 7 | 1151.9 | 2 | |
| | 5256 | 15 | 89.7 | 12 | 1143.6 | 2 | |
| | 5259 | 16 | 50.2 | 20 | 1241.0 | 2 | |
| | 5256 | 17 | 59.8 | 13 | 1702.6 | 1 | |
| 8 | 5257 | 1 | 76.9 | 16 | 1440.4 | 2 | 1 |
| | 5254 | 2 | 91.1 | 7 | 1396.0 | 2 | |
| | 5258 | 3 | 94.1 | 17 | 1712.7 | 3 | |
| | 5256 | 4 | 72.4 | 12 | 1678.4 | 2 | |
| | 5256 | 5 | 79.6 | 13 | 1738.5 | 3 | |
| | 5257 | 6 | 65.1 | 14 | 1717.1 | 1 | |
| | 5255 | 7 | 56.9 | 9 | 1268.3 | 2 | |
| | 5254 | 8 | 64.7 | 7 | 1262.6 | 1 | |
| | 5259 | 9 | 60.8 | 19 | 1933.1 | 3 | |
| | 5257 | 10 | 86.7 | 16 | 1092.5 | 1 | |
| | 5253 | 11 | 58.3 | 6 | 1670.2 | 1 | |
| | 5255 | 12 | 82.1 | 10 | 1632.5 | 3 | |
| | 5258 | 13 | 86.1 | 17 | 1953.9 | 3 | |
| | 5255 | 14 | 63.1 | 10 | 1534.3 | 1 | |
| | 5255 | 15 | 58.2 | 10 | 1469.1 | 2 | |
| | 5255 | 16 | 75.0 | 9 | 1239.6 | 2 | |
| | 5253 | 17 | 75.6 | 6 | 1630.1 | 2 | |
| | 5258 | 18 | 55.4 | 17 | 1599.0 | 2 | |

| Test Mode | 802.11be EHT80 |
|---|---|
| Frequency | 5290 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 9 | 5258 | 1 | 76.9 | 17 | 1472.7 | 2 | 1 |
| | 5255 | 2 | 54.8 | 10 | 1074.1 | 2 | |
| | 5253 | 3 | 96.6 | 6 | 1308.7 | 3 | |
| | 5256 | 4 | 73.2 | 12 | 1886.0 | 1 | |
| | 5254 | 5 | 93.2 | 8 | 1081.3 | 3 | |
| | 5257 | 6 | 62.0 | 15 | 1476.7 | 1 | |
| | 5259 | 7 | 56.0 | 19 | 1621.1 | 1 | |
| | 5257 | 8 | 50.7 | 14 | 1016.8 | 1 | |
| | 5259 | 9 | 87.3 | 20 | 1119.6 | 1 | |
| | 5257 | 10 | 56.7 | 15 | 1310.4 | 3 | |
| | 5255 | 11 | 83.8 | 11 | 1357.8 | 3 | |
| | 5259 | 12 | 85.8 | 20 | 1561.1 | 2 | |
| | 5255 | 13 | 81.4 | 10 | 1401.5 | 1 | |
| | 5256 | 14 | 64.7 | 12 | 1420.7 | 3 | |
| | 5257 | 15 | 76.0 | 14 | 1915.7 | 1 | |
| | 5256 | 16 | 90.1 | 12 | 1708.0 | 3 | |
| | 5256 | 17 | 72.7 | 13 | 1432.8 | 3 | |
| | 5254 | 18 | 61.5 | 8 | 1615.1 | 1 | |
| | 5256 | 19 | 90.5 | 12 | 1280.4 | 3 | |
| 10 | 5257 | 1 | 59.7 | 14 | 1731.6 | 3 | 1 |
| | 5254 | 2 | 61.9 | 7 | 1792.8 | 2 | |
| | 5254 | 3 | 61.3 | 8 | 1027.2 | 2 | |
| | 5255 | 4 | 76.1 | 11 | 1139.5 | 2 | |
| | 5254 | 5 | 99.5 | 7 | 1241.2 | 1 | |
| | 5253 | 6 | 58.5 | 6 | 1032.6 | 2 | |
| | 5254 | 7 | 62.4 | 7 | 1679.9 | 3 | |
| | 5257 | 8 | 94.1 | 15 | 1413.4 | 2 | |

| Test Mode | 802.11be EHT80 |
|---|---|
| Frequency | 5290 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 11 | 5290 | 1 | 53.7 | 13 | 1749.3 | 1 | 1 |
| | 5290 | 2 | 92.9 | 17 | 1526.4 | 2 | |
| | 5290 | 3 | 84.7 | 17 | 1422.0 | 3 | |
| | 5290 | 4 | 71.7 | 10 | 1767.4 | 1 | |
| | 5290 | 5 | 88.3 | 12 | 1664.6 | 2 | |
| | 5290 | 6 | 81.2 | 9 | 1294.1 | 1 | |
| | 5290 | 7 | 84.1 | 13 | 1835.2 | 1 | |
| | 5290 | 8 | 50.5 | 14 | 1760.7 | 1 | |
| | 5290 | 9 | 89.4 | 12 | 1330.7 | 1 | |
| | 5290 | 10 | 82.4 | 17 | 1421.9 | 1 | |
| | 5290 | 11 | 65.1 | 11 | 1923.3 | 3 | |
| | 5290 | 12 | 70.7 | 19 | 1413.4 | 2 | |
| | 5290 | 13 | 76.6 | 7 | 1532.5 | 1 | |
| | 5290 | 14 | 90.0 | 13 | 1714.9 | 2 | |
| | 5290 | 15 | 65.3 | 7 | 1716.8 | 2 | |
| | 5290 | 16 | 80.4 | 14 | 1368.6 | 1 | |
| 12 | 5290 | 1 | 50.6 | 5 | 1863.2 | 2 | 1 |
| | 5290 | 2 | 92.0 | 16 | 1169.8 | 3 | |
| | 5290 | 3 | 84.3 | 12 | 1396.3 | 3 | |
| | 5290 | 4 | 63.8 | 14 | 1742.8 | 2 | |
| | 5290 | 5 | 99.6 | 17 | 1285.0 | 3 | |
| | 5290 | 6 | 57.7 | 16 | 1892.9 | 3 | |
| | 5290 | 7 | 73.3 | 20 | 1159.8 | 2 | |
| | 5290 | 8 | 71.1 | 18 | 1152.9 | 3 | |
| | 5290 | 9 | 66.5 | 13 | 1021.3 | 2 | |
| | 5290 | 10 | 80.1 | 12 | 1260.5 | 3 | |
| | 5290 | 11 | 85.9 | 18 | 1945.0 | 1 | |
| | 5290 | 12 | 53.1 | 8 | 1647.5 | 2 | |
| | 5290 | 13 | 65.3 | 14 | 1198.7 | 2 | |
| | 5290 | 14 | 59.5 | 20 | 1436.1 | 2 | |
| | 5290 | 15 | 73.7 | 10 | 1887.0 | 1 | |
| | 5290 | 16 | 74.8 | 14 | 1154.4 | 2 | |
| | 5290 | 17 | 59.7 | 13 | 1110.3 | 2 | |
| | 5290 | 18 | 80.3 | 16 | 1115.3 | 2 | |
| | 5290 | 19 | 93.1 | 18 | 1843.3 | 2 | |
| | 5290 | 20 | 85.7 | 17 | 1371.8 | 2 | |

| Test Mode | 802.11be EHT80 |
|---|---|
| Frequency | 5290 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 13 | 5290 | 1 | 69.2 | 10 | 1886.5 | 1 | 1 |
| | 5290 | 2 | 95.5 | 16 | 1707.3 | 1 | |
| | 5290 | 3 | 65.9 | 18 | 1032.0 | 3 | |
| | 5290 | 4 | 82.4 | 14 | 1345.8 | 2 | |
| | 5290 | 5 | 80.7 | 12 | 1989.1 | 3 | |
| | 5290 | 6 | 55.7 | 9 | 1427.7 | 2 | |
| | 5290 | 7 | 99.4 | 9 | 1099.3 | 1 | |
| | 5290 | 8 | 95.7 | 6 | 1050.4 | 1 | |
| | 5290 | 9 | 87.7 | 10 | 1884.0 | 2 | |
| | 5290 | 10 | 94.8 | 14 | 1573.1 | 1 | |
| 14 | 5290 | 1 | 65.8 | 16 | 1249.3 | 3 | 1 |
| | 5290 | 2 | 79.0 | 10 | 1808.0 | 3 | |
| | 5290 | 3 | 89.3 | 8 | 1458.1 | 1 | |
| | 5290 | 4 | 78.9 | 8 | 1732.8 | 3 | |
| | 5290 | 5 | 54.1 | 19 | 1989.1 | 3 | |
| | 5290 | 6 | 76.0 | 6 | 1676.1 | 1 | |
| | 5290 | 7 | 81.5 | 19 | 1081.7 | 1 | |
| | 5290 | 8 | 94.8 | 16 | 1481.7 | 3 | |
| | 5290 | 9 | 91.3 | 15 | 1260.7 | 3 | |
| | 5290 | 10 | 84.4 | 11 | 1142.2 | 3 | |
| | 5290 | 11 | 89.6 | 19 | 1709.9 | 1 | |
| | 5290 | 12 | 75.3 | 8 | 1457.5 | 2 | |
| | 5290 | 13 | 95.7 | 16 | 1550.7 | 3 | |
| | 5290 | 14 | 69.9 | 18 | 1391.7 | 2 | |
| | 5290 | 15 | 89.3 | 14 | 1050.9 | 1 | |
| | 5290 | 16 | 78.1 | 10 | 1560.1 | 1 | |
| | 5290 | 17 | 73.0 | 18 | 1537.9 | 1 | |
| | 5290 | 18 | 87.1 | 7 | 1550.6 | 2 | |
| | 5290 | 19 | 71.4 | 6 | 1899.8 | 3 | |
| | 5290 | 20 | 62.8 | 7 | 1878.1 | 1 | |

| Test Mode | 802.11be EHT80 |
|---|---|
| Frequency | 5290 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 15 | 5290 | 1 | 83.9 | 16 | 1680.3 | 2 | 1 |
| | 5290 | 2 | 97.2 | 5 | 1070.7 | 1 | |
| | 5290 | 3 | 61.4 | 18 | 1566.1 | 1 | |
| | 5290 | 4 | 67.5 | 12 | 1718.6 | 1 | |
| | 5290 | 5 | 55.6 | 17 | 1475.0 | 3 | |
| | 5290 | 6 | 70.4 | 18 | 1771.6 | 2 | |
| | 5290 | 7 | 63.5 | 20 | 1936.9 | 3 | |
| | 5290 | 8 | 76.9 | 6 | 1253.2 | 3 | |
| | 5290 | 9 | 99.3 | 14 | 1012.8 | 1 | |
| | 5290 | 10 | 88.6 | 8 | 1874.1 | 2 | |
| | 5290 | 11 | 97.4 | 11 | 1736.6 | 1 | |
| | 5290 | 12 | 84.0 | 6 | 1370.3 | 3 | |
| | 5290 | 13 | 58.8 | 19 | 1556.7 | 3 | |
| | 5290 | 14 | 53.0 | 6 | 1787.5 | 1 | |
| | 5290 | 15 | 55.7 | 7 | 1041.5 | 3 | |
| | 5290 | 16 | 65.2 | 6 | 1621.7 | 3 | |
| | 5290 | 17 | 62.2 | 19 | 1460.3 | 1 | |
| | 5290 | 18 | 65.7 | 17 | 1844.8 | 1 | |
| | 5290 | 19 | 93.7 | 6 | 1799.5 | 3 | |
| 16 | 5290 | 1 | 94.8 | 7 | 1338.2 | 1 | 0 |
| | 5290 | 2 | 81.2 | 8 | 1744.0 | 1 | |
| | 5290 | 3 | 94.3 | 7 | 1063.7 | 2 | |
| | 5290 | 4 | 79.6 | 7 | 1283.6 | 1 | |
| | 5290 | 5 | 66.2 | 18 | 1165.4 | 3 | |
| | 5290 | 6 | 92.1 | 6 | 1289.5 | 2 | |
| | 5290 | 7 | 58.8 | 14 | 1031.6 | 1 | |
| | 5290 | 8 | 86.6 | 18 | 1750.5 | 2 | |
| | 5290 | 9 | 88.9 | 16 | 1632.1 | 3 | |
| | 5290 | 10 | 91.7 | 10 | 1669.4 | 1 | |
| | 5290 | 11 | 52.5 | 8 | 1988.8 | 3 | |
| | 5290 | 12 | 93.6 | 16 | 1493.2 | 3 | |
| | 5290 | 13 | 95.7 | 19 | 1164.4 | 1 | |
| | 5290 | 14 | 61.7 | 9 | 1146.5 | 2 | |
| | 5290 | 15 | 59.6 | 18 | 1385.7 | 3 | |
| | 5290 | 16 | 61.1 | 18 | 1532.2 | 1 | |
| | 5290 | 17 | 81.7 | 8 | 1760.7 | 3 | |
| | 5290 | 18 | 50.3 | 5 | 1472.1 | 2 | |

| Test Mode | 802.11be EHT80 |
|---|---|
| Frequency | 5290 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 17 | 5290 | 1 | 70.6 | 12 | 1037.0 | 3 | 0 |
| | 5290 | 2 | 91.1 | 7 | 1886.9 | 3 | |
| | 5290 | 3 | 79.8 | 20 | 1033.9 | 3 | |
| | 5290 | 4 | 65.7 | 15 | 1650.4 | 2 | |
| | 5290 | 5 | 90.9 | 9 | 1242.7 | 1 | |
| | 5290 | 6 | 68.4 | 15 | 1334.8 | 3 | |
| | 5290 | 7 | 57.0 | 19 | 1815.0 | 3 | |
| | 5290 | 8 | 76.7 | 13 | 1756.1 | 1 | |
| | 5290 | 9 | 96.6 | 8 | 1598.6 | 3 | |
| | 5290 | 10 | 89.3 | 9 | 1913.9 | 1 | |
| | 5290 | 11 | 55.4 | 7 | 1164.8 | 2 | |
| | 5290 | 12 | 67.7 | 10 | 1234.5 | 3 | |
| | 5290 | 13 | 91.3 | 11 | 1397.4 | 1 | |
| | 5290 | 14 | 69.8 | 6 | 1847.3 | 1 | |
| | 5290 | 15 | 84.0 | 10 | 1190.4 | 3 | |
| | 5290 | 16 | 68.9 | 10 | 1857.9 | 1 | |
| | 5290 | 17 | 72.0 | 10 | 1080.8 | 1 | |
| 18 | 5290 | 1 | 63.7 | 9 | 1127.5 | 1 | 1 |
| | 5290 | 2 | 62.2 | 16 | 1338.4 | 2 | |
| | 5290 | 3 | 84.7 | 15 | 1071.5 | 1 | |
| | 5290 | 4 | 99.8 | 16 | 1945.8 | 2 | |
| | 5290 | 5 | 76.4 | 5 | 1662.9 | 3 | |
| | 5290 | 6 | 62.9 | 17 | 1962.6 | 3 | |
| | 5290 | 7 | 86.3 | 11 | 1877.6 | 2 | |
| | 5290 | 8 | 63.8 | 6 | 1917.1 | 3 | |
| | 5290 | 9 | 93.4 | 13 | 1100.4 | 3 | |
| | 5290 | 10 | 64.5 | 6 | 1875.9 | 1 | |
| | 5290 | 11 | 98.0 | 17 | 1332.1 | 3 | |
| | 5290 | 12 | 60.3 | 19 | 1200.6 | 1 | |
| | 5290 | 13 | 83.2 | 6 | 1967.7 | 3 | |
| | 5290 | 14 | 73.5 | 11 | 1947.1 | 1 | |
| | 5290 | 15 | 99.6 | 8 | 1875.6 | 1 | |

| Test Mode | 802.11be EHT80 |
|---|---|
| Frequency | 5290 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 19 | 5290 | 1 | 62.9 | 14 | 1820.3 | 3 | 1 |
| | 5290 | 2 | 71.2 | 19 | 1348.1 | 3 | |
| | 5290 | 3 | 82.1 | 7 | 1633.3 | 3 | |
| | 5290 | 4 | 94.5 | 15 | 1451.6 | 3 | |
| | 5290 | 5 | 56.9 | 7 | 1782.1 | 1 | |
| | 5290 | 6 | 65.9 | 11 | 1902.0 | 3 | |
| | 5290 | 7 | 87.5 | 8 | 1004.2 | 3 | |
| | 5290 | 8 | 59.8 | 10 | 1016.6 | 2 | |
| | 5290 | 9 | 78.2 | 18 | 1210.3 | 3 | |
| | 5290 | 10 | 87.7 | 8 | 1741.0 | 3 | |
| | 5290 | 11 | 58.2 | 9 | 1817.5 | 3 | |
| | 5290 | 12 | 55.6 | 12 | 1037.7 | 3 | |
| | 5290 | 13 | 67.4 | 8 | 1783.4 | 1 | |
| | 5290 | 14 | 64.2 | 15 | 1920.7 | 3 | |
| 20 | 5290 | 1 | 89.4 | 11 | 1918.1 | 2 | 1 |
| | 5290 | 2 | 95.2 | 8 | 1534.9 | 2 | |
| | 5290 | 3 | 87.1 | 13 | 1903.9 | 2 | |
| | 5290 | 4 | 61.8 | 19 | 1717.0 | 2 | |
| | 5290 | 5 | 74.3 | 10 | 1152.7 | 3 | |
| | 5290 | 6 | 56.0 | 16 | 1671.7 | 1 | |
| | 5290 | 7 | 67.0 | 10 | 1984.2 | 2 | |
| | 5290 | 8 | 74.8 | 20 | 1296.7 | 3 | |
| | 5290 | 9 | 97.3 | 12 | 1289.9 | 3 | |
| | 5290 | 10 | 98.0 | 12 | 1576.0 | 2 | |
| 21 | 5325 | 1 | 80.1 | 11 | 1233.4 | 3 | 1 |
| | 5321 | 2 | 99.6 | 19 | 1061.3 | 2 | |
| | 5322 | 3 | 92.9 | 17 | 1886.2 | 2 | |
| | 5323 | 4 | 60.0 | 15 | 1110.1 | 2 | |
| | 5323 | 5 | 58.7 | 15 | 1750.0 | 2 | |
| | 5324 | 6 | 92.4 | 13 | 1337.6 | 2 | |
| | 5323 | 7 | 52.5 | 15 | 1889.5 | 3 | |
| | 5323 | 8 | 80.5 | 14 | 1336.8 | 2 | |
| | 5324 | 9 | 90.4 | 13 | 1297.4 | 1 | |
| | 5324 | 10 | 92.4 | 12 | 1118.9 | 1 | |
| | 5321 | 11 | 71.1 | 19 | 1184.5 | 2 | |
| | 5323 | 12 | 73.8 | 16 | 1566.3 | 3 | |

| Test Mode | 802.11be EHT80 |
|---|---|
| Frequency | 5290 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 22 | 5321 | 1 | 96.3 | 19 | 1392.3 | 1 | 1 |
| | 5326 | 2 | 58.2 | 8 | 1457.1 | 3 | |
| | 5325 | 3 | 83.4 | 10 | 1908.0 | 3 | |
| | 5324 | 4 | 50.1 | 13 | 1577.3 | 1 | |
| | 5322 | 5 | 83.9 | 17 | 1629.1 | 3 | |
| | 5325 | 6 | 56.6 | 11 | 1296.8 | 2 | |
| | 5325 | 7 | 59.4 | 9 | 1631.2 | 2 | |
| | 5327 | 8 | 95.6 | 6 | 1152.6 | 2 | |
| | 5324 | 9 | 51.7 | 12 | 1528.7 | 2 | |
| 23 | 5325 | 1 | 51.5 | 9 | 1490.3 | 3 | 1 |
| | 5325 | 2 | 62.1 | 9 | 1871.9 | 3 | |
| | 5322 | 3 | 88.5 | 17 | 1042.4 | 2 | |
| | 5322 | 4 | 75.3 | 18 | 1282.1 | 3 | |
| | 5324 | 5 | 63.4 | 13 | 1602.8 | 2 | |
| | 5327 | 6 | 54.3 | 5 | 1691.5 | 2 | |
| | 5326 | 7 | 80.5 | 8 | 1092.1 | 2 | |
| | 5325 | 8 | 70.4 | 10 | 1209.1 | 2 | |
| | 5326 | 9 | 51.2 | 8 | 1516.9 | 1 | |
| | 5322 | 10 | 70.9 | 18 | 1607.3 | 3 | |
| | 5322 | 11 | 75.1 | 17 | 1896.8 | 1 | |
| | 5321 | 12 | 90.1 | 20 | 1266.7 | 3 | |
| | 5326 | 13 | 51.3 | 8 | 1166.8 | 1 | |
| | 5325 | 14 | 99.7 | 11 | 1792.9 | 2 | |
| | 5321 | 15 | 60.3 | 19 | 1350.9 | 1 | |
| 24 | 5325 | 1 | 64.4 | 10 | 1187.6 | 1 | 0 |
| | 5323 | 2 | 71.2 | 16 | 1032.8 | 2 | |
| | 5324 | 3 | 67.1 | 12 | 1039.8 | 1 | |
| | 5324 | 4 | 69.0 | 12 | 1767.2 | 1 | |
| | 5326 | 5 | 94.2 | 7 | 1160.1 | 1 | |
| | 5326 | 6 | 61.8 | 7 | 1287.7 | 3 | |
| | 5325 | 7 | 61.5 | 11 | 1896.0 | 1 | |
| | 5326 | 8 | 71.8 | 7 | 1796.5 | 3 | |
| | 5324 | 9 | 75.7 | 12 | 1393.5 | 2 | |
| | 5323 | 10 | 86.7 | 16 | 1217.2 | 3 | |
| | 5324 | 11 | 56.0 | 13 | 1002.0 | 2 | |
| | 5323 | 12 | 79.1 | 15 | 1725.0 | 2 | |
| | 5326 | 13 | 77.8 | 8 | 1209.8 | 2 | |
| | 5321 | 14 | 68.6 | 19 | 1265.7 | 2 | |

| Test Mode | 802.11be EHT80 |
|---|---|
| Frequency | 5290 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 25 | 5324 | 1 | 73.3 | 12 | 1234.4 | 3 | 1 |
| | 5323 | 2 | 96.5 | 14 | 1870.7 | 1 | |
| | 5321 | 3 | 69.5 | 19 | 1906.5 | 3 | |
| | 5322 | 4 | 85.5 | 17 | 1497.5 | 1 | |
| | 5327 | 5 | 59.3 | 5 | 1674.3 | 3 | |
| | 5324 | 6 | 97.3 | 12 | 1714.7 | 2 | |
| | 5323 | 7 | 73.9 | 16 | 1752.2 | 2 | |
| | 5321 | 8 | 55.9 | 19 | 1497.4 | 2 | |
| | 5324 | 9 | 56.8 | 13 | 1271.0 | 2 | |
| | 5327 | 10 | 66.3 | 5 | 1411.5 | 2 | |
| | 5327 | 11 | 73.9 | 6 | 1193.8 | 2 | |
| | 5323 | 12 | 93.3 | 16 | 1586.7 | 2 | |
| | 5321 | 13 | 86.2 | 19 | 1073.1 | 3 | |
| | 5327 | 14 | 85.7 | 6 | 1304.1 | 1 | |
| | 5321 | 15 | 56.1 | 20 | 1412.0 | 2 | |
| | 5323 | 16 | 84.2 | 16 | 1525.6 | 1 | |
| | 5322 | 17 | 78.3 | 17 | 1197.9 | 3 | |
| | 5325 | 18 | 72.0 | 11 | 1875.8 | 1 | |
| 26 | 5325 | 1 | 77.3 | 9 | 1916.3 | 3 | 0 |
| | 5321 | 2 | 79.3 | 20 | 1079.2 | 1 | |
| | 5327 | 3 | 95.9 | 6 | 1232.8 | 3 | |
| | 5325 | 4 | 94.9 | 11 | 1939.2 | 3 | |
| | 5324 | 5 | 66.0 | 12 | 1499.1 | 2 | |
| | 5327 | 6 | 59.4 | 5 | 1739.8 | 2 | |
| | 5322 | 7 | 86.7 | 18 | 1060.3 | 2 | |
| | 5323 | 8 | 72.8 | 14 | 1267.4 | 3 | |
| | 5321 | 9 | 56.8 | 20 | 1830.3 | 1 | |
| | 5326 | 10 | 74.5 | 8 | 1989.9 | 2 | |
| | 5323 | 11 | 53.3 | 15 | 1618.8 | 3 | |
| | 5324 | 12 | 53.8 | 13 | 1048.4 | 2 | |
| | 5325 | 13 | 51.5 | 10 | 1451.3 | 1 | |
| | 5325 | 14 | 78.6 | 11 | 1170.9 | 2 | |
| | 5322 | 15 | 51.7 | 17 | 1485.6 | 2 | |
| | 5323 | 16 | 90.0 | 14 | 1919.2 | 2 | |

| Test Mode | 802.11be EHT80 |
|---|---|
| Frequency | 5290 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 27 | 5327 | 1 | 79.2 | 6 | 1434.9 | 1 | 1 |
| | 5325 | 2 | 59.6 | 10 | 1080.0 | 3 | |
| | 5326 | 3 | 73.9 | 7 | 1286.7 | 3 | |
| | 5323 | 4 | 80.8 | 14 | 1168.1 | 1 | |
| | 5326 | 5 | 93.8 | 7 | 1619.8 | 2 | |
| | 5325 | 6 | 78.0 | 10 | 1488.4 | 3 | |
| | 5322 | 7 | 86.6 | 17 | 1893.9 | 3 | |
| | 5325 | 8 | 52.9 | 11 | 1941.2 | 3 | |
| | 5321 | 9 | 93.9 | 20 | 1661.8 | 2 | |
| | 5324 | 10 | 57.7 | 12 | 1631.0 | 1 | |
| | 5323 | 11 | 78.6 | 15 | 1724.3 | 3 | |
| | 5327 | 12 | 80.0 | 6 | 1062.1 | 1 | |
| | 5323 | 13 | 97.3 | 16 | 1341.9 | 1 | |
| | 5323 | 14 | 64.7 | 16 | 1503.7 | 3 | |
| | 5322 | 15 | 69.9 | 17 | 1552.1 | 3 | |
| | 5323 | 16 | 80.3 | 15 | 1914.1 | 3 | |
| | 5325 | 17 | 56.6 | 10 | 1607.4 | 2 | |
| | 5322 | 18 | 55.4 | 17 | 1448.8 | 3 | |
| | 5323 | 19 | 68.2 | 14 | 1291.6 | 2 | |
| | 5325 | 20 | 93.9 | 10 | 1304.1 | 1 | |

| Test Mode | 802.11be EHT80 |
|---|---|
| Frequency | 5290 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 28 | 5327 | 1 | 61.4 | 5 | 1338.5 | 2 | 1 |
| | 5326 | 2 | 90.9 | 7 | 1715.3 | 2 | |
| | 5327 | 3 | 64.6 | 5 | 1728.0 | 1 | |
| | 5323 | 4 | 65.4 | 14 | 1264.3 | 3 | |
| | 5325 | 5 | 55.5 | 11 | 1209.2 | 3 | |
| | 5325 | 6 | 95.3 | 11 | 1869.4 | 1 | |
| | 5324 | 7 | 82.8 | 13 | 1623.3 | 3 | |
| | 5322 | 8 | 78.1 | 17 | 1064.6 | 2 | |
| | 5323 | 9 | 82.6 | 15 | 1826.8 | 3 | |
| | 5325 | 10 | 57.6 | 11 | 1637.5 | 1 | |
| | 5322 | 11 | 70.4 | 18 | 1004.6 | 3 | |
| | 5324 | 12 | 76.1 | 12 | 1326.9 | 3 | |
| | 5325 | 13 | 58.9 | 10 | 1022.4 | 3 | |
| | 5325 | 14 | 74.6 | 9 | 1147.5 | 2 | |
| | 5322 | 15 | 96.7 | 18 | 1019.0 | 1 | |
| | 5322 | 16 | 61.6 | 18 | 1455.4 | 3 | |
| | 5322 | 17 | 95.4 | 18 | 1059.8 | 3 | |
| | 5323 | 18 | 52.4 | 15 | 1604.1 | 2 | |
| | 5323 | 19 | 95.6 | 16 | 1473.3 | 3 | |
| | 5323 | 20 | 51.5 | 16 | 1810.9 | 3 | |

| Test Mode | 802.11be EHT80 | | | | | | |
|---|---|---|---|---|---|---|---|
| Frequency | 5290 MHz | | | | | | |
| Radar Signal | Type 5 | | | | | | |
| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
| 29 | 5323 | 1 | 71.3 | 16 | 1854.6 | 3 | 1 |
| | 5324 | 2 | 92.5 | 13 | 1474.9 | 2 | |
| | 5321 | 3 | 75.3 | 19 | 1164.3 | 2 | |
| | 5322 | 4 | 87.6 | 18 | 1545.1 | 1 | |
| | 5327 | 5 | 57.6 | 6 | 1957.7 | 2 | |
| | 5325 | 6 | 56.3 | 9 | 1562.6 | 2 | |
| | 5325 | 7 | 52.0 | 11 | 1089.7 | 1 | |
| | 5321 | 8 | 55.7 | 20 | 1659.7 | 1 | |
| | 5322 | 9 | 77.2 | 17 | 1193.6 | 2 | |
| | 5324 | 10 | 64.6 | 12 | 1510.7 | 2 | |
| | 5326 | 11 | 98.9 | 8 | 1583.6 | 1 | |
| | 5325 | 12 | 64.3 | 10 | 1783.9 | 2 | |
| | 5322 | 13 | 80.8 | 18 | 1004.5 | 2 | |
| | 5324 | 14 | 58.5 | 12 | 1544.1 | 2 | |
| | 5325 | 15 | 99.3 | 9 | 1661.9 | 1 | |
| | 5322 | 16 | 82.5 | 18 | 1314.8 | 3 | |
| | 5327 | 17 | 77.5 | 6 | 1972.3 | 1 | |
| 30 | 5327 | 1 | 98.4 | 6 | 1842.8 | 1 | 1 |
| | 5325 | 2 | 67.3 | 11 | 1314.5 | 3 | |
| | 5326 | 3 | 68.6 | 8 | 1323.9 | 1 | |
| | 5323 | 4 | 52.2 | 15 | 1108.5 | 3 | |
| | 5322 | 5 | 87.6 | 18 | 1286.7 | 2 | |
| | 5326 | 6 | 87.9 | 7 | 1144.5 | 3 | |
| | 5321 | 7 | 53.3 | 19 | 1647.0 | 3 | |
| | 5326 | 8 | 87.5 | 7 | 1274.8 | 2 | |
| | 5321 | 9 | 88.3 | 20 | 1145.3 | 1 | |
| | 5322 | 10 | 52.6 | 18 | 1901.7 | 2 | |
| | 5325 | 11 | 93.5 | 9 | 1558.6 | 2 | |
| | 5323 | 12 | 97.7 | 14 | 1835.9 | 3 | |
| | 5323 | 13 | 69.3 | 16 | 1332.3 | 1 | |
| | 5321 | 14 | 59.3 | 19 | 1050.3 | 3 | |
| Detection Percentage (%) | | | | | | | 83.33 |

| Test Mode | 802.11be EHT80 |
|---|---|
| Frequency | 5290 MHz |
| Radar Signal | Type 6 |

| Trial # | Pulse Width (us) | PRI (us) | Pulses / Hop | Hopping Rate (kHz) | Hopping Sequence Length (ms) | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|
| 1 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 2 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 3 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 4 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 5 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 6 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 7 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 8 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 9 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 10 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 11 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 12 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 13 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 14 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 15 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 16 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 17 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 18 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 19 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 20 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 21 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 22 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 23 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 24 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 25 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 26 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 27 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 28 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 29 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 30 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| Detection Percentage (%) | | | | | | 100.00 |

| Test Mode | 802.11be EHT160 | | | | | |
|---|---|---|---|---|---|---|
| Frequency | 5250 MHz | | | | | |
| Radar Signal | Type 1 | | | | | |
| Trial # | Test Frequency (MHz) | Pulse Width (us) | PRI (us) | Number of Pluse | PRF (Hz) | 1=Detection ; 0=No Detection |
| 1 | 5250 | 1 | 718 | 74 | 1393 | 1 |
| 2 | 5250 | 1 | 938 | 57 | 1066 | 1 |
| 3 | 5250 | 1 | 538 | 99 | 1859 | 0 |
| 4 | 5250 | 1 | 638 | 83 | 1567 | 1 |
| 5 | 5250 | 1 | 838 | 63 | 1193 | 1 |
| 6 | 5250 | 1 | 778 | 68 | 1285 | 1 |
| 7 | 5250 | 1 | 858 | 62 | 1166 | 1 |
| 8 | 5250 | 1 | 738 | 72 | 1355 | 1 |
| 9 | 5250 | 1 | 638 | 83 | 1567 | 1 |
| 10 | 5250 | 1 | 818 | 65 | 1222 | 1 |
| 11 | 5250 | 1 | 3066 | 18 | 326 | 0 |
| 12 | 5250 | 1 | 758 | 70 | 1319 | 1 |
| 13 | 5250 | 1 | 678 | 78 | 1475 | 0 |
| 14 | 5250 | 1 | 838 | 63 | 1193 | 1 |
| 15 | 5250 | 1 | 738 | 72 | 1355 | 1 |
| 16 | 5250 | 1 | 1048 | 51 | 954 | 1 |
| 17 | 5250 | 1 | 2606 | 21 | 384 | 1 |
| 18 | 5250 | 1 | 2546 | 21 | 393 | 1 |
| 19 | 5250 | 1 | 2317 | 23 | 432 | 1 |
| 20 | 5250 | 1 | 1285 | 42 | 778 | 0 |
| 21 | 5250 | 1 | 1338 | 40 | 747 | 1 |
| 22 | 5250 | 1 | 613 | 87 | 1631 | 1 |
| 23 | 5250 | 1 | 1686 | 32 | 593 | 1 |
| 24 | 5250 | 1 | 2185 | 25 | 458 | 1 |
| 25 | 5250 | 1 | 2826 | 19 | 354 | 1 |
| 26 | 5250 | 1 | 2704 | 20 | 370 | 1 |
| 27 | 5250 | 1 | 2945 | 18 | 340 | 1 |
| 28 | 5250 | 1 | 659 | 81 | 1517 | 1 |
| 29 | 5250 | 1 | 1490 | 36 | 671 | 1 |
| 30 | 5250 | 1 | 2284 | 24 | 438 | 1 |
| Detection Percentage (%) | | | | | | 86.67 |

| Test Mode | 802.11be EHT160 | | | | | |
|---|---|---|---|---|---|---|
| Frequency | 5250 MHz | | | | | |
| Radar Signal | Type 2 | | | | | |
| Trial # | Test Frequency (MHz) | Pulse Width (us) | PRI (us) | Number of Pluse | PRF (Hz) | 1=Detection ; 0=No Detection |
| 1 | 5250 | 4.50 | 163.00 | 29 | 6135 | 0 |
| 2 | 5250 | 4.00 | 195.10 | 26 | 5126 | 1 |
| 3 | 5250 | 2.40 | 213.50 | 27 | 4684 | 1 |
| 4 | 5250 | 4.70 | 179.30 | 25 | 5577 | 1 |
| 5 | 5250 | 3.80 | 156.80 | 27 | 6378 | 1 |
| 6 | 5250 | 2.70 | 166.30 | 29 | 6013 | 1 |
| 7 | 5250 | 3.60 | 196.90 | 25 | 5079 | 1 |
| 8 | 5250 | 1.90 | 185.00 | 29 | 5405 | 0 |
| 9 | 5250 | 4.70 | 185.30 | 27 | 5397 | 1 |
| 10 | 5250 | 4.20 | 155.40 | 24 | 6435 | 1 |
| 11 | 5250 | 3.80 | 181.80 | 27 | 5501 | 1 |
| 12 | 5250 | 4.80 | 186.90 | 25 | 5350 | 1 |
| 13 | 5250 | 4.90 | 208.60 | 28 | 4794 | 1 |
| 14 | 5250 | 1.90 | 163.10 | 27 | 6131 | 1 |
| 15 | 5250 | 2.70 | 170.20 | 29 | 5875 | 1 |
| 16 | 5250 | 1.30 | 157.40 | 27 | 6353 | 1 |
| 17 | 5250 | 4.40 | 226.30 | 25 | 4419 | 1 |
| 18 | 5250 | 3.70 | 175.50 | 29 | 5698 | 1 |
| 19 | 5250 | 2.10 | 229.50 | 24 | 4357 | 1 |
| 20 | 5250 | 3.40 | 201.60 | 26 | 4960 | 0 |
| 21 | 5250 | 2.60 | 216.50 | 24 | 4619 | 1 |
| 22 | 5250 | 2.10 | 160.60 | 25 | 6227 | 1 |
| 23 | 5250 | 1.40 | 160.70 | 29 | 6223 | 0 |
| 24 | 5250 | 4.50 | 214.90 | 24 | 4653 | 1 |
| 25 | 5250 | 1.40 | 200.20 | 23 | 4995 | 1 |
| 26 | 5250 | 1.70 | 216.50 | 23 | 4619 | 1 |
| 27 | 5250 | 2.50 | 204.60 | 26 | 4888 | 1 |
| 28 | 5250 | 1.70 | 193.90 | 23 | 5157 | 1 |
| 29 | 5250 | 2.20 | 224.40 | 23 | 4456 | 1 |
| 30 | 5250 | 3.00 | 194.10 | 24 | 5152 | 0 |
| Detection Percentage (%) | | | | | | 83.33 |

| Test Mode | 802.11be EHT160 | | | | | |
|---|---|---|---|---|---|---|
| Frequency | 5250 MHz | | | | | |
| Radar Signal | Type 3 | | | | | |
| Trial # | Test Frequency (MHz) | Pulse Width (us) | PRI (us) | Number of Pluse | PRF (Hz) | 1=Detection ; 0=No Detection |
| 1 | 5250 | 8.30 | 329.80 | 17 | 3032.14 | 1 |
| 2 | 5250 | 9.50 | 271.70 | 16 | 3680.53 | 1 |
| 3 | 5250 | 8.90 | 428.50 | 18 | 2333.72 | 1 |
| 4 | 5250 | 7.10 | 238.60 | 18 | 4191.11 | 1 |
| 5 | 5250 | 8.20 | 452.00 | 17 | 2212.39 | 1 |
| 6 | 5250 | 7.70 | 355.80 | 18 | 2810.57 | 1 |
| 7 | 5250 | 8.00 | 382.40 | 18 | 2615.06 | 1 |
| 8 | 5250 | 7.60 | 250.40 | 18 | 3993.61 | 1 |
| 9 | 5250 | 9.70 | 243.80 | 16 | 4101.72 | 0 |
| 10 | 5250 | 7.30 | 235.10 | 16 | 4253.51 | 1 |
| 11 | 5250 | 7.90 | 454.60 | 17 | 2199.74 | 1 |
| 12 | 5250 | 7.70 | 499.10 | 16 | 2003.61 | 0 |
| 13 | 5250 | 6.80 | 380.80 | 17 | 2626.05 | 1 |
| 14 | 5250 | 9.20 | 239.00 | 16 | 4184.10 | 1 |
| 15 | 5250 | 7.70 | 334.80 | 16 | 2986.86 | 1 |
| 16 | 5250 | 7.80 | 497.20 | 17 | 2011.26 | 1 |
| 17 | 5250 | 6.40 | 440.80 | 18 | 2268.60 | 1 |
| 18 | 5250 | 7.00 | 459.30 | 18 | 2177.23 | 1 |
| 19 | 5250 | 8.50 | 323.90 | 16 | 3087.37 | 1 |
| 20 | 5250 | 9.40 | 415.20 | 16 | 2408.48 | 1 |
| 21 | 5250 | 7.90 | 448.40 | 18 | 2230.15 | 1 |
| 22 | 5250 | 9.30 | 469.30 | 17 | 2130.83 | 0 |
| 23 | 5250 | 6.50 | 291.10 | 18 | 3435.25 | 1 |
| 24 | 5250 | 8.10 | 257.50 | 18 | 3883.50 | 1 |
| 25 | 5250 | 8.60 | 493.80 | 17 | 2025.11 | 1 |
| 26 | 5250 | 6.40 | 313.00 | 17 | 3194.89 | 1 |
| 27 | 5250 | 9.80 | 360.90 | 17 | 2770.85 | 1 |
| 28 | 5250 | 8.70 | 258.90 | 17 | 3862.50 | 1 |
| 29 | 5250 | 8.20 | 294.30 | 18 | 3397.89 | 1 |
| 30 | 5250 | 7.00 | 317.00 | 18 | 3154.57 | 1 |
| Detection Percentage (%) | | | | | | 90.00 |

| Test Mode | 802.11be EHT160 | | | | | |
|---|---|---|---|---|---|---|
| Frequency | 5250 MHz | | | | | |
| Radar Signal | Type 4 | | | | | |
| Trial # | Test Frequency (MHz) | Pulse Width (us) | PRI (us) | Number of Pluse | PRF (Hz) | 1=Detection ; 0=No Detection |
| 1 | 5250 | 19.00 | 365.60 | 12 | 2735 | 1 |
| 2 | 5250 | 15.50 | 336.20 | 15 | 2974 | 1 |
| 3 | 5250 | 16.10 | 449.60 | 12 | 2224 | 1 |
| 4 | 5250 | 18.40 | 444.60 | 14 | 2249 | 1 |
| 5 | 5250 | 19.20 | 220.30 | 12 | 4539 | 0 |
| 6 | 5250 | 11.30 | 320.50 | 13 | 3120 | 1 |
| 7 | 5250 | 16.60 | 274.40 | 15 | 3644 | 1 |
| 8 | 5250 | 13.60 | 454.50 | 13 | 2200 | 1 |
| 9 | 5250 | 11.30 | 329.80 | 13 | 3032 | 1 |
| 10 | 5250 | 13.70 | 423.10 | 14 | 2364 | 1 |
| 11 | 5250 | 13.90 | 383.70 | 15 | 2606 | 1 |
| 12 | 5250 | 15.50 | 237.70 | 13 | 4207 | 1 |
| 13 | 5250 | 12.00 | 407.90 | 16 | 2452 | 1 |
| 14 | 5250 | 11.10 | 410.30 | 13 | 2437 | 1 |
| 15 | 5250 | 13.40 | 450.70 | 14 | 2219 | 1 |
| 16 | 5250 | 15.30 | 478.30 | 13 | 2091 | 1 |
| 17 | 5250 | 13.80 | 369.20 | 12 | 2709 | 1 |
| 18 | 5250 | 18.40 | 404.30 | 13 | 2473 | 1 |
| 19 | 5250 | 19.10 | 330.70 | 12 | 3024 | 1 |
| 20 | 5250 | 18.30 | 479.30 | 13 | 2086 | 0 |
| 21 | 5250 | 17.50 | 362.60 | 14 | 2758 | 0 |
| 22 | 5250 | 19.70 | 317.40 | 15 | 3151 | 1 |
| 23 | 5250 | 12.40 | 260.80 | 15 | 3834 | 1 |
| 24 | 5250 | 12.60 | 230.80 | 16 | 4333 | 1 |
| 25 | 5250 | 15.10 | 375.00 | 14 | 2667 | 0 |
| 26 | 5250 | 12.10 | 263.30 | 13 | 3798 | 1 |
| 27 | 5250 | 12.20 | 213.90 | 12 | 4675 | 1 |
| 28 | 5250 | 20.00 | 245.80 | 12 | 4068 | 1 |
| 29 | 5250 | 15.70 | 275.90 | 12 | 3625 | 1 |
| 30 | 5250 | 19.30 | 361.40 | 15 | 2767 | 1 |
| Detection Percentage (%) | | | | | | 86.67 |

| Test Mode | 802.11be EHT160 |
|---|---|
| Frequency | 5250 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 1 | 5212.5 | 1 | 87.0 | 6 | 1238.9 | 1 | 1 |
| | 5216.5 | 2 | 80.2 | 15 | 1073.7 | 2 | |
| | 5215.5 | 3 | 78.2 | 12 | 1033.0 | 1 | |
| | 5213.5 | 4 | 82.2 | 8 | 1891.9 | 3 | |
| | 5214.5 | 5 | 73.7 | 9 | 1417.0 | 2 | |
| | 5212.5 | 6 | 58.9 | 6 | 1268.8 | 1 | |
| | 5213.5 | 7 | 67.3 | 8 | 1676.6 | 1 | |
| | 5214.5 | 8 | 69.0 | 10 | 1303.6 | 1 | |
| | 5215.5 | 9 | 52.9 | 12 | 1561.2 | 3 | |
| | 5214.5 | 10 | 97.3 | 9 | 1914.8 | 2 | |
| | 5217.5 | 11 | 70.6 | 18 | 1208.8 | 2 | |
| 2 | 5218.5 | 1 | 76.5 | 19 | 1292.0 | 2 | 1 |
| | 5216.5 | 2 | 84.9 | 14 | 1531.6 | 1 | |
| | 5217.5 | 3 | 65.5 | 18 | 1429.2 | 1 | |
| | 5214.5 | 4 | 84.6 | 10 | 1174.6 | 2 | |
| | 5218.5 | 5 | 71.9 | 20 | 1342.4 | 1 | |
| | 5216.5 | 6 | 73.4 | 14 | 1479.6 | 2 | |
| | 5212.5 | 7 | 68.4 | 6 | 1351.3 | 2 | |
| | 5213.5 | 8 | 76.2 | 7 | 1740.1 | 1 | |
| | 5213.5 | 9 | 97.9 | 8 | 1310.2 | 2 | |
| | 5218.5 | 10 | 55.7 | 19 | 1991.5 | 3 | |
| | 5215.5 | 11 | 59.1 | 12 | 1011.1 | 2 | |
| | 5214.5 | 12 | 58.0 | 10 | 1318.2 | 2 | |
| 3 | 5216.5 | 1 | 55.3 | 14 | 1181.1 | 3 | 1 |
| | 5217.5 | 2 | 93.5 | 18 | 1071.0 | 3 | |
| | 5218.5 | 3 | 88.6 | 19 | 1504.4 | 1 | |
| | 5216.5 | 4 | 87.6 | 15 | 1646.6 | 3 | |
| | 5215.5 | 5 | 72.8 | 13 | 1699.7 | 2 | |
| | 5212.5 | 6 | 71.3 | 6 | 1152.3 | 3 | |
| | 5214.5 | 7 | 57.9 | 10 | 1271.7 | 3 | |
| | 5215.5 | 8 | 91.0 | 12 | 1027.4 | 1 | |
| | 5218.5 | 9 | 59.5 | 19 | 1973.1 | 2 | |
| | 5213.5 | 10 | 90.5 | 8 | 1833.8 | 2 | |
| | 5216.5 | 11 | 67.2 | 15 | 1029.8 | 3 | |
| | 5216.5 | 12 | 73.7 | 16 | 1334.0 | 3 | |
| | 5217.5 | 13 | 68.2 | 17 | 1569.7 | 1 | |

| Test Mode | 802.11be EHT160 |
|---|---|
| Frequency | 5250 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 4 | 5213.5 | 1 | 98.2 | 7 | 1269.8 | 3 | 1 |
| | 5214.5 | 2 | 68.7 | 10 | 1075.0 | 1 | |
| | 5214.5 | 3 | 65.4 | 11 | 1275.9 | 2 | |
| | 5216.5 | 4 | 91.3 | 15 | 1849.0 | 3 | |
| | 5214.5 | 5 | 54.7 | 10 | 1892.6 | 1 | |
| | 5213.5 | 6 | 50.7 | 8 | 1432.8 | 3 | |
| | 5217.5 | 7 | 50.3 | 17 | 1054.2 | 1 | |
| | 5216.5 | 8 | 93.0 | 15 | 1568.8 | 3 | |
| | 5216.5 | 9 | 58.6 | 15 | 1182.4 | 2 | |
| 5 | 5218.5 | 1 | 81.3 | 19 | 1188.1 | 3 | 1 |
| | 5212.5 | 2 | 62.1 | 5 | 1819.7 | 3 | |
| | 5213.5 | 3 | 54.0 | 8 | 1601.3 | 3 | |
| | 5212.5 | 4 | 88.5 | 5 | 1220.3 | 2 | |
| | 5215.5 | 5 | 55.9 | 12 | 1348.4 | 2 | |
| | 5217.5 | 6 | 72.5 | 18 | 1268.5 | 2 | |
| | 5214.5 | 7 | 50.3 | 9 | 1931.5 | 1 | |
| | 5214.5 | 8 | 95.0 | 9 | 1389.4 | 1 | |
| | 5214.5 | 9 | 76.7 | 9 | 1783.0 | 3 | |
| | 5215.5 | 10 | 82.5 | 13 | 1170.8 | 1 | |
| | 5217.5 | 11 | 62.9 | 18 | 1277.8 | 1 | |
| | 5216.5 | 12 | 53.1 | 16 | 1414.3 | 2 | |
| | 5212.5 | 13 | 81.1 | 6 | 1773.6 | 3 | |
| | 5212.5 | 14 | 88.1 | 5 | 1969.7 | 3 | |
| | 5216.5 | 15 | 57.9 | 16 | 1949.6 | 2 | |
| 6 | 5218.5 | 1 | 95.8 | 19 | 1184.8 | 3 | 1 |
| | 5218.5 | 2 | 56.9 | 19 | 1567.6 | 1 | |
| | 5215.5 | 3 | 98.1 | 12 | 1391.2 | 3 | |
| | 5218.5 | 4 | 87.5 | 19 | 1047.0 | 2 | |
| | 5215.5 | 5 | 55.2 | 13 | 1196.2 | 3 | |
| | 5214.5 | 6 | 59.2 | 9 | 1878.0 | 2 | |
| | 5213.5 | 7 | 56.4 | 8 | 1852.9 | 3 | |
| | 5214.5 | 8 | 53.1 | 9 | 1204.3 | 2 | |
| | 5214.5 | 9 | 98.5 | 11 | 1625.1 | 1 | |
| | 5218.5 | 10 | 55.1 | 19 | 1561.8 | 1 | |
| | 5216.5 | 11 | 64.7 | 15 | 1399.6 | 3 | |
| | 5215.5 | 12 | 58.7 | 13 | 1040.1 | 2 | |
| | 5216.5 | 13 | 58.2 | 16 | 1775.6 | 1 | |
| | 5218.5 | 14 | 63.9 | 19 | 1557.9 | 2 | |

| Test Mode | 802.11be EHT160 |
|---|---|
| Frequency | 5250 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 7 | 5218.5 | 1 | 70.6 | 19 | 1383.6 | 1 | 1 |
| | 5217.5 | 2 | 84.1 | 18 | 1844.9 | 1 | |
| | 5215.5 | 3 | 93.0 | 13 | 1798.4 | 2 | |
| | 5213.5 | 4 | 67.0 | 7 | 1922.4 | 3 | |
| | 5213.5 | 5 | 50.4 | 7 | 1665.5 | 2 | |
| | 5214.5 | 6 | 56.5 | 11 | 1407.3 | 2 | |
| | 5213.5 | 7 | 62.0 | 8 | 1724.7 | 2 | |
| | 5217.5 | 8 | 70.4 | 17 | 1913.0 | 3 | |
| | 5213.5 | 9 | 98.3 | 7 | 1806.4 | 2 | |
| | 5212.5 | 10 | 93.9 | 6 | 1653.5 | 1 | |
| | 5216.5 | 11 | 53.3 | 15 | 1727.1 | 3 | |
| | 5214.5 | 12 | 87.8 | 10 | 1526.0 | 3 | |
| | 5214.5 | 13 | 91.7 | 9 | 1338.7 | 3 | |
| | 5212.5 | 14 | 68.4 | 6 | 1044.2 | 3 | |
| | 5216.5 | 15 | 75.2 | 16 | 1968.0 | 3 | |
| | 5217.5 | 16 | 89.7 | 18 | 1009.4 | 2 | |
| | 5216.5 | 17 | 63.0 | 16 | 1264.9 | 1 | |
| 8 | 5212.5 | 1 | 95.5 | 6 | 1610.0 | 2 | 0 |
| | 5214.5 | 2 | 84.3 | 10 | 1791.6 | 3 | |
| | 5215.5 | 3 | 95.5 | 12 | 1318.3 | 3 | |
| | 5216.5 | 4 | 78.2 | 14 | 1747.6 | 2 | |
| | 5216.5 | 5 | 86.2 | 15 | 1853.1 | 1 | |
| | 5213.5 | 6 | 78.1 | 8 | 1608.0 | 2 | |
| | 5217.5 | 7 | 85.5 | 18 | 1042.9 | 1 | |
| | 5218.5 | 8 | 88.0 | 19 | 1141.9 | 1 | |
| | 5214.5 | 9 | 77.9 | 10 | 1882.1 | 3 | |
| | 5212.5 | 10 | 70.0 | 6 | 1766.8 | 3 | |
| | 5215.5 | 11 | 69.6 | 13 | 1511.9 | 1 | |
| | 5216.5 | 12 | 93.0 | 15 | 1193.6 | 1 | |
| | 5216.5 | 13 | 62.9 | 14 | 1563.1 | 1 | |
| | 5212.5 | 14 | 99.1 | 6 | 1545.6 | 3 | |
| | 5215.5 | 15 | 65.9 | 13 | 1288.6 | 2 | |
| | 5212.5 | 16 | 54.9 | 5 | 1832.3 | 2 | |
| | 5215.5 | 17 | 61.6 | 13 | 1278.1 | 3 | |
| | 5216.5 | 18 | 78.5 | 15 | 1651.3 | 3 | |

| Test Mode | 802.11be EHT160 |
|---|---|
| Frequency | 5250 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 9 | 5218.5 | 1 | 76.3 | 19 | 1576.2 | 3 | 1 |
| | 5215.5 | 2 | 76.1 | 12 | 1474.1 | 2 | |
| | 5217.5 | 3 | 77.8 | 18 | 1275.0 | 1 | |
| | 5214.5 | 4 | 55.9 | 11 | 1651.6 | 3 | |
| | 5216.5 | 5 | 69.0 | 16 | 1498.2 | 1 | |
| | 5218.5 | 6 | 64.8 | 20 | 1729.3 | 2 | |
| | 5214.5 | 7 | 68.9 | 11 | 1620.8 | 1 | |
| | 5213.5 | 8 | 66.8 | 7 | 1614.1 | 2 | |
| | 5215.5 | 9 | 77.8 | 12 | 1882.1 | 1 | |
| | 5217.5 | 10 | 88.6 | 17 | 1947.9 | 3 | |
| | 5213.5 | 11 | 88.5 | 8 | 1739.5 | 1 | |
| | 5216.5 | 12 | 60.7 | 14 | 1493.7 | 1 | |
| | 5213.5 | 13 | 91.7 | 8 | 1165.6 | 3 | |
| | 5215.5 | 14 | 68.0 | 13 | 1764.5 | 3 | |
| | 5215.5 | 15 | 88.2 | 13 | 1715.8 | 2 | |
| | 5217.5 | 16 | 89.2 | 17 | 1459.6 | 2 | |
| | 5218.5 | 17 | 68.2 | 19 | 1930.8 | 2 | |
| | 5218.5 | 18 | 74.0 | 19 | 1323.8 | 3 | |
| | 5216.5 | 19 | 50.5 | 14 | 1747.5 | 2 | |
| 10 | 5214.5 | 1 | 86.2 | 9 | 1204.4 | 1 | 1 |
| | 5214.5 | 2 | 70.6 | 10 | 1629.2 | 3 | |
| | 5214.5 | 3 | 64.5 | 10 | 1844.0 | 3 | |
| | 5214.5 | 4 | 89.1 | 10 | 1174.9 | 3 | |
| | 5214.5 | 5 | 57.1 | 11 | 1094.4 | 2 | |
| | 5217.5 | 6 | 79.9 | 18 | 1088.7 | 2 | |
| | 5213.5 | 7 | 91.3 | 7 | 1712.7 | 1 | |
| | 5216.5 | 8 | 73.8 | 15 | 1435.3 | 1 | |

| Test Mode | 802.11be EHT160 |
|---|---|
| Frequency | 5250 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 11 | 5250 | 1 | 95.4 | 19 | 1608.5 | 1 | 1 |
| | 5250 | 2 | 65.2 | 19 | 1594.9 | 3 | |
| | 5250 | 3 | 82.4 | 10 | 1564.2 | 1 | |
| | 5250 | 4 | 83.6 | 20 | 1919.1 | 2 | |
| | 5250 | 5 | 77.0 | 9 | 1992.9 | 1 | |
| | 5250 | 6 | 84.0 | 9 | 1773.1 | 3 | |
| | 5250 | 7 | 56.2 | 20 | 1481.9 | 3 | |
| | 5250 | 8 | 59.5 | 17 | 1380.6 | 3 | |
| | 5250 | 9 | 57.1 | 8 | 1805.1 | 2 | |
| | 5250 | 10 | 88.6 | 10 | 1567.1 | 1 | |
| | 5250 | 11 | 63.6 | 15 | 1534.4 | 2 | |
| | 5250 | 12 | 96.7 | 7 | 1479.7 | 2 | |
| | 5250 | 13 | 54.8 | 14 | 1382.4 | 1 | |
| | 5250 | 14 | 73.9 | 20 | 1096.0 | 1 | |
| | 5250 | 15 | 71.1 | 7 | 1532.7 | 3 | |
| | 5250 | 16 | 95.2 | 14 | 1172.2 | 1 | |
| 12 | 5250 | 1 | 71.5 | 6 | 1530.4 | 1 | 1 |
| | 5250 | 2 | 66.5 | 12 | 1478.3 | 1 | |
| | 5250 | 3 | 97.9 | 14 | 1271.8 | 1 | |
| | 5250 | 4 | 63.9 | 14 | 1834.3 | 3 | |
| | 5250 | 5 | 87.7 | 9 | 1281.4 | 2 | |
| | 5250 | 6 | 80.0 | 12 | 1995.0 | 2 | |
| | 5250 | 7 | 85.6 | 6 | 1765.2 | 1 | |
| | 5250 | 8 | 86.9 | 11 | 1260.0 | 3 | |
| | 5250 | 9 | 63.7 | 12 | 1181.0 | 1 | |
| | 5250 | 10 | 63.3 | 12 | 1553.7 | 2 | |
| | 5250 | 11 | 65.9 | 5 | 1229.3 | 3 | |
| | 5250 | 12 | 69.9 | 9 | 1345.2 | 3 | |
| | 5250 | 13 | 89.1 | 8 | 1035.8 | 1 | |
| | 5250 | 14 | 94.8 | 5 | 1116.8 | 2 | |
| | 5250 | 15 | 58.0 | 18 | 1526.7 | 2 | |
| | 5250 | 16 | 72.6 | 18 | 1040.3 | 2 | |
| | 5250 | 17 | 63.6 | 10 | 1179.7 | 1 | |
| | 5250 | 18 | 85.3 | 8 | 1521.9 | 2 | |
| | 5250 | 19 | 61.6 | 17 | 1251.6 | 2 | |
| | 5250 | 20 | 57.6 | 13 | 1258.0 | 1 | |

| Test Mode | 802.11be EHT160 |
|---|---|
| Frequency | 5250 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 13 | 5250 | 1 | 66.7 | 10 | 1228.8 | 1 | 1 |
| | 5250 | 2 | 98.0 | 12 | 1182.5 | 3 | |
| | 5250 | 3 | 94.1 | 7 | 1460.2 | 2 | |
| | 5250 | 4 | 66.4 | 14 | 1984.5 | 3 | |
| | 5250 | 5 | 51.9 | 8 | 1177.4 | 2 | |
| | 5250 | 6 | 96.8 | 8 | 1013.2 | 2 | |
| | 5250 | 7 | 67.2 | 18 | 1972.5 | 1 | |
| | 5250 | 8 | 52.5 | 8 | 1638.9 | 1 | |
| | 5250 | 9 | 55.9 | 17 | 1572.9 | 1 | |
| | 5250 | 10 | 85.5 | 19 | 1058.6 | 1 | |
| 14 | 5250 | 1 | 68.7 | 12 | 1873.2 | 3 | 0 |
| | 5250 | 2 | 76.8 | 10 | 1209.1 | 3 | |
| | 5250 | 3 | 66.2 | 19 | 1160.6 | 3 | |
| | 5250 | 4 | 57.1 | 10 | 1123.6 | 2 | |
| | 5250 | 5 | 84.1 | 5 | 1490.4 | 3 | |
| | 5250 | 6 | 56.1 | 13 | 1966.7 | 2 | |
| | 5250 | 7 | 91.5 | 20 | 1102.8 | 2 | |
| | 5250 | 8 | 66.9 | 12 | 1963.0 | 1 | |
| | 5250 | 9 | 89.1 | 17 | 1581.8 | 3 | |
| | 5250 | 10 | 85.2 | 9 | 1118.0 | 3 | |
| | 5250 | 11 | 53.0 | 8 | 1009.8 | 2 | |
| | 5250 | 12 | 87.6 | 18 | 1065.6 | 3 | |
| | 5250 | 13 | 70.1 | 19 | 1596.9 | 2 | |
| | 5250 | 14 | 95.2 | 14 | 1801.4 | 1 | |
| | 5250 | 15 | 68.6 | 10 | 1310.0 | 1 | |
| | 5250 | 16 | 66.3 | 15 | 1548.4 | 2 | |
| | 5250 | 17 | 92.6 | 13 | 1367.0 | 3 | |
| | 5250 | 18 | 92.0 | 9 | 1253.3 | 3 | |
| | 5250 | 19 | 71.2 | 19 | 1931.5 | 2 | |
| | 5250 | 20 | 96.2 | 16 | 1317.3 | 1 | |

| Test Mode | 802.11be EHT160 |
|---|---|
| Frequency | 5250 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 15 | 5250 | 1 | 76.6 | 9 | 1643.8 | 2 | 0 |
| | 5250 | 2 | 77.0 | 16 | 1947.2 | 1 | |
| | 5250 | 3 | 83.6 | 9 | 1960.5 | 1 | |
| | 5250 | 4 | 62.3 | 15 | 1496.9 | 2 | |
| | 5250 | 5 | 91.2 | 15 | 1666.9 | 3 | |
| | 5250 | 6 | 91.0 | 17 | 1355.9 | 3 | |
| | 5250 | 7 | 99.0 | 15 | 1005.8 | 1 | |
| | 5250 | 8 | 95.8 | 18 | 1273.1 | 2 | |
| | 5250 | 9 | 84.0 | 15 | 1505.5 | 2 | |
| | 5250 | 10 | 80.1 | 15 | 1193.4 | 1 | |
| | 5250 | 11 | 55.1 | 7 | 1276.8 | 2 | |
| | 5250 | 12 | 76.6 | 10 | 1333.0 | 2 | |
| | 5250 | 13 | 50.6 | 14 | 1344.9 | 1 | |
| | 5250 | 14 | 52.4 | 18 | 1075.7 | 2 | |
| | 5250 | 15 | 58.1 | 5 | 1926.2 | 1 | |
| | 5250 | 16 | 58.3 | 14 | 1316.3 | 1 | |
| | 5250 | 17 | 76.3 | 6 | 1835.5 | 1 | |
| | 5250 | 18 | 71.7 | 7 | 1761.0 | 1 | |
| | 5250 | 19 | 88.3 | 16 | 1383.6 | 3 | |
| 16 | 5250 | 1 | 89.4 | 15 | 1527.5 | 3 | 1 |
| | 5250 | 2 | 62.0 | 9 | 1188.4 | 1 | |
| | 5250 | 3 | 61.0 | 7 | 1088.6 | 1 | |
| | 5250 | 4 | 95.7 | 11 | 1830.3 | 2 | |
| | 5250 | 5 | 95.8 | 9 | 1606.8 | 3 | |
| | 5250 | 6 | 52.0 | 18 | 1679.1 | 3 | |
| | 5250 | 7 | 96.5 | 18 | 1348.5 | 1 | |
| | 5250 | 8 | 50.6 | 19 | 1978.4 | 3 | |
| | 5250 | 9 | 91.3 | 13 | 1800.1 | 3 | |
| | 5250 | 10 | 89.6 | 10 | 1321.6 | 3 | |
| | 5250 | 11 | 76.2 | 8 | 1214.4 | 1 | |
| | 5250 | 12 | 75.3 | 10 | 1159.7 | 1 | |
| | 5250 | 13 | 86.6 | 12 | 1456.2 | 1 | |
| | 5250 | 14 | 68.2 | 14 | 1895.9 | 3 | |
| | 5250 | 15 | 69.2 | 16 | 1446.6 | 1 | |
| | 5250 | 16 | 71.9 | 12 | 1640.1 | 3 | |
| | 5250 | 17 | 75.7 | 10 | 1277.2 | 3 | |
| | 5250 | 18 | 82.7 | 11 | 1161.9 | 3 | |

| Test Mode | 802.11be EHT160 |
|---|---|
| Frequency | 5250 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 17 | 5250 | 1 | 97.0 | 18 | 1629.8 | 1 | 1 |
| | 5250 | 2 | 82.0 | 8 | 1128.5 | 2 | |
| | 5250 | 3 | 83.2 | 6 | 1374.7 | 2 | |
| | 5250 | 4 | 76.7 | 11 | 1887.4 | 2 | |
| | 5250 | 5 | 96.0 | 7 | 1908.8 | 3 | |
| | 5250 | 6 | 95.1 | 16 | 1673.7 | 2 | |
| | 5250 | 7 | 90.7 | 16 | 1134.3 | 2 | |
| | 5250 | 8 | 55.9 | 19 | 1878.4 | 1 | |
| | 5250 | 9 | 67.1 | 12 | 1160.5 | 1 | |
| | 5250 | 10 | 76.9 | 5 | 1689.3 | 3 | |
| | 5250 | 11 | 51.1 | 12 | 1054.1 | 2 | |
| | 5250 | 12 | 84.8 | 6 | 1644.7 | 3 | |
| | 5250 | 13 | 84.7 | 8 | 1867.1 | 3 | |
| | 5250 | 14 | 73.7 | 11 | 1355.6 | 2 | |
| | 5250 | 15 | 65.0 | 8 | 1417.2 | 1 | |
| | 5250 | 16 | 64.1 | 10 | 1438.6 | 2 | |
| | 5250 | 17 | 50.7 | 12 | 1973.5 | 3 | |
| 18 | 5250 | 1 | 96.3 | 8 | 1694.7 | 2 | 1 |
| | 5250 | 2 | 95.9 | 8 | 1589.5 | 1 | |
| | 5250 | 3 | 50.9 | 13 | 1044.9 | 3 | |
| | 5250 | 4 | 98.1 | 15 | 1098.2 | 1 | |
| | 5250 | 5 | 68.8 | 20 | 1236.7 | 2 | |
| | 5250 | 6 | 86.3 | 14 | 1517.4 | 1 | |
| | 5250 | 7 | 69.7 | 18 | 1992.9 | 1 | |
| | 5250 | 8 | 94.0 | 20 | 1315.9 | 1 | |
| | 5250 | 9 | 59.0 | 20 | 1208.2 | 3 | |
| | 5250 | 10 | 61.1 | 17 | 1154.9 | 2 | |
| | 5250 | 11 | 68.9 | 11 | 1315.1 | 2 | |
| | 5250 | 12 | 82.9 | 18 | 1753.9 | 3 | |
| | 5250 | 13 | 84.5 | 7 | 1851.2 | 2 | |
| | 5250 | 14 | 66.9 | 11 | 1619.4 | 2 | |
| | 5250 | 15 | 57.2 | 20 | 1917.5 | 2 | |

| Test Mode | 802.11be EHT160 |
|---|---|
| Frequency | 5250 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 19 | 5250 | 1 | 54.3 | 16 | 1713.0 | 2 | 1 |
| | 5250 | 2 | 77.5 | 17 | 1033.6 | 2 | |
| | 5250 | 3 | 65.5 | 7 | 1332.6 | 3 | |
| | 5250 | 4 | 68.4 | 14 | 1620.9 | 1 | |
| | 5250 | 5 | 78.0 | 14 | 1770.6 | 3 | |
| | 5250 | 6 | 72.2 | 6 | 1012.9 | 2 | |
| | 5250 | 7 | 94.5 | 12 | 1302.4 | 1 | |
| | 5250 | 8 | 97.3 | 8 | 1414.1 | 1 | |
| | 5250 | 9 | 89.0 | 13 | 1017.1 | 1 | |
| | 5250 | 10 | 97.4 | 11 | 1442.6 | 3 | |
| | 5250 | 11 | 82.4 | 6 | 1637.2 | 2 | |
| | 5250 | 12 | 70.4 | 10 | 1551.0 | 1 | |
| | 5250 | 13 | 89.7 | 10 | 1401.5 | 2 | |
| | 5250 | 14 | 51.8 | 11 | 1611.6 | 1 | |
| 20 | 5250 | 1 | 67.5 | 17 | 1243.9 | 1 | 1 |
| | 5250 | 2 | 98.0 | 8 | 1308.6 | 2 | |
| | 5250 | 3 | 69.8 | 15 | 1488.4 | 1 | |
| | 5250 | 4 | 80.1 | 6 | 1855.1 | 2 | |
| | 5250 | 5 | 54.1 | 18 | 1666.8 | 1 | |
| | 5250 | 6 | 78.6 | 6 | 1143.4 | 1 | |
| | 5250 | 7 | 79.5 | 12 | 1977.6 | 3 | |
| | 5250 | 8 | 62.3 | 13 | 1185.7 | 3 | |
| | 5250 | 9 | 86.4 | 5 | 1100.1 | 1 | |
| | 5250 | 10 | 89.1 | 13 | 1564.5 | 3 | |
| 21 | 5287.5 | 1 | 64.3 | 5 | 1615.4 | 3 | 1 |
| | 5286.5 | 2 | 99.7 | 7 | 1958.1 | 1 | |
| | 5281.5 | 3 | 93.1 | 19 | 1138.8 | 2 | |
| | 5285.5 | 4 | 93.9 | 10 | 1129.3 | 3 | |
| | 5287.5 | 5 | 91.3 | 6 | 1305.1 | 3 | |
| | 5285.5 | 6 | 77.5 | 9 | 1679.1 | 1 | |
| | 5281.5 | 7 | 78.4 | 19 | 1818.8 | 2 | |
| | 5285.5 | 8 | 93.9 | 10 | 1035.0 | 2 | |
| | 5282.5 | 9 | 99.8 | 18 | 1200.5 | 3 | |
| | 5284.5 | 10 | 51.6 | 12 | 1970.5 | 2 | |
| | 5286.5 | 11 | 85.9 | 7 | 1595.6 | 3 | |
| | 5281.5 | 12 | 54.0 | 19 | 1736.1 | 2 | |

| Test Mode | 802.11be EHT160 |
|---|---|
| Frequency | 5250 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 22 | 5287.5 | 1 | 87.2 | 6 | 1304.3 | 1 | 1 |
| | 5286.5 | 2 | 82.6 | 7 | 1019.1 | 2 | |
| | 5283.5 | 3 | 60.6 | 14 | 1444.3 | 3 | |
| | 5283.5 | 4 | 55.2 | 15 | 1167.1 | 3 | |
| | 5287.5 | 5 | 73.8 | 6 | 1185.6 | 1 | |
| | 5283.5 | 6 | 52.4 | 15 | 1424.7 | 2 | |
| | 5285.5 | 7 | 81.0 | 9 | 1238.4 | 3 | |
| | 5282.5 | 8 | 56.1 | 18 | 1538.5 | 3 | |
| | 5282.5 | 9 | 84.0 | 18 | 1403.4 | 2 | |
| 23 | 5287.5 | 1 | 93.8 | 6 | 1064.2 | 3 | 1 |
| | 5282.5 | 2 | 71.2 | 17 | 1104.4 | 2 | |
| | 5285.5 | 3 | 89.8 | 10 | 1182.8 | 1 | |
| | 5282.5 | 4 | 86.1 | 17 | 1009.6 | 2 | |
| | 5285.5 | 5 | 71.4 | 9 | 1125.5 | 3 | |
| | 5283.5 | 6 | 81.9 | 15 | 1916.7 | 1 | |
| | 5286.5 | 7 | 64.1 | 7 | 1118.3 | 2 | |
| | 5282.5 | 8 | 63.6 | 18 | 1889.2 | 2 | |
| | 5285.5 | 9 | 80.0 | 10 | 1755.7 | 3 | |
| | 5284.5 | 10 | 81.4 | 12 | 1468.8 | 3 | |
| | 5282.5 | 11 | 53.4 | 18 | 1870.8 | 2 | |
| | 5286.5 | 12 | 80.0 | 7 | 1974.6 | 1 | |
| | 5282.5 | 13 | 78.5 | 18 | 1302.7 | 3 | |
| | 5287.5 | 14 | 86.7 | 6 | 1856.6 | 1 | |
| | 5284.5 | 15 | 83.4 | 12 | 1210.8 | 2 | |
| 24 | 5282.5 | 1 | 93.9 | 18 | 1990.4 | 2 | 1 |
| | 5287.5 | 2 | 63.6 | 6 | 1645.3 | 2 | |
| | 5285.5 | 3 | 97.3 | 11 | 1234.1 | 1 | |
| | 5283.5 | 4 | 71.3 | 15 | 1270.4 | 3 | |
| | 5281.5 | 5 | 65.5 | 19 | 1059.5 | 2 | |
| | 5285.5 | 6 | 84.8 | 11 | 1814.2 | 2 | |
| | 5284.5 | 7 | 65.1 | 13 | 1538.8 | 3 | |
| | 5283.5 | 8 | 88.8 | 16 | 1649.3 | 3 | |
| | 5282.5 | 9 | 70.3 | 18 | 1981.0 | 2 | |
| | 5282.5 | 10 | 55.0 | 17 | 1467.3 | 1 | |
| | 5283.5 | 11 | 87.0 | 14 | 1900.8 | 2 | |
| | 5285.5 | 12 | 61.8 | 11 | 1678.8 | 3 | |
| | 5286.5 | 13 | 75.3 | 8 | 1189.2 | 2 | |
| | 5281.5 | 14 | 82.3 | 19 | 1659.8 | 3 | |

| Test Mode | 802.11be EHT160 |
|---|---|
| Frequency | 5250 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 25 | 5286.5 | 1 | 84.7 | 7 | 1781.1 | 3 | 0 |
| | 5282.5 | 2 | 85.6 | 18 | 1948.2 | 3 | |
| | 5284.5 | 3 | 82.8 | 13 | 1240.2 | 3 | |
| | 5285.5 | 4 | 81.2 | 11 | 1600.2 | 3 | |
| | 5283.5 | 5 | 59.7 | 14 | 1289.9 | 2 | |
| | 5285.5 | 6 | 95.4 | 11 | 1161.8 | 3 | |
| | 5284.5 | 7 | 93.2 | 13 | 1087.0 | 1 | |
| | 5282.5 | 8 | 52.8 | 17 | 1717.8 | 3 | |
| | 5286.5 | 9 | 50.9 | 7 | 1573.1 | 2 | |
| | 5285.5 | 10 | 83.9 | 11 | 1994.2 | 3 | |
| | 5281.5 | 11 | 65.6 | 19 | 1096.2 | 1 | |
| | 5282.5 | 12 | 54.0 | 18 | 1112.1 | 1 | |
| | 5286.5 | 13 | 99.0 | 7 | 1446.6 | 2 | |
| | 5284.5 | 14 | 97.0 | 13 | 1526.3 | 3 | |
| | 5287.5 | 15 | 71.5 | 5 | 1007.7 | 1 | |
| | 5286.5 | 16 | 79.4 | 8 | 1478.1 | 1 | |
| | 5284.5 | 17 | 79.6 | 12 | 1708.0 | 1 | |
| | 5282.5 | 18 | 68.3 | 17 | 1713.0 | 3 | |
| 26 | 5283.5 | 1 | 75.3 | 14 | 1383.1 | 3 | 1 |
| | 5286.5 | 2 | 58.6 | 7 | 1262.2 | 1 | |
| | 5286.5 | 3 | 78.9 | 7 | 1917.5 | 3 | |
| | 5283.5 | 4 | 52.6 | 14 | 1853.8 | 3 | |
| | 5285.5 | 5 | 66.4 | 11 | 1825.3 | 2 | |
| | 5281.5 | 6 | 62.6 | 20 | 1144.0 | 2 | |
| | 5284.5 | 7 | 57.3 | 13 | 1888.9 | 3 | |
| | 5283.5 | 8 | 61.4 | 14 | 1530.6 | 3 | |
| | 5282.5 | 9 | 83.9 | 18 | 1649.5 | 2 | |
| | 5286.5 | 10 | 59.6 | 8 | 1644.2 | 3 | |
| | 5283.5 | 11 | 69.7 | 16 | 1158.5 | 3 | |
| | 5285.5 | 12 | 81.8 | 10 | 1928.4 | 3 | |
| | 5286.5 | 13 | 63.4 | 7 | 1455.0 | 2 | |
| | 5287.5 | 14 | 91.0 | 6 | 1305.0 | 2 | |
| | 5281.5 | 15 | 54.2 | 19 | 1839.0 | 3 | |
| | 5284.5 | 16 | 54.4 | 13 | 1020.7 | 1 | |

| Test Mode | 802.11be EHT160 |
|---|---|
| Frequency | 5250 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 27 | 5283.5 | 1 | 56.4 | 14 | 1401.5 | 1 | 1 |
| | 5282.5 | 2 | 59.0 | 18 | 1355.6 | 1 | |
| | 5286.5 | 3 | 99.4 | 8 | 1892.3 | 3 | |
| | 5287.5 | 4 | 57.9 | 6 | 1281.3 | 3 | |
| | 5281.5 | 5 | 63.0 | 19 | 1806.1 | 2 | |
| | 5283.5 | 6 | 61.5 | 14 | 1356.9 | 1 | |
| | 5287.5 | 7 | 99.1 | 6 | 1185.7 | 2 | |
| | 5282.5 | 8 | 90.0 | 17 | 1057.4 | 3 | |
| | 5284.5 | 9 | 58.1 | 13 | 1217.9 | 2 | |
| | 5282.5 | 10 | 93.3 | 18 | 1469.6 | 3 | |
| | 5283.5 | 11 | 72.2 | 16 | 1194.4 | 3 | |
| | 5282.5 | 12 | 99.8 | 17 | 1902.9 | 1 | |
| | 5286.5 | 13 | 66.2 | 7 | 1956.5 | 2 | |
| | 5285.5 | 14 | 53.6 | 11 | 1987.3 | 1 | |
| | 5284.5 | 15 | 68.2 | 13 | 1870.4 | 3 | |
| | 5284.5 | 16 | 87.5 | 12 | 1891.6 | 3 | |
| | 5285.5 | 17 | 50.3 | 10 | 1877.2 | 3 | |
| | 5281.5 | 18 | 60.6 | 19 | 1953.5 | 2 | |
| | 5285.5 | 19 | 74.2 | 10 | 1819.2 | 2 | |
| | 5286.5 | 20 | 53.7 | 7 | 1084.4 | 2 | |

| Test Mode | 802.11be EHT160 |
|---|---|
| Frequency | 5250 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 28 | 5283.5 | 1 | 65.3 | 14 | 1693.2 | 2 | 1 |
| | 5285.5 | 2 | 85.9 | 11 | 1647.1 | 3 | |
| | 5282.5 | 3 | 94.2 | 18 | 1392.9 | 2 | |
| | 5285.5 | 4 | 61.4 | 9 | 1118.8 | 3 | |
| | 5281.5 | 5 | 94.7 | 19 | 1480.6 | 2 | |
| | 5281.5 | 6 | 99.4 | 20 | 1674.4 | 2 | |
| | 5286.5 | 7 | 84.4 | 8 | 1510.3 | 3 | |
| | 5282.5 | 8 | 59.3 | 18 | 1581.1 | 1 | |
| | 5283.5 | 9 | 57.8 | 16 | 1959.5 | 2 | |
| | 5287.5 | 10 | 86.5 | 6 | 1443.5 | 2 | |
| | 5283.5 | 11 | 86.9 | 15 | 1779.7 | 3 | |
| | 5284.5 | 12 | 70.5 | 12 | 1730.0 | 3 | |
| | 5282.5 | 13 | 57.3 | 17 | 1782.7 | 3 | |
| | 5284.5 | 14 | 87.6 | 13 | 1093.7 | 3 | |
| | 5283.5 | 15 | 68.5 | 15 | 1586.4 | 1 | |
| | 5283.5 | 16 | 55.8 | 16 | 1841.1 | 3 | |
| | 5282.5 | 17 | 93.6 | 17 | 1996.2 | 1 | |
| | 5281.5 | 18 | 75.2 | 20 | 1727.8 | 2 | |
| | 5283.5 | 19 | 92.1 | 14 | 1695.8 | 3 | |
| | 5287.5 | 20 | 52.5 | 6 | 1198.6 | 1 | |

| Test Mode | 802.11be EHT160 |
|---|---|
| Frequency | 5250 MHz |
| Radar Signal | Type 5 |

| Trial # | Test Frequency (MHz) | Burst# | Pulse Width (us) | Chirp Width (MHz) | PRI (us) | Number of Pulses / Burst | 1=Detection ; 0=No Detection |
|---|---|---|---|---|---|---|---|
| 29 | 5285.5 | 1 | 65.0 | 11 | 1693.7 | 3 | 1 |
| | 5284.5 | 2 | 51.8 | 13 | 1485.5 | 3 | |
| | 5283.5 | 3 | 95.9 | 15 | 1680.4 | 3 | |
| | 5285.5 | 4 | 75.8 | 10 | 1811.3 | 1 | |
| | 5282.5 | 5 | 66.9 | 17 | 1120.0 | 3 | |
| | 5285.5 | 6 | 72.9 | 11 | 1108.4 | 2 | |
| | 5282.5 | 7 | 76.9 | 18 | 1802.2 | 2 | |
| | 5287.5 | 8 | 83.6 | 6 | 1007.6 | 1 | |
| | 5287.5 | 9 | 99.2 | 5 | 1110.4 | 2 | |
| | 5282.5 | 10 | 68.2 | 18 | 1229.0 | 3 | |
| | 5283.5 | 11 | 76.1 | 15 | 1635.0 | 3 | |
| | 5284.5 | 12 | 72.0 | 13 | 1624.2 | 2 | |
| | 5284.5 | 13 | 55.1 | 13 | 1852.5 | 2 | |
| | 5286.5 | 14 | 94.1 | 7 | 1039.3 | 1 | |
| | 5281.5 | 15 | 97.3 | 20 | 1121.1 | 2 | |
| | 5286.5 | 16 | 97.4 | 8 | 1194.3 | 3 | |
| | 5281.5 | 17 | 55.0 | 19 | 1566.3 | 1 | |
| 30 | 5283.5 | 1 | 96.8 | 15 | 1733.5 | 2 | 1 |
| | 5284.5 | 2 | 97.4 | 12 | 1448.5 | 3 | |
| | 5285.5 | 3 | 78.6 | 10 | 1670.4 | 3 | |
| | 5283.5 | 4 | 85.0 | 14 | 1721.8 | 3 | |
| | 5285.5 | 5 | 69.6 | 11 | 1613.3 | 2 | |
| | 5286.5 | 6 | 54.1 | 7 | 1903.0 | 1 | |
| | 5282.5 | 7 | 64.1 | 18 | 1626.8 | 2 | |
| | 5282.5 | 8 | 60.6 | 18 | 1612.6 | 2 | |
| | 5285.5 | 9 | 75.6 | 10 | 1579.3 | 2 | |
| | 5282.5 | 10 | 77.2 | 18 | 1264.2 | 1 | |
| | 5287.5 | 11 | 77.5 | 5 | 1361.1 | 1 | |
| | 5281.5 | 12 | 67.3 | 19 | 1945.0 | 1 | |
| | 5283.5 | 13 | 99.4 | 15 | 1472.7 | 1 | |
| | 5287.5 | 14 | 86.2 | 6 | 1272.0 | 1 | |
| Detection Percentage (%) | | | | | | | 86.67 |

| Test Mode | 802.11be EHT160 | | | | | |
|---|---|---|---|---|---|---|
| Frequency | 5250 MHz | | | | | |
| Radar Signal | Type 6 | | | | | |
| Trial # | Pulse Width (us) | PRI (us) | Pulses / Hop | Hopping Rate (kHz) | Hopping Sequence Length (ms) | 1=Detection ; 0=No Detection |
| 1 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 2 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 3 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 4 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 5 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 6 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 7 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 8 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 9 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 10 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 11 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 12 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 13 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 14 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 15 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 16 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 17 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 18 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 19 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 20 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 21 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 22 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 23 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 24 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 25 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 26 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 27 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 28 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 29 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| 30 | 1 | 333 | 9 | 0.333 | 300 | 1 |
| Detection Percentage (%) | | | | | | 100.00 |

---END---