



Appendix F. FCC 3G SAR Measurement Procedures


Conducted Output Power:

The EUT was tested according to the requirements of the FCC 3G procedures and the TS 34.121. The EUT's WCDMA and HSPA function is Release 6 version supporting HSDPA Category 8, and HSUPA Category 6. A detailed analysis of the output power for all WCDMA, HSPDA, and HSPA (HSUPA & HSDPA) modes is provided in the tables below. According to the FCC 3G procedures, handsets with both HSDPA and HSUPA should be tested according to Release 6 HSPA test procedures, and the EUT does not support VOIP function over the HSPA function. Device was tested according to procedure KDB941225 - section Release 6 HSPA Data Devices as documented/evaluated in the following table.

WCDMA SAR Test mode - Conducted Power							
Mode	Setup	Cell band (850)			PCS band (1900)		
		CH4132	CH4182	CH4233	CH9262	CH9400	CH9538
		826.4 (MHz)	836.4 (MHz)	846.6 (MHz)	1852.4 (MHz)	1880.0 (MHz)	1907.6 (MHz)
WCDMA	RMC 12.2Kbps	22.42	22.36	22.49	22.85	22.80	22.88
HSDPA	Subtest 1	22.34	22.29	22.25	22.82	22.45	22.72
	Subtest 2	22.22	22.05	22.20	22.72	22.30	22.71
	Subtest 3	22.14	22.03	22.18	22.04	21.55	22.40
	Subtest 4	22.15	22.05	22.08	22.03	21.44	22.21
HSUPA	Subtest 1	22.05	21.84	22.16	22.49	22.45	22.43
	Subtest 2	20.66	20.22	20.50	20.58	21.04	20.76
	Subtest 3	21.34	21.02	21.32	21.36	21.62	21.64
	Subtest 4	21.10	20.80	21.15	21.04	21.22	21.52
	Subtest 5	21.42	21.34	21.30	22.28	21.88	22.03

WCDMA Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting
 - i. Data rates: Varied from RMC 12.2Kbps
 - ii. RMC Test Loop = Loop Mode 1
 - iii. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

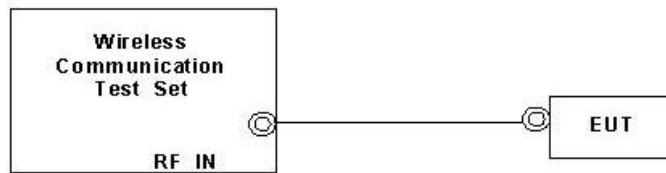

Setup Configuration

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set DeltaACK, DeltaNACK and DeltaCQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d=12/15, \beta_{HS}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSPA (HSUPA & HSPDA) Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d=12/15, \beta_{HS}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

Note: For details settings in the Agilent 8960 test equipment, please refer to the user guide “ HSUPA Measurement Guide with 8960 V7.5.0 Release 7 (2007-06) Ver.: v.02.18”



Call Setup Screen																					
Call Control	Active Cell Operating Mode		Call Parms																		
Channel (UARFCN) Info	<table border="1"> <thead> <tr> <th colspan="2">UE Information</th> </tr> </thead> <tbody> <tr> <td>INSI:</td> <td></td> </tr> <tr> <td>INEI:</td> <td></td> </tr> <tr> <td>Power Class:</td> <td></td> </tr> </tbody> </table>		UE Information		INSI:		INEI:		Power Class:		Cell Power -86.00 dBm/3.84 MHz										
UE Information																					
INSI:																					
INEI:																					
Power Class:																					
Cell Parameters	<table border="1"> <thead> <tr> <th colspan="2">UE Expected Open Loop Transmit Power</th> </tr> </thead> <tbody> <tr> <td>Initial PRACH TX Power:</td> <td>-11.70 dBm</td> </tr> <tr> <td>Initial DPCCCH TX Power:</td> <td>-0.56 dBm</td> </tr> </tbody> </table>		UE Expected Open Loop Transmit Power		Initial PRACH TX Power:	-11.70 dBm	Initial DPCCCH TX Power:	-0.56 dBm	Channel Type 12.2k + HSPA												
UE Expected Open Loop Transmit Power																					
Initial PRACH TX Power:	-11.70 dBm																				
Initial DPCCCH TX Power:	-0.56 dBm																				
Generator Info	<table border="1"> <thead> <tr> <th>Uplink Parameters</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>PRACH Preambles</td> <td>64</td> </tr> <tr> <td>PRACH Ramping Cycles (NMAX)</td> <td>2</td> </tr> <tr> <td>Available Subchannels (Bit Mask)</td> <td>000000000001</td> </tr> <tr> <td>Uplink DPCH Scrambling Code</td> <td>0</td> </tr> <tr> <td>Uplink DPCH Bc/Bd Control</td> <td>Manual</td> </tr> <tr> <td>Manual Uplink DPCH Bc</td> <td>11</td> </tr> <tr> <td>Manual Uplink DPCH Bd</td> <td>15</td> </tr> <tr> <td>Maximum Uplink Transmit Power Level</td> <td>21 dBm</td> </tr> </tbody> </table>		Uplink Parameters	Value	PRACH Preambles	64	PRACH Ramping Cycles (NMAX)	2	Available Subchannels (Bit Mask)	000000000001	Uplink DPCH Scrambling Code	0	Uplink DPCH Bc/Bd Control	Manual	Manual Uplink DPCH Bc	11	Manual Uplink DPCH Bd	15	Maximum Uplink Transmit Power Level	21 dBm	Paging Service RB Test Mode
Uplink Parameters	Value																				
PRACH Preambles	64																				
PRACH Ramping Cycles (NMAX)	2																				
Available Subchannels (Bit Mask)	000000000001																				
Uplink DPCH Scrambling Code	0																				
Uplink DPCH Bc/Bd Control	Manual																				
Manual Uplink DPCH Bc	11																				
Manual Uplink DPCH Bd	15																				
Maximum Uplink Transmit Power Level	21 dBm																				
Uplink Parameters			HSPA Parameters																		
UE Rep Neas			34.121 Preset Call Configs																		
Close Menu			Channel (UARFCN) Parms																		
	Active Cell Idle		Sys Type: UTRA FDD																		
2 of 4	IntRef	Offset	1 of 3																		

Example for HSPA Subtest 1, and other subtests following table, C11.1.3
(Gain Factors ($\beta_c = 11$ and $\beta_d = 15$))

Call Setup Screen																							
Call Control	Active Cell Operating Mode		Serving Grant																				
Additional Screens	<table border="1"> <thead> <tr> <th colspan="2">UE Information</th> </tr> </thead> <tbody> <tr> <td>INSI:</td> <td></td> </tr> <tr> <td>INEI:</td> <td></td> </tr> <tr> <td>Power Class:</td> <td></td> </tr> </tbody> </table>		UE Information		INSI:		INEI:		Power Class:		AG Mode Single Shot												
UE Information																							
INSI:																							
INEI:																							
Power Class:																							
Cell Parameters	<table border="1"> <thead> <tr> <th colspan="2">UE Expected Open Loop Transmit Power</th> </tr> </thead> <tbody> <tr> <td>Initial PRACH TX Power:</td> <td>-11.70 dBm</td> </tr> <tr> <td>Initial DPCCCH TX Power:</td> <td>-0.56 dBm</td> </tr> </tbody> </table>		UE Expected Open Loop Transmit Power		Initial PRACH TX Power:	-11.70 dBm	Initial DPCCCH TX Power:	-0.56 dBm	Single Shot AG 20: (119/15)^2														
UE Expected Open Loop Transmit Power																							
Initial PRACH TX Power:	-11.70 dBm																						
Initial DPCCCH TX Power:	-0.56 dBm																						
Generator Info	<table border="1"> <thead> <tr> <th colspan="2">Call Processing Status</th> </tr> </thead> <tbody> <tr> <td>Current Service Type:</td> <td>None</td> </tr> <tr> <td>MM Status:</td> <td>Abs Single Shot AG</td> </tr> <tr> <td>GMN State:</td> <td>Index 15: (67/15)^2</td> </tr> <tr> <td>Current DPCH</td> <td>Index 16: (75/15)^2</td> </tr> <tr> <td>HSUPA In</td> <td>Index 17: (84/15)^2</td> </tr> <tr> <td>UE Rep E-DCH</td> <td>Index 18: (95/15)^2</td> </tr> <tr> <td>Last Received</td> <td>Index 19: (106/15)^2</td> </tr> <tr> <td>Throughput:</td> <td>Index 20: (119/15)^2</td> </tr> <tr> <td>ACKs Transmitted:</td> <td></td> </tr> </tbody> </table>		Call Processing Status		Current Service Type:	None	MM Status:	Abs Single Shot AG	GMN State:	Index 15: (67/15)^2	Current DPCH	Index 16: (75/15)^2	HSUPA In	Index 17: (84/15)^2	UE Rep E-DCH	Index 18: (95/15)^2	Last Received	Index 19: (106/15)^2	Throughput:	Index 20: (119/15)^2	ACKs Transmitted:		Send Single Shot Absolute Grant
Call Processing Status																							
Current Service Type:	None																						
MM Status:	Abs Single Shot AG																						
GMN State:	Index 15: (67/15)^2																						
Current DPCH	Index 16: (75/15)^2																						
HSUPA In	Index 17: (84/15)^2																						
UE Rep E-DCH	Index 18: (95/15)^2																						
Last Received	Index 19: (106/15)^2																						
Throughput:	Index 20: (119/15)^2																						
ACKs Transmitted:																							
Uplink Parameters			Send Relative Grant Up																				
UE Rep Neas			Send Relative Grant Down																				
Trig Output Setup			Return																				
Sys Frame Clock																							
	Active Cell Idle		Sys Type: UTRA FDD																				
2 of 4	IntRef	Offset	1 of 2																				

Example: AG – Index = 20 for HSPA subtest 1



Call Setup Screen																																																																																																						
Screen Ctrl	Recorded E-TFCI Information	E-TFCI Record																																																																																																				
Channel (UARFCN) Info	E-TFCI Recording State	E-TFCI Rec Count																																																																																																				
	Idle	15																																																																																																				
HSPA Information	Recorded E-TFCI Values	Start Recording E-TFCI Values																																																																																																				
E-TFCI Recording Information	<table border="1"> <tr><td>1:</td><td>75</td><td>11:</td><td>75</td><td>21:</td><td>----</td><td>31:</td><td>----</td><td>41:</td><td>----</td></tr> <tr><td>2:</td><td>75</td><td>12:</td><td>75</td><td>22:</td><td>----</td><td>32:</td><td>----</td><td>42:</td><td>----</td></tr> <tr><td>3:</td><td>75</td><td>13:</td><td>75</td><td>23:</td><td>----</td><td>33:</td><td>----</td><td>43:</td><td>----</td></tr> <tr><td>4:</td><td>75</td><td>14:</td><td>75</td><td>24:</td><td>----</td><td>34:</td><td>----</td><td>44:</td><td>----</td></tr> <tr><td>5:</td><td>75</td><td>15:</td><td>75</td><td>25:</td><td>----</td><td>35:</td><td>----</td><td>45:</td><td>----</td></tr> <tr><td>6:</td><td>75</td><td>16:</td><td>----</td><td>26:</td><td>----</td><td>36:</td><td>----</td><td>46:</td><td>----</td></tr> <tr><td>7:</td><td>75</td><td>17:</td><td>----</td><td>27:</td><td>----</td><td>37:</td><td>----</td><td>47:</td><td>----</td></tr> <tr><td>8:</td><td>75</td><td>18:</td><td>----</td><td>28:</td><td>----</td><td>38:</td><td>----</td><td>48:</td><td>----</td></tr> <tr><td>9:</td><td>75</td><td>19:</td><td>----</td><td>29:</td><td>----</td><td>39:</td><td>----</td><td>49:</td><td>----</td></tr> <tr><td>10:</td><td>75</td><td>20:</td><td>----</td><td>30:</td><td>----</td><td>40:</td><td>----</td><td>50:</td><td>----</td></tr> </table>	1:	75	11:	75	21:	----	31:	----	41:	----	2:	75	12:	75	22:	----	32:	----	42:	----	3:	75	13:	75	23:	----	33:	----	43:	----	4:	75	14:	75	24:	----	34:	----	44:	----	5:	75	15:	75	25:	----	35:	----	45:	----	6:	75	16:	----	26:	----	36:	----	46:	----	7:	75	17:	----	27:	----	37:	----	47:	----	8:	75	18:	----	28:	----	38:	----	48:	----	9:	75	19:	----	29:	----	39:	----	49:	----	10:	75	20:	----	30:	----	40:	----	50:	----	
1:	75	11:	75	21:	----	31:	----	41:	----																																																																																													
2:	75	12:	75	22:	----	32:	----	42:	----																																																																																													
3:	75	13:	75	23:	----	33:	----	43:	----																																																																																													
4:	75	14:	75	24:	----	34:	----	44:	----																																																																																													
5:	75	15:	75	25:	----	35:	----	45:	----																																																																																													
6:	75	16:	----	26:	----	36:	----	46:	----																																																																																													
7:	75	17:	----	27:	----	37:	----	47:	----																																																																																													
8:	75	18:	----	28:	----	38:	----	48:	----																																																																																													
9:	75	19:	----	29:	----	39:	----	49:	----																																																																																													
10:	75	20:	----	30:	----	40:	----	50:	----																																																																																													
Clear UE Info	15/15	Send Step Up TPC Bit Pattern																																																																																																				
Return		Send Step Down TPC Bit Pattern																																																																																																				
	<table border="1"> <tr> <td><input type="checkbox"/> Background</td> <td>Active Cell</td> <td>Sys Type: UTRA FDD</td> </tr> <tr> <td></td> <td>Connected</td> <td></td> </tr> <tr> <td></td> <td>IntRef</td> <td>Offset</td> </tr> </table>	<input type="checkbox"/> Background	Active Cell	Sys Type: UTRA FDD		Connected			IntRef	Offset	Return																																																																																											
<input type="checkbox"/> Background	Active Cell	Sys Type: UTRA FDD																																																																																																				
	Connected																																																																																																					
	IntRef	Offset																																																																																																				

Example: Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1



Reference:

- [1] 941225 D01 SAR test for 3G devices v02, SAR Measurement Procedures for 3G Devices CDMA 2000/Ev-Do/WCDMA/HSDPA/HSPA Oct. 2007 Laboratory Division Office of Engineering and Technology Federal Communications Commission
- [2.] TS 34.121 Universal Mobile Telecommunications System (UMTS); Terminal Conformance Specification, Radio Transmission and Reception (FDD)
- [3.] HSUPA Measurement Guide with 8960 V7.5.0 Release 7 (2007-06) Ver.: v.02.18