



BLOCK DIAGRAM

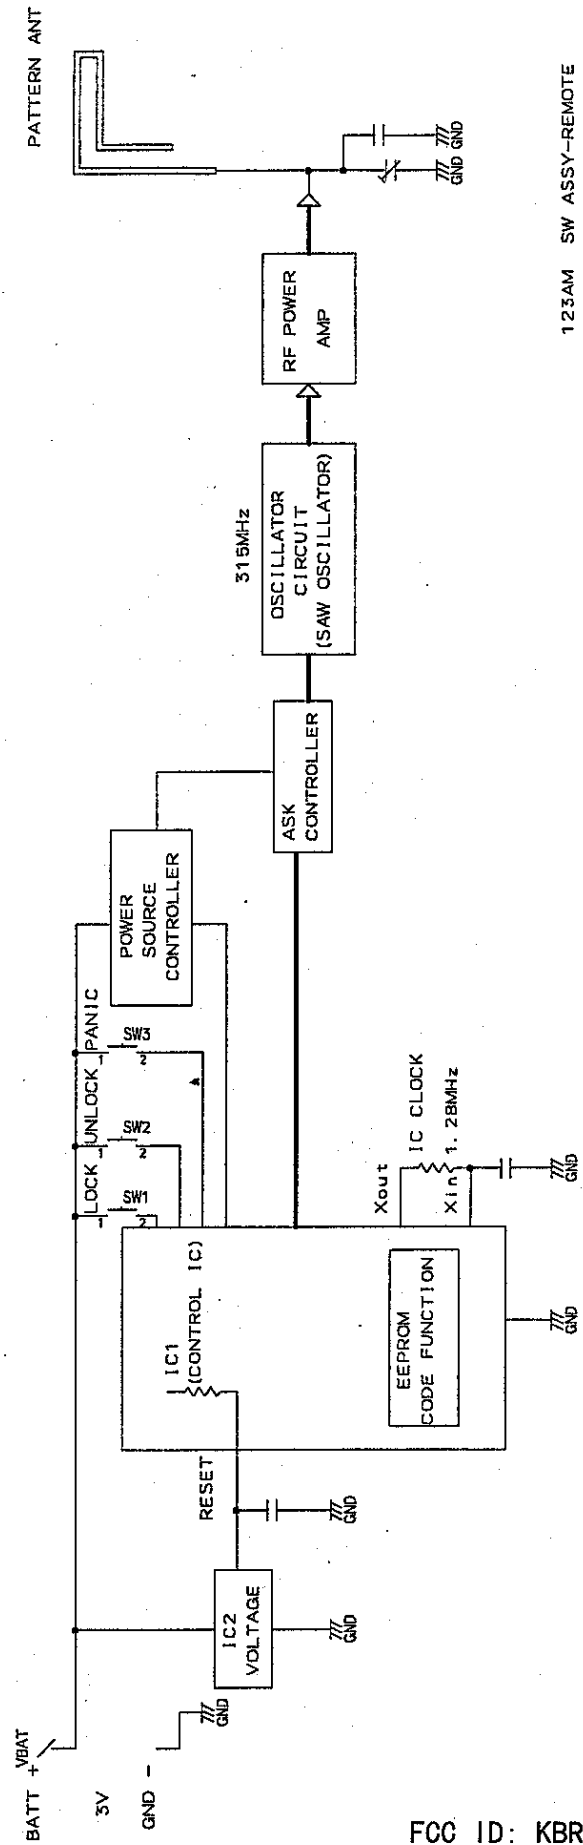

123AM SW ASSY-REMOTE

FCC ID: KBRASU10

CIRCUIT DIAGRAM

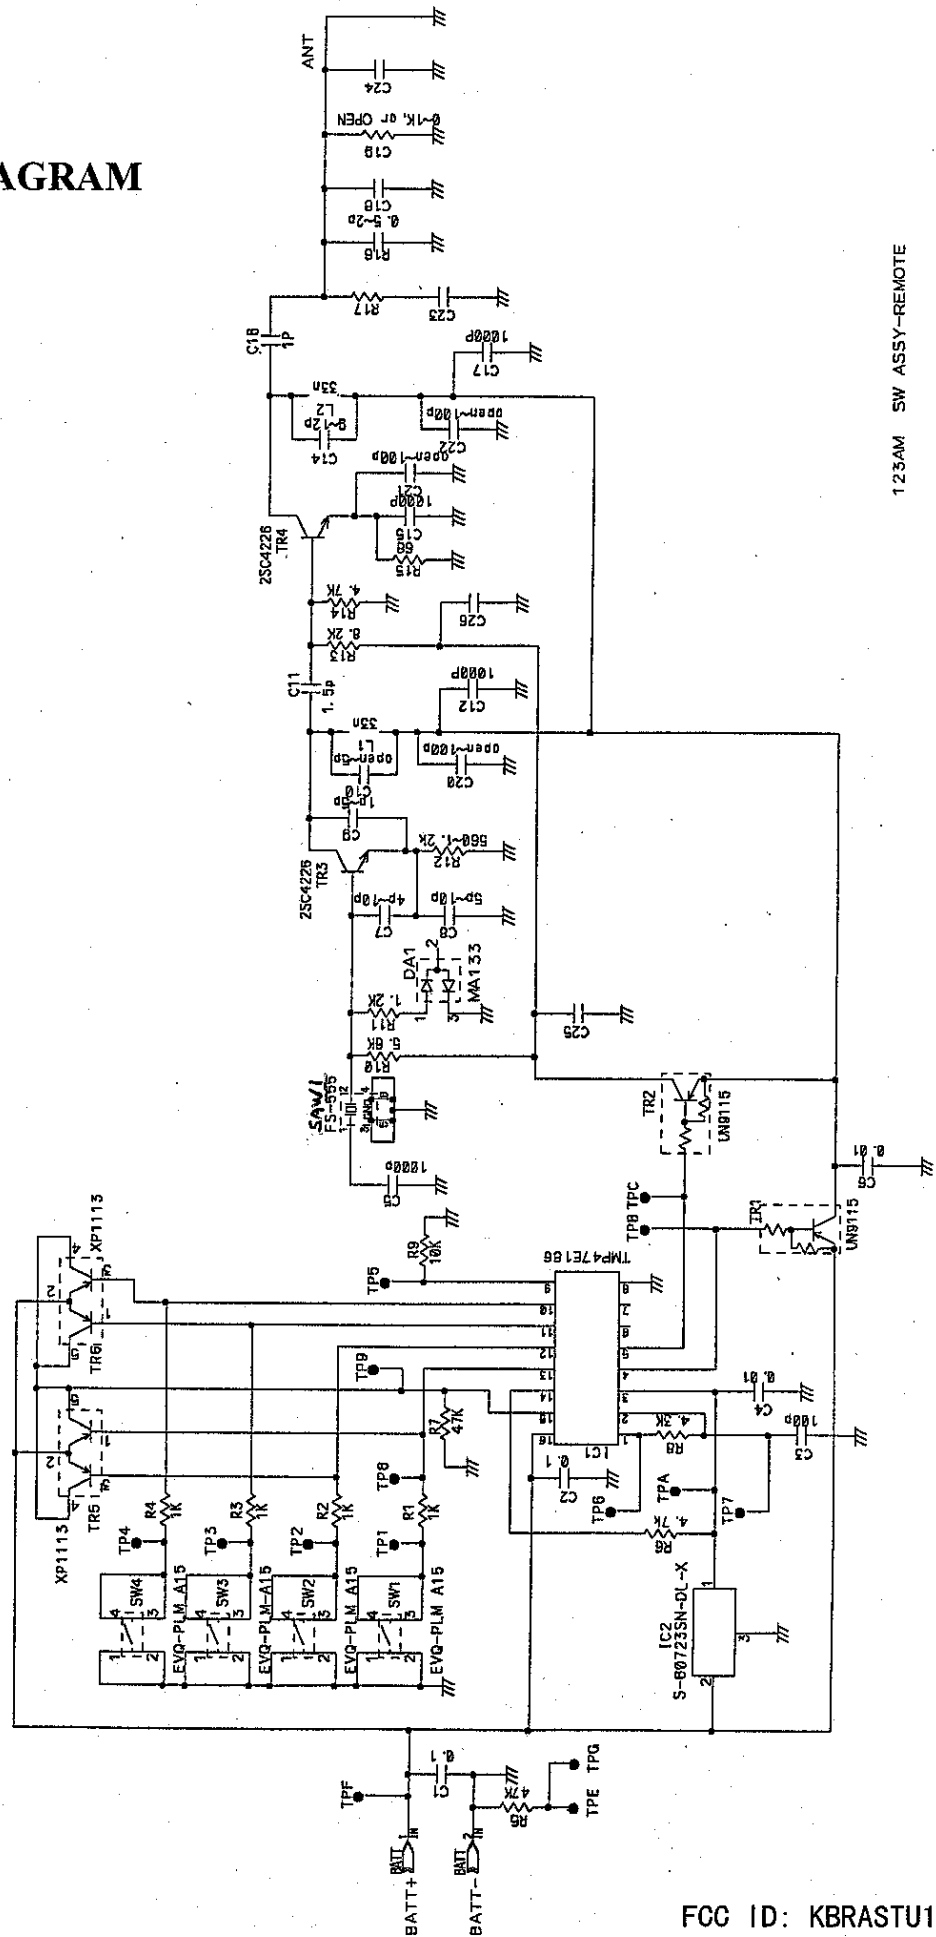

123AM SW ASSY-REMOTE

FCC ID: KBRASU10

LIST OF PARTS AND COMPONENTS

Symbol	Part No.	Manufacturer	Mfr's Part No.	Characteristics
C1,2	K70071C9901	Murata	GRM39F104Z25	0.1uf,25v,+80-20%
C3,21,26	86451-TK2000	Murata	GRK39CH101J50	100pf,50v,5%
C4,6	K890774P000	Murata	GRK39R103M50	0.01uf,50v,20%
C5,12,15,17	K393266P100	Murata	GRK39R102K50	1000pf,50v,10%
C7,20,22	K864525P000	Murata	GRK39CH050D50	5pf,50v,0.5pf
C8	K702485L300	Murata	GRK39CH090D50	9pf,50v,0.5pf
C9,C10	K864513J100	Murata	GRK39CH020C50	2pf,50v,0.25pf
C11	72611-RY0100	Murata	GRK39CK1R5C50	1.5pf,50v,0.25pf
C14	K86405C9914	Murata	GRK39CH110J50	11pf,50v,0.5pf
C16,R16	K702687J100	Murata	GRM39CK010C50	1pf,50v,0.25pf
DA1	K70261C9914	Matushita	MA133	
IC1	K702282W601	Toshiba	TMP47E186	(OTP:TMP47P186)
IC2	K702182W601	Seiko	S-80823ANMP	
L1,2	K70138C9960	Murata	LQP11A33NG00	33nH,,2%
R1,2,3,4	K86103C9960	Rohm	MCR03EZHJ102	1k,1/16w,5%
R5,7	K8611880F60	Rohm	MCR03EZHJ473	47k,1/16w,5%
R6,14	K86003C9960	Rohm	MCR03EZHJ472	4.7k,1/16w,5%
R8	K702782W600	Matushita	ERJ-3EKF4301	4.3k,1/16w,1%
R9	K8611780F60	Rohm	MCR03EZHJ103	10k,1/16w,5%
R10	K86102C9960	Rohm	MCR03EZHJ562	5.6k,1/16w,5%
R11,12	K8610180F60	Rohm	MCR03EZHJ122	1.2k,1/16w,5%
R13	K86104C9960	Rohm	MCR03EZHJ822	8.2k,1/16w,5%
R15	K8610880F60	Rohm	MCR03EZHJ680	68,1/16w,5%
SW1,2,3,4	72728-RY0100	Matushita	EVQ-PLM	
TR1,2	K702927J100	Matushita	UN9115	
TR3,4	K70255C9914	NEC	2SC4226	
TR5,6	K702957J100	Matushita	XP1113	
SAW1	K702342W601	Seiko	FS-555	315.015MHz,+/-30kHz