


Door/Window Contact

Introduction

This is a supervised, wireless, door/window contact intender for use with certain 345Mhz Alarm systems. Please has qualified service persons install this device for you.

Product Description and Specification

*** For indoor use only ***

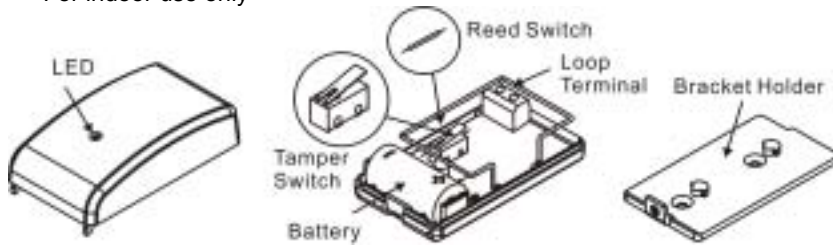

Specification:

Frequency Range: 345MHz +/- 150KHz
Operating Range: Up to 100 feet line of sight
Dimensions: 74x42x28 mm
Operating Temp.: -15°C~ 60°C (5°F~140°F)
Battery: Panasonic CR123A * 1PC


Package Content:

1pc Door/Window sensor
1pc Magnet set
1pc Bracket Holder
1pc Adhesive tape for sensor
3pc Screw
1pc CR123A Lithium Battery

Installation

Notice: Select a mounting location free from exposure to moisture and humidity.

1. Install Battery: Use care when installing the battery. Press the locking tab on the top sensor cover, and then gently pull up the cover. Observe the correct polarity before insert the battery.
2. If a wired contact loop is to be used with concealed wiring, feed the wires through the concealed wiring entry hole. A thin breakout area I provided on the side of case. Wiring can be run through the breakout in the case.
3. Using the adhesive tape or fixing screws to fix the bracket holder with sensor.

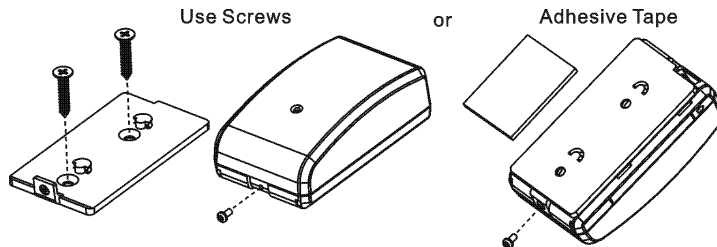

4. Find the notch on the outside of the door/window enclosure. Align the magnet with the notches that the distance between magnet & transmitter can't exceed 3/4". Mount the magnet by supplied adhesive tape.

Federal Communications Commision Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try and correct the interfere by one of the following measures:

- Reorient or relocate the receiving antenna,
- Increase the separation between the equipment and receiver,
- Connect the equipment into and outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

Limited Warranty

We Guarantees that every wireless Door/Window sensor is free form physical defects in material and workmanship under normal use for one year from the date of purchase. If the product proves defective during this one-year warranty period, we will replace it free of charge. We does not issue any refunds. This warranty is extended to the original end user purchase only and is not transferable. This warranty does not apply to : (1) damage to units caused by accident, dropping or abuse in handling, or any negligent use; (2) units which have been subject to unauthorized repair, opened, taken apart, or otherwise modified; (3) units not used in accordance with instruction; (4) damages exceeding the cost of the product; (5) transit damage, initial installation costs, removal cost, or reinstallation cost. Please contact local dealer for more information.

This device does not exist and support the polling function.