


# Garage Door Monitor™ Sensor

Model GS-101

## 1. INTRODUCTION

The garage door monitor™ sensor is designed to monitor the status of your garage door and advise you if the door is open. By placing the sensor on the door panel, you will be alerted when the door is open. When the garage door is open, receiver will beep and flash.

In this package, you should find a garage door monitor™ sensor, 3V lithium battery, double-sided foam tape, mounting accessories and a clip.

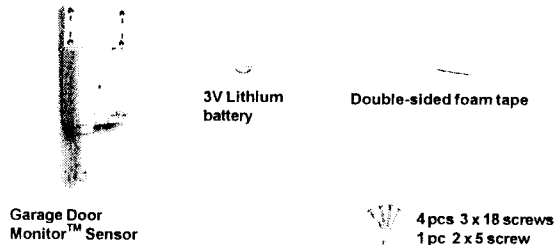

Please follow the instructions below to set up your garage door monitor™ sensor properly.

## 2. SET UP THE GARAGE DOOR SENSOR

To program the sensor to the Control Panel AM-001


1. Press the [PROG] button on the side of the control panel, the [PROG] LED will light on.
2. Enter the current MPIN [default 1234].
3. Enter [3].
4. Select a zone and sensor location to program the sensor to.
5. Activate the sensor, the control panel will beep and you will hear "Zone  $x$  Sensor  $x$  Accepted if the sensor is programmed. The [PROG] LED will be off.
6. To program other sensor, repeat the above steps.

Notes: If an occupied sensor location is selected, the new sensor will replace the old one.

## 3. POWER UP THE GARAGE DOOR MONITOR™ SENSOR

After setting up all the connectors, the sensor is ready to be powered up.

Push the detection rod to it's fully retracted position. Insert the 3V lithium battery to the sensor as shown in the diagram.



Insert 3V battery to the sensor

If the detection rod on the sensor is fully extended, one of the red LED on the receiver will flash and beep.

You can install the sensor onto the garage door.

Detection rod is fully retracted

Detection rod is fully extended



## 4. INSTALLATION




Unplug the power cord of your garage door opener before installation to ensure power is not connected.

Step 1 – Select a spot on your garage door to mount the sensor

Before you install the sensor onto the garage door, make sure the garage door is closed. The sensor assembly should be mounted on one of the vertical supports of your garage door near the bottom.

When the door is closed, the detection rod should be retracted. When the door is open, the detection rod will be extended.

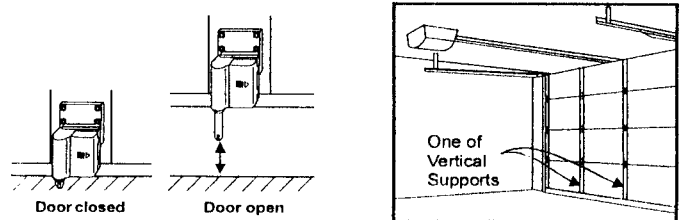

## 5. OPERATION

When the garage door is open, the sensor will send a signal to the receiver. It will beep and the corresponding zone red LED will flash.

## 6. FCC

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

### WARNING:

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

### NOTE:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## 7. WARRANTY

If, within one year from date of purchase, this product should become defective (except battery), due to faulty workmanship or materials, it will be repaired or replaced, without charge. Proof of purchase and a Return Authorization are required.

## 8. CUSTOMER SERVICE

If you would like to order Skylink's products or have difficulty getting them to work, please :

- 1 visit our FAQ section at [www.skylinkhome.com](http://www.skylinkhome.com), or
- 2 email us at [support@skylinkhome.com](mailto:support@skylinkhome.com), or
- 3 call our toll free at 1-800-304-1187 from Monday to Friday, 9 am to 5 pm EST. Fax (800) 286-1320

### CUSTOMER SERVICE

17 Sheard Avenue, Brampton, Ontario, Canada L6Y 1J3  
Email: [support@skylinkhome.com](mailto:support@skylinkhome.com)  
<http://www.skylinkhome.com>  
P/N. 101AXXX Rev.0  
US Patent 6,597,291  
©2005 SKYLINK GROUP