

INSTALLATION INSTRUCTIONS

Garage door Internet Gateway Model : NV-001



Congratulations on your purchase of the Skylink garage door internet gateway model NV-001. This unit allows you to control your garage door with internet access or remote transmitter.

ONE YEAR WARRANTY

This product is guaranteed to be free of defects in materials and workmanship for 1 year from the date of purchase. If this product is defective, call 1-800-304-1187 for repair or replacement parts. Guarantee does not include normal wear and tear or batteries.



If you have any questions, problems or missing parts, please call Skylink Customer Support: 9:00am – 5:00pm EST, Monday-Friday.

1-800-304-1187

Or e-mail us at support@skylinkhome.com

www.skylinkhome.com

P/N:

NV-100 Series

SAFETY INFORMATION


This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

WARNING:

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

CAUTION: RISK OF ELECTRICAL SHOCK. FOR INDOOR USE ONLY.

Package Contents

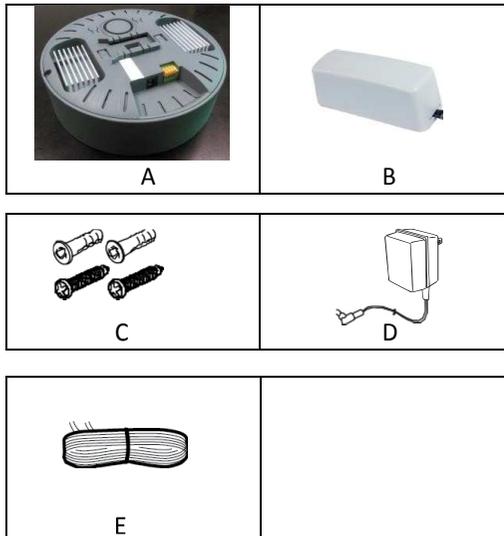


Parts	Description	Quantity
A	Garage door internet gateway	1
B	Garage sensor	1
C	Mounting accessories	1 set
D	DC adaptor	1
E	Bell wire	1 roll

Section 1 – Installation

WARNING: Unplug the power cord of your garage door opener before installation to ensure power is not connected.

Note: The garage door internet gateway can work up to 2 garage doors.

1. Install the mounting bracket to the ceiling inside the garage.
2. Connect the bell wires from the garage door internet gateway to the wall button.



3. Plug-in the DC adapter to the garage door internet gateway.

Section 2 - Setup the Garage sensor

1. Insert an AA battery to the garage sensor. The red LED will on once.




2. Attach the garage sensor to the garage door after programming.



Section 3 – Programming

Note: Each garage door internet gateway can program up to 16 remote devices. If you try to program a 17 remote devices into the garage door internet gateway, the first programmed remote device will be erased.

1. Press the SET1 button once on the garage door internet gateway, the blue LED flash once.
2. Activate the garage sensor by tilting it from vertical to horizontal.



3. Once the garage sensor is programmed, the blue LED flashes quickly and then off. You have successfully to program the remote.
4. Refer to the Skylink App to program the smartphone to the garage door internet gateway.

Note: To program the remote or sensor to operate the door 2, press the SET1 button twice. The blue LED flash twice indicating for the door 2 programming.

Section 4 – Operation

Note: Use remote or manually toggle on the

A – Use Remote:

1. Press the programmed button on the remote to activate the garage door internet gateway to open or close the garage door.

B – Use the App:

1. Press the Open button once in the App to open the garage door.
2. Press the Close button once in the App to close the garage door.

Section 5 - Erase sensor from the garage door internet gateway

NOTE: To erase unwanted remote or sensor from the garage door internet gateway, first erase all remote controls, then learn the ones you would wish to keep.

1. Press and hold the SET 1 button on the garage door internet gateway for 10 seconds.
2. Release the SET1 button when the red and blue LED are flashing on the garage door internet gateway.
3. You have successfully erased all the remotes from the garage door internet gateway.

Section 6 - Indicator Lights

NOTE: The garage door internet gateway is built in with 12W LED lighting.

1. Press the Light button once in the App to turn on the light.

Section 7 – Battery Replacement

The garage sensor comes with an AA battery. It is time to change the battery when the red LED on the sensor does not turn on.

To replace the battery :

1. Pry out the case on the bottom of the case.
2. Take out the old battery.
3. Place the new battery in position. Be sure the polarity is correct.
4. Close the case.

Battery disposal: Dispose used battery according to local regulations.

Section 8 - FAQ

Q: What can I do if the garage door is not react after I activate the remote or the App in the smartphone?

- A: - Ensure when the button on the remote is pressed.
- Ensure the remote has been programmed to the garage door internet gateway.
 - Ensure the button in the App has been programmed to the garage door internet gateway.

FCC

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning:

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful

interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device shall be installed to provide a separation distance of at least 20cm from all persons and must not be co-located or operating in conjunction with any other antenna and transmitter

ISED

This device contains licence-exempt transmitters that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil contient un émetteur(s) exempt de licence conforme à la norme RSS(s) d'Innovation, Sciences et Développement économique Canada. Le fonctionnement est

soumis aux deux conditions suivantes:

- (1) Cet appareil ne doit pas causer d'interférences.
- (2) Cet appareil doit accepter toutes les interférences, y compris celles susceptibles de provoquer un fonctionnement indésirable de l'appareil.

WARRANTY

If, within one year from date of purchase, this product should become defective (except battery), due to faulty workmanship or materials, it will be repaired or replaced, without charge. Proof of purchase and a Return Authorization Number are required.

CUSTOMER SERVICE

17 Shread Avenue,
Brampton, Ontario,
Canada L6Y 1J3
Email:support@skylinkhome.com
<http://www.skylinkhome.com>
©2018 SKYLINK GROUP

US Office
Securelink Inc.,
1180-D East Francis Street,
Ontario, CA 91761, USA
Tel: (909) 673-1778