

## 1. Introduction

Thank you for your purchase of a SkylinkHome™ Plug-In Lighting Module, Model PR-318. This receiver allows you to wirelessly turn on or off, dim and brighten the lighting fixtures.

The Plug-In Lighting Module PR-318 can communicate with up to 16 transmitters so users has the option to add more transmitters to the system.

The following items are included in this package:



- One Plug-In Lighting Module
- User's Instructions


## 2. Installation

Simply plug the Plug-In Lighting Module to an electrical outlet, then plug in a lighting fixture to the socket on the Plug-In Lighting Module.

The Plug-In Lighting Module is designed to operate maximum load of 300W at 120VAC, 60Hz.

## 3. Programming the Plug-In Lighting Module

- Plug in a load to the Plug-In Lighting Module.
- Plug in the module to an AC outlet, the red LED flashes once quickly. The connected load (i.e. lighting fixture) will be on automatically.
- Press and hold the 'SET' button for about 3 seconds until the red LED flashes. Release the 'SET' button.
- Activate the transmitter you are programming to the Plug-In Module. Once the transmitter is programmed, the red LED stop flashing. You have successfully program the transmitter.

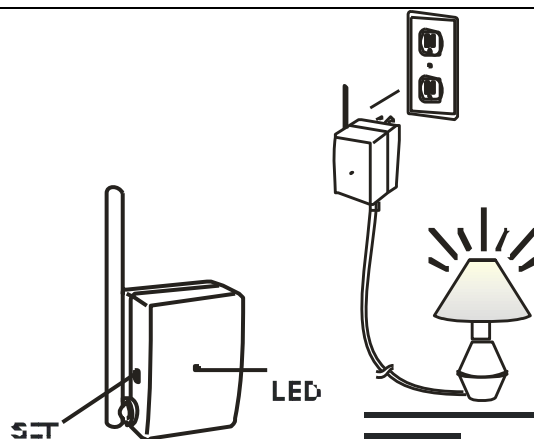

Note: You must complete the programming sequence within the 15-second interval, otherwise, the module will quit from programming mode and you need to start again if the red LED is off.


#### 4. Operation

The PR-318 Plug-In Lighting Module allows on / off operation, when the programmed transmitter is activated.

#### 5. Erasing transmitter

You may erase a transmitter from the Plug-In Lighting Module, but you cannot erase a specific device directly, you must erase all the wireless devices, the program the ones you want to keep. Follow the instructions below to erase programmed transmitters.

- Power off the Plug-In On/Off Control by removing it from the AC outlet.
- Press and hold the 'SET' button, while plugging in the Plug-In Control to the AC outlet.
- The red LED will be on, then flashes rapidly for 1 second.
- You may release the 'SET' button, now you have successfully erased all the devices.

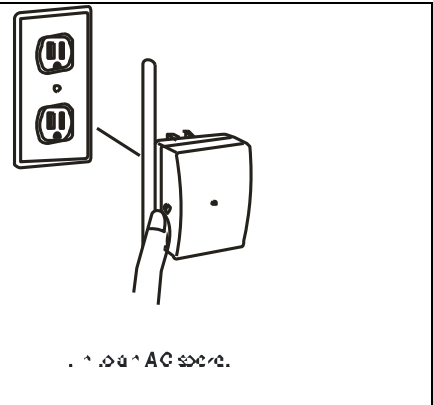

#### 6. Technical Specification

- Input Voltage: 120V AC, 60Hz
- Standby Current: 3mA
- Maximum Rating: 300W
- Frequency: 318MHz
- Range: Up to 300 feet in open area.

#### WARRANTY

If, within one year from date of purchase, this product should become defective (except battery), due to faulty workmanship or materials, it will be repaired or replaced, without charge. Proof of purchase and a Return Authorization are required.

#### FCC

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**WARNING:**

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**CUSTOMER SERVICE**

If you would like to

- find out the up-to-date specifications
- know more about features and applications
- download documents, i.e. user's instructions
- order Skylink products

or if you have difficulty getting products to work, please:

1. visit our FAQ section at [www.skylinkhome.com](http://www.skylinkhome.com), or
2. email us at [support@skylinkhome.com](mailto:support@skylinkhome.com)

**CUSTOMER SERVICE**

17 Shread Ave., Brampton, Ontario,  
Canada L6Y 1J3

Email: [support@skylinkhome.com](mailto:support@skylinkhome.com)

<http://www.skylinkhome.com>

©2014 SKYLINK GROUP