


RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

Annex B: Probe and dipole descriptions and calibration certificates

B.1 Probe and Measurement Chain Descriptions and Specifications

RTS RIM Testing Services	Document		
	Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01	FCC ID L6ARAV20CW

DASY Dosimetric Assessment System by Schmid & Partner Engineering AG

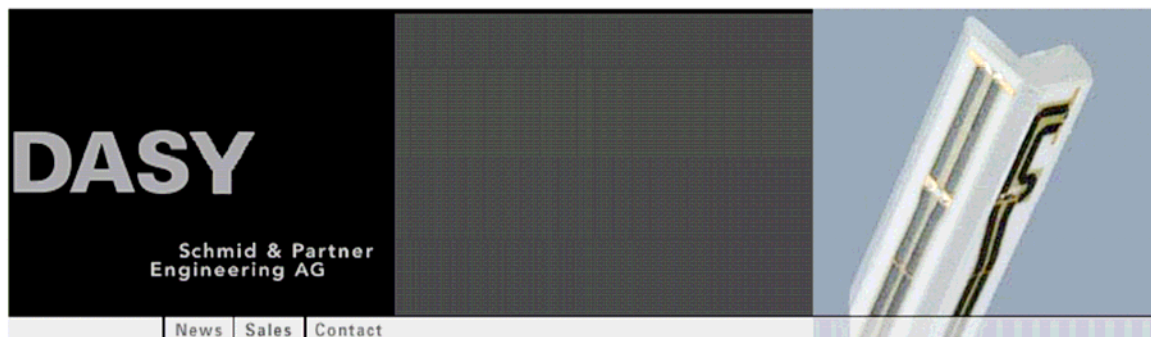

Applications
Support & Downloads
Products
<ul style="list-style-type: none"> ▪ DASY4 Packages ▪ EASY4 ▪ Probes <ul style="list-style-type: none"> ET3DV6 - Isotropic Dos-Probe ES3DV3 - Isotropic Dos-Probe EX3DV4 - Isotropic Dos-Probe ET1DV3 - D-Probe EUUV3 - Universal Vector E-Probe H3DV6 - Isotropic H-Probe HUV4 - Universal Vector H-Probe T1V3 - Temp-Probe DP1 - Dummy-Probe ▪ Data Acquisition System ▪ Software ▪ Phantoms ▪ Robots ▪ Validation Kits & Calibration Dipoles <ul style="list-style-type: none"> ▪ Hearing Aid Compatibility (HAC) Ext ▪ Tissue Simulating Liquids
SPEAG Home

ER3DV6 ISOTROPIC E-FIELD PROBE FOR GENERAL NEAR-FIELD MEASUREMENTS


 [Download Product Flyer \(PDF, 192kB\)](#)

Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycoether)
Calibration	In air from 100 MHz to 3.0 GHz (absolute accuracy $\pm 6.0\%$, $k=2$)
Frequency	100 MHz to > 6 GHz; Linearity: ± 0.2 dB (100 MHz to 3 GHz)
Directivity	± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis)
Dynamic Range	2 V/m to > 1000 V/m; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.5 mm
Application	General near-field measurements up to 6 GHz Field component measurements Fast automatic scanning in phantoms

<http://www.dasy4.com/er3.htm>

RTS RIM Testing Services	Document		
	Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01	FCC ID L6ARAV20CW

DASY Dosimetric Assessment System by Schmid & Partner Engineering AG

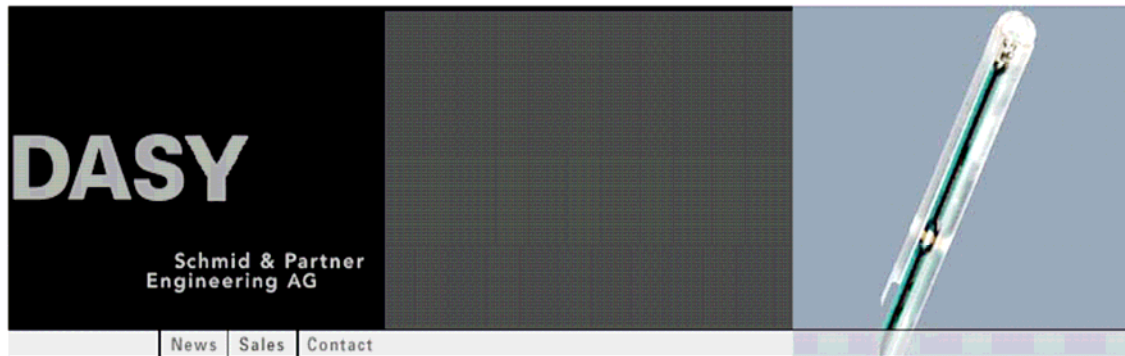

Applications
Support & Downloads
Products
<ul style="list-style-type: none"> ▪ DASY4 Packages ▪ EASY4 ▪ Probes <ul style="list-style-type: none"> ET3DV6 - Isotropic Dos-Probe ES3DV3 - Isotropic Dos-Probe EX3DV4 - Isotropic Dos-Probe ET1DV3 - D-Probe ER3DV6 - Isotropic E-Probe EUV3 - Universal Vector E-Probe HUV4 - Universal Vector H-Probe T1V3 - Temp-Probe DP1 - Dummy-Probe ▪ Data Acquisition System ▪ Software ▪ Phantoms ▪ Robots ▪ Validation Kits & Calibration Dipoles <ul style="list-style-type: none"> ▪ Hearing Aid Compatibility (HAC) Ext ▪ Tissue Simulating Liquids
SPEAG Home

H3DV6 3-DIMENSIONAL H-FIELD PROBE FOR SMALL BAND APPLICATIONS

 [Download Product Flyer](#) (PDF, 192kB)

Construction	Three concentric loop sensors with 3.8 mm loop diameters Resistively loaded detector diodes for linear response Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycoether)
Frequency	200 MHz to 3 GHz (absolute accuracy $\pm 6.0\%$, $k=2$); Output linearized
Directivity	± 0.25 dB (spherical isotropy error)
Dynamic Range	10 mA/m to 2 A/m at 1 GHz
E-Field Interference	< 10% at 3 GHz (for plane wave)
Dimensions	Overall length: 330 mm (Tip: 40 mm) Tip diameter: 6 mm (Body: 12 mm) Distance from probe tip to dipole centers: 3 mm
Application	General magnetic near-field measurements up to 3 GHz Field component measurements Surface current measurements Measurements in air or liquids Low interaction with the measured field

<http://www.dasy4.com/h3d.htm>

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

All measurements were performed to the nearest element point as per the C63.19 standard. Offset distances were entered in the DASY4 software so that the measurement was to the nearest element.


Figures 1 and 2, provided by the manufacturer, illustrate detail of the probe tip and its dimensions.

ER3DV6 E-Field probe: The distances from the probe tip to the closest points on the dipole sensors are 1.45mm for X and Y and 1.25mm for Z. From the probe tip to the center of the sensors is 2.5mm.


H3DV6 H-Field probe: The distance from the probe tip to the closest point of the X, Y and Z loop sensors is 1.1mm. From the probe tip to the center of the sensor is 3.00mm.



E-Field Probe (ER3DV6)

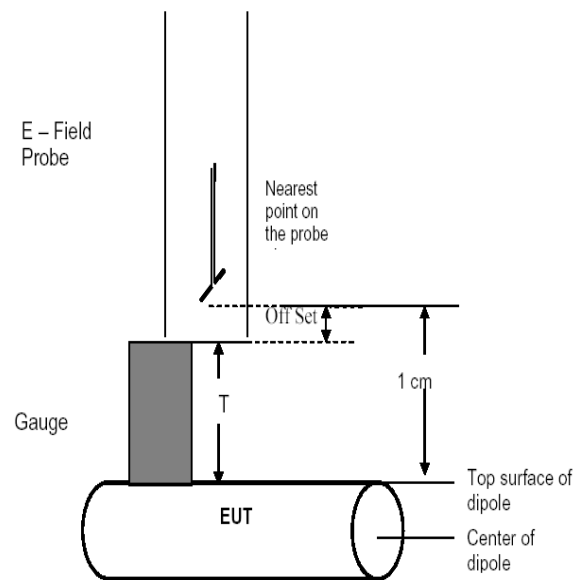

H-Field Probe (H3DV6)

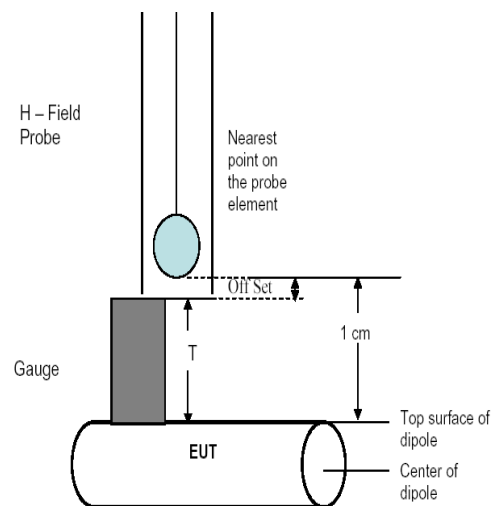

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

The following information is from the system manufacturer user manual describing the process chain:

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i} \quad (20.1)$$

with V_i = compensated signal of channel i (i = x, y, z)
 U_i = input signal of channel i (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E - fieldprobes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$\text{H - fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i (i = x, y, z)
 $Norm_i$ = sensor sensitivity of channel i (i = x, y, z)
 $\mu\text{V}/(\text{V/m})^2$ for E-field Probes
 $ConvF$ = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2} \quad (20.2)$$

The measurement / integration time per point is > 500 ms, as per the system manufacturer:

The time response of the field probes has been assessed by exposing the probe to a well-controlled field producing signals larger than HAC E- and H-fields of class M4. The signal response time is evaluated as the time required by the system to reach 90% of the expected final value after an on/off switch of the power source with an integration time of 500 ms and a probe response time of <5 ms. In the current implementation, DASY4 waits longer than 100ms after having reached the grid point before starting a measurement, i.e., the response time uncertainty is negligible.

If the device under test does not emit a CW signal, the integration time applied to measure the electric field at a specific point may introduce additional uncertainties due to the discretization. The tolerances for the different systems had the worst-case of 2.6%.

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

B.2

Probe and Dipole Calibration Certificates

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

Calibration Laboratory of Schmid & Partner Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **RIM**

Certificate No: **ER3-2285_Dec04**

CALIBRATION CERTIFICATE

Object **ER3DV6 - SN:2285**
 Calibration procedure(s) **QA CAL-02.v4
 Calibration procedure for E-field probes optimized for close near field evaluations in air**
 Calibration date: **December 10, 2004**
 Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
 The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-May-04 (METAS, No. 251-00388)	May-05
Power sensor E4412A	MY41495277	5-May-04 (METAS, No. 251-00388)	May-05
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-04 (METAS, No. 251-00403)	Aug-05
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-04 (METAS, No. 251-00389)	May-05
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-04 (METAS, No. 251-00404)	Aug-05
Reference Probe ER3DV6	SN: 2328	6-Oct-04 (SPEAG, No. ER3-2328_Oct04)	Oct-05
DAE4	SN: 617	29-Sep-04 (SPEAG, No. DAE4-617_Sep04)	Sep-05

Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov 05

Calibrated by: **Nico Vetterli** Laboratory Technician *Nico Vetterli*
 Approved by: **Katja Pokovic** Technical Manager *Katja Pokovic*

Issued: December 13, 2004

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

RTS RIM Testing Services	Document		
	Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01	FCC ID L6ARAV20CW

Calibration Laboratory of Schmid & Partner Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

NORM_{x,y,z} sensitivity in free space
DCP diode compression point
Polarization ϕ ϕ rotation around probe axis
Polarization ϑ ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1309-1996, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", 1996.

Methods Applied and Interpretation of Parameters:

- **NORM_{x,y,z}**: Assessed for E-field polarization $\vartheta = 0$ for XY sensors and $\vartheta = 90$ for Z sensor ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide).
- **NORM(f)_{x,y,z}** = **NORM_{x,y,z}** * *frequency_response* (see Frequency Response Chart).
- **DCP_{x,y,z}**: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency.
- **Spherical isotropy (3D deviation from isotropy)**: in a locally homogeneous field realized using an open waveguide setup.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle**: The angle is assessed using the information gained by determining the **NORM_x** (no uncertainty required).

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

ER3DV6 SN:2285

December 10, 2004

Probe ER3DV6

SN:2285

Manufactured:	September 20, 2002
Last calibrated:	January 12, 2004
Recalibrated:	December 10, 2004

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

ER3DV6 SN:2285

December 10, 2004

DASY - Parameters of Probe: ER3DV6 SN:2285

Sensitivity in Free Space [$\mu\text{V}/(\text{V}/\text{m})^2$]		Diode Compression ^A	
NormX	1.24 ± 10.1 % (k=2)	DCP X	95 mV
NormY	1.41 ± 10.1 % (k=2)	DCP Y	95 mV
NormZ	1.55 ± 10.1 % (k=2)	DCP Z	98 mV

Frequency Correction

X	0.0
Y	0.0
Z	0.0

Sensor Offset (Probe Tip to Sensor Center)

X	2.5 mm
Y	2.5 mm
Z	2.5 mm

Connector Angle 51 °

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A numerical linearization parameter: uncertainty not required


RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

ER3DV6 SN:2285

December 10, 2004

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide R22)

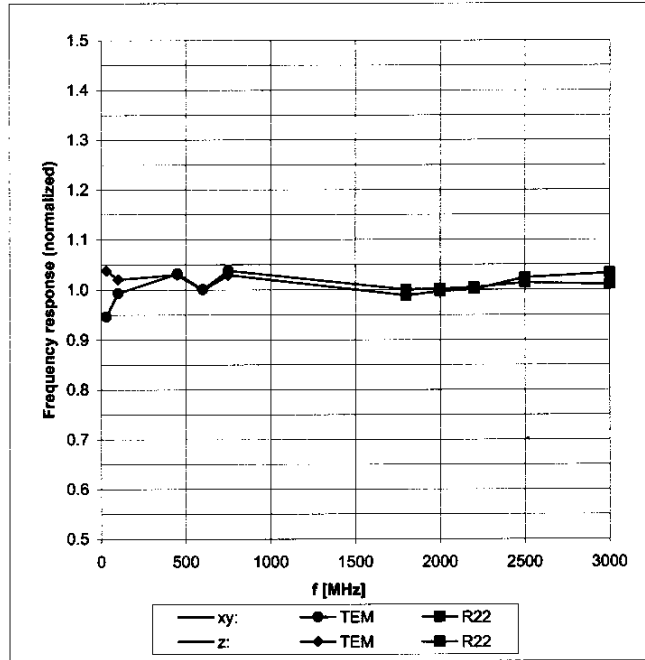


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ (k=2)

RTS RIM Testing Services	Document		
	Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01	FCC ID L6ARAV20CW


ER3DV6 SN:2285

December 10, 2004

Receiving Pattern (ϕ), $\theta = 0^\circ$

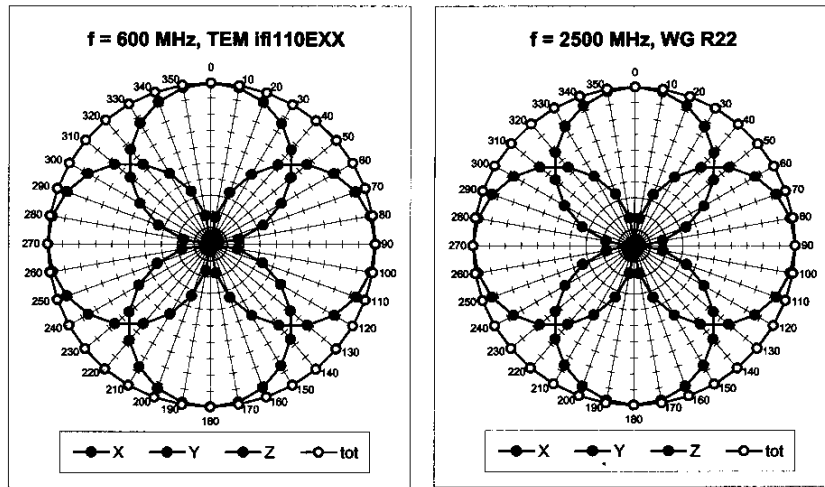

Receiving Pattern (ϕ), $\theta = 90^\circ$

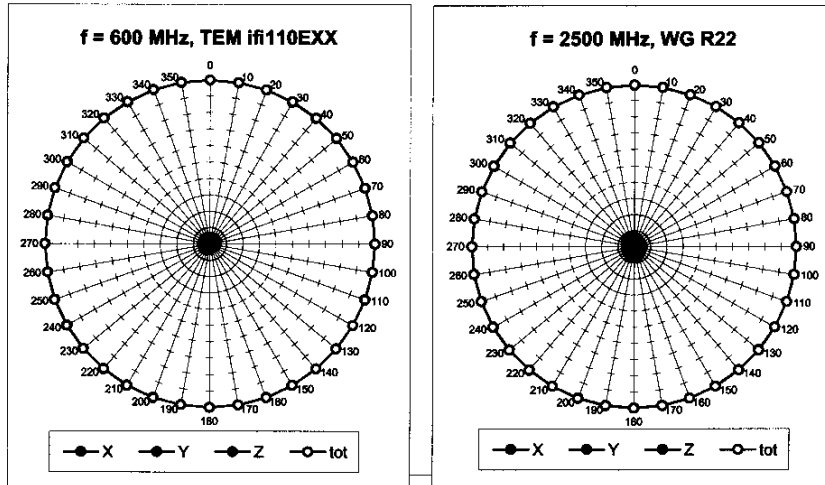


RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

ER3DV6 SN:2285


December 10, 2004

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

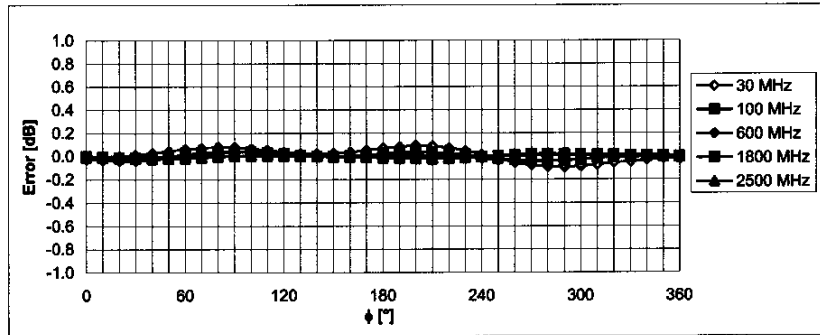

Uncertainty of Axial isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Receiving Pattern (ϕ), $\vartheta = 90^\circ$

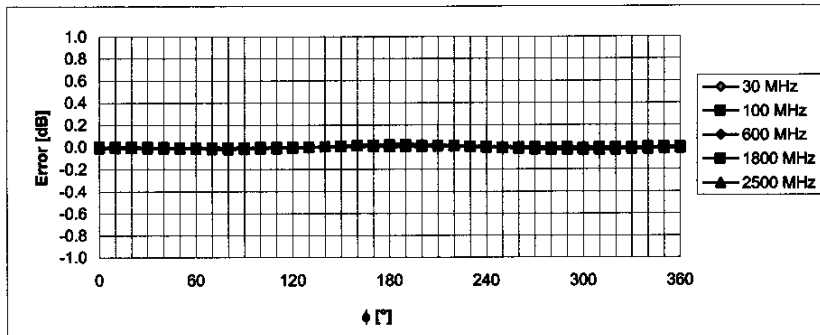



Uncertainty of Axial isotropy Assessment: $\pm 0.5\%$ ($k=2$)

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

ER3DV6 SN:2285

December 10, 2004

Dynamic Range f(E-field)
(Waveguide R22, f = 1800 MHz)

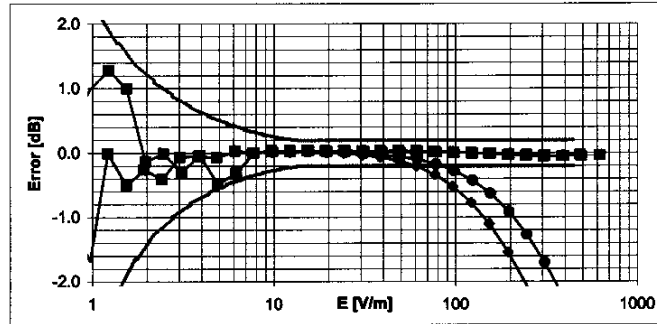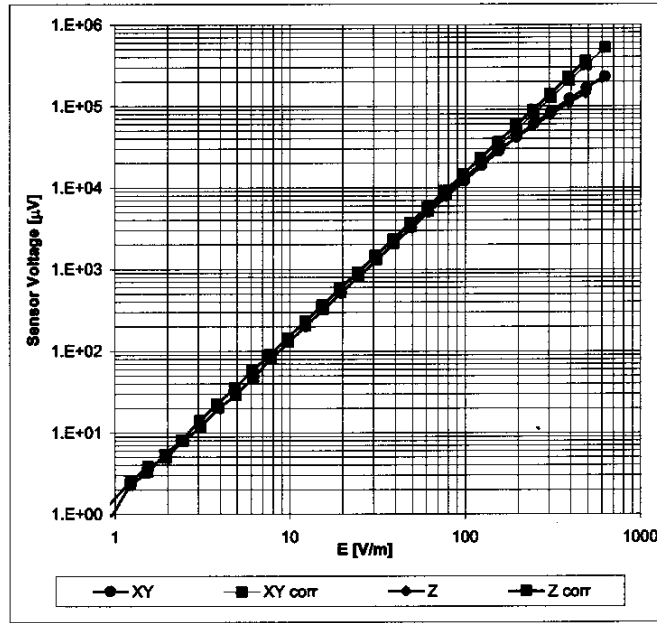


Uncertainty of Linearity Assessment: $\pm 0.6\%$ (k=2)

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

ER3DV6 SN:2285

December 10, 2004

Deviation from Isotropy in Air
Error (ϕ, θ), $f = 900$ MHz

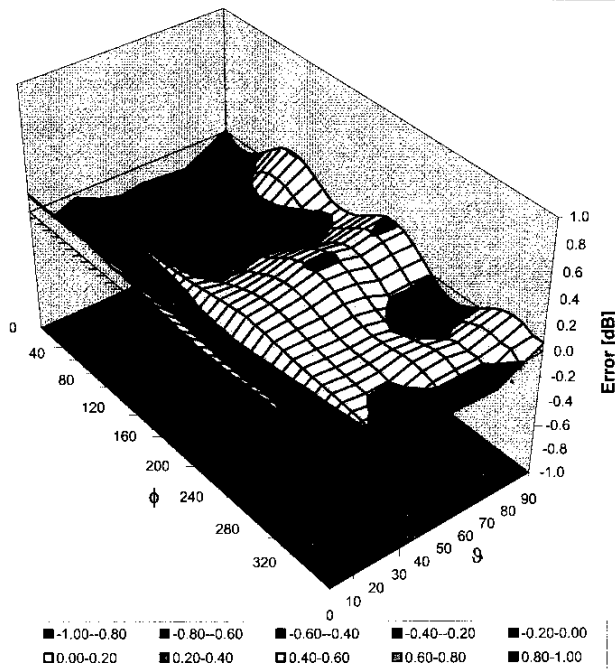

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ ($k=2$)

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

Calibration Laboratory of
Schmid & Partner
Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **RIM**

Certificate No: **H3-6105_Dec04**

CALIBRATION CERTIFICATE			
Object	H3DV6 - SN:6105		
Calibration procedure(s)	QA CAL-03.v4 Calibration procedure for H-field probes optimized for close near field evaluations in air		
Calibration date:	December 10, 2004		
Condition of the calibrated item	In Tolerance		
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p>			
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No)	Scheduled Calibration
Power meter E4419B	GB41293874	5-May-04 (METAS, No. 251-00388)	May-05
Power sensor E4412A	MY41495277	5-May-04 (METAS, No. 251-00388)	May-05
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-04 (METAS, No. 251-00403)	Aug-05
Reference 20 dB Attenuator	SN: S5086 (20b)	3-May-04 (METAS, No. 251-00389)	May-05
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-04 (METAS, No. 251-00404)	Aug-05
Reference Probe H3DV6	SN: 6182	6-Oct-04 (SPEAG, No. H3-6182_Oct04)	Oct-05
DAE4	SN: 617	29-Sep-04 (SPEAG, No. DAE4-617_Sep04)	Sep-05
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092180	18-Sep-02 (SPEAG, in house check Oct-03)	In house check: Oct 05
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Dec-03)	In house check: Dec-05
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov 05
Calibrated by:	Name Nico Vetterli	Function Laboratory Technician	Signature
Approved by:	Name Katja Pokovic	Function Technical Manager	Signature
			Issued: December 13, 2004
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

Certificate No: H3-6105_Dec04

Page 1 of 8

RTS RIM Testing Services	Document		
	Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01	FCC ID L6ARAV20CW

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

NORM_{x,y,z} sensitivity in free space
DCP diode compression point
Polarization φ φ rotation around probe axis
Polarization ϑ ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1309-1996, " IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", 1996.

Methods Applied and Interpretation of Parameters:

- **X, Y, Z_{a0a1a2}** : Assessed for E-field polarization $\vartheta = 90$ for XY-sensors and $\vartheta = 0$ for Z sensor ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide).
- **$X, Y, Z(f)_{a0a1a2} = X, Y, Z_{a0a1a2} * frequency_response$** (see Frequency Response Chart).
- **$DCP_{x,y,z}$** : DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency.
- **Spherical isotropy (3D deviation from isotropy)**: in a locally homogeneous field realized using an open waveguide setup.
- **Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- **Connector Angle**: The angle is assessed using the information gained by determining the X_{a0a1a2} (no uncertainty required).

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

H3DV6 SN:6105

December 10, 2004

Probe H3DV6

SN:6105

Manufactured: January 4, 2002
Last calibrated: January 12, 2004
Recalibrated: December 10, 2004

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

H3DV6 SN:6105

December 10, 2004

DASY - Parameters of Probe: H3DV6 SN:6105

Sensitivity in Free Space [A/m / $\sqrt{(\mu V)}$]

	a0	a1	a2
X	2.852E-03	1.139E-4	-2.960E-5 ± 5.1 % (k=2)
Y	2.600E-03	1.234E-4	-2.015E-5 ± 5.1 % (k=2)
Z	2.910E-03	2.506E-5	-2.259E-5 ± 5.1 % (k=2)

Diode Compression¹

DCP X	88 mV
DCP Y	88 mV
DCP Z	89 mV

Sensor Offset (Probe Tip to Sensor Center)

X	3.0 mm
Y	3.0 mm
Z	3.0 mm

Connector Angle **103 °**

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.


¹ numerical linearization parameter; uncertainty not required

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

H3DV6 SN:6105

December 10, 2004

Frequency Response of H-Field
(TEM-Cell:If1110, Waveguide R22)

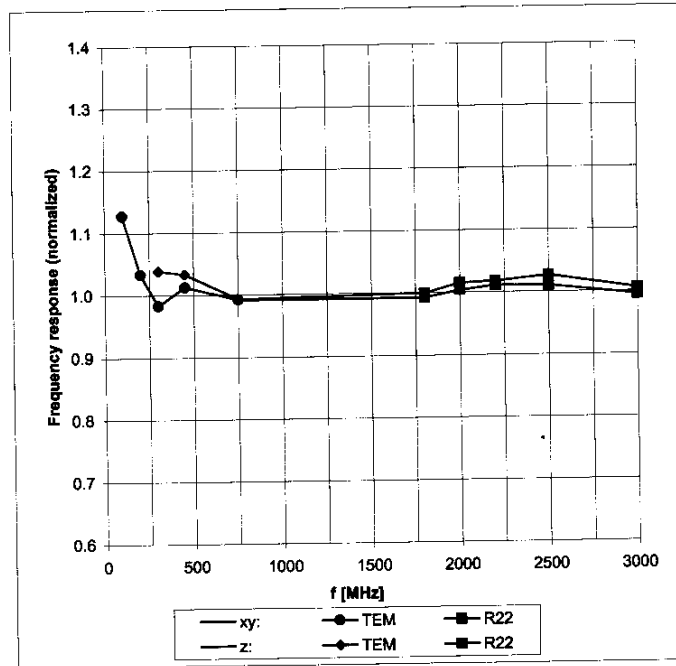


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

RTS RIM Testing Services	Document		
	Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01	FCC ID L6ARAV20CW


H3DV6 SN:6105

December 10, 2004

Receiving Pattern (ϕ), $\vartheta = 90^\circ$

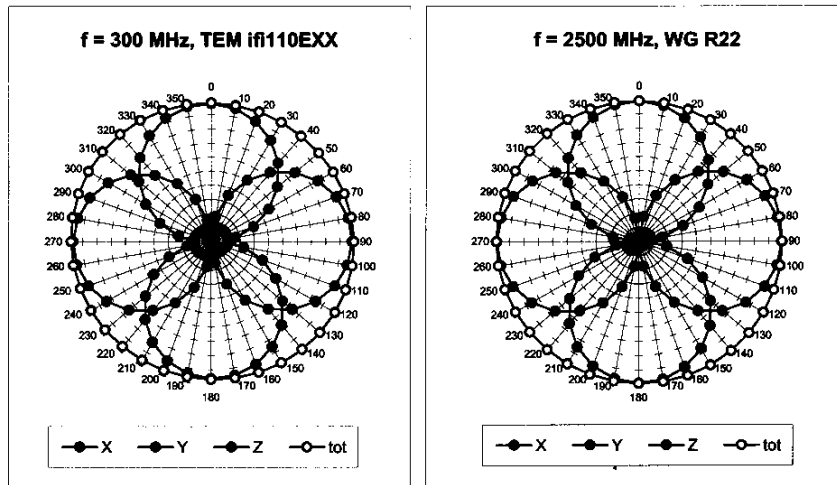

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

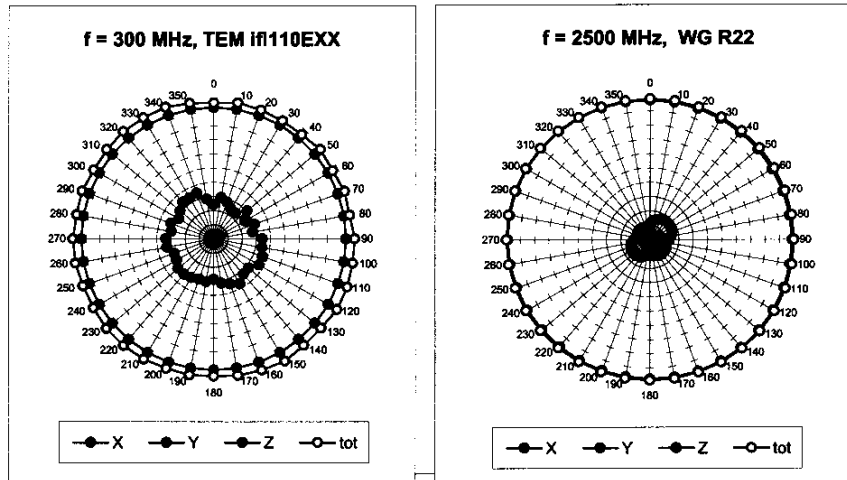


RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

H3DV6 SN:6105


December 10, 2004

Receiving Pattern (ϕ), $\vartheta = 90^\circ$

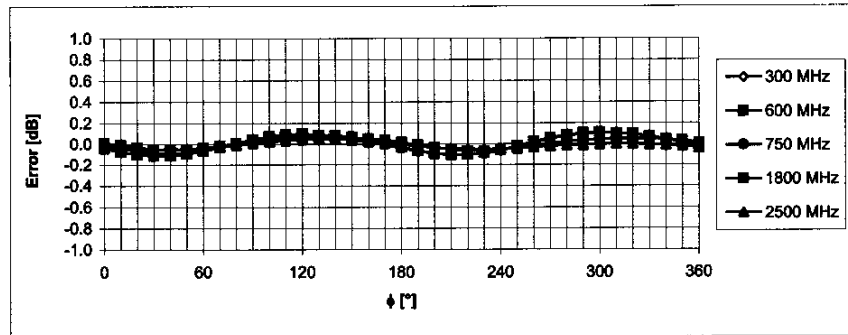

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Receiving Pattern (ϕ), $\vartheta = 0^\circ$

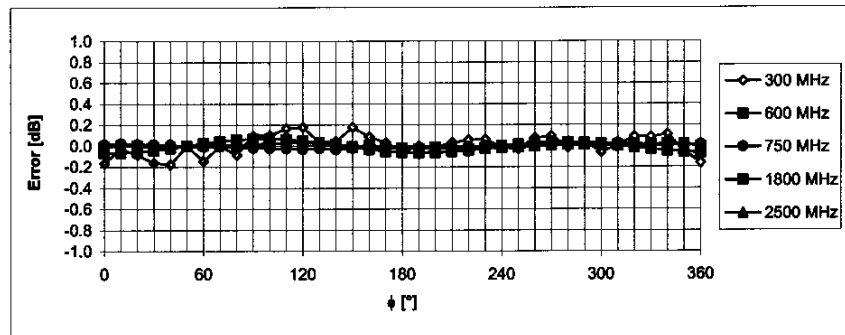



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

H3DV6 SN:6105

December 10, 2004

Dynamic Range f(H-field)
(Waveguide R22, f = 1800 MHz)

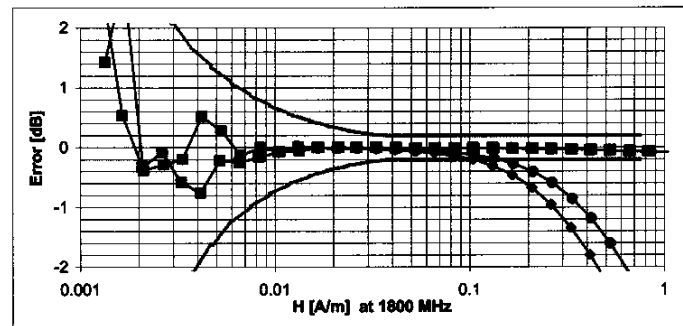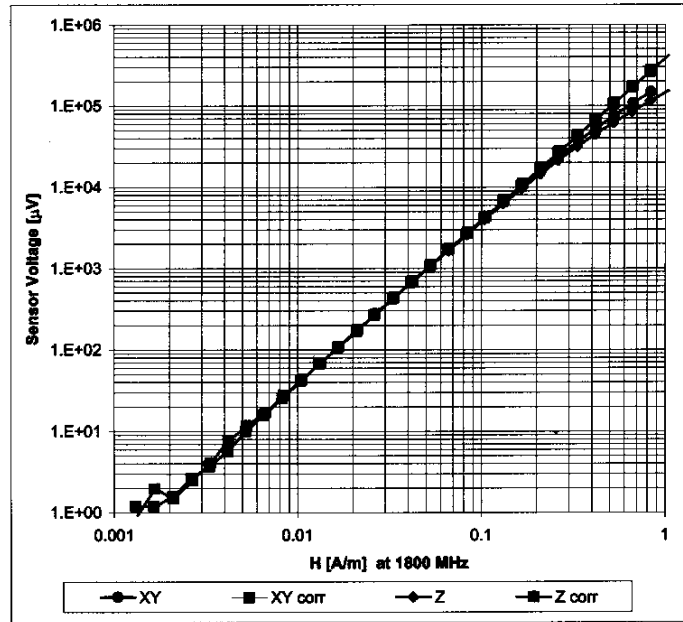

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

Calibration Laboratory of Schmid & Partner Engineering AG
 Zeughausstrasse 43, 8004 Zurich, Switzerland

Client

RIM

Certificate No: **CD835V3-1011_Feb05**

CALIBRATION CERTIFICATE																																																							
Object	CD835V3 - SN: 1011																																																						
Calibration procedure(s)	QA CAL-20.v2 Calibration procedure for dipoles in air																																																						
Calibration date:	February, 24, 2005																																																						
Condition of the calibrated item	In Tolerance																																																						
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3°C and humidity < 70%.</p> <p>Calibration Equipment used (M&TE critical for calibration)</p> <table border="1"> <thead> <tr> <th>Primary Standards</th> <th>ID #</th> <th>Cal Date (Calibrated by, Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter EPM E442</td> <td>GB37480704</td> <td>12-Oct-04 (METAS, No. 251-00412)</td> <td>Oct-05</td> </tr> <tr> <td>Power sensor HP 8481A</td> <td>US37292783</td> <td>12-Oct-04 (METAS, No. 251-00412)</td> <td>Oct-05</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: 5086 (20g)</td> <td>10-Aug-04 (METAS, No 251-00402)</td> <td>Aug-05</td> </tr> <tr> <td>Reference 10 dB Attenuator</td> <td>SN: 5047.2 (10r)</td> <td>10-Aug-04 (METAS, No 251-00402)</td> <td>Aug-05</td> </tr> <tr> <td>Reference Probe ER3DV6</td> <td>SN 2328</td> <td>06-Oct-04 (SPEAG, No. ER3-2328_Oct04)</td> <td>Oct-05</td> </tr> <tr> <td>DAE4</td> <td>SN 601</td> <td>07-Jan-05 (SPEAG, No. DAE4-601_Jan05)</td> <td>Jan-06</td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Secondary Standards</th> <th>ID #</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Power sensor HP 8481A</td> <td>MY41092312</td> <td>10-Aug-03 (SPEAG, in house check Jan-04)</td> <td>In house check: Oct-05</td> </tr> <tr> <td>Power sensor HP 8481A</td> <td>MY41093315</td> <td>10-Aug-03 (SPEAG, in house check Jan-04)</td> <td>In house check: Oct-05</td> </tr> <tr> <td>RF generator Agilent E8251A</td> <td>US41140111</td> <td>4-Aug-03 (Agilent)</td> <td>In house check: Aug-05</td> </tr> <tr> <td>Network Analyzer HP 8753E</td> <td>US37390585 S4206</td> <td>18-Oct-01 (SPEAG, in house check Nov-04)</td> <td>In house check: Nov-05</td> </tr> <tr> <td>Probe H3DV6</td> <td>SN: 6065</td> <td>10-Oct-04 (SPEAG, No. H3-6065-Oct04)</td> <td>Calibration, Oct-05</td> </tr> </tbody> </table>				Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration	Power meter EPM E442	GB37480704	12-Oct-04 (METAS, No. 251-00412)	Oct-05	Power sensor HP 8481A	US37292783	12-Oct-04 (METAS, No. 251-00412)	Oct-05	Reference 20 dB Attenuator	SN: 5086 (20g)	10-Aug-04 (METAS, No 251-00402)	Aug-05	Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-04 (METAS, No 251-00402)	Aug-05	Reference Probe ER3DV6	SN 2328	06-Oct-04 (SPEAG, No. ER3-2328_Oct04)	Oct-05	DAE4	SN 601	07-Jan-05 (SPEAG, No. DAE4-601_Jan05)	Jan-06	Secondary Standards	ID #	Check Date (in house)	Scheduled Check	Power sensor HP 8481A	MY41092312	10-Aug-03 (SPEAG, in house check Jan-04)	In house check: Oct-05	Power sensor HP 8481A	MY41093315	10-Aug-03 (SPEAG, in house check Jan-04)	In house check: Oct-05	RF generator Agilent E8251A	US41140111	4-Aug-03 (Agilent)	In house check: Aug-05	Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov-05	Probe H3DV6	SN: 6065	10-Oct-04 (SPEAG, No. H3-6065-Oct04)	Calibration, Oct-05
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration																																																				
Power meter EPM E442	GB37480704	12-Oct-04 (METAS, No. 251-00412)	Oct-05																																																				
Power sensor HP 8481A	US37292783	12-Oct-04 (METAS, No. 251-00412)	Oct-05																																																				
Reference 20 dB Attenuator	SN: 5086 (20g)	10-Aug-04 (METAS, No 251-00402)	Aug-05																																																				
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-04 (METAS, No 251-00402)	Aug-05																																																				
Reference Probe ER3DV6	SN 2328	06-Oct-04 (SPEAG, No. ER3-2328_Oct04)	Oct-05																																																				
DAE4	SN 601	07-Jan-05 (SPEAG, No. DAE4-601_Jan05)	Jan-06																																																				
Secondary Standards	ID #	Check Date (in house)	Scheduled Check																																																				
Power sensor HP 8481A	MY41092312	10-Aug-03 (SPEAG, in house check Jan-04)	In house check: Oct-05																																																				
Power sensor HP 8481A	MY41093315	10-Aug-03 (SPEAG, in house check Jan-04)	In house check: Oct-05																																																				
RF generator Agilent E8251A	US41140111	4-Aug-03 (Agilent)	In house check: Aug-05																																																				
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov-05																																																				
Probe H3DV6	SN: 6065	10-Oct-04 (SPEAG, No. H3-6065-Oct04)	Calibration, Oct-05																																																				
Calibrated by:	Name Mike Meili	Function Laboratory Technician	Signature <i>M. Meili</i>																																																				
Approved by:	Name Fin Bornholt	Technical Director	<i>F. Bornholt</i>																																																				
Issued: February 27, 2005																																																							
<p>This calibration certificate is issued as an intermediate solution until the specific calibration procedure is submitted and accepted in the frame of the accreditation of the Calibration Laboratory of Schmid & Partner Engineering AG (based on ISO/IEC 17025 International Standard)</p>																																																							

Certificate No: CD835V3-1011_Feb05

Page 1 of 6

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland

References

- [1] ANSI-PC63.19-2003 (Draft)
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- Coordinate System:** y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with standard [1], the measurement planes (probe sensor center) are selected to be at a distance of 10 mm above the top edge of the dipole arms.
- Measurement Conditions:** Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- Antenna Positioning:** The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections.
It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY4 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- Feed Point Impedance and Return Loss:** These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminated by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- E-field distribution:** E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 10 mm (in z) above the top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, 10mm above the dipole surface.
- H-field distribution:** H-field is measured with an isotropic H-field probe with 100mW forward power to the antenna feed point, in the x-y-plane. The scan area and sensor distance is equivalent to the E-field scan. The maximum of the field is available at the center (subgrid 5) above the feed point. The H-field value stated as calibration value represents the maximum of the interpolated H-field, 10mm above the dipole surface at the feed point.

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

1 Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.5 B13
DASY PP Version	SEMCAD	V1.8 B144
Phantom	HAC Test Arch	SD HAC P01 BA, #1002
Distance Dipole Top - Probe Center	10 mm	
Scan resolution	dx, dy = 5 mm	area = 20 x 180 mm
Frequency	835 MHz ± 1 MHz	
Forward power at dipole connector	20.0 dBm = 100mW	
Input power drift	< 0.05 dB	

2 Maximum Field values

H-field 10 mm above dipole surface	condition	interpolated maximum
Maximum measured	100 mW forward power	0.442 A/m

Uncertainty for H-field measurement: 8.2% (k=2)

E-field 10 mm above dipole surface	condition	interpolated maximum
Maximum measured above high end	100 mW forward power	185.0 V/m
Maximum measured above low end	100 mW forward power	155.8 V/m
Averaged maximum above arm	100 mW forward power	180.4 V/m

Uncertainty for E-field measurement: 12.8% (k=2)

3 Appendix

3.1 Antenna Parameters

Frequency	Return Loss	Impedance
800 MHz	16.9 dB	(40.9-j9.4) Ohm
835 MHz	27.7 dB	(52.6 + j3.3) Ohm
900 MHz	16.9 dB	(49.1 - j14.3) Ohm
950 MHz	19.9 dB	(46.5 + j8.1) Ohm
960 MHz	16.4 dB	(56.0 + j15.0) Ohm

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.


Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

3.3 Measurement Sheets

3.3.1 Return Loss and Smith Chart

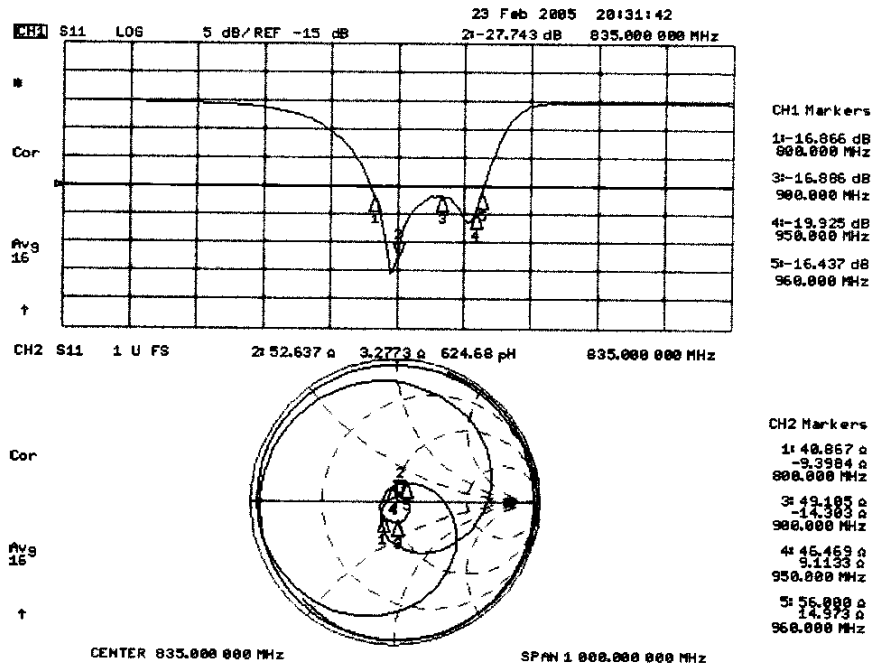

3.3.2 DASY4 H-field result

See page 5

3.3.3 DASY4 E-Field result

See page 6

RTS RIM Testing Services	Document		
	Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01	FCC ID L6ARAV20CW

Date/Time: 24.02.2005 11:14:35

Test Laboratory: SPEAG, Zurich, Switzerland
 File Name: H_CD835_1011_050224.da4

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1011
 Program Name: HAC H Dipole


Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
 Medium parameters used: $\sigma = 0$; mho/m, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$
 Phantom section: H Dipole Section

DASY4 Configuration:
 - Probe: H3DV6 - SN6065; ; Calibrated: 10.12.2004
 - Sensor-Surface: (Fix Surface)
 - Electronics: DAE4 Sn901; Calibrated: 29.06.2004
 - Phantom: HAC Phantom; Type: SD HAC P01 BA; Serial: 1002
 - Measurement SW: DASY4, V4.5 Build 13; Postprocessing SW: SEMCAD, V1.8 Build 144

H Scan 10mm above CD 835 MHz/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm, dz=5.555mm
 Maximum value of Total field (slot averaged) = 0.442 A/m
 Hearing Aid Near-Field Category: M2 (AWF 0 dB)

H in A/m (Time averaged) H in A/m (Slot averaged)

Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
0.366	0.388	0.362	0.366	0.388	0.362
Grid 4		Grid 6	Grid 4		Grid 6
0.417		0.415	0.417		0.415
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
0.361	0.383	0.362	0.361	0.383	0.362

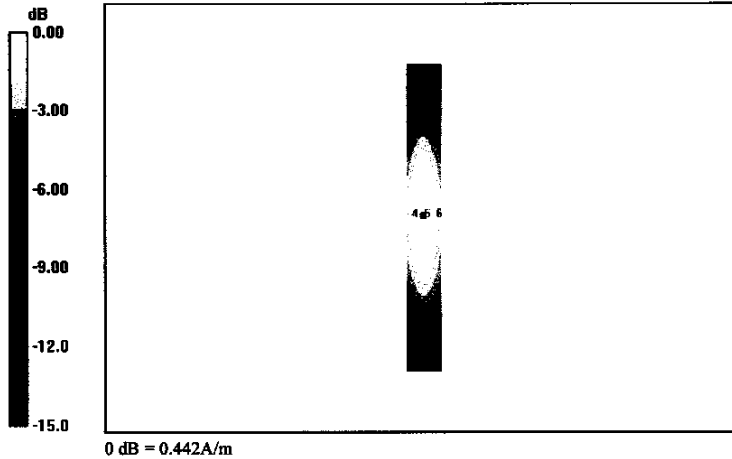

RTS RIM Testing Services	Document		
	Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
Author Data	Dates	Report No	FCC ID
Lauren Weber	July 05-08, 2005	RTS-0181-0507-01	L6ARAV20CW

Date/Time: 24.02.2005 08:58:55

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: E_CD835_1011_050224.da4

DUT: HAC-Dipole 835 MHz; Type: D835V3; Serial: 1011
Program Name: HAC E Dipole


Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$; mho/m, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: E Dipole Section

DASY4 Configuration:
- Probe: ER3DV6 - SN2328; ConvF(1, 1, 1); Calibrated: 06.10.2004
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn901; Calibrated: 29.06.2004
- Phantom: HAC Phantom; Type: SD HAC P01 BA; Serial: 1002
- Measurement SW: DASY4, V4.5 Build 13; Postprocessing SW: SEMCAD, V1.8 Build 144

E Scan 10mm above CD 835 MHz/Hearing Aid Compatibility Test (41x361x1): Measurement grid: dx=5mm, dy=5mm, dz=5.555mm
Maximum value of Total field (slot averaged) = 165.0 V/m
Hearing Aid Near-Field Category: M2 (AWF 0 dB)

E in V/m (Time averaged) E in V/m (Slot averaged)

Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
163.5	165.0	153.0	163.5	165.0	153.0
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
90.3	91.2	85.1	90.3	91.2	85.1
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
153.1	155.8	147.3	153.1	155.8	147.3

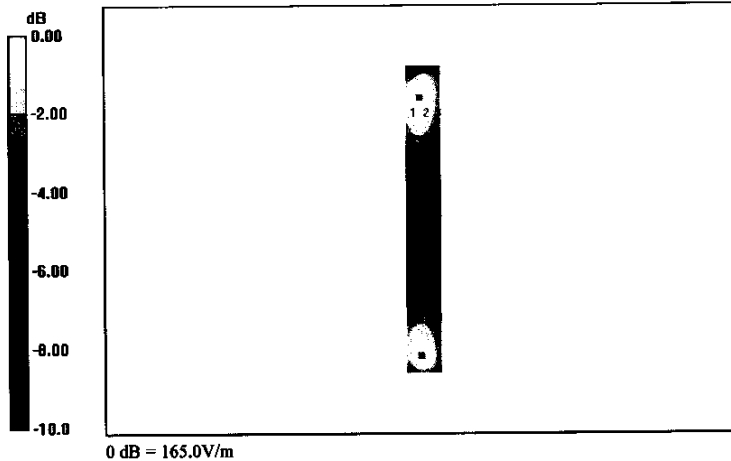

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

**Calibration Laboratory of
 Schmid & Partner
 Engineering AG**
 Zeughausstrasse 43, 8004 Zurich, Switzerland

Client

RIM

Contract No. **CD1880V3-1008_Feb05**

CALIBRATION CERTIFICATE			
Object	CD1880V3 - SN: 1008		
Calibration procedure(s)	QA CAL-20.v2 Calibration procedure for dipples in air		
Calibration date:	February, 23, 2005		
Condition of the calibrated item	In Tolerance		
<p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.</p>			
Calibration Equipment used (M&TE critical for calibration)			
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter EPM E442	GB37480704	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Power sensor HP 8481A	US37292783	12-Oct-04 (METAS, No. 251-00412)	Oct-05
Reference 20 dB Attenuator	SN: 5086 (20g)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference 10 dB Attenuator	SN: 5047.2 (10r)	10-Aug-04 (METAS, No 251-00402)	Aug-05
Reference Probe ER3DV6	SN 2328	06-Oct-04 (SPEAG, No. ER3-2328_Oct04)	Oct-05
DAE4	SN 601	07-Jan-05 (SPEAG, No. DAE4-601_Jan05)	Jan-06
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
Power sensor HP 8481A	MY41092312	10-Aug-03 (SPEAG, in house check Jan-04)	In house check: Oct-05
Power sensor HP 8481A	MY41093315	10-Aug-03 (SPEAG, in house check Jan-04)	In house check: Oct-05
RF generator Agilent E8251A	US41140111	4-Aug-03 (Agilent)	In house check: Aug-05
Network Analyzer HP 8753E	US37390585 S4206	18-Oct-01 (SPEAG, in house check Nov-04)	In house check: Nov-05
Probe H3DV6	SN: 6065	10-Oct-04 (SPEAG, No. H3-6065-Oct04)	Calibration, Oct-05
Calibrated by:	Name Mike Meil	Function Laboratory Technician	Signature <i>Mike Meil</i>
Approved by:	Name Fin Bonholt	Technical Director Technical Director	<i>Fin Bonholt</i>
Issued: February 27, 2005			
<p>This calibration certificate is issued as an intermediate solution until the specific calibration procedure is submitted and accepted in the frame of the accreditation of the Calibration Laboratory of Schmid & Partner Engineering AG (based on ISO/IEC 17025 International Standard)</p>			

Certificate No: CD1880V3-1008_Feb05

Page 1 of 6

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

**Calibration Laboratory of
Schmid & Partner
Engineering AG**
Zeughausstrasse 43, 8004 Zurich, Switzerland

References

- [1] ANSI-PC63.19-2003 (Draft)
American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids.

Methods Applied and Interpretation of Parameters:

- Coordinate System:** y-axis is in the direction of the dipole arms. z-axis is from the basis of the antenna (mounted on the table) towards its feed point between the two dipole arms. x-axis is normal to the other axes. In coincidence with standard [1], the measurement planes (probe sensor center) are selected to be at a distance of 10 mm above the top edge of the dipole arms.
- Measurement Conditions:** Further details are available from the hardcopies at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated. The forward power to the dipole connector is set with a calibrated power meter connected and monitored with an auxiliary power meter connected to a directional coupler. While the dipole under test is connected, the forward power is adjusted to the same level.
- Antenna Positioning:** The dipole is mounted on a HAC Test Arch phantom using the matching dipole positioner with the arms horizontal and the feeding cable coming from the floor. The measurements are performed in a shielded room with absorbers around the setup to reduce the reflections. It is verified before the mounting of the dipole under the Test Arch phantom, that its arms are perfectly in a line. It is installed on the HAC dipole positioner with its arms parallel below the dielectric reference wire and able to move elastically in vertical direction without changing its relative position to the top center of the Test Arch phantom. The vertical distance to the probe is adjusted after dipole mounting with a DASY4 Surface Check job. Before the measurement, the distance between phantom surface and probe tip is verified. The proper measurement distance is selected by choosing the matching section of the HAC Test Arch phantom with the proper device reference point (upper surface of the dipole) and the matching grid reference point (tip of the probe) considering the probe sensor offset. The vertical distance to the probe is essential for the accuracy.
- Feed Point Impedance and Return Loss:** These parameters are measured using a HP 8753E Vector Network Analyzer. The impedance is specified at the SMA connector of the dipole. The influence of reflections was eliminating by applying the averaging function while moving the dipole in the air, at least 70cm away from any obstacles.
- E-field distribution:** E field is measured in the x-y-plane with an isotropic ER3D-field probe with 100 mW forward power to the antenna feed point. In accordance with [1], the scan area is 20mm wide, its length exceeds the dipole arm length (180 or 90mm). The sensor center is 10 mm (in z) above the top of the dipole arms. Two 3D maxima are available near the end of the dipole arms. Assuming the dipole arms are perfectly in one line, the average of these two maxima (in subgrid 2 and subgrid 8) is determined to compensate for any non-parallelity to the measurement plane as well as the sensor displacement. The E-field value stated as calibration value represents the maximum of the interpolated 3D-E-field, 10mm above the dipole surface.
- H-field distribution:** H-field is measured with an isotropic H-field probe with 100mW forward power to the antenna feed point, in the x-y-plane. The scan area and sensor distance is equivalent to the E-field scan. The maximum of the field is available at the center (subgrid 5) above the feed point. The H-field value stated as calibration value represents the maximum of the interpolated H-field, 10mm above the dipole surface at the feed point.

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

1 Measurement Conditions

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.5 B13
DASY PP Version	SEMCAD	V1.8 B144
Phantom	HAC Test Arch	SD HAC P01 BA, #1002
Distance Dipole Top - Probe Center	10 mm	
Scan resolution	dx, dy = 5 mm	area = 20 x 90 mm
Frequency	1880 MHz ± 1 MHz	
Forward power at dipole connector	20.0 dBm = 100mW	
Input power drift	< 0.05 dB	

2 Maximum Field values

H-field 10 mm above dipole surface	condition	interpolated maximum
Maximum measured	100 mW forward power	0.444 A/m

Uncertainty for H-field measurement: 8.2% (k=2)

E-field 10 mm above dipole surface	condition	interpolated maximum
Maximum measured above high end	100 mW forward power	136.1 V/m
Maximum measured above low end	100 mW forward power	134.7 V/m
Averaged maximum above arm	100 mW forward power	135.4 V/m

Uncertainty for E-field measurement: 12.8% (k=2)

3 Appendix

3.1 Antenna Parameters

Frequency	Return Loss	Impedance
1710 MHz	28.5 dB	(52.3 + j4.4) Ohm
1880 MHz	19.1 dB	(59.0 + j7.4) Ohm
1900 MHz	19.8 dB	(59.8 + j2.2) Ohm
1950 MHz	26.2 dB	(55.1 - j3.5) Ohm
2000 MHz	23.0 dB	(48.8 + j8.0) Ohm

3.2 Antenna Design and Handling

The calibration dipole has a symmetric geometry with a built-in two stub matching network, which leads to the enhanced bandwidth.

The dipole is built of standard semirigid coaxial cable. The internal matching line is open ended. The antenna is therefore open for DC signals.


Do not apply force to dipole arms, as they are liable to bend. The soldered connections near the feedpoint may be damaged. After excessive mechanical stress or overheating, check the impedance characteristics to ensure that the internal matching network is not affected.

After long term use with 40W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

3.3 Measurement Sheets

3.3.1 Return Loss and Smith Chart

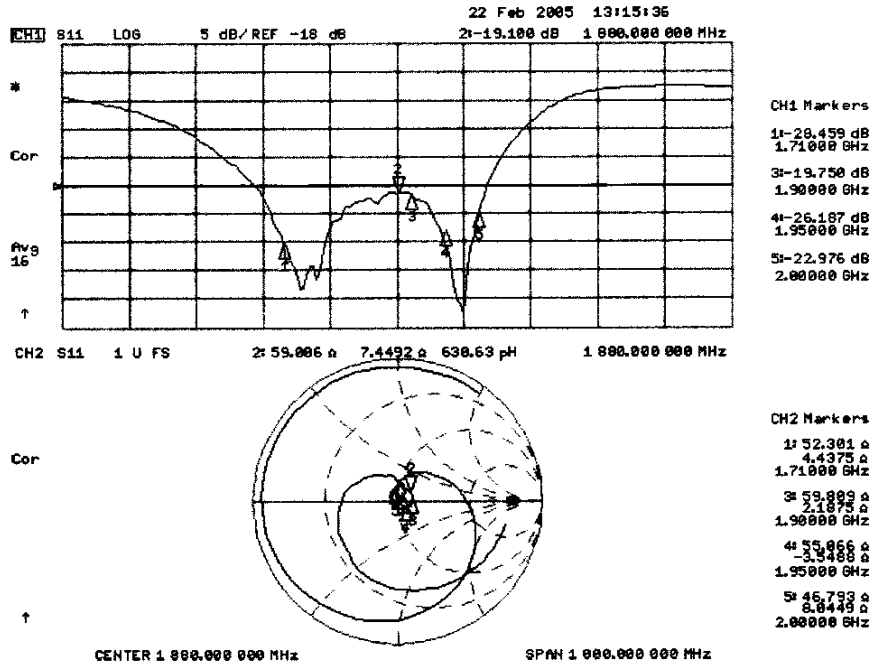

3.3.2 DASY4 H-field result

See page 5

3.3.3 DASY4 E-Field result

See page 6

RTS RIM Testing Services	Document		
	Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
Author Data	Dates	Report No	FCC ID
Lauren Weber	July 05-08, 2005	RTS-0181-0507-01	L6ARAV20CW

Date/Time: 23.02.2005 12:27:27

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: H_CD1880_1008_050223.da4

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1008
Program Name: HAC H Dipole


Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$; mho/m, $\epsilon_r = 1$; $\rho = 1 \text{ kg/m}^3$
Phantom section: H Dipole Section

DASY4 Configuration:
- Probe: H3DV6 - SN6065; ; Calibrated: 10.12.2004
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn901; Calibrated: 29.06.2004
- Phantom: HAC Phantom; Type: SD HAC P01 BA; Serial: 1002
- Measurement SW: DASY4, V4.5 Build 13; Postprocessing SW: SEMCAD, V1.8 Build 144

H Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm, dz=5.5555mm
Maximum value of Total field (slot averaged) = 0.444 A/m
Hearing Aid Near-Field Category: M2 (AWF 0 dB)

H in A/m (Time averaged) H in A/m (Slot averaged)

Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
0.378	0.407	0.390	0.378	0.407	0.390
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
0.416	0.444	0.427	0.416	0.444	0.427
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
0.374	0.400	0.386	0.374	0.400	0.386

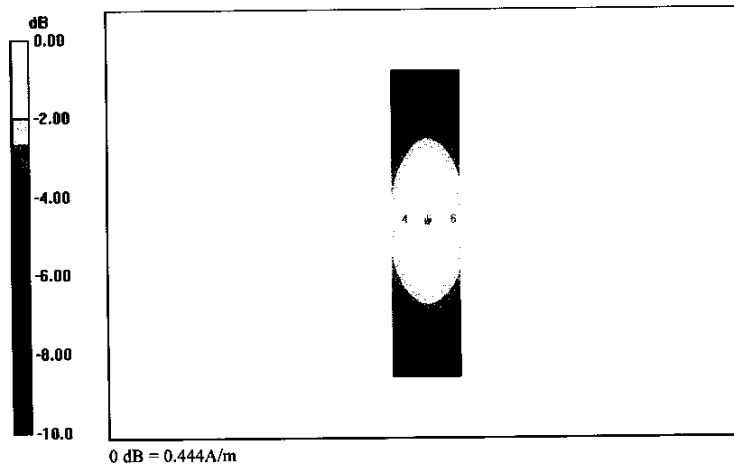

RTS RIM Testing Services	Document		
	Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01	FCC ID L6ARAV20CW

Date/Time: 23.02.2005 18:29:42

Test Laboratory: SPEAG, Zurich, Switzerland
File Name: E_CD1880_1008_050223.da4

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1008
Program Name: HAC E Dipole


Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium parameters used: $\sigma = 0$; mho/m, $\epsilon_r = 1$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: E Dipole Section

DASY4 Configuration:
- Probe: ER3DV6 - SN2328; ConvF(1, 1, 1); Calibrated: 06.10.2004
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn901; Calibrated: 29.06.2004
- Phantom: HAC Phantom; Type: SD HAC P01 BA; Serial: 1002
- Measurement SW: DASY4, V4.5 Build 13; Postprocessing SW: SEMCAD, V1.8 Build 144

E Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (41x181x1): Measurement grid: dx=5mm, dy=5mm, dz=5.555mm
Maximum value of Total field (slot averaged) = 136.1 V/m
Hearing Aid Near-Field Category: M2 (AWF 0 dB)

E in V/m (Time averaged) E in V/m (Slot averaged)

Grid 1 129.7	Grid 2 134.7	Grid 3 132.4	Grid 1 129.7	Grid 2 134.7	Grid 3 132.4
Grid 4 90.0	Grid 5 92.6	Grid 6 89.2	Grid 4 90.0	Grid 5 92.6	Grid 6 89.2
Grid 7 129.1	Grid 8 136.1	Grid 9 133.9	Grid 7 129.1	Grid 8 136.1	Grid 9 133.9

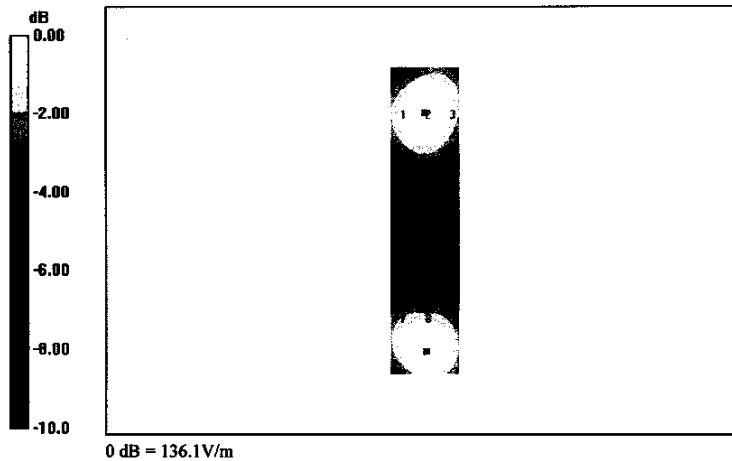

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

Annex C: Test set up photos

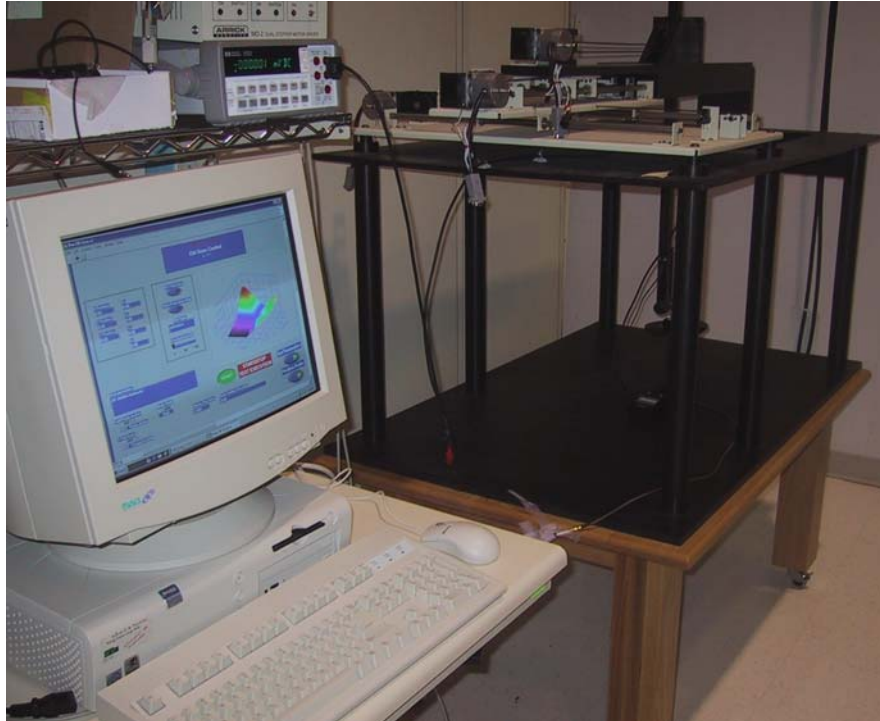


Figure 1 – T-Coil Audio Band Magnetic field measurement system

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

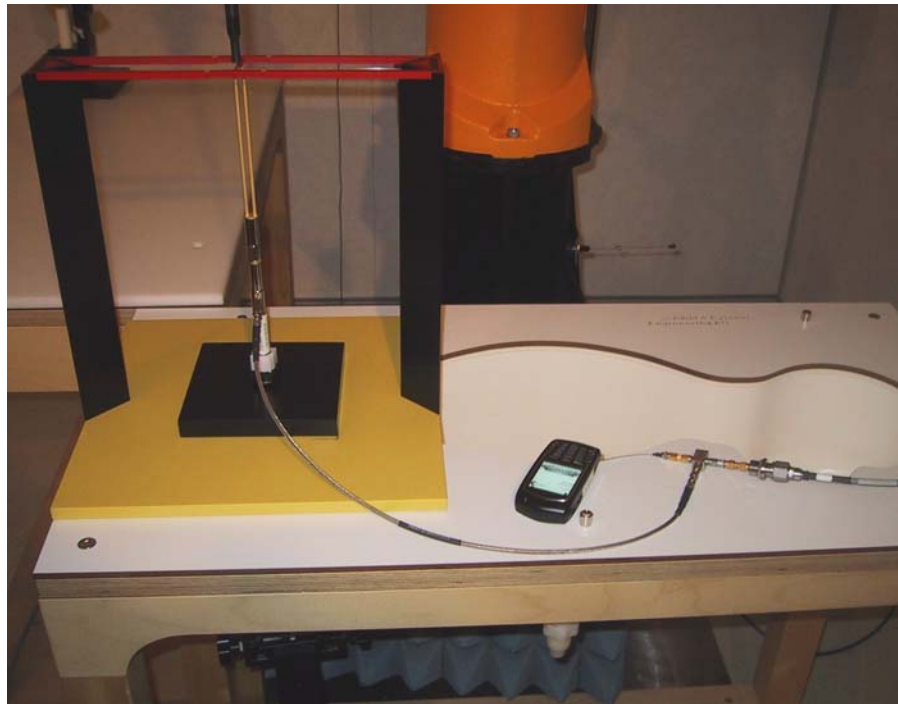
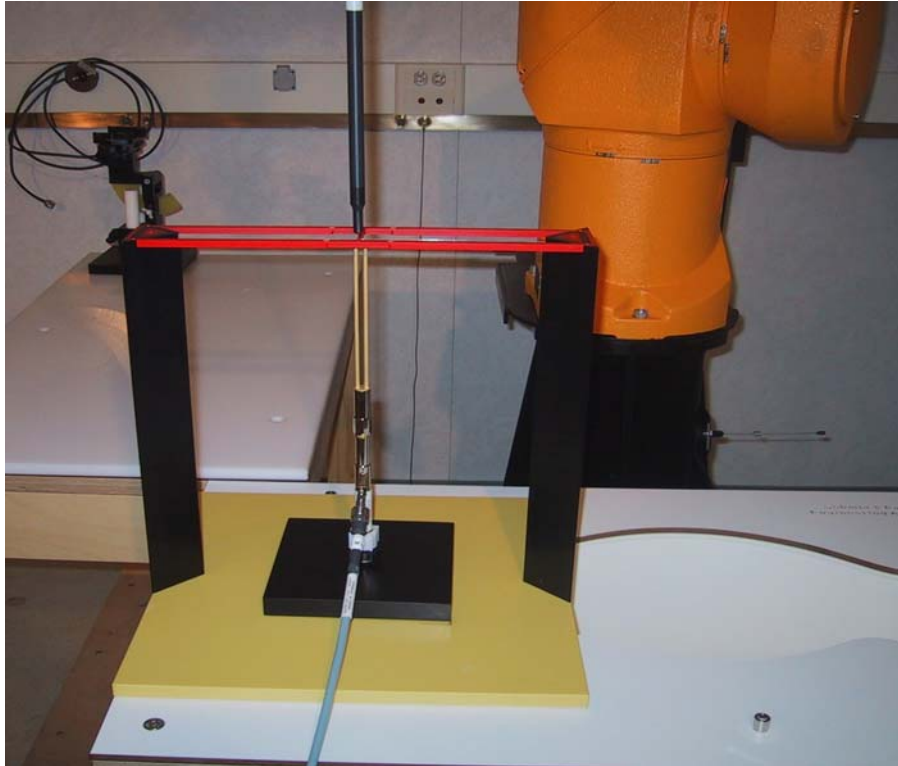


Figure 2 – Dipole validation and modulation measurement setup

RTS RIM Testing Services	Document Hearing Aid Compatibility RF Emissions Test Report for BlackBerry 7130e Wireless Handheld Model RAV20CW		
	Author Data Lauren Weber	Dates July 05-08, 2005	Report No RTS-0181-0507-01

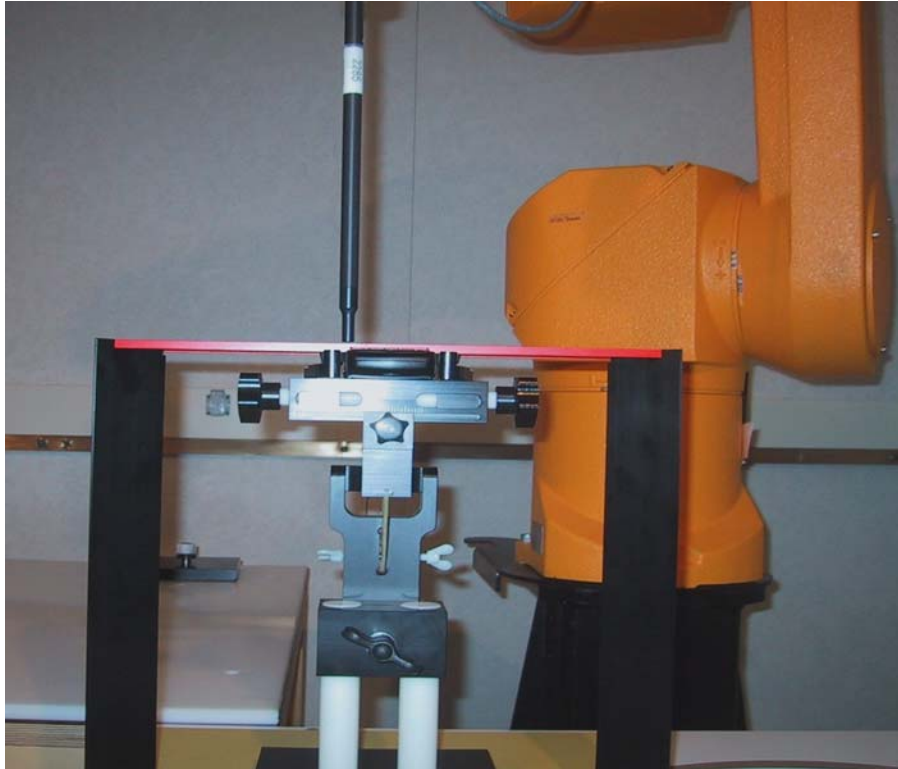


Figure 3 – HAC RF emissions test setup