



HEXAGRAM INC.

An ESCO Technologies Company

Solon OH 44139

(440) 528-7200

30400 Solon Road

RADIO-FREQUENCY EMISSIONS TEST REPORT

FOR

UTILITY METER TRANSMITTING UNIT

Model 2009-013

FCC ID: LLB09013

February 8, 2010

Report Prepared by

James R. Pollock

Agency Certification Control Technician

INTRODUCTION

The Hexagram Model 2009-013 transmitter is a battery-powered transmitter designed to be connected to a typical utility meter. The transmitter is configured for use with an external antenna. At programmed intervals the transmitter provides a very short, intermittent radio frequency transmission to provide a remote reading of the meter. A microprocessor provides timing, control and data processing functions. The external antenna to be used with the transmitter will be one that will not exceed the ERP limits of 90.267(d)(2). One transmitter was tested and this report presents the worst case data obtained in support of an application for certification.

MEASUREMENTS PERFORMED

Power Output and Spurious Emissions	Page 3
Field Strength of Spurious Emissions	Page 5
Occupied Bandwidth	Page 11
Frequency Stability vs. Temperature	Page 13
Frequency Stability vs. Supply Voltage	Page 14
Transient Stability	Page 16

The microprocessor portion of the transmitter was also examined for radiated emissions per Part 15, and has been verified to comply with the appropriate sections of that part. The data used for verification of the microprocessor portion is presented in a separate report.

POWER OUTPUT AND SPURIOUS EMISSIONS

Measurements of the RF power output and spurious emissions were made at the antenna terminal per 2.1046 and 2.1051.

The output of the transmitter was connected to the spectrum analyzer through 50 dB of attenuation and a 1 ft. length of RG-174 cable. The loss in the connecting segment was measured using a network analyzer and is shown in the “loss” column of Table 1. The transmitter was made to transmit a brief, unmodulated signal for determining the output. The fundamental and harmonic emissions were observed and the signal strengths recorded for the three frequencies covering the tuning range of the transmitter. No spurious signals other than the harmonics were noted from the transmitter.

According to 90.210(d)(3) all emissions greater than 12.5 kHz from the center of the authorized band shall be attenuated below the unmodulated carrier by $50+10\log(P)$.

The determined power outputs, the required harmonic attenuation as well as the attenuation for each harmonic are found in Tables 1a – 1c.

TABLE 1a
OUTPUT & SPURIOUS EMISSIONS
DIRECT MEASUREMENT
2009-013

Frequency (MHz)	Measured Signal (dBm)	Attenuation Loss (dB)	Output Power (dBm)	Difference (dBc)
450	-15.7	50.8	35.1	
900	-80.8	51.5	-29.3	-64.4
1350	-94.7	51.8	-42.9	-78.0
1800	-89.0	52.3	-36.7	-71.8
2250	-90.5	52.6	-37.9	-73.0
2700	-97.8	54.0	-43.8	-78.9
3150	-95.3	55.4	-39.9	-75.0
3600	-91.8	55.7	-36.1	-71.2
4050	-92.8	55.9	-36.9	-72.0
4500	-92.7	55.9	-36.8	-71.9

35.1 dBm = 3.24 W

Required Attenuation = 55.1 dB

**TABLE 1b
OUTPUT & SPURIOUS EMISSIONS
DIRECT MEASUREMENT
2009-013**

Frequency (MHz)	Measured Signal (dBm)	Attenuation Loss (dB)	Output Power (dBm)	Difference (dBc)
460	-16.3	50.8	34.5	
920	-84.3	51.3	-33.0	-67.5
1380	-85.1	51.6	-33.5	-68.0
1840	-91.6	52.1	-39.5	-74.0
2300	-93.5	52.7	-40.8	-75.3
2760	-95.6	53.9	-41.7	-76.2
3220	-92.0	54.6	-37.4	-71.9
3680	-89.6	56.7	-32.9	-67.4
4140	-91.1	55.6	-35.5	-70.0
4600	-90.0	56.4	-33.6	-68.1

34.5 dBm = 2.82 W

Required Attenuation = 54.5 dB

**TABLE 1c
OUTPUT & SPURIOUS EMISSIONS
DIRECT MEASUREMENT
2009-013**

Frequency (MHz)	Measured Signal (dBm)	Attenuation Loss (dB)	Output Power (dBm)	Difference (dBc)
470	-16.3	50.8	34.5	
940	-79.1	51.2	-27.9	-62.4
1410	-83.8	51.6	-32.2	-66.7
1880	-77.6	52.1	-25.5	-60.0
2350	-92.6	53.1	-39.5	-74.0
2820	-95.6	54.2	-41.4	-45.9
3290	-91.8	55.1	-36.7	-71.2
3760	-91.8	56.2	-35.6	-70.1
4230	-93.8	55.3	-38.5	-73.0
4700	-94.3	55.7	-38.6	-73.1

34.5 dBm = 2.82 W

Required Attenuation = 54.5 dB

FIELD STRENGTH OF SPURIOUS EMISSIONS

Using the power measurements of the fundamental described in the previous section as the reference, measurement of the harmonic emissions was made using the substitution method of TIA/EIA 603. These measurements were made with a 50 Ohm dummy load connected to the transmitter output.

Within the tuning range of 450 – 470 MHz, the transmitter was examined at three fundamental frequencies and their harmonics. All measurements below 1 GHz were made at a 3-meter distance on the Smith Electronics open area test site located at 8200 Snowville Road, Brecksville, OH. Data pertinent to this site is on file with the FCC (Reg. #90938) and Industry Canada (File #4541A-1). The harmonic measurements above 1 GHz were made at a distance of 1 meter over a suitable ground plane

Tuned dipoles were used for measurements below 1000 MHz and a wave-guide antenna was used above 1000 MHz. A spectrum analyzer was used as a receiver.

The transmitter was placed on a remotely rotatable, non-conducting test stand. This general set up is shown in Pictorial 1. Because of the very short transmissions of the normally operating transmitter a larger, external battery pack was connected directly to the transmitter and the transmitter was forced to transmit for 20 seconds at a 50% duty cycle to obtain these measurements. A ferrite bead was placed on the battery leads to minimize emissions that might come from the leads.

With the test receiver tuned to the unmodulated signal, the transmitter under test was rotated to the position of maximum signal. The receiving antenna was then varied between 1 and 4 meters in height to again maximize the signal. Measurements were made with the antennas positioned both vertically and horizontally and the maximum signals recorded. Peak detection was used for the signals below 1000 MHz and average detection above 1000 MHz.

After the maximum received meter readings were obtained for each frequency and polarity, the transmitter under test was removed from the area and replaced by a signal generator and a vertically polarized transmitting antenna. With the transmit antenna placed as close as possible to the position of the test unit, the signal generator was activated at a test frequency. With the signal detected, the vertically oriented receiving antenna was positioned vertically for maximum reception. The signal generator output was then adjusted until the received signal was equal to the previously received signal from the unit under test. These measurements were repeated for each frequency and antenna orientation and the maximum values obtained are noted in Tables 2a – 2c.

In order to convert the signal generator output value to equivalent radiated power from a dipole, the following equation is used:

$$P_d = P_g - \text{cable loss(dB)} + \text{antenna gain(dB}_d\text{)}$$


where:

P_d is the dipole equivalent power in dBm, P_g is the generator output into the substitution antenna, also in dBm, and “antenna gain” is the gain of the substitution antenna with respect to a theoretical dipole.

According to 90.210(d)(3) all emissions greater than 12.5 kHz from the center of the authorized band shall be attenuated below the unmodulated carrier by $50 + 10\log(P)$.

The determined power outputs, the required harmonic attenuation as well as the attenuation for each harmonic are found in Tables 2a – 2c.

Some broadband emissions were observed in the 50 – 150 MHz range during transmission. These were measured using a pair of biconical antennas at the 3 meter distance. These emissions were determined to be more than 20 dB below the required attenuation value of 55.1 dB.

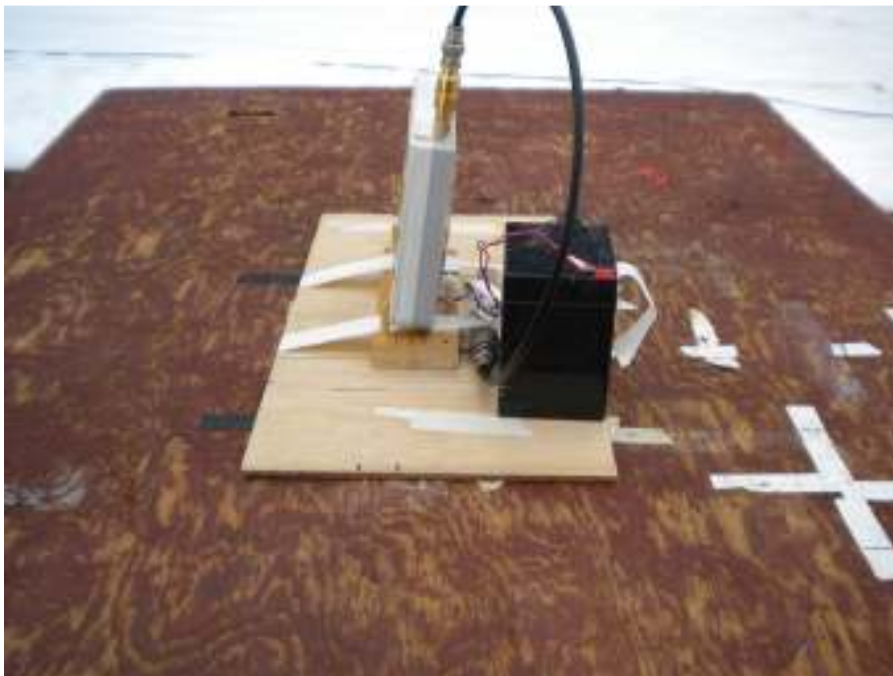

PICTORIAL 1
HEXAGRAM MODEL 2009-013 MTU
OUTPUT POWER AND SPURIOUS EMISSIONS
TYPICAL TEST SETUP

TABLE 2a
HEXAGRAM MODEL 2009-013 TRANSMITTER
SUBSTITUTION METHOD
450 MHz

Horizontal 3 meter measurement using tuned dipole antenna

Freq. (MHz)	Gen. Output (dB)	Coax Loss (dB)	Ant. Gain (dBd)	Dipole Eq. Power (dBm)	Difference (dB)
450				35.1	*
900	-53.0	2.9	-0.7	-56.6	-91.7

Output = 35.1 dBm
= 3.236 W
Req. Att.= 55.1 dB

Horizontal 1 meter measurement using horn antenna

Freq. (MHz)	Gen. Output (dBm)	Coax Loss (dB)	Ant. Gain (dBd)	Dipole Eq. Power (Dbm)	Difference (dB)
1350	-55.9	0.8	5.5	-51.2	-86.3
1800	-56.9	1.0	5.9	-52.0	-87.1
2250	-56.7	1.2	6.8	-51.1	-86.2
2700	-56.7	1.3	7.7	-50.3	-85.4
3150	-54.3	1.4	7.8	-47.9	-83.0
3600	-52.7	1.6	7.8	-46.5	-81.6
4050	-53.0	1.7	7.7	-47.0	-82.1
4500	-38.3	1.8	8.3	-31.8	-66.9

Vertical 3 meter measurement using tuned dipole antenna

Freq. (MHz)	Gen. Output (dB)	Coax Loss (dB)	Ant. Gain (dBd)	Dipole Eq. Power (dBm)	Difference (dB)
450				35.1	*
900	-48.0	2.9	-0.7	-51.6	-86.7

Output = 35.1 dBm
= 3.236 W
Req. Att.= 55.1 dB

Vertical 1 meter measurement using horn antenna

Freq. (MHz)	Gen. Output (dBm)	Coax Loss (dB)	Ant. Gain (dBd)	Dipole Eq. Power (Dbm)	Difference (dB)
1350	-56.3	0.8	5.5	-51.6	-86.7
1800	-57.0	1.0	5.9	-52.1	-87.2
2250	-52.7	1.2	6.8	-47.1	-82.2
2700	-58.0	1.3	7.7	-51.6	-86.7
3150	-53.1	1.4	7.8	-46.7	-81.8
3600	-56.2	1.6	7.8	-50.0	-85.1
4050	-53.3	1.7	7.7	-47.3	-82.4
4500	-41.2	1.8	8.3	-34.7	-69.8

* - Direct Measurement (See Table 1a)

TABLE 2b
HEXAGRAM MODEL 2009-013 TRANSMITTER
SUBSTITUTION METHOD
460 MHz

Horizontal 3 meter measurement using tuned dipole antenna

Freq. (MHz)	Gen. Output (dB)	Coax Loss (dB)	Ant. Gain (dBd)	Dipole Eq. Power (dBm)	Difference (dB)
460				34.5	*
920	-53.0	3.0	-0.6	-56.6	-91.1

Output = 34.5 dBm
= 2.818 W
Req. Att.= 54.5 dB

Horizontal 1 meter measurement using horn antenna

Freq. (MHz)	Gen. Output (dBm)	Coax Loss (dB)	Ant. Gain (dBd)	Dipole Eq. Power (Dbm)	Difference (dB)
1380	-56.3	0.9	5.6	-51.6	-86.1
1840	-56.6	1.0	5.9	-51.7	-86.2
2300	-59.2	1.2	7.0	-53.4	-87.9
2760	-52.0	1.3	7.7	-45.6	-80.1
3220	-55.7	1.4	7.8	-49.3	-83.8
3680	-51.5	1.6	7.7	-45.4	-79.9
4140	-47.3	1.7	7.8	-41.2	-75.7
4600	-36.0	1.8	8.4	-29.4	-63.9

Vertical 3 meter measurement using tuned dipole antenna

Freq. (MHz)	Gen. Output (dB)	Coax Loss (dB)	Ant. Gain (dBd)	Dipole Eq. Power (dBm)	Difference (dB)
460				34.5	*
920	-49.0	3.0	-0.6	-52.6	-87.1

Output = 34.5 dBm
= 2.818 W
Req. Att.= 54.5 dB

Vertical 1 meter measurement using horn antenna

Freq. (MHz)	Gen. Output (dBm)	Coax Loss (dB)	Ant. Gain (dBd)	Dipole Eq. Power (Dbm)	Difference (dB)
1380	-56.0	0.9	5.6	-51.3	-85.8
1840	-58.1	1.0	5.9	-53.2	-87.7
2300	-54.8	1.2	7.0	-49.0	-83.5
2760	-52.5	1.3	7.7	-46.1	-80.6
3220	-50.9	1.4	7.8	-44.5	-79.0
3680	-52.7	1.6	7.7	-46.6	-81.1
4140	-51.8	1.7	7.8	-45.7	-80.2
4600	-35.0	1.8	8.4	-28.4	-62.9

* - Direct Measurement (See Table 1b)

TABLE 2c
HEXAGRAM MODEL 2009-013 TRANSMITTER
SUBSTITUTION METHOD
470 MHz

Horizontal 3 meter measurement using tuned dipole antenna

Freq. (MHz)	Gen. Output (dB)	Coax Loss (dB)	Ant. Gain (dBd)	Dipole Eq. Power (dBm)	Difference (dB)
470				34.5	*
940	-50.0	3.0	-0.6	-53.6	-88.1

Output = 34.5 dBm
= 2.82 W
Req. Att.= 54.5 dBm

Horizontal 1 meter measurement using horn antenna

Freq. (MHz)	Gen. Output (dBm)	Coax Loss (dB)	Ant. Gain (dBd)	Dipole Eq. Power (Dbm)	Difference (dB)
1410	-49.2	0.9	5.7	-44.4	-78.9
1880	-48.0	1.0	5.9	-43.1	-77.6
2350	-52.8	1.2	7.2	-46.8	-81.3
2820	-47.7	1.3	7.7	-41.3	-75.8
3290	-50.1	1.5	7.8	-43.8	-78.3
3760	-49.1	1.6	7.7	-43.0	-77.5
4230	-34.8	1.7	7.9	-28.6	-63.1
4700	-36.7	1.8	8.4	-30.1	-64.6

Vertical 3 meter measurement using tuned dipole antenna

Freq. (MHz)	Gen. Output (dB)	Coax Loss (dB)	Ant. Gain (dBd)	Dipole Eq. Power (dBm)	Difference (dB)
470				34.5	
940	-47.0	3.0	-0.6	-50.6	-85.1

Output = 34.5 dBm
= 2.82W
Req. Att.= 54.5 dBm

Vertical 1 meter measurement using horn antenna

Freq. (MHz)	Gen. Output (dBm)	Coax Loss (dB)	Ant. Gain (dBd)	Dipole Eq. Power (Dbm)	Difference (dB)
1410	-50.3	0.9	5.7	-45.5	-80.0
1880	-44.8	1.0	5.9	-39.9	-74.4
2350	-50.7	1.2	7.2	-44.7	-79.2
2820	-52.7	1.3	7.7	-46.3	-80.8
3290	-52.2	1.5	7.8	-45.9	-80.4
3760	-53.5	1.6	-39.9	-47.4	-81.9
4230	-39.9	1.7	7.9	-33.7	-68.2
4700	-32.5	1.8	8.4	-25.9	-60.4

* - Direct Measurement (See Table 1c)

TEST EQUIPMENT USED (Substitution)

Spectrum Analyzer	Hewlett-Packard Model 8593EM Spectrum Analyzer SN: 3536A00147 Cal Due: 8/26/2010
Antennas	(2x) ETS-Lindgren Model DB-4 Tuned Dipole Frequency Range 400 – 1000 MHz (2x) ETS-Lindgren Model 3115 Double Ridged Guide Horn Frequency Range 0.75 – 18 GHz EMCO Model 3104 Biconical ElectroMetrics Model BIA-25 Biconical Frequency Range 20 – 200 MHz
Signal Generator	Hewlett-Packard Model 8340B, S/N 3010A01889 Cal Due: 6/04/2010
Miscellaneous	12.2 m RG-213/U coaxial cable 22.5 m LMR-400 coaxial cable 3.0 m RG-213/U coaxial cable 3.0 m RG-213/U coaxial cable
Test Performed	January 18 – 20, 2010

TEST EQUIPMENT USED (Direct Measurement)

Spectrum Analyzer	Tektronix Model WCA 280 SN: J300168 Cal Due: 7/2010
Attenuators	Mini-Circuits Model VAT-30W2+ 30 dB MECA Model 612-10-1 10 dB Bird Model 25-A-MFN-10 10 dB
Miscellaneous	0.3 m RG-174 Various coaxial adapters
Tests Performed	January 11 - 20, 2010

Unit Tested: 2009-013 Rev B SN—B-0006

OCCUPIED BANDWIDTH

The emissions close to the center of the specified channel are limited by the emissions masks described in Part 90.210. For the frequency range of the 2009-013 transmitter, Mask D is specified. From the center frequency of the band ± 5.625 kHz, 0 dB of attenuation is required. From 5.625 kHz to 12.5 kHz from the center frequency, attenuation must be at least $7.27(f_d - 2.88 \text{ kHz})$ dB, where f_d is the displacement frequency from the center of the band in kHz.

At more than 12.5 kHz from the band center, the attenuation must be 70 dB or $50 + 10 \log(P)$, whichever is less. Since the maximum P was determined to be 3.24 W, $50 + 10 \log(3.24)$ equals 55.1 dB.

Both modulated and unmodulated transmissions were stored on the spectrum analyzer display. The plot of Fig. 1 shows both signals with Mask D superimposed on the plot. The plot indicates that the modulated emission does comply with the requirement for occupied bandwidth as found in 90.210.

For purposes of this test, the test signal was FSK modulated with a continuous sequence of Manchester encoded 1's at the specified 1200 bits per second data rate. The Manchester encoding scheme forces a mid-bit transition for an encoded "1". Therefore, the sequence of continuous 1's sends the highest frequency waveform to the modulator circuit.

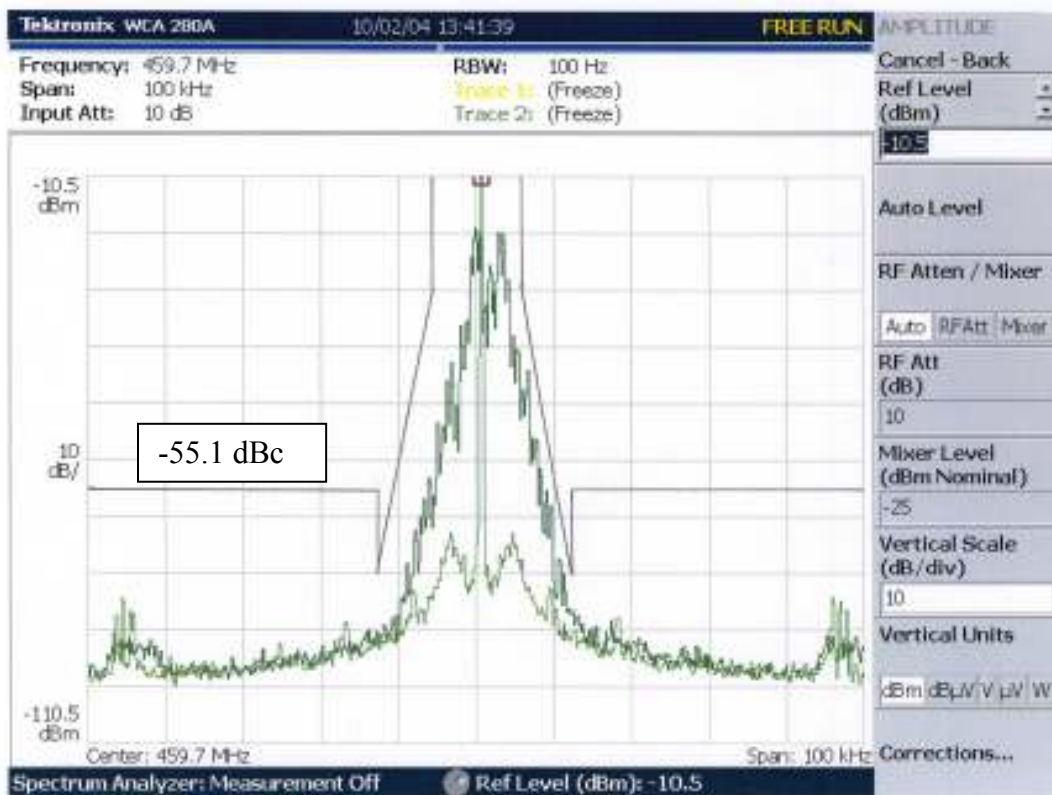


Fig. 1
Hexagram Model 2009-013
Emissions Mask

TEST EQUIPMENT USED

Spectrum Analyzer

Tektronix Model WCA 280A
SN: J300168 Cal Due: 7/23/2010

Antenna

Aclara Model 2009-013A
(Designed for use with 2009-013 MTU)

Test Performed

February 4, 2010

Unit Tested: 2009-013 Rev B SN—B-0006

FREQUENCY STABILITY VS. TEMPERATURE

The temperature stability of the frequency generating components of the transmitter was observed. The transmitter was placed in a temperature chamber with a programming coil that allows a transmission to be requested from outside the chamber. A receiving antenna outside the chamber picked up the transmitted signal, which was fed to the spectrum analyzer.

With the transmitter programmed to transmit at 460 MHz, the chamber temperature was set to 20° C. After reaching the set temperature, the transmitter was allowed to stabilize. The transmitted signal was captured by the spectrum analyzer and the frequency was determined. The temperature in the chamber was then increased to 30° C. At each temperature, at least 20 minutes were allowed for stabilization of the transmitter, a transmission was made and the frequency determined. The temperature was increased in 10° C intervals to 80° C and then to 85° C. The temperature was then returned to 20° C. stabilized and then decreased to 10° and then to -30° C in 10° intervals. The temperature was stabilized at each 10° interval before a reading was made. The frequency at each temperature was recorded, compared to the transmission frequency of the initial 20° measurement and is recorded in Table 2. It can be seen from the table that all readings are within the deviation limit of ± 2.5 ppm or 1149 Hz at 459.7 MHz.

TABLE 3
FREQUENCY STABILITY VS. TEMPERATURE
459.7 MHz

Temperature (°C)	Frequency (MHz)	Deviation (Hz)	Deviation (ppm)
+20	459.700586	586	+1.27
+30	459.699902	-98	-0.21
+40	459.699629	-371	-0.81
+50	459.699727	-273	-0.59
+60	459.699707	-293	-0.64
+70	459.699063	-937	-2.04
+20	459.700000	0	0.00
+10	459.700117	+117	+0.25
0	459.700078	+78	+0.17
-10	459.699785	-215	-0.47
-20	459.699736	-264	-0.57
-27	459.699677	-323	-0.70.
-30	No Transmission	--	--
+20	459.700303	+303	+0.66

Reference frequency = 459.700000 MHz

FREQUENCY STABILITY VS. SUPPLY VOLTAGE

To vary the DC supply voltage, a variable DC source was connected to the transmitter, replacing the battery. The frequency was measured at the TIA default standard of 3.75 V of the lithium ion batteries, and at, or below, the 85% level of the nominal 3.6 V or 3.06 V.

With the voltage set to a measurement point, the transmitted signal was captured by a spectrum analyzer and the frequency value determined. The frequencies are compared to the value of the set frequency. The data for these measurements are found in Table 3. It can be seen that all values obtained are within the deviation limit of ± 2.5 ppm or 1149 Hz at the 459.7 MHz test frequency.

TABLE 4
FREQUENCY STABILITY VS. SUPPLY VOLTAGE
459.7 MHz

Voltage (VDC)	Frequency (MHz)	Deviation (Hz)	Deviation (ppm)
3.75 VDC	459.699688	-312	-0.68
3.6 VDC	459.699893	-107	-0.23
3.5 VDC	459.699902	-98	-0.21
3.4 VDC	459.699902	-98	-0.21
3.3 VDC	459.699931	-69	-0.15
3.2 VDC	459.700136	+136	+0.30
3.1 VDC	459.700107	+107	+0.23
3.0 VDC	459.700117	+117	+0.25
2.9 VDC	459.700312	+312	+0.68
2.8 VDC	459.700292	+292	+0.64

Reference frequency = 459.700000 MHz

TEST EQUIPMENT USED

Spectrum Analyzer

Tektronix Model WCA 280
SN: J300168 Cal Due: 7/23/2010

Antenna

Aclara Model 2009-013A
(Designed for use with 2009-013 MTU)

DC Power Supply

MPJA Model 14600PS
SN: 003803229 Cal Due: 7/14/2010

Digital Multi-Meter

Fluke Model 179
SN: 96480042 Cal Due: 7/14/2010

Temperature Chamber

Test Equity Model 115
Cal Due: 2/12/2010

Thermometer

Cooper Model SRH77A
SN: 460525 Cal Due: 6/16/2010

Tests Performed


Temperature: January 29 – February 1, 2010
Voltage: January 27, 2010

Unit Tested: 2009-013 Rev B SN—B-0006

TRANSIENT STABILITY

The transient stability measurements indicate the variation in tuned frequency during the brief interval of time during the start of the transmission and at the end of the transmission.

The Model 2009-013 transmitter was tested for transient frequency behavior using the test method of TIA/EIA-603. A block diagram of the test setup is seen in Fig. 2. A modified DCU wideband receiver was used. The storage oscilloscope was triggered by the radiated signal from the transmitter. Appropriate delay was provided by the digital delay circuitry of the oscilloscope. The 1 kHz modulated test signal at 460 MHz was provided by the 8920D test set. The generator’s output control was used to insure that the test signal was at least 50 dB below the received signal level from the 2009-013.

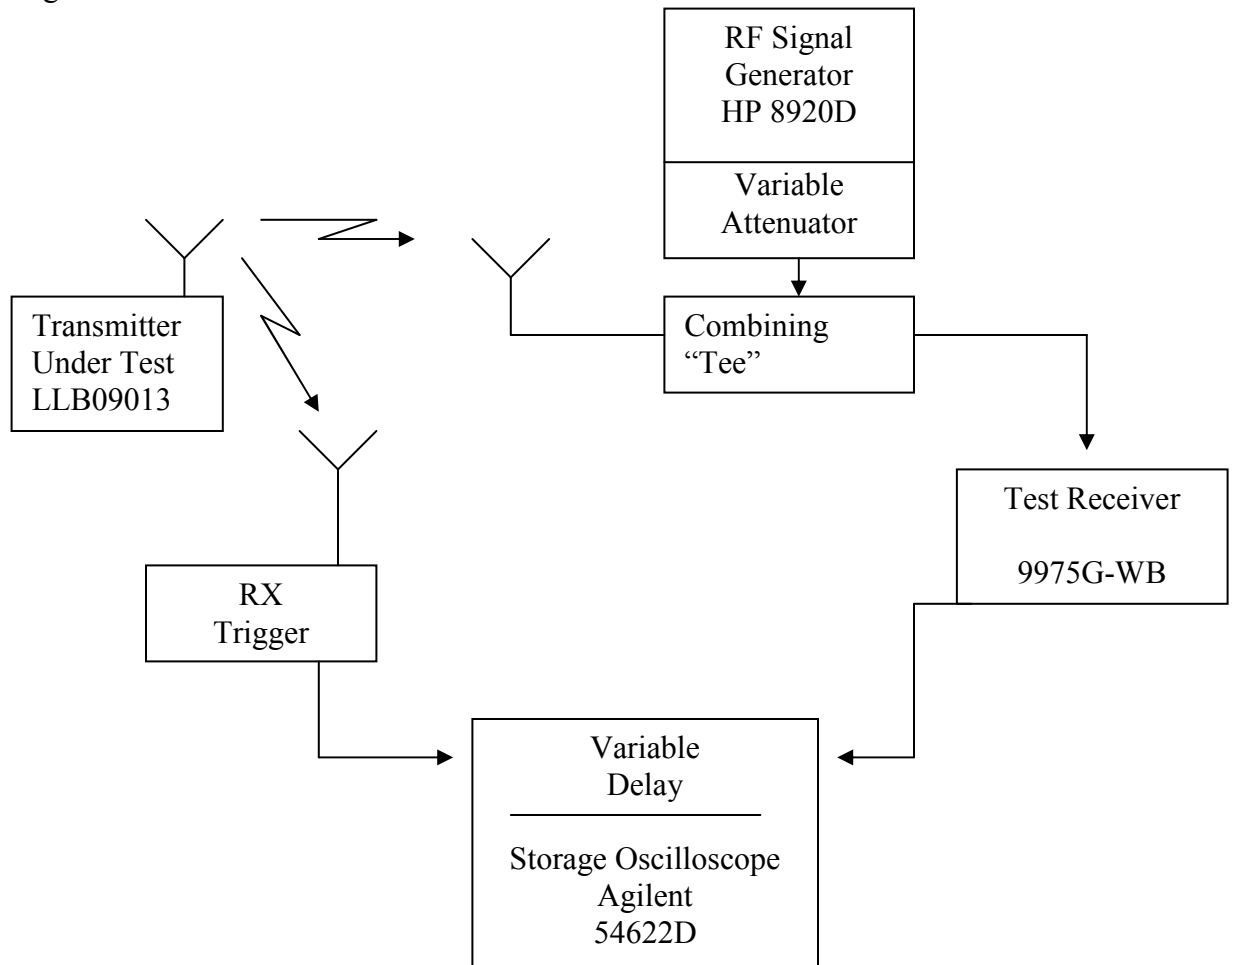

**Fig. 2
Transient Frequency Behavior
Test Setup**

Test Requirements

The test requirements per 90.214 are:

1. Frequency deviation during t_1 (10 ms duration after t_{on}) may be greater than ± 12.5 kHz, because the output power is less than 6 Watts.
2. Frequency deviation during t_2 (25 ms duration after t_1) must be less than ± 6.25 kHz.
3. Frequency deviation after t_2 must be less than ± 2.5 ppm, or, ± 1150 Hz at 460 MHz.
4. Frequency deviation during t_3 (10 ms duration after transmitter is turned off) may exceed ± 12.5 kHz because output power is less than 6 Watts.

Test Data

Figures 3 through 7 show the Model 2009-013's transient frequency characteristics. The limit masks are indicated on each of the figures.

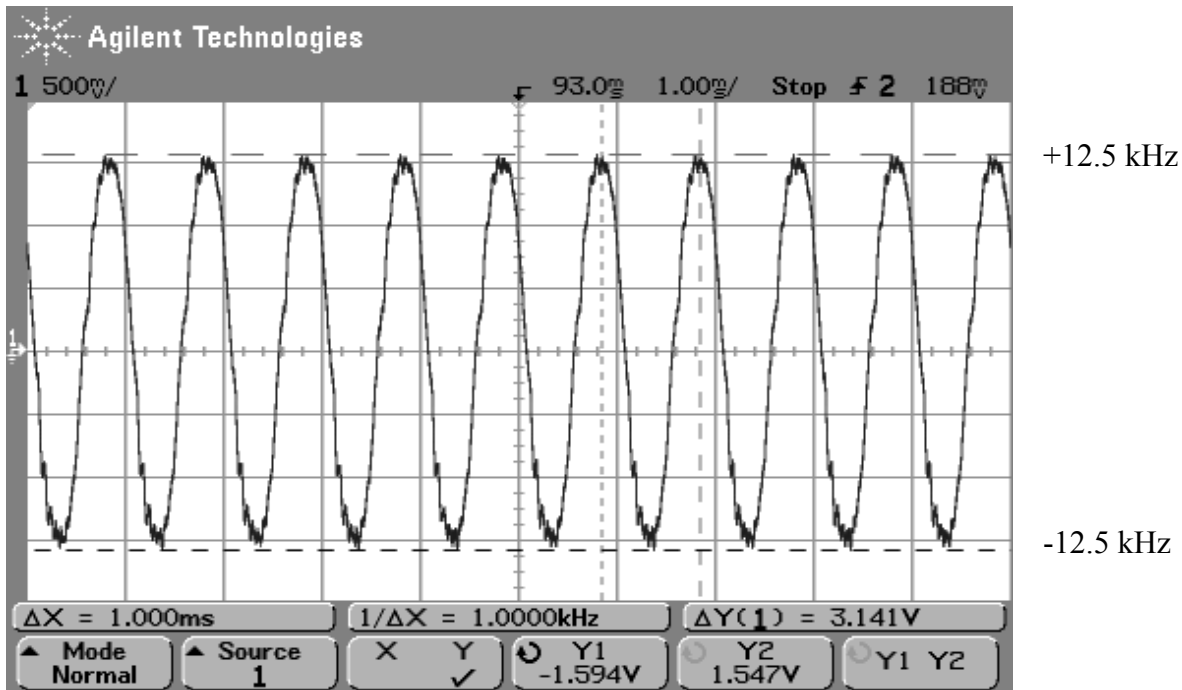


Fig. 3 ± 12.5 kHz modulated test signal .

- ± 12.5 kHz = 3.14 V
- ± 6.25 kHz = 1.57 V
- ± 1.15 kHz = 288 mV

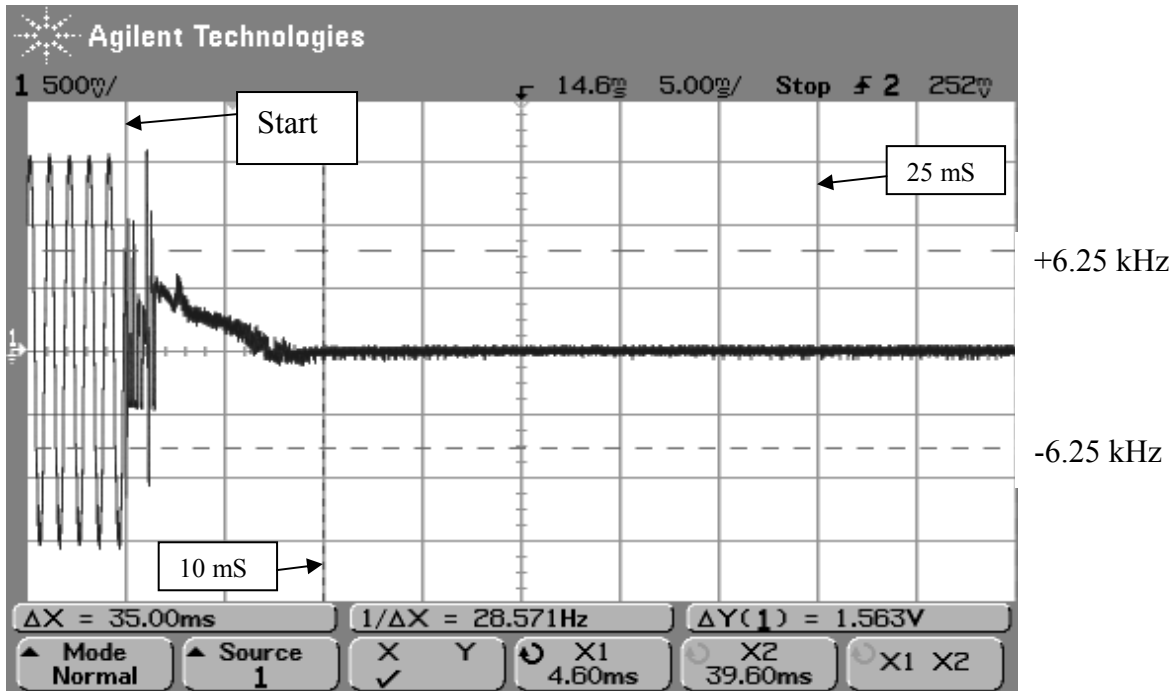


Fig. 4 Start of Transmission

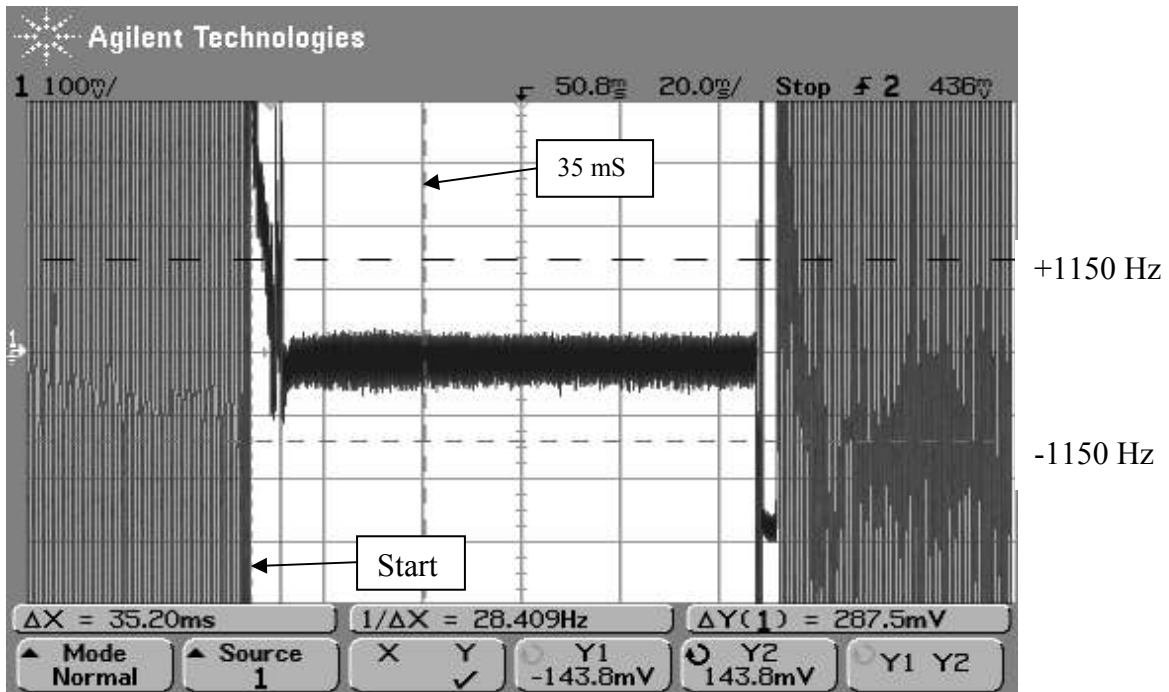


Fig. 5 Full Transmission

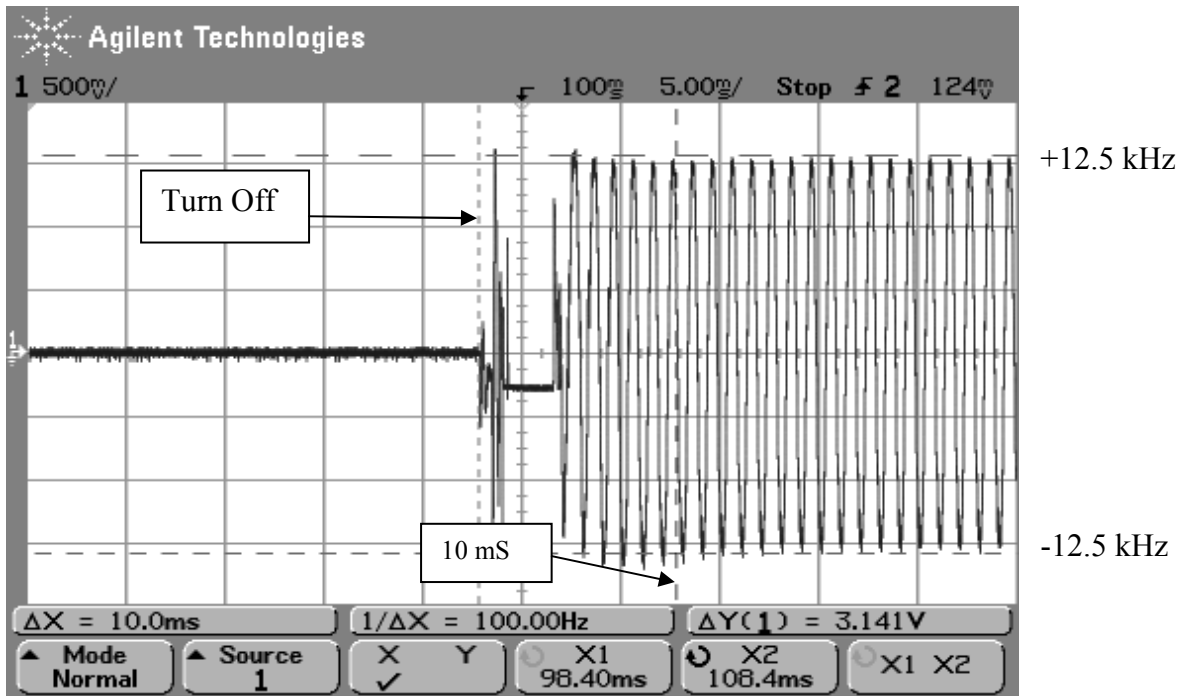


Fig. 6 Turn Off Transient

The modulated signal appears well within the allowed 10 ms and does not exceed ± 12.5 kHz beyond 10 ms.

TEST EQUIPMENT USED

Signal Generator

Hewlett-Packard Model 8920D
RF Communications Test Set
SN: US37253192 Cal Due: 7/21/2010

Test Receiver

Hexagram Broadband Receiver
Model 9975G-WB

Oscilloscope

Agilent Model 54622D
SN: MY40003551 Cal Due: 11/20/2010

RF Trigger

Hexagram Detector Circuit

Test Performed

January 25, 2010

Unit Tested: 2009-013 Rev B SN—B00006

TEST INFORMATION

SUMMARY

The Hexagram Model 2009-013 transmitter has been shown to be capable of complying with those requirements of the Federal Communications Commission for a Part 90 transmitter that are covered by this report.

EQUIPMENT UNDER TEST

“MTU” Transmitter, Model 2009-013

MANUFACTURER

Hexagram, Inc.
30400 Solon Rd.
Solon, OH 44139

TEST DATES

January 11 – February 4, 2010

OPEN AREA TEST SITE

Smith Electronics, Inc.
8200 Snowville Road
Cleveland, OH 44141
(330) 289-9306

FCC (Reg. #90938)
Industry Canada (File #4541A-1).