



FCC TEST REPORT (Part 24)

REPORT NO.: RF121004E01-2

MODEL NO.: FD-400GT(SL8081)

FCC ID: MQT-FD400GTSL

RECEIVED: Oct. 04, 2012

TESTED: Oct. 19 to 29, 2012

ISSUED: Nov. 08, 2012

APPLICANT: XAC AUTOMATION CORP.

ADDRESS: 4F, No. 30, INDUSTRY E. RD. IX, SCIENCE-BASED INDUSTRIAL PARK,HSINCHU,TAIWAN

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.) Ltd.,
Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS: No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, Taiwan, R.O.C.

TEST LOCATION (2): No.49, Ln. 206, Wende Rd., Shangshan Tsuen, Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



TABLE OF CONTENTS

| | |
|--|----|
| RELEASE CONTROL RECORD | 4 |
| 1 CERTIFICATION | 5 |
| 2 SUMMARY OF TEST RESULTS | 6 |
| 2.1 MEASUREMENT UNCERTAINTY | 7 |
| 3 GENERAL INFORMATION | 8 |
| 3.1 GENERAL DESCRIPTION OF EUT | 8 |
| 3.2 DESCRIPTION OF TEST MODES | 10 |
| 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL | 12 |
| 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS | 18 |
| 3.4 DESCRIPTION OF SUPPORT UNITS | 19 |
| 3.5 CONFIGURATION OF SYSTEM UNDER TEST | 20 |
| 4 TEST TYPES AND RESULTS | 21 |
| 4.1 OUTPUT POWER MEASUREMENT | 21 |
| 4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT | 21 |
| 4.1.2 TEST INSTRUMENTS | 22 |
| 4.1.3 TEST PROCEDURES | 24 |
| 4.1.4 TEST SETUP | 25 |
| 4.1.5 EUT OPERATING CONDITIONS | 26 |
| 4.1.6 TEST RESULTS | 27 |
| 4.2 FREQUENCY STABILITY MEASUREMENT | 34 |
| 4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT | 34 |
| 4.2.2 TEST INSTRUMENTS | 34 |
| 4.2.3 TEST PROCEDURE | 35 |
| 4.2.4 TEST SETUP | 35 |
| 4.2.5 TEST RESULTS | 36 |
| 4.3 OCCUPIED BANDWIDTH MEASUREMENT | 38 |
| 4.3.1 TEST PROCEDURES | 38 |
| 4.3.2 TEST INSTRUMENTS | 38 |
| 4.3.3 TEST SETUP | 38 |
| 4.3.4 EUT OPERATING CONDITION | 38 |
| 4.3.5 TEST RESULTS | 39 |
| 4.4 BAND EDGE MEASUREMENT | 41 |
| 4.4.1 LIMITS OF BAND EDGE MEASUREMENT | 41 |
| 4.4.2 TEST INSTRUMENTS | 41 |
| 4.4.3 TEST SETUP | 41 |
| 4.4.4 TEST PROCEDURES | 42 |
| 4.4.5 EUT OPERATING CONDITION | 42 |
| 4.4.6 TEST RESULTS | 43 |
| 4.5 CONDUCTED SPURIOUS EMISSIONS | 45 |
| 4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT | 45 |



A D T

| | | |
|-------|---|----|
| 4.5.2 | TEST INSTRUMENTS | 45 |
| 4.5.3 | TEST PROCEDURE | 46 |
| 4.5.4 | TEST SETUP | 46 |
| 4.5.5 | EUT OPERATING CONDITIONS | 46 |
| 4.5.6 | TEST RESULTS | 47 |
| 4.6 | RADIATED EMISSION MEASUREMENT | 53 |
| 4.6.1 | LIMITS OF RADIATED EMISSION MEASUREMENT | 53 |
| 4.6.2 | TEST INSTRUMENTS | 54 |
| 4.6.3 | TEST PROCEDURES | 55 |
| 4.6.4 | DEVIATION FROM TEST STANDARD | 56 |
| 4.6.5 | TEST SETUP | 56 |
| 4.6.6 | EUT OPERATING CONDITIONS | 56 |
| 4.6.7 | TEST RESULTS | 57 |
| 5 | PHOTOGRAPHS OF THE TEST CONFIGURATION | 65 |
| 6 | INFORMATION ON THE TESTING LABORATORIES | 66 |
| 7 | APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB | 67 |



RELEASE CONTROL RECORD


| ISSUE NO. | REASON FOR CHANGE | DATE ISSUED |
|---------------|-------------------|---------------|
| RF121004E01-2 | Original release | Nov. 08, 2012 |



1 CERTIFICATION

PRODUCT : Portable Terminal
BRAND NAME : First Data
MODEL NO.: FD-400GT(SL8081)
TEST SAMPLE : R&D SAMPLE
APPLICANT : XAC AUTOMATION CORP.
TESTED : Oct. 19 to 29, 2012
STANDARDS : **FCC Part 24, Subpart E**

The above equipment (model: FD-400GT(SL8081)) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** Nov. 08, 2012
(Claire Kuan, Specialist)

APPROVED BY :  , **DATE:** Nov. 08, 2012
(May Chen, Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 24 & Part 2 | | | |
|--|--|--------|--|
| STANDARD SECTION | TEST TYPE AND LIMIT | RESULT | REMARK |
| 2.1046 24.232 | Maximum Peak Output Power Limit: max. 2 watts e.i.r.p peak power | PASS | Meet the requirement of limit. |
| 2.1055 24.235 | Frequency Stability AFC Freq. Error vs. Voltage AFC Freq. Error vs. Temperature Limit: max. ± 2.5 ppm | PASS | Meet the requirement of limit. |
| 2.1049 24.238(b) | Occupied Bandwidth | PASS | Meet the requirement of limit. |
| 24.238(b) | Band Edge Measurements | PASS | Meet the requirement of limit. |
| 2.1051 24.238 | Conducted Spurious Emissions | PASS | Meet the requirement of limit. |
| 2.1053 24.238 | Radiated Spurious Emissions | PASS | Meet the requirement of limit. Minimum passing margin is -40.51dB at 3700MHz. |

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

| Measurement | Value |
|-----------------------------------|---------|
| Radiated emissions (30MHz-1GHz) | 5.59 dB |
| Radiated emissions (1GHz -6GHz) | 3.56 dB |
| Radiated emissions (6GHz -18GHz) | 4.10 dB |
| Radiated emissions (18GHz -40GHz) | 4.24 dB |

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

| | |
|----------------------------|---|
| PRODUCT | Portable Terminal |
| MODEL NO. | FD-400GT(SL8081) |
| POWER SUPPLY | DC 12V from adapter or DC7.4V from battery |
| MODULATION TYPE | GMSK, 8PSK (for GPRS / EDGE) BPSK (for WCDMA/ HSDPA/ HSUPA) |
| OPERATING FREQUENCY | 1850.2MHz ~ 1909.8MHz (for GPRS / EDGE) 1852.4MHz ~ 1907.6MHz (for WCDMA/ HSDPA/ HSUPA) |
| NUMBER OF CHANNEL | 299 (for GPRS / EDGE) 277 (for WCDMA/ HSDPA/ HSUPA) |
| MAX. EIRP POWER | GPRS Mode: 29.8dBm (955.0mW) EDGE Mode: 29.4dBm (871.0mW) WCDMA Mode: 23.4dBm (218.8mW) |
| ANTENNA TYPE | Please see NOTE |
| MAX. ANTENNA GAIN | Please see NOTE |
| DATA CABLE | NA |
| I/O PORTS | Refer to users' manual |
| ACCESSORY DEVICES | Adapter x 1, Battery x 1 |

NOTE:

1. There are RFID, GPRS, EDGE, WCDMA, HSDPA and HSUPA technology used for the EUT. and the functions of EUT listed as below table:

| Function | Report No. |
|-------------------|---------------|
| RFID | RF121004E01 |
| 2G & 3G (Part 22) | RF121004E01-1 |
| 2G & 3G (Part 24) | RF121004E01-2 |

2. The emission of the simultaneous operation (RFID & GPRS, EDGE, WCDMA, HSDPA and HSUPA) has been evaluated and no non-compliance found.

3. The EUT could be supplied with DC7.4V battery or power adapter as the following table:

| Item | Brand | Model No. | Spec. |
|---------|--|------------|--|
| Battery | CHENG UEI PRECISION INDUSTRY CO.,LTD | FD400 | DC7.4V, 2300mAh (17.02Wh) |
| Adapter | DELTA | ADP-36JH B | AC I/P: 100-240V, 50-60Hz, 1.0A AC input cable: Unshielded, 1.85m DC O/P: 12V, 3A DC output cable: Unshielded, 1.8m with one core |

4. There are two antennas provided to this EUT, please refer to the following table:

| RFID Antenna Spec. | | | | | |
|---|--|-------------------|-------------------|-----------|-----------------------|
| Brand | Model No. | Antenna Type | Antenna Connector | Gain(dBi) | Frequency range (MHz) |
| XAC | PCB OSP ANTENNA BOARD FD400 (ROHS) | PCB (2 Layers) | NA | 13 | 13.56 |
| GPRS, EDGE, WCDMA, HSDPA and HSUPA Antenna Spec. | | | | | |
| Brand | Model No. | Antenna Type | Antenna Connector | Gain(dBi) | Frequency range (MHz) |
| Ethertronics Inc. | T-000084-01 | FPCB | NA | 1.65 | 824~894 1850~1990 |

5. The EUT was pre-tested in chamber under the following modes

| Pre-test Mode | Description |
|---------------|---------------------|
| Mode A | Battery mode |
| Mode B | Adapter mode |

From the above modes, the worst case was found in **Mode A**. Therefore only the test data of the modes were recorded in this report.

6. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES

FOR GPRS & EDGE:

299 channels are provided to this EUT. Therefore, the low, middle and high channels are chosen for testing.

| | CHANNEL | FREQUENCY | TX MODE |
|--------|---------|------------|------------|
| LOW | 512 | 1850.2 MHz | GPRS, EDGE |
| MIDDLE | 661 | 1880.0 MHz | GPRS, EDGE |
| HIGH | 810 | 1909.8 MHz | GPRS, EDGE |

NOTE:

1. Below 1 GHz, the channel 512, 661, and 810 were pre-tested in chamber. The channel 512 was chosen for final test.
2. Above 1 GHz, the channel 512, 661, and 810 were tested individually.
3. The worst case for final test is chosen when the power control level set 5.
4. The channel space is 0.2MHz.
5. The EUT is a GPRS class 10 device, which provide 2 up-link and EDGE class 12 device, which provide 4 up-link. After pre-tested both functions, found up-link with 1 time slot is worse, therefore, test results of output power, frequency stability, occupied bandwidth and band edge tests came out from this.
6. The EUT has GPRS, EDGE functions. After pre-testing, GPRS function is the worst case for all the emission tests.

FOR WCDMA:

277 channels are provided to this EUT. Therefore, the low, middle and high channels are chosen for testing.

| | CHANNEL | FREQUENCY | TX MODE |
|--------|---------|------------|---------------------|
| LOW | 9262 | 1852.4 MHz | WCDMA, HSDPA, HSUPA |
| MIDDLE | 9400 | 1880.0 MHz | WCDMA, HSDPA, HSUPA |
| HIGH | 9538 | 1907.6 MHz | WCDMA, HSDPA, HSUPA |

NOTE:

1. Below 1 GHz, the channel 9262, 9400 and 9538 were pre-tested in chamber. The channel 9262 was chosen for final test.
2. Above 1 GHz, the channel 9262, 9400 and 9538 were tested individually.
3. The channel space is 0.2MHz.
4. The EUT has WCDMA-RMC, HSPDA-Subtest 1 ~ 4, & HSUPA-Subtest 1 ~ 5 functions. After pre-testing, WCDMA-RMC function is the worst case for all the emission tests.

3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

FOR GPRS EDGE:

| EUT CONFIGURE MODE | APPLICABLE TO | | | | | | | DESCRIPTION |
|--------------------|---------------|----|----|----|----|-------|-------|-------------|
| | OP | FS | OB | BE | CE | RE<1G | RE≥1G | |
| - | √ | √ | √ | √ | √ | √ | √ | - |

Where **OP**: Output power **FS**: Frequency stability
OB: Occupied bandwidth **BE**: Band edge
CE: Conducted spurious emissions **RE<1G**: Radiated emission below 1GHz
RE≥1G: Radiated emission above 1GHz

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

OUTPUT POWER MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 512 to 810 | 512, 661, 810 | GPRS, EDGE |

FREQUENCY STABILITY MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 512 to 810 | 661 | GPRS |

OCCUPIED BANDWIDTH MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 512 to 810 | 512, 661, 810 | GPRS, EDGE |

BAND EDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 512 to 810 | 512, 810 | GPRS, EDGE |

CONDUCTED SPURIOUS EMISSIONS MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 512 to 810 | 512, 661, 810 | GPRS |

RADIATED EMISSION MEASUREMENT (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, xyz axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 512 to 810 | 512 | GPRS |

RADIATED EMISSION MEASUREMENT (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, xyz axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 512 to 810 | 512, 661, 810 | GPRS |

TEST CONDITION:

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | INPUT POWER | TESTED BY |
|---------------|--------------------------|---------------------|--------------|
| OP | 25deg. C, 63%RH | 7.4Vdc from battery | Amos Chuang |
| FS | 25deg. C, 63%RH | 7.4Vdc from battery | Amos Chuang |
| OB | 25deg. C, 63%RH | 7.4Vdc from battery | Amos Chuang |
| EM | 25deg. C, 63%RH | 7.4Vdc from battery | Amos Chuang |
| BE | 25deg. C, 63%RH | 7.4Vdc from battery | Amos Chuang |
| CE | 25deg. C, 63%RH | 7.4Vdc from battery | Amos Chuang |
| RE < 1G | 26deg. C, 69%RH | 7.4Vdc from battery | Robert Cheng |
| RE ≥ 1G | 25deg. C, 66%RH | 7.4Vdc from battery | Robert Cheng |



FOR WCDMA:

| EUT CONFIGURE MODE | APPLICABLE TO | | | | | | | DESCRIPTION |
|--------------------|---------------|----|----|----|----|-------|-------|-------------|
| | OP | FS | OB | BE | CE | RE<1G | RE≥1G | |
| - | √ | √ | √ | √ | √ | √ | √ | - |

Where **OP**: Output power **FS**: Frequency stability
OB: Occupied bandwidth **BE**: Band edge
CE: Conducted spurious emissions **RE<1G**: Radiated emission below 1GHz
RE≥1G: Radiated emission above 1GHz

NOTE: The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **X-plane**.

OUTPUT POWER MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|------------------|-----------------------|
| 9262 to 9538 | 9262, 9400, 9538 | WCDMA, HSDPA, HSUPA |

FREQUENCY STABILITY MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 9262 to 9538 | 9400 | WCDMA |

OCCUPIED BANDWIDTH MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|------------------|-----------------------|
| 9262 to 9538 | 9262, 9400, 9538 | WCDMA, HSDPA, HSUPA |



A D T

BAND EDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 9262 to 9538 | 9262, 9538 | WCDMA, HSDPA, HSUPA |

CONDUCTED SPURIOUS EMISSIONS MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|------------------|-----------------------|
| 9262 to 9538 | 9262, 9400, 9538 | WCDMA |

RADIATED EMISSION MEASUREMENT (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|----------------|-----------------------|
| 9262 to 9538 | 9262 | WCDMA |

RADIATED EMISSION MEASUREMENT (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY |
|-------------------|------------------|-----------------------|
| 9262 to 9538 | 9262, 9400, 9538 | WCDMA |



A D T

TEST CONDITION:

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | INPUT POWER | TESTED BY |
|---------------|--------------------------|---------------------|--------------|
| OP | 25deg. C, 63%RH | 7.4Vdc from battery | Amos Chuang |
| FS | 25deg. C, 63%RH | 7.4Vdc from battery | Amos Chuang |
| OB | 25deg. C, 63%RH | 7.4Vdc from battery | Amos Chuang |
| EM | 25deg. C, 63%RH | 7.4Vdc from battery | Amos Chuang |
| BE | 25deg. C, 63%RH | 7.4Vdc from battery | Amos Chuang |
| CE | 25deg. C, 63%RH | 7.4Vdc from battery | Amos Chuang |
| RE < 1G | 26deg. C, 69%RH | 7.4Vdc from battery | Robert Cheng |
| RE ≥ 1G | 25deg. C, 66%RH | 7.4Vdc from battery | Robert Cheng |

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 24

ANSI/TIA/EIA-603-C 2004

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT | BRAND | MODEL NO. | SERIAL NO. | FCC ID |
|-----|--|-------|-----------|------------|--------|
| 1 | Universal Radio Communication Tester | R&S | CMU200 | 121040 | NA |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|---|
| 1 | NA |

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

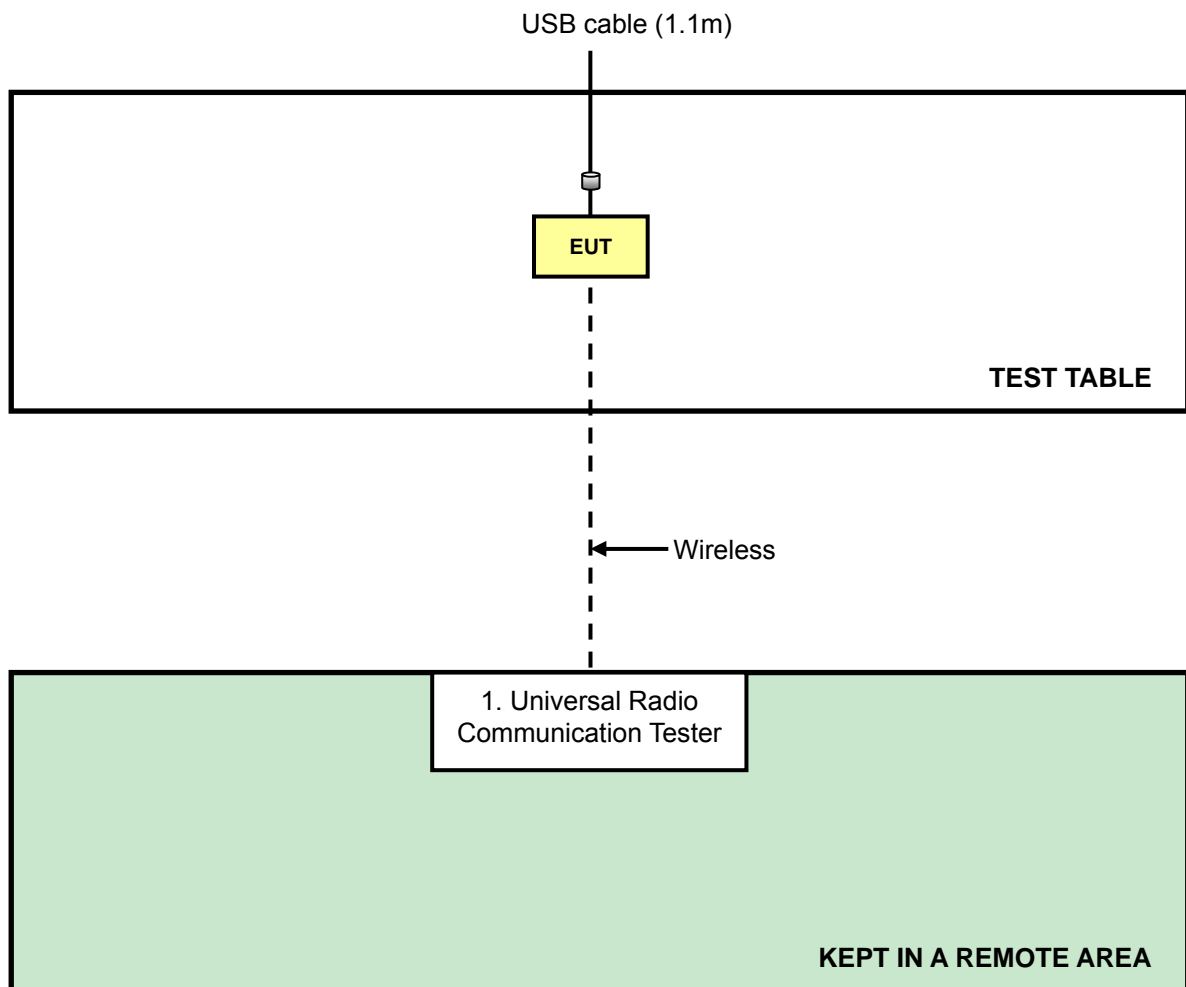

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Mobile and portable stations are limited to 2 watts EIRP



A D T

4.1.2 TEST INSTRUMENTS

EIRP POWER MEASUREMENT:

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|---|--------------------------|-------------------------------------|-----------------|------------------|
| Spectrum Analyzer Agilent | E4446A | MY48250254 | July 09, 2012 | July 08, 2013 |
| Pre-Selector Agilent | N9039A | MY46520311 | July 09, 2012 | July 08, 2013 |
| Signal Generator Agilent | N5181A | MY49060517 | July 09, 2012 | July 08, 2013 |
| Pre-Amplifier Mini-Circuits | ZFL-1000VH2 B | AMP-ZFL-03 | Nov. 15, 2011 | Nov. 14, 2012 |
| Pre-Amplifier Agilent | 8449B | 3008A02578 | June 26, 2012 | June 25, 2013 |
| Pre-Amplifier SPACEK LABS | SLKKa-48-6 | 9K16 | Nov. 15, 2011 | Nov. 14, 2012 |
| Trilog Broadband Antenna SCHWARZBECK | VULB 9168 | 9168-360 | Apr. 09, 2012 | Apr. 08, 2013 |
| Horn_Antenna AISL | AIH.8018 | 0000320091110 | Nov. 14, 2011 | Nov. 13, 2012 |
| Horn_Antenna SCHWARZBECK | BBHA 9170 | 9170-424 | Oct. 12, 2012 | Oct. 11, 2013 |
| RF Cable | NA | RF104-201 RF104-203 RF104-204 | Dec. 26, 2011 | Dec. 25, 2012 |
| RF Cable | NA | CHGCAB_001 | Oct. 06, 2012 | Oct. 05, 2013 |
| Software | ADT_Radiated _V8.7.05 | NA | NA | NA |
| Antenna Tower & Turn Table CT | NA | NA | NA | NA |

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: Oct. 19, 2012



A D T

CONDUCTED POWER MEASUREMENT:

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| R&S SPECTRUM ANALYZER | FSP40 | 100060 | May 09, 2012 | May 08, 2013 |
| OVEN | MHU-225AU | 911033 | Dec. 12, 2011 | Dec. 11, 2012 |
| AC POWER SOURCE | 6205 | 1140503 | NA | NA |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. Tested date: Oct. 19, 2012

4.1.3 TEST PROCEDURES


- a. All measurements were done at low, middle and high operational frequency range. RWB and VBW is 1MHz for GPRS & EDGE and 5MHz for WCDMA mode.
- b. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a tx cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step b. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$

CONDUCTED POWER MEASUREMENT:

- e. The EUT was set up for the maximum power with GPRS, EDGE & WCDMA link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.4 TEST SETUP

EIRP POWER MEASUREMENT:

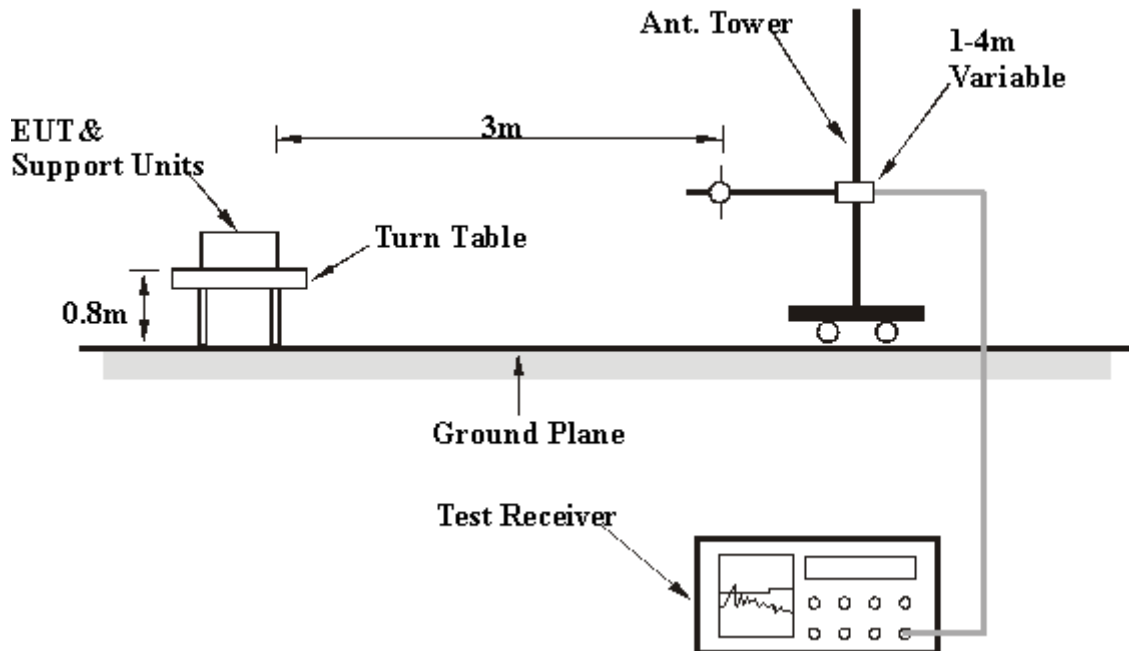

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:

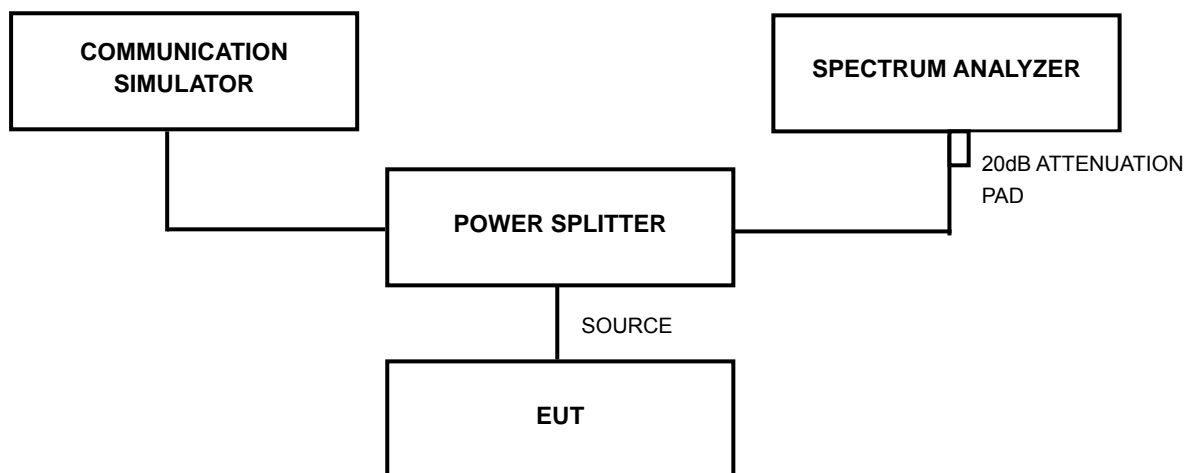

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.5 EUT OPERATING CONDITIONS

- a. The EUT makes a call to the communication simulator.
- b. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency.

4.1.6 TEST RESULTS

FOR GPRS & EDGE:

GPRS MODE

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|-------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | mW |
| 512 | 1850.2 | 25.1 | 2.7 | 27.8 | 602.6 |
| 661 | 1880.0 | 24.6 | 2.7 | 27.3 | 537.0 |
| 810 | 1909.8 | 24.2 | 2.7 | 26.9 | 489.8 |

EDGE MODE

| CONDUCTED PEAK OUTPUT POWER | | | | | |
|-----------------------------|-----------------|-----------------|------------------------|-------------------|-------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | PEAK OUTPUT POWER | |
| | | | | dBm | mW |
| 512 | 1850.2 | 25.1 | 2.7 | 27.8 | 602.6 |
| 661 | 1880.0 | 24.6 | 2.7 | 27.3 | 537.0 |
| 810 | 1909.8 | 24.2 | 2.7 | 26.9 | 489.8 |

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
 2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB) + 20dB Pad.



A D T

GPRS MODE

| EIRP POWER | | | | | |
|-------------|-----------------|-----------------|------------------------|--------------|-------|
| CHANNEL NO. | FREQUENCY (MHz) | S.G VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | mW |
| 512 | 1850.2 | 22.9 | 6.6 | 29.5 | 891.3 |
| 661 | 1880.0 | 23.1 | 6.7 | 29.8 | 955.0 |
| 810 | 1909.8 | 22.4 | 6.7 | 29.1 | 812.8 |

EDGE MODE

| EIRP POWER | | | | | |
|-------------|-----------------|-----------------|------------------------|--------------|-------|
| CHANNEL NO. | FREQUENCY (MHz) | S.G VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | Watt |
| 512 | 1850.2 | 22.7 | 6.6 | 29.3 | 851.1 |
| 661 | 1880.0 | 22.7 | 6.7 | 29.4 | 871.0 |
| 810 | 1909.8 | 22.3 | 6.7 | 29.0 | 794.3 |

REMARKS: 1. Peak Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = substitution Antenna Gain (dBi) + Cable Loss (dB) + Free Space Loss (dB).

**FOR WCDMA:****WCDMA-RMC MODE**

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|-------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | mW |
| 9262 | 1852.4 | 18.4 | 2.7 | 21.1 | 128.8 |
| 9400 | 1880 | 17.8 | 2.7 | 20.5 | 112.2 |
| 9538 | 1907.6 | 17.4 | 2.7 | 20.1 | 102.3 |

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB) + 20dB Pad.

HSDPA MODE - SUBTEST 1

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|-------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | mW |
| 9262 | 1852.4 | 18.3 | 2.7 | 21.0 | 125.9 |
| 9400 | 1880 | 17.7 | 2.7 | 20.4 | 109.6 |
| 9538 | 1907.6 | 17.3 | 2.7 | 20.0 | 100.0 |

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB) + 20dB Pad.

HSDPA MODE - SUBTEST 2

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|-------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | mW |
| 9262 | 1852.4 | 18.2 | 2.7 | 20.9 | 123.0 |
| 9400 | 1880 | 17.4 | 2.7 | 20.1 | 102.3 |
| 9538 | 1907.6 | 17.2 | 2.7 | 19.9 | 97.7 |

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB) + 20dB Pad.



A D T

HSDPA MODE - SUBTEST 3

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|-------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | mW |
| 9262 | 1852.4 | 18.4 | 2.7 | 21.1 | 128.8 |
| 9400 | 1880 | 17.7 | 2.7 | 20.4 | 109.6 |
| 9538 | 1907.6 | 17.0 | 2.7 | 19.7 | 93.3 |

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB) + 20dB Pad.

HSDPA MODE - SUBTEST 4

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|-------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | mW |
| 9262 | 1852.4 | 18.3 | 2.7 | 21.0 | 125.9 |
| 9400 | 1880 | 17.6 | 2.7 | 20.3 | 107.2 |
| 9538 | 1907.6 | 17.3 | 2.7 | 20.0 | 100.0 |

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB) + 20dB Pad.

HSUPA MODE-SUBTEST 1

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|-------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | mW |
| 9262 | 1852.4 | 18.3 | 2.7 | 21.0 | 125.9 |
| 9400 | 1880 | 17.7 | 2.7 | 20.4 | 109.6 |
| 9538 | 1907.6 | 17.3 | 2.7 | 20.0 | 100.0 |

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB) + 20dB Pad.



A D T

HSUPA MODE-SUBTEST 2

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|-------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | mW |
| 9262 | 1852.4 | 18.2 | 2.7 | 20.9 | 123.0 |
| 9400 | 1880 | 17.7 | 2.7 | 20.4 | 109.6 |
| 9538 | 1907.6 | 17.3 | 2.7 | 20.0 | 100.0 |

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB) + 20dB Pad.

HSUPA MODE-SUBTEST 3

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|-------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | mW |
| 9262 | 1852.4 | 18.1 | 2.7 | 20.8 | 120.2 |
| 9400 | 1880 | 17.6 | 2.7 | 20.3 | 107.2 |
| 9538 | 1907.6 | 17.2 | 2.7 | 19.9 | 97.7 |

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB) + 20dB Pad.

HSUPA MODE-SUBTEST 4

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|-------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | mW |
| 9262 | 1852.4 | 18.1 | 2.7 | 20.8 | 120.2 |
| 9400 | 1880 | 17.5 | 2.7 | 20.2 | 104.7 |
| 9538 | 1907.6 | 17.2 | 2.7 | 19.9 | 97.7 |

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB) + 20dB Pad.



A D T

HSUPA MODE-SUBTEST 5

| CONDUCTED OUTPUT POWER | | | | | |
|------------------------|-----------------|-----------------|------------------------|--------------|-------|
| CHANNEL NO. | FREQUENCY (MHz) | RAW VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | mW |
| 9262 | 1852.4 | 18.0 | 2.7 | 20.7 | 117.5 |
| 9400 | 1880 | 17.4 | 2.7 | 20.1 | 102.3 |
| 9538 | 1907.6 | 17.1 | 2.7 | 19.8 | 95.5 |

REMARKS: 1. Peak Output Power (dBm) = Raw Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Power Splitter Loss (dB) + Cable Loss (dB) + 20dB Pad.

**WCDMA-RMC MODE**

| EIRP POWER | | | | | |
|-------------|-----------------|-----------------|------------------------|--------------|-------|
| CHANNEL NO. | FREQUENCY (MHz) | S.G VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | mW |
| 9262 | 1852.4 | 16.8 | 6.6 | 23.4 | 218.8 |
| 9400 | 1880 | 16.3 | 6.7 | 23.0 | 199.5 |
| 9538 | 1907.6 | 16.1 | 6.7 | 22.8 | 190.5 |

REMARKS: 1. Peak Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = substitution Antenna Gain (dBi) + Cable Loss (dB) + Free Space Loss (dB).

HSDPA MODE-SUBTEST 1

| EIRP POWER | | | | | |
|-------------|-----------------|-----------------|------------------------|--------------|-------|
| CHANNEL NO. | FREQUENCY (MHz) | S.G VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | mW |
| 9262 | 1852.4 | 16.7 | 6.6 | 23.3 | 213.8 |
| 9400 | 1880 | 16.2 | 6.7 | 22.9 | 195.0 |
| 9538 | 1907.6 | 15.9 | 6.7 | 22.6 | 182.0 |

REMARKS: 1. Peak Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = substitution Antenna Gain (dBi) + Cable Loss (dB) + Free Space Loss (dB).

HSUPA MODE-SUBTEST 1

| EIRP POWER | | | | | |
|-------------|-----------------|-----------------|------------------------|--------------|-------|
| CHANNEL NO. | FREQUENCY (MHz) | S.G VALUE (dBm) | CORRECTION FACTOR (dB) | OUTPUT POWER | |
| | | | | dBm | mW |
| 9262 | 1852.4 | 16.6 | 6.6 | 23.2 | 208.9 |
| 9400 | 1880 | 16.1 | 6.7 | 22.8 | 190.5 |
| 9538 | 1907.6 | 15.8 | 6.7 | 22.5 | 177.8 |

REMARKS: 1. Peak Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = substitution Antenna Gain (dBi) + Cable Loss (dB) + Free Space Loss (dB).

4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

4.2.2 TEST INSTRUMENTS


| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|--|-------------|---------------------------|-----------------|------------------|
| Spectrum Analyzer R&S | FSP 40 | 100060 | May 09, 2012 | May 08, 2013 |
| Spectrum Analyzer Agilent | E4446A | MY48250113 | Nov. 30, 2011 | Nov. 29, 2012 |
| Power meter Anritsu | ML2495A | 1014008 | Apr. 28, 2012 | Apr. 27, 2013 |
| Power sensor Anritsu | MA2411B | 0917122 | Apr. 28, 2012 | Apr. 27, 2013 |
| AC Power Source EXTECH Electronics | 6502 | 1140503 | NA | NA |
| Temperature & Humidity Chamber TERCHY | MHU-225AU | 911033 | Dec. 12, 2011 | Dec. 11, 2012 |
| DC Power Supply GOOD WILL INSTRUMENT CO., LTD. | GPC - 3030D | 7700087 | NA | NA |
| ESG Vector signal generator Agilent | E4438C | MY47271330 506 602 UNJ | May 08, 2012 | May 07, 2013 |

- NOTE:**
1. The test was performed in Oven room A.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 3. Tested Date: Oct. 19, 2012

4.2.3 TEST PROCEDURE

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.
- d. **NOTE:** The frequency error was recorded frequency error from the communication simulator.

4.2.4 TEST SETUP

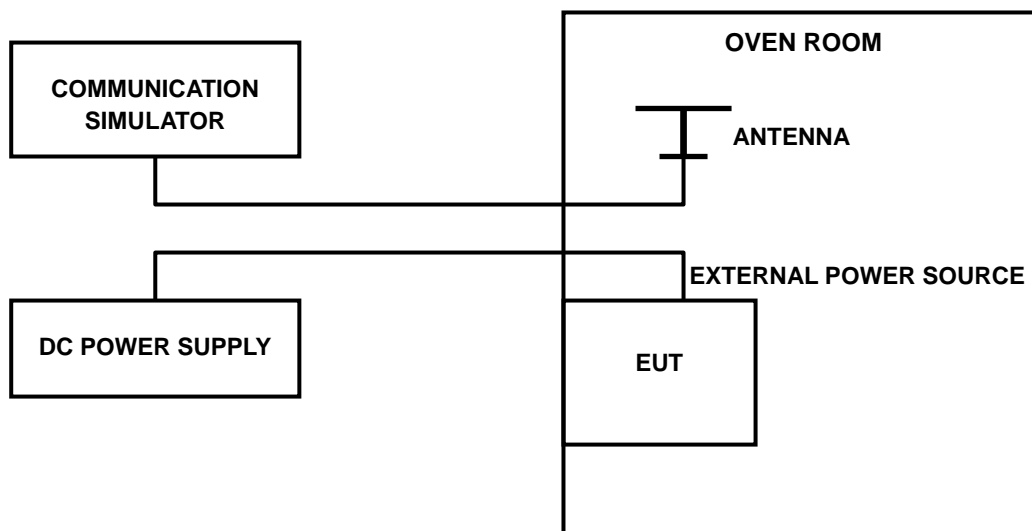

4.2.5 TEST RESULTS

FOR GPRS:

| AFC FREQUENCY ERROR vs. VOLTAGE | | | |
|---------------------------------|----------------------|-----------------------|-------------|
| VOLTAGE (Volts) | FREQUENCY ERROR (Hz) | FREQUENCY ERROR (ppm) | LIMIT (ppm) |
| 6.29 | -21 | -0.011 | 2.5 |
| 8.51 | -20 | -0.011 | 2.5 |

| AFC FREQUENCY ERROR vs. TEMP. | | | |
|-------------------------------|----------------------|-----------------------|-------------|
| TEMP. (°C) | FREQUENCY ERROR (Hz) | FREQUENCY ERROR (ppm) | LIMIT (ppm) |
| 50 | -22 | -0.012 | 2.5 |
| 40 | -20 | -0.011 | 2.5 |
| 30 | -21 | -0.011 | 2.5 |
| 20 | -22 | -0.012 | 2.5 |
| 10 | -22 | -0.012 | 2.5 |
| 0 | -20 | -0.011 | 2.5 |
| -10 | -21 | -0.011 | 2.5 |
| -20 | -19 | -0.010 | 2.5 |
| -30 | -22 | -0.012 | 2.5 |



FOR WCDMA:

| AFC FREQUENCY ERROR vs. VOLTAGE | | | |
|--|-----------------------------|------------------------------|--------------------|
| VOLTAGE (Volts) | FREQUENCY ERROR (Hz) | FREQUENCY ERROR (ppm) | LIMIT (ppm) |
| 6.29 | -29 | -0.015 | 2.5 |
| 8.51 | -31 | -0.016 | 2.5 |

| AFC FREQUENCY ERROR vs. TEMP. | | | |
|--------------------------------------|-----------------------------|------------------------------|--------------------|
| TEMP. (°C) | FREQUENCY ERROR (Hz) | FREQUENCY ERROR (ppm) | LIMIT (ppm) |
| 50 | -30 | -0.016 | 2.5 |
| 40 | -28 | -0.015 | 2.5 |
| 30 | -31 | -0.016 | 2.5 |
| 20 | -25 | -0.013 | 2.5 |
| 10 | -28 | -0.015 | 2.5 |
| 0 | -32 | -0.017 | 2.5 |
| -10 | -30 | -0.016 | 2.5 |
| -20 | -28 | -0.015 | 2.5 |
| -30 | -30 | -0.016 | 2.5 |

4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 TEST PROCEDURES

The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range. The communication simulator station system controlled a EUT to export maximum output power under transmission mode and specific channel frequency. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.

4.3.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| R&S SPECTRUM ANALYZER | FSP40 | 100060 | May 09, 2012 | May 08, 2013 |
| OVEN | MHU-225AU | 911033 | Dec. 12, 2011 | Dec. 11, 2012 |
| AC POWER SOURCE | 6205 | 1140503 | NA | NA |

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. Tested date: Oct. 19, 2012

4.3.3 TEST SETUP

Same as Item 4.2.4 (Conducted Power Setup)

4.3.4 EUT OPERATING CONDITION

Same as the 4.1.5

4.3.5 TEST RESULTS


| CHANNEL | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (kHz) | |
|---------|-----------------|------------------------------|------|
| | | GPRS | EDGE |
| 128 | 1850.2 | 244 | 246 |
| 190 | 1880 | 244 | 246 |
| 251 | 1909.8 | 242 | 244 |

| CHANNEL | FREQUENCY (MHz) | 99% OCCUPIED BANDWIDTH (MHz) | | |
|---------|-----------------|------------------------------|-------|-------|
| | | WCDMA | HSDPA | HSUPA |
| 4132 | 1852.4 | 4.18 | 4.18 | 4.18 |
| 4182 | 1880 | 4.16 | 4.20 | 4.18 |
| 4233 | 1907.6 | 4.16 | 4.16 | 4.16 |



A D T

SPECTRUM PLOT OF WORST VALUE

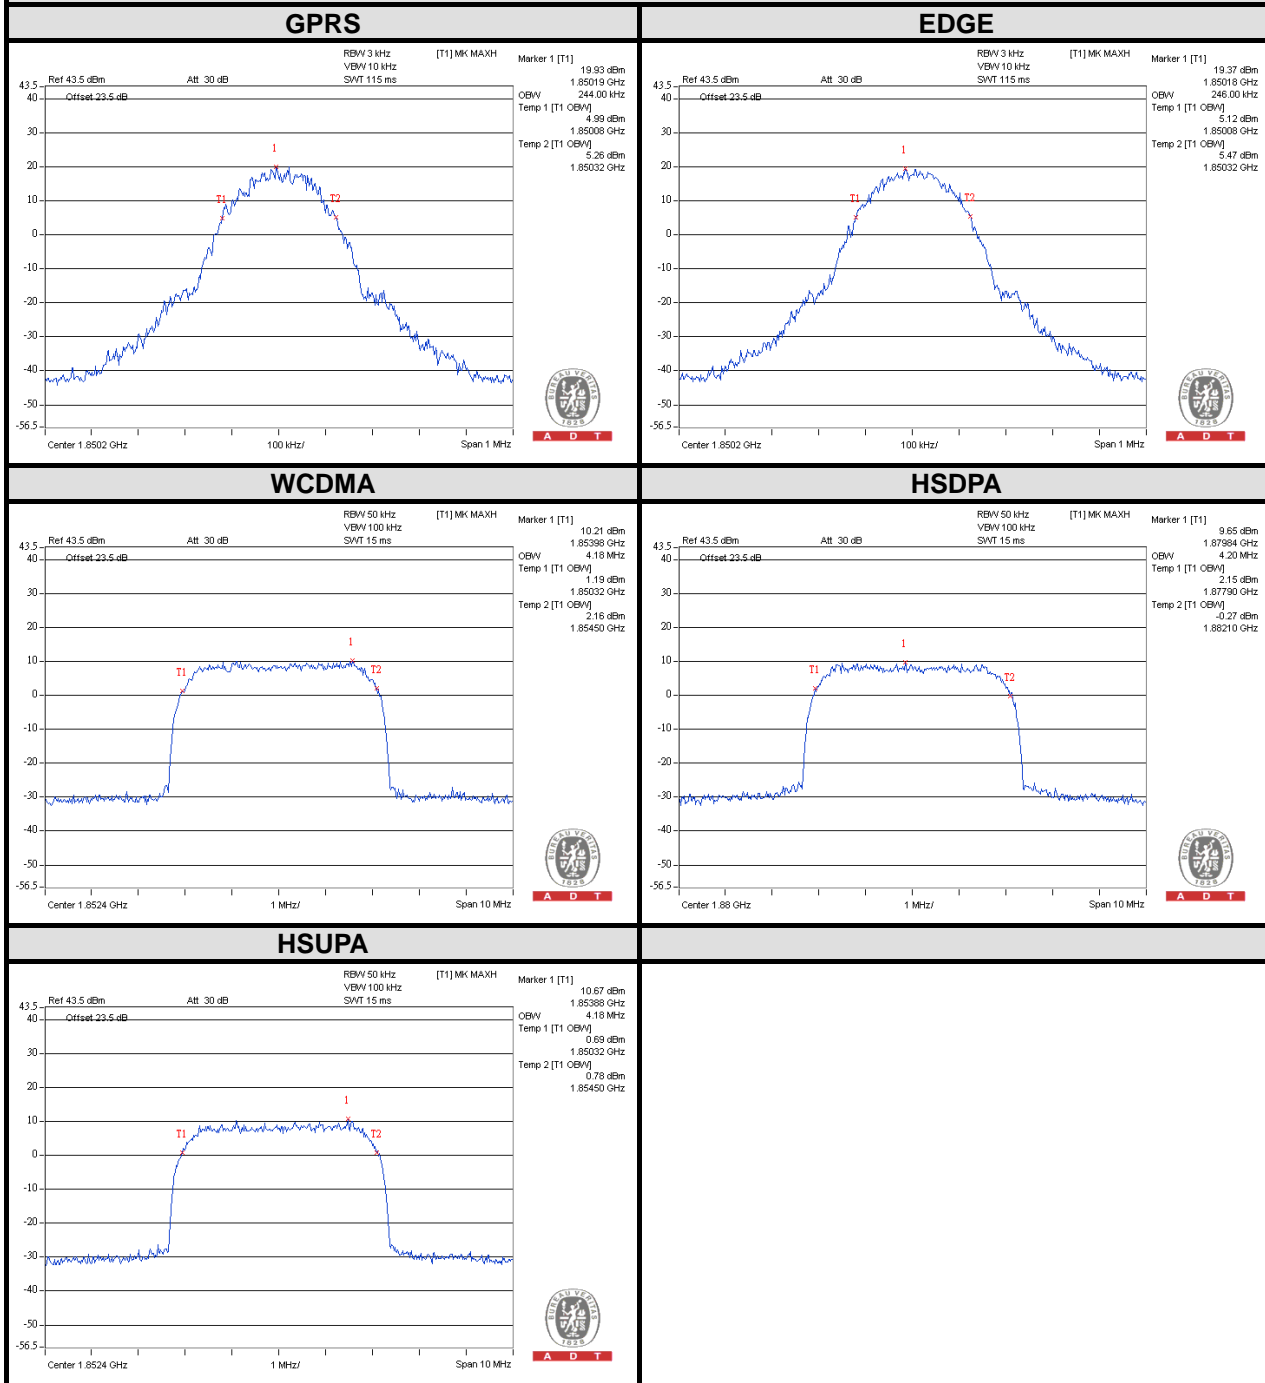



4.4 BAND EDGE MEASUREMENT

4.4.1 LIMITS OF BAND EDGE MEASUREMENT

Power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.4.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|----------------------------|-----------|------------|-----------------|------------------|
| R&S SPECTRUM ANALYZER | FSP40 | 100060 | May 09, 2012 | May 08, 2013 |
| OVEN | MHU-225AU | 911033 | Dec. 12, 2011 | Dec. 11, 2012 |
| AC POWER SOURCE | 6205 | 1140503 | NA | NA |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. Tested date: Oct. 19, 2012

4.4.3 TEST SETUP

Same as Item 4.2.4 (Conducted Power Setup)


4.4.4 TEST PROCEDURES

- a. All measurements were done at low and high operational frequency range.
- b. The center frequency of spectrum is the band edge frequency and span is 1.5 MHz. RB of the spectrum is 3kHz and VB of the spectrum is 10kHz (GSM/GPRS/EDGE).
- c. The center frequency of spectrum is the band edge frequency and span is 10MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz (WCDMA).
- d. Record the max trace plot into the test report.

4.4.5 EUT OPERATING CONDITION

Same as the 4.1.5

4.4.6 TEST RESULTS

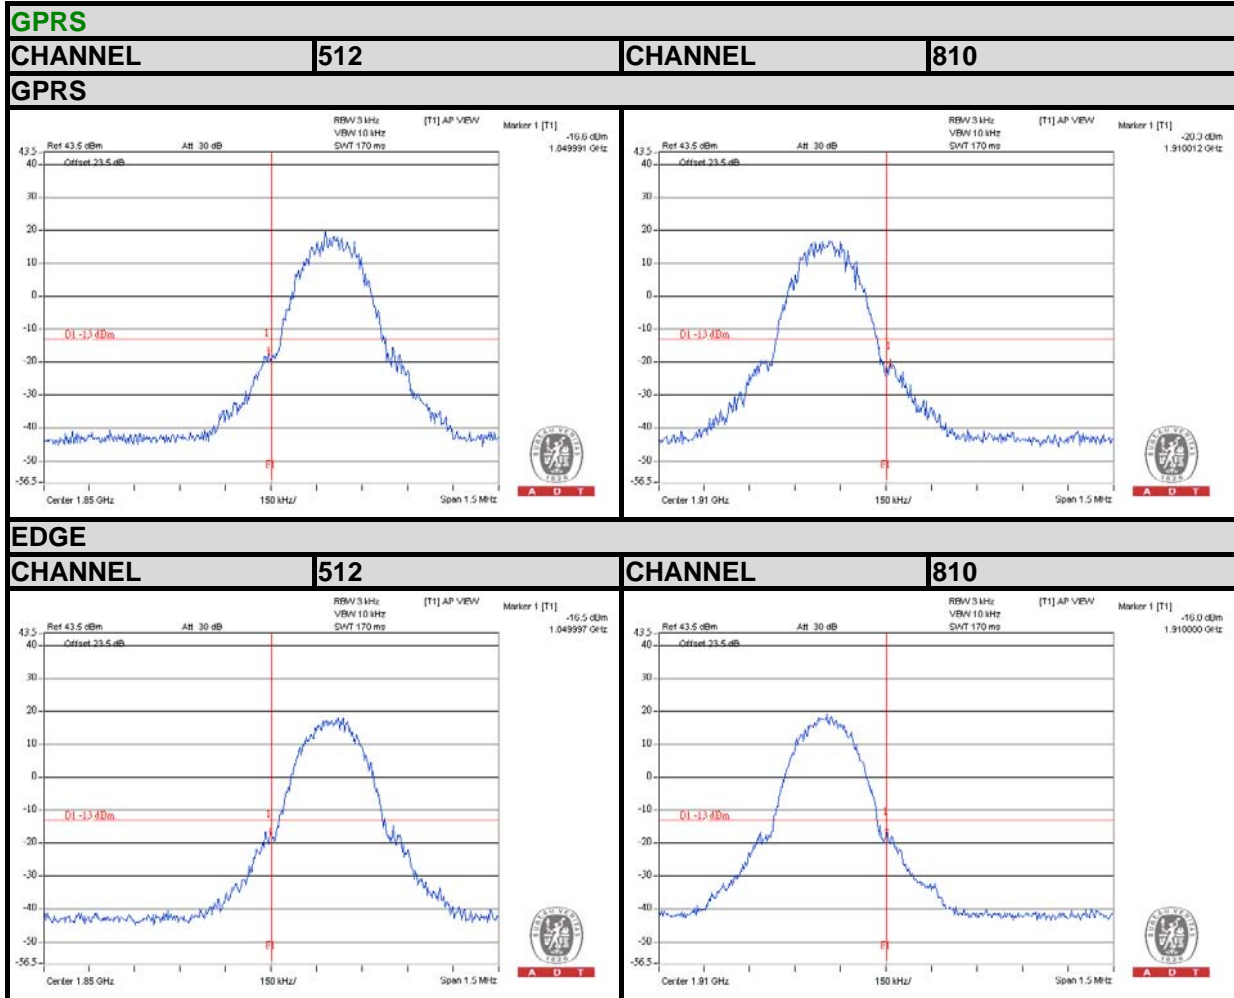





A D T

WCDMA


WCDMA

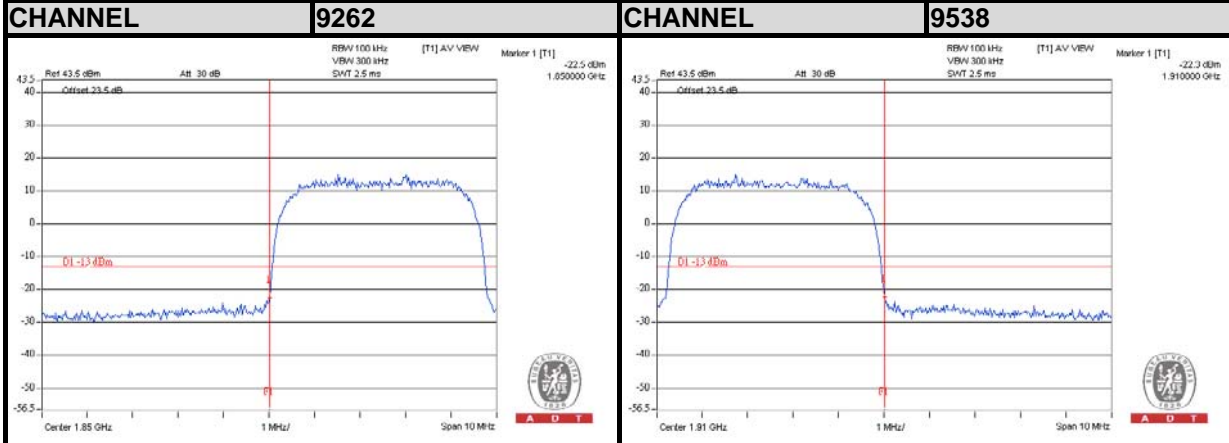

HSDPA

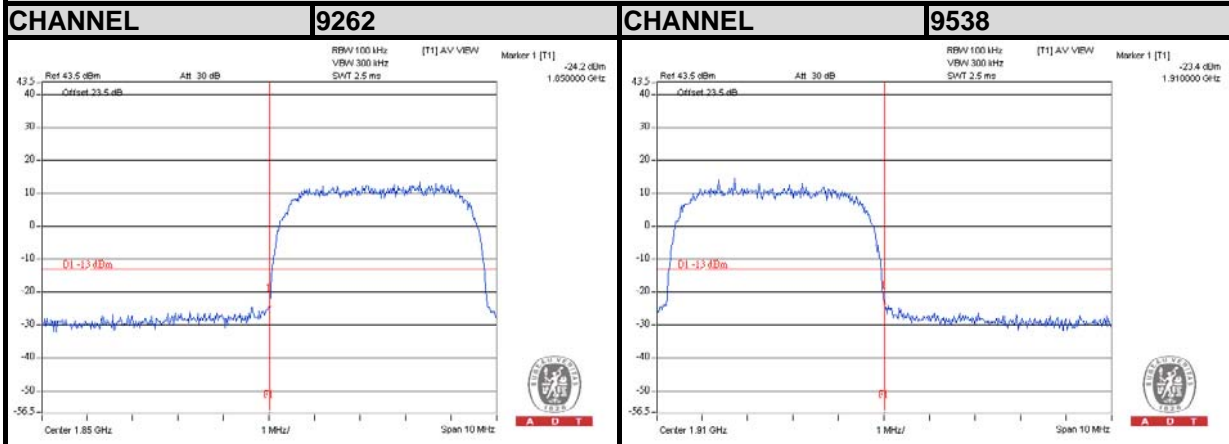

HSUPA

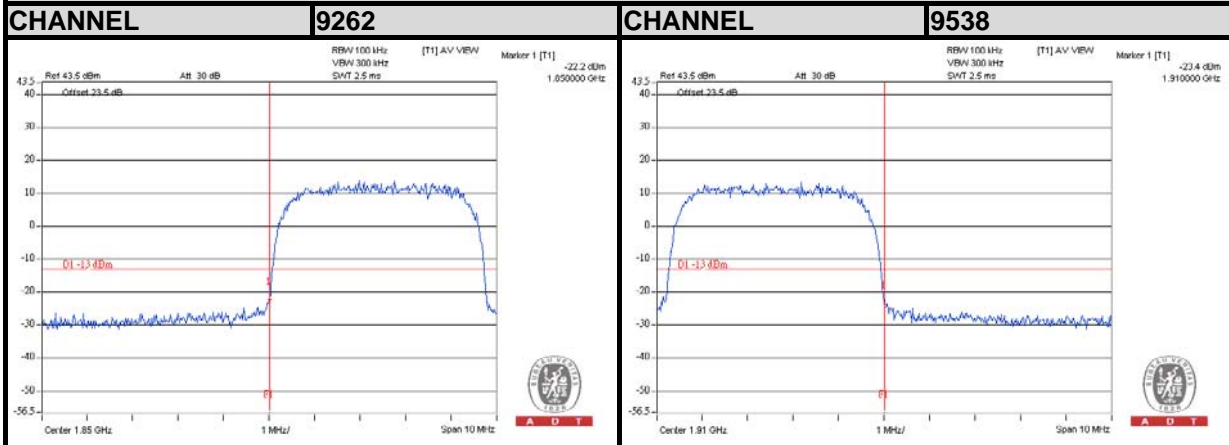



4.5 CONDUCTED SPURIOUS EMISSIONS

4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .

4.5.2 TEST INSTRUMENTS


| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|--|---|------------|-----------------|------------------|
| R&S SPECTRUM ANALYZER | FSP40 | 100060 | May 09, 2012 | May 08, 2013 |
| OVEN | MHU-225AU | 911033 | Dec. 12, 2011 | Dec. 11, 2012 |
| AC POWER SOURCE | 6205 | 1140503 | NA | NA |
| Wainwright Instruments Band Reject Filter | WRCG1850/191 0-1830/1930-60/ 10SS | SN1 | NA | NA |
| * Wainwright Instruments High Pass Filter | WHK3.1/18G-10 SS | SN1 | NA | NA |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. Tested date: Oct. 19, 2012

4.5.3 TEST PROCEDURE

- a. The EUT makes a call to the communication simulator. All measurements were done at low, middle and high operational frequency range.
- b. Measuring frequency range is from 9 kHz to 19.1GHz. 20dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz is used for conducted emission measurement.

4.5.4 TEST SETUP

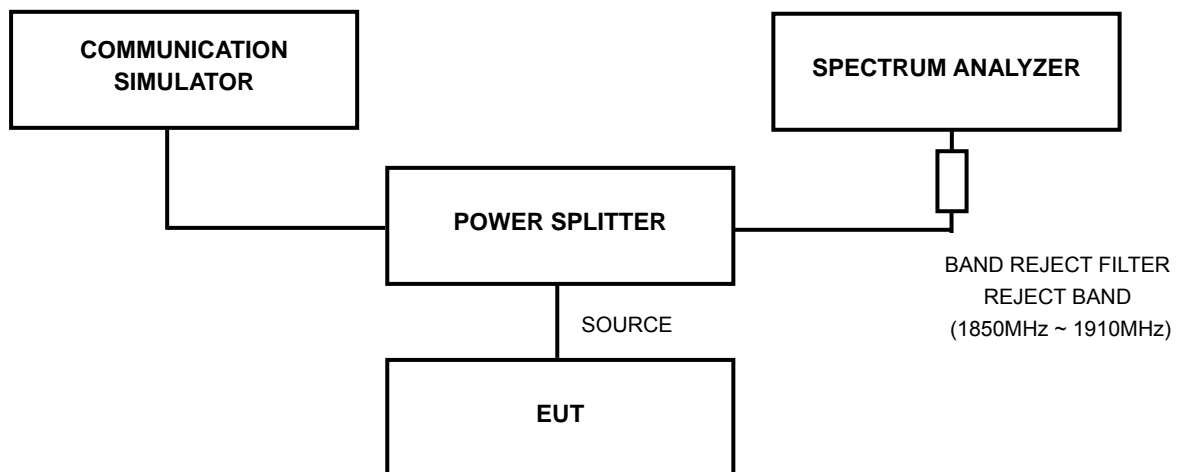


4.5.5 EUT OPERATING CONDITIONS

Same as the 4.1.5



A D T

4.5.6 TEST RESULTS

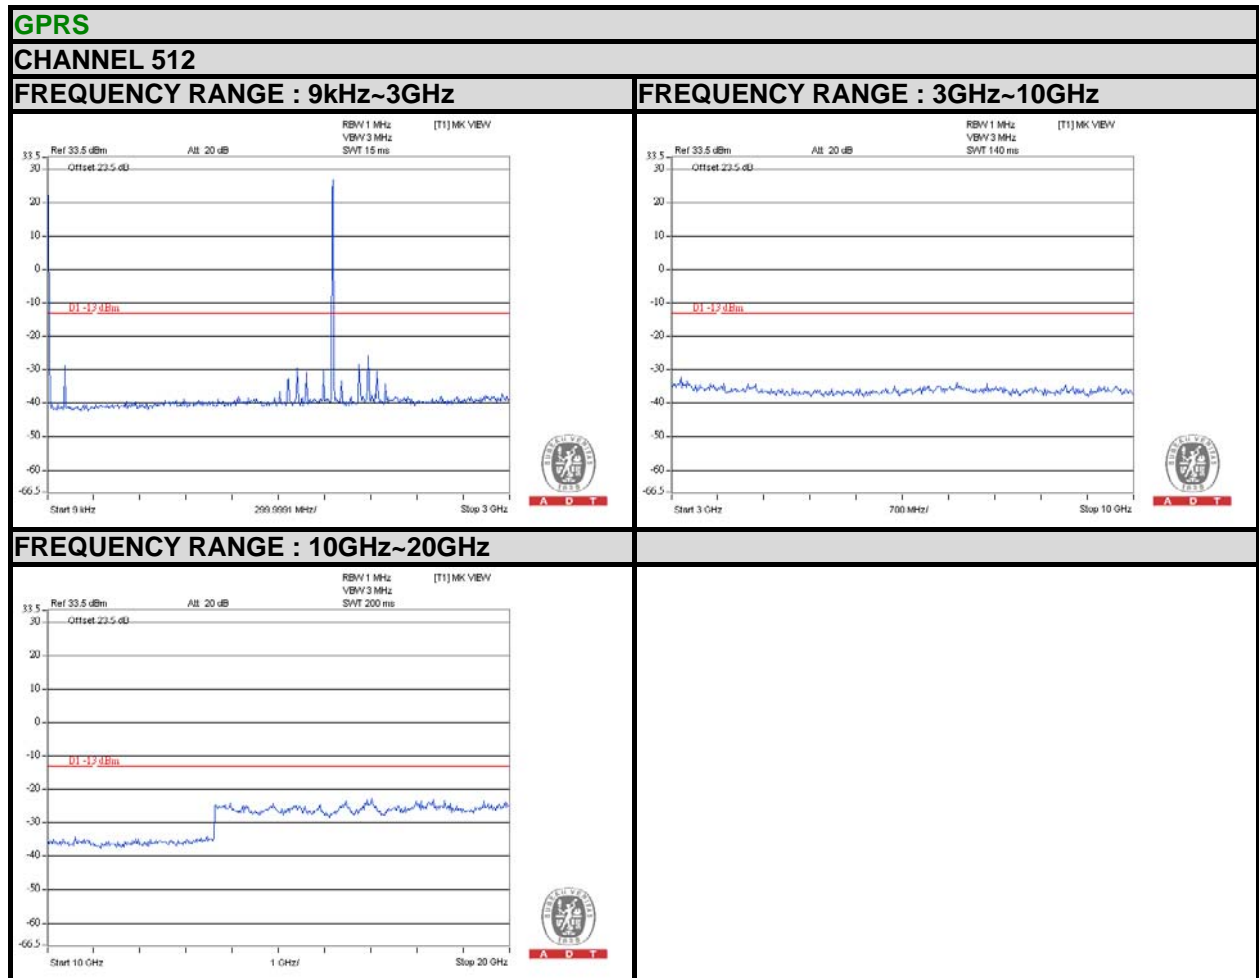




A D T


GPRS

CHANNEL 661


FREQUENCY RANGE : 9kHz~3GHz

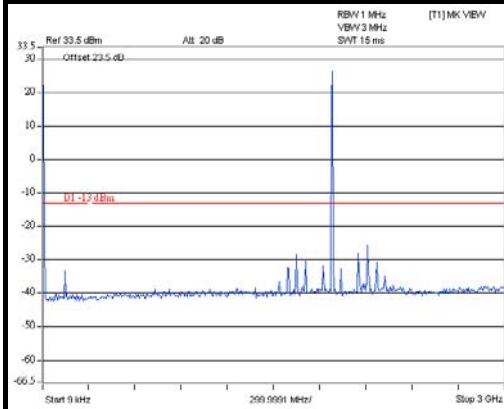

FREQUENCY RANGE : 3GHz~10GHz

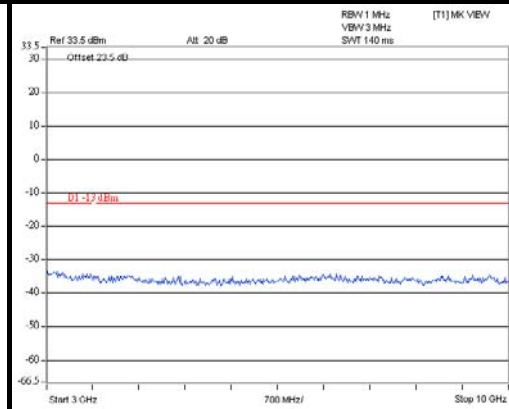

FREQUENCY RANGE : 10GHz~20GHz

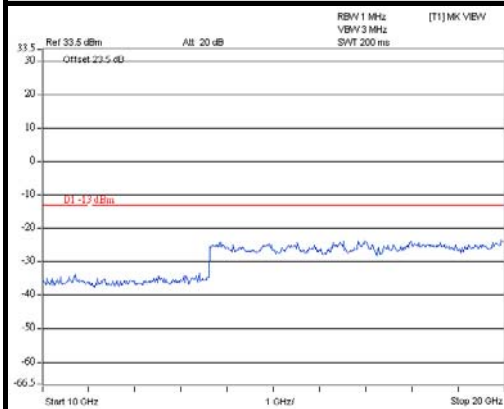




A D T


GPRS

CHANNEL 810


FREQUENCY RANGE : 9kHz~3GHz

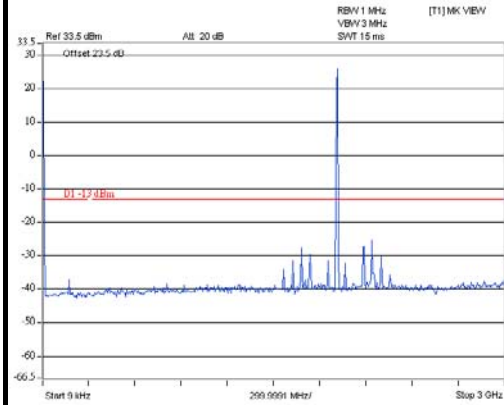

FREQUENCY RANGE : 3GHz~10GHz

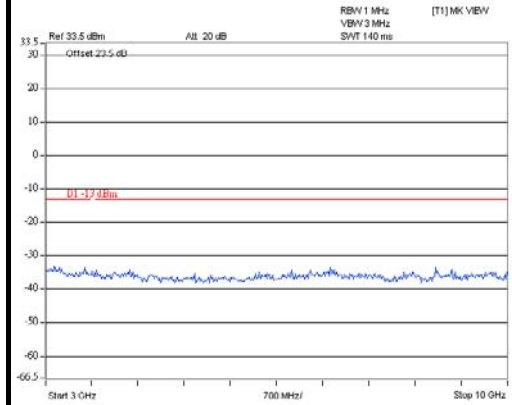

FREQUENCY RANGE : 10GHz~20GHz

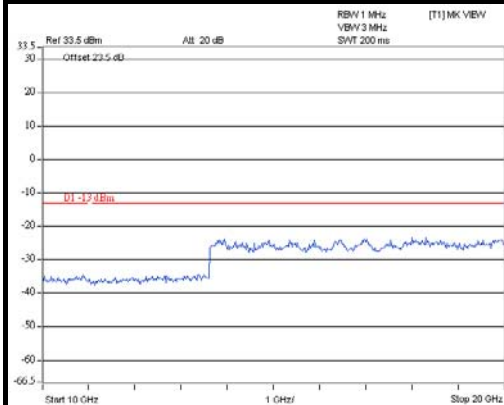




A D T


WCDMA

CHANNEL 9262


FREQUENCY RANGE : 9kHz~3GHz

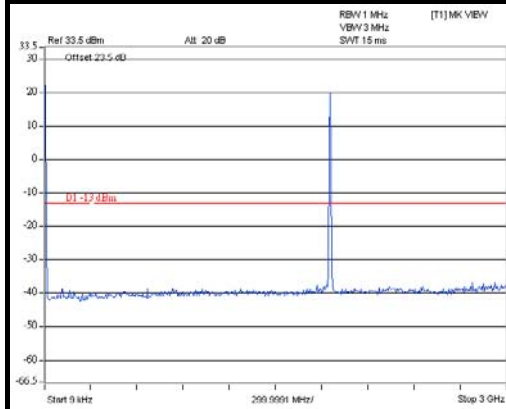

FREQUENCY RANGE : 3GHz~10GHz

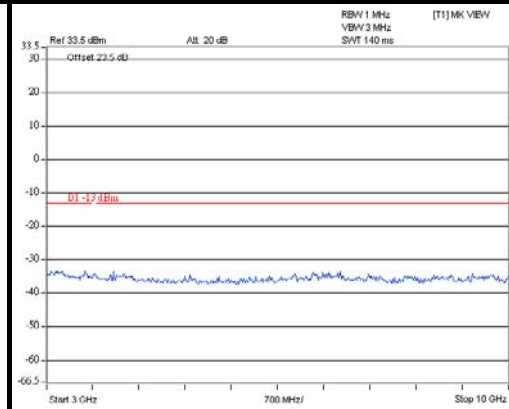

FREQUENCY RANGE : 10GHz~20GHz

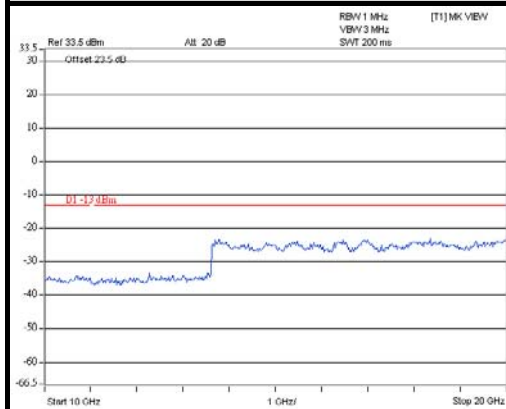




A D T

WCDMA


CHANNEL 9400

FREQUENCY RANGE : 9kHz~3GHz

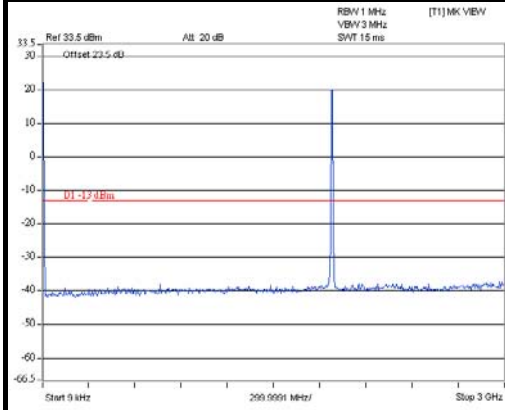


A D T

FREQUENCY RANGE : 3GHz~10GHz

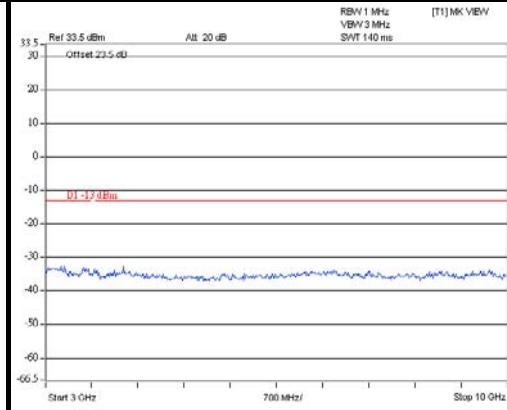

A D T

FREQUENCY RANGE : 10GHz~20GHz

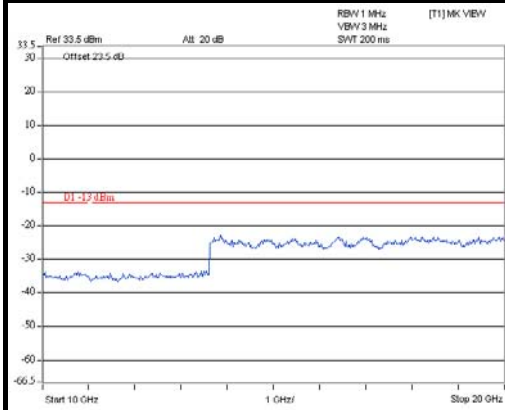

A D T




A D T


WCDMA

CHANNEL 9538


FREQUENCY RANGE : 9kHz~3GHz

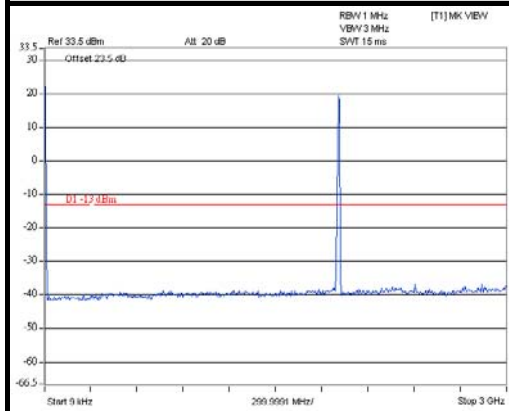

FREQUENCY RANGE : 3GHz~10GHz

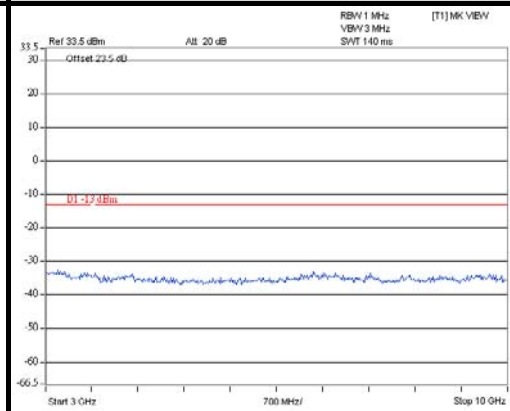

FREQUENCY RANGE : 10GHz~20GHz

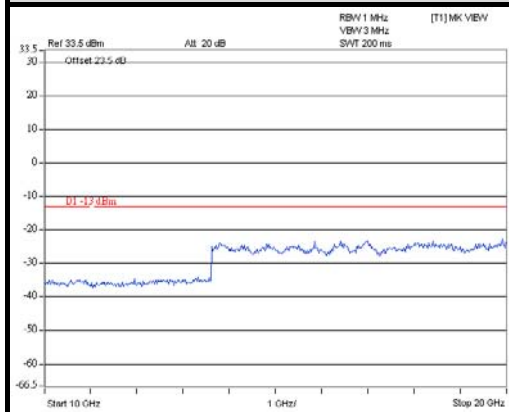

4.6 RADIATED EMISSION MEASUREMENT

4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13dBm .



A D T

4.6.2 TEST INSTRUMENTS

| DESCRIPTION & MANUFACTURER | MODEL NO. | SERIAL NO. | CALIBRATED DATE | CALIBRATED UNTIL |
|---|--------------------------|-------------------------------------|-----------------|------------------|
| Spectrum Analyzer Agilent | E4446A | MY48250254 | July 09, 2012 | July 08, 2013 |
| Pre-Selector Agilent | N9039A | MY46520311 | July 09, 2012 | July 08, 2013 |
| Signal Generator Agilent | N5181A | MY49060517 | July 09, 2012 | July 08, 2013 |
| Pre-Amplifier Mini-Circuits | ZFL-1000VH2 B | AMP-ZFL-03 | Nov. 15, 2011 | Nov. 14, 2012 |
| Pre-Amplifier Agilent | 8449B | 3008A02578 | June 26, 2012 | June 25, 2013 |
| Pre-Amplifier SPACEK LABS | SLKKa-48-6 | 9K16 | Nov. 15, 2011 | Nov. 14, 2012 |
| Trilog Broadband Antenna SCHWARZBECK | VULB 9168 | 9168-360 | Apr. 09, 2012 | Apr. 08, 2013 |
| Horn_Antenna AISI | AIH.8018 | 0000320091110 | Nov. 14, 2011 | Nov. 13, 2012 |
| Horn_Antenna SCHWARZBECK | BBHA 9170 | 9170-424 | Oct. 12, 2012 | Oct. 11, 2013 |
| RF Cable | NA | RF104-201 RF104-203 RF104-204 | Dec. 26, 2011 | Dec. 25, 2012 |
| RF Cable | NA | CHGCAB_001 | Oct. 06, 2012 | Oct. 05, 2013 |
| Software | ADT_Radiated _V8.7.05 | NA | NA | NA |
| Antenna Tower & Turn Table CT | NA | NA | NA | NA |

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: Oct. 29, 2012

4.6.3 TEST PROCEDURES


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value “ of step a. Record the power level of S.G
- c. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $E.R.P \text{ power} = E.I.P.R \text{ power} - 2.15\text{dBi.}$

NOTE: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

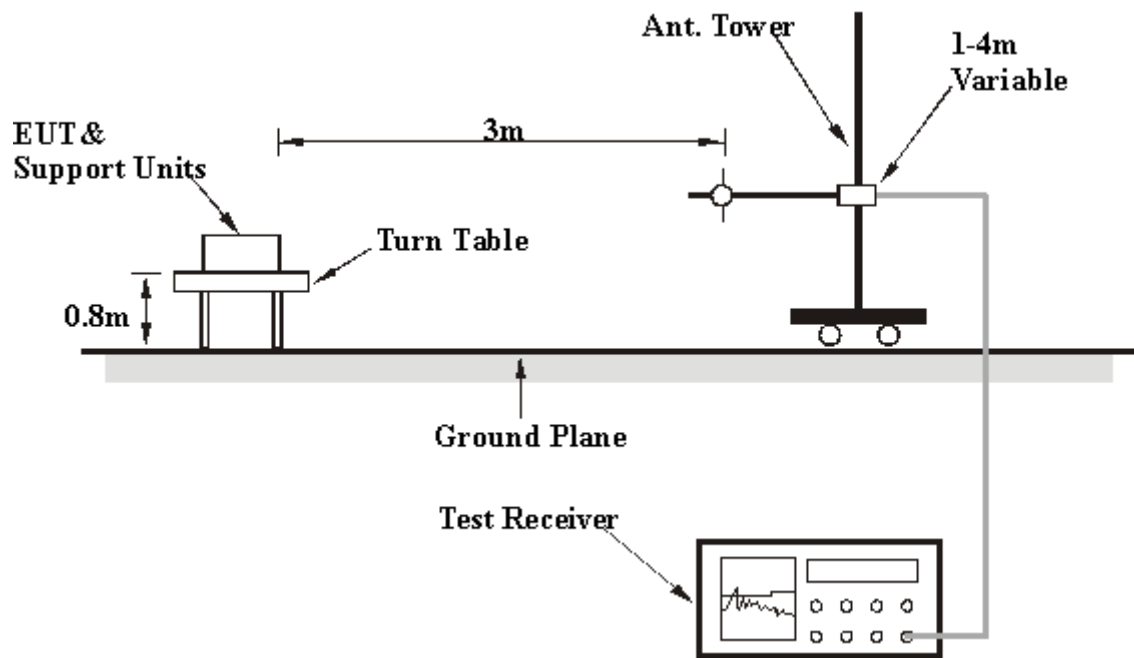

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.6.6 EUT OPERATING CONDITIONS

Same as the 4.1.5

4.6.7 TEST RESULTS

BELOW 1GHz DATA

GPRS

| | | | |
|----------------|----------------|------------------------|------------|
| CHANNEL | TX Channel 512 | FREQUENCY RANGE | Below 1GHz |
|----------------|----------------|------------------------|------------|

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | |
|---|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
| 1 | 76.54 | 27.39 | -13 | -64.65 | -2.78 | -67.43 |
| 2 | 117.02 | 38.59 | -13 | -51.17 | -1.10 | -52.27 |
| 3 | 127.45 | 37.02 | -13 | -54.19 | -1.23 | -55.43 |
| 4 | 204.9 | 42.21 | -13 | -53.27 | 4.28 | -48.99 |
| 5 | 214.74 | 42.73 | -13 | -52.71 | 4.15 | -48.56 |
| 6 | 223.74 | 40.88 | -13 | -54.53 | 4.03 | -50.50 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | |
| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
| 1 | 41.13 | 35.8 | -13 | -39.49 | -12.18 | -51.67 |
| 2 | 76.9 | 38.92 | -13 | -53.33 | -2.68 | -56.01 |
| 3 | 120.36 | 37.97 | -13 | -51.71 | -1.19 | -52.89 |
| 4 | 204.91 | 37.32 | -13 | -58.16 | 4.28 | -53.88 |
| 5 | 223.74 | 36.27 | -13 | -59.14 | 4.03 | -55.11 |
| 6 | 626.38 | 40.58 | -13 | -54.24 | 1.77 | -52.47 |

REMARKS:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).

WCDMA

| | | | |
|----------------|-----------------|------------------------|------------|
| CHANNEL | TX Channel 9262 | FREQUENCY RANGE | Below 1GHz |
|----------------|-----------------|------------------------|------------|

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | |
|--|-------------|-----------------------|-------------|-----------------------|------------------------|-------------------|
| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
| 1 | 76.4 | 27.39 | -13 | -64.56 | -2.82 | -67.39 |
| 2 | 115 | 38.49 | -13 | -51.38 | -1.04 | -52.42 |
| 3 | 127.3 | 36.96 | -13 | -54.22 | -1.23 | -55.45 |
| 4 | 204.5 | 42.14 | -13 | -53.34 | 4.28 | -49.05 |
| 5 | 214.5 | 42.65 | -13 | -52.79 | 4.15 | -48.64 |
| 6 | 223.6 | 40.76 | -13 | -54.65 | 4.03 | -50.62 |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | |
| No. | Freq. (MHz) | Emission Level (dBuV) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | Power Value (dBm) |
| 1 | 41.1 | 34.81 | -13 | -40.47 | -12.19 | -52.66 |
| 2 | 77 | 37.65 | -13 | -54.66 | -2.65 | -57.31 |
| 3 | 120.3 | 37.07 | -13 | -52.59 | -1.18 | -53.78 |
| 4 | 204.4 | 36.4 | -13 | -59.08 | 4.28 | -54.79 |
| 5 | 223.6 | 35.34 | -13 | -60.07 | 4.03 | -56.04 |
| 6 | 626.31 | 39.64 | -13 | -55.18 | 1.77 | -53.41 |

REMARKS:

1. Output Power (dBm) = S.G Value (dBm) + Correction Factor (dB).
2. Correction Factor (dB) = Substitution Antenna Gain (dB) + Cable Loss (dB).



ABOVE 1GHz DATA

GPRS

| | | | |
|----------------|----------------|------------------------|--------------|
| CHANNEL | TX Channel 512 | FREQUENCY RANGE | 1GHz ~ 20GHz |
|----------------|----------------|------------------------|--------------|

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | |
|---|-------------|-------------------|-------------|-----------------------|------------------------|-----------|
| No. | Freq. (MHz) | SPA READING (dBm) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) |
| 1 | 3700 | 55.70 | -13 | -48.23 | 7.72 | -40.51 |
| 2 | 5550.6 | 54.30 | -13 | -50.59 | 7.08 | -43.51 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | |
|---|-------------|-------------------|-------------|-----------------------|------------------------|-----------|
| No. | Freq. (MHz) | SPA READING (dBm) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) |
| 1 | 3700 | 55.60 | -13 | -48.33 | 7.72 | -40.61 |
| 2 | 5550.6 | 56.20 | -13 | -48.69 | 7.08 | -41.61 |

REMARKS:

1. $ERP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$.
2. Correction Factor = gain of substitution antenna + cable loss



A D T

| | | | |
|----------------|----------------|------------------------|--------------|
| CHANNEL | TX Channel 661 | FREQUENCY RANGE | 1GHz ~ 20GHz |
|----------------|----------------|------------------------|--------------|

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | SPA READING (dBm) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) |
|-----|-------------|-------------------|-------------|-----------------------|------------------------|-----------|
| 1 | 3760 | 55.50 | -13 | -48.65 | 7.68 | -40.97 |
| 2 | 5640 | 54.60 | -13 | -50.14 | 7.02 | -43.12 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | SPA READING (dBm) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) |
|-----|-------------|-------------------|-------------|-----------------------|------------------------|-----------|
| 1 | 3760 | 53.90 | -13 | -50.25 | 7.68 | -42.57 |
| 2 | 5640 | 54.50 | -13 | -50.24 | 7.02 | -43.22 |

REMARKS:

1. ERP(dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor = gain of substitution antenna + cable loss



A D T

| | | | |
|----------------|----------------|------------------------|--------------|
| CHANNEL | TX Channel 810 | FREQUENCY RANGE | 1GHz ~ 20GHz |
|----------------|----------------|------------------------|--------------|

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | SPA READING (dBm) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) |
|-----|-------------|-------------------|-------------|-----------------------|------------------------|-----------|
| 1 | 3819.6 | 54.70 | -13 | -49.67 | 7.64 | -42.03 |
| 2 | 5729.4 | 54.20 | -13 | -50.39 | 6.96 | -43.43 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | SPA READING (dBm) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) |
|-----|-------------|-------------------|-------------|-----------------------|------------------------|-----------|
| 1 | 3819.6 | 54.50 | -13 | -49.87 | 7.64 | -42.23 |
| 2 | 5729.4 | 56.50 | -13 | -48.09 | 6.96 | -41.13 |

REMARKS:

1. $ERP(dBm) = S.G \text{ Power Value (dBm)} + \text{Correction Factor (dB)}$.
2. Correction Factor = gain of substitution antenna + cable loss

WCDMA

| | | | |
|----------------|-----------------|------------------------|--------------|
| CHANNEL | TX Channel 9262 | FREQUENCY RANGE | 1GHz ~ 20GHz |
|----------------|-----------------|------------------------|--------------|

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | SPA READING (dBm) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) |
|-----|-------------|-------------------|-------------|-----------------------|------------------------|-----------|
| 1 | 3704.8 | 51.90 | -13 | -52.05 | 7.71 | -44.34 |
| 2 | 5557.2 | 51.60 | -13 | -53.28 | 7.08 | -46.20 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | SPA READING (dBm) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) |
|-----|-------------|-------------------|-------------|-----------------------|------------------------|-----------|
| 1 | 3704.8 | 51.20 | -13 | -52.75 | 7.71 | -45.04 |
| 2 | 5557.2 | 51.60 | -13 | -53.28 | 7.08 | -46.20 |

REMARKS:

1. ERP(dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor = gain of substitution antenna + cable loss



A D T

| | | | |
|----------------|-----------------|------------------------|--------------|
| CHANNEL | TX Channel 9400 | FREQUENCY RANGE | 1GHz ~ 20GHz |
|----------------|-----------------|------------------------|--------------|

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| No. | Freq. (MHz) | SPA READING (dBm) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) |
|-----|-------------|-------------------|-------------|-----------------------|------------------------|-----------|
| 1 | 3760 | 51.80 | -13 | -52.35 | 7.68 | -44.67 |
| 2 | 5640 | 51.80 | -13 | -52.94 | 7.02 | -45.92 |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| No. | Freq. (MHz) | SPA READING (dBm) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) |
|-----|-------------|-------------------|-------------|-----------------------|------------------------|-----------|
| 1 | 3760 | 51.90 | -13 | -52.25 | 7.68 | -44.57 |
| 2 | 5640 | 51.40 | -13 | -53.34 | 7.02 | -46.32 |

REMARKS:

1. ERP(dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor = gain of substitution antenna + cable loss

| | | | |
|----------------|-----------------|------------------------|--------------|
| CHANNEL | TX Channel 9538 | FREQUENCY RANGE | 1GHz ~ 20GHz |
|----------------|-----------------|------------------------|--------------|

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | |
|---|--|--|--|--|--|--|
|---|--|--|--|--|--|--|

| No. | Freq. (MHz) | SPA READING (dBm) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) |
|-----|-------------|-------------------|-------------|-----------------------|------------------------|-----------|
| 1 | 3815.2 | 52.10 | -13 | -52.25 | 7.64 | -44.61 |
| 2 | 5722.8 | 51.40 | -13 | -53.21 | 6.96 | -46.24 |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | |
|---|--|--|--|--|--|--|
|---|--|--|--|--|--|--|

| No. | Freq. (MHz) | SPA READING (dBm) | Limit (dBm) | S.G Power Value (dBm) | Correction Factor (dB) | ERP (dBm) |
|-----|-------------|-------------------|-------------|-----------------------|------------------------|-----------|
| 1 | 3815.2 | 51.40 | -13 | -52.95 | 7.64 | -45.31 |
| 2 | 5722.8 | 51.00 | -13 | -53.61 | 6.96 | -46.64 |

REMARKS:

1. ERP(dBm) = S.G Power Value (dBm) + Correction Factor (dB).
2. Correction Factor = gain of substitution antenna + cable loss

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

7 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---