

SCANRECO

Radio Remote Control

Instruction Manual

G5 CU R



Document

66063

Revision

A

Language

English

Document information

Attribute	Information
Document Type	Instruction Manual
Title	SCANRECO G5 CU R
Document No.	66063
Language	English
Release date	2013-05-20
Original	English
Release date (original)	2013-05-20
Author	SCANRECO
Company	SCANRECO AB, SWEDEN

All rights reserved

Design, equipment, technical data and specifications are subject to change or improvement without prior notice. The text in this instruction manual, or any part of it may not be reproduced or transmitted in any form or by any means, including electronic, mechanical, photocopying, recording, storage in an information retrieval system, or otherwise, without prior written permission of SCANRECO AB, SWEDEN.

Revision history

Revision	Date	Note
A	2013-05-20	First release

G5 receiver

Product description

The Central Unit (CU) is manufactured in robust plastic housing and provides contacts for the connection of power supply and electro-hydraulic valves. Several of the outputs can also be used as digital inputs. Depending on the version of the G5 Central unit, it can either be equipped with MOSFET outputs and Deutsch connectors or can have relay outputs with terminal block.

Since the central unit can be exposed to very tough environments, the box is encapsulated to give protection from damp, heat, cold, dust, vibration and corrosive environments.

The Central unit has short circuit protected inputs and outputs and has protection against reverse polarity, over-voltage, large incoming voltage transients and EMC/RF.



Relay output

The Relay output connectors are separated from the rest of the electronics in the central unit to create an electrically isolated output. The maximum load for each output is 10A. Through the terminal block, both the normally open and the normally closed connection points are available.

Models

Model	Functions
G5CU R5	Two cable glands. 5 Relay outputs.
G5CU R10	Two cable glands. 10 Relay outputs.


Expansion boards

The main board may be used stand alone or together with one expansion board.
There are several different expansion boards.
All expansions boards have the same mechanical outline.
They may have different functionalities depending on customers application.

The differnt functions are exemplified in the table below:

Description of expansion functions	Number of expansion function
Relays	1-5
Analog inputs	1-10
Analog outputs	1-5
Digital I/O	1-20
PWM	1-5

Terminal schematics G5 CU R5 and G5 CU R10

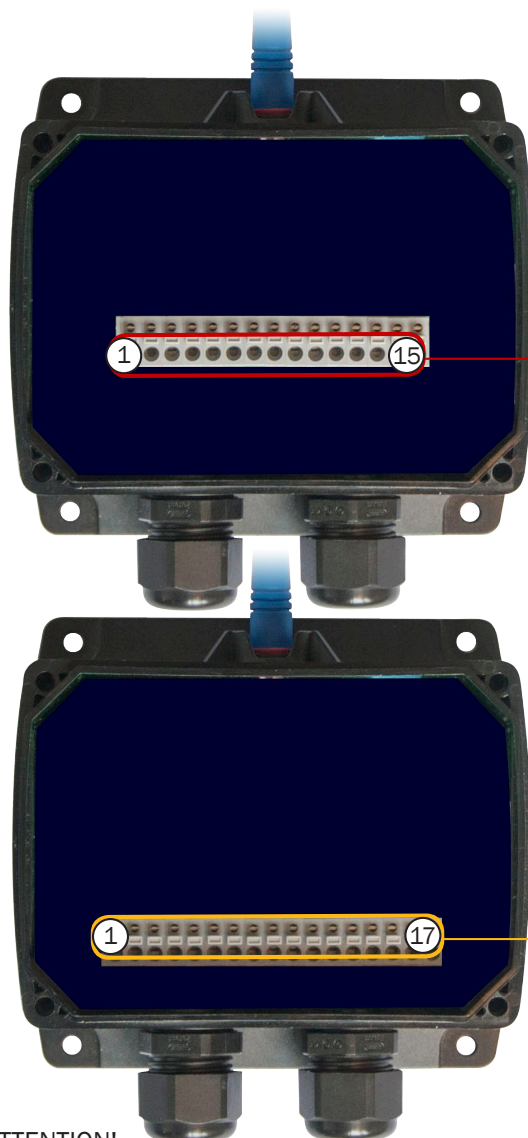

Expansion board (49839)

- 1 = REL6, common
- 2 = REL6, normally closed
- 3 = REL6, normally open
- 4 = REL7, common
- 5 = REL7, normally closed
- 6 = REL7, normally open
- 7 = REL8, common
- 8 = REL8, normally closed
- 9 = REL8, normally open
- 10 = REL9, common
- 11 = REL9, normally closed
- 12 = REL9, normally open
- 13 = REL10, common
- 14 = REL10, normally closed
- 15 = REL10, normally open

Main board

- 1 = GND
- 2 = Power Supply +
- 3 = REL1, common
- 4 = REL1, normally closed
- 5 = REL1, normally open
- 6 = REL2, common
- 7 = REL2, normally closed
- 8 = REL2, normally open
- 9 = REL3, common
- 10 = REL3, normally closed
- 11 = REL3, normally open
- 12 = REL4, common
- 13 = REL4, normally closed
- 14 = REL4, normally open
- 15 = REL5, common
- 16 = REL5, normally closed
- 17 = REL5, normally open



ATTENTION!

After assembly make sure you tighten the housing screws with 0,8 Nm to avoid any water ingress.

Technical Data Central Unit

Attribute	Information
Housing material	Plastic PC
IP-class	IP67 (for versions with cable glands IP65)
Ambient temperature	-25° C to +70° C
Supply voltage	9-36VDC
Fuse	Not required.
Current consumption at idle	<30mA
Relay Output load	Max 10 A
Housing screw torque	0,8 Nm
Weight	Approx. 0,35Kg



Size: approx. ~
127 x 117 x 57 mm / ~ 5,0 x 4,6 x 2,2 in.

Radio information

The G5 system family incorporates an automated frequency jumping technology, a reliable radio transmission highly resistant to interference.

The radio transmission takes place within the ISM-band used at pre-defined channels.

The channel switching takes place multiple times per second following a pseudorandom sequence. This ensures that transmission takes place on an optimal frequency at all times!

No transmitter uses the same pseudorandom sequence order when switching channels; this minimizes the risk of two G5 systems interfering with each other.

The G5 Pocket is approved to transmit on the ISM band. The radio is license free for the end user.

Technical information

Attribute	Information
Frequency	2,400 - 2,4835 GHz
Channels management	FHSS DSSS THSS
Channel order	Pseudorandom
Channel capacity	Duplex
System address/ID	<16777216 unique system addresses available
Redundancy	CRC-16
Range	100 meters

FCC information

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Warning

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Industry Canada Information

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

CAN ICES-3 (A)/NMB-3(A)

The antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter.

L'antenne (s) utilisée pour cet émetteur doit être installée pour fournir une distance de séparation d'au moins 20 cm de toute personne et ne doit pas être co-localisées ou opérant en conjonction avec une autre antenne ou émetteur.

SCANRECO
Radio Remote Control