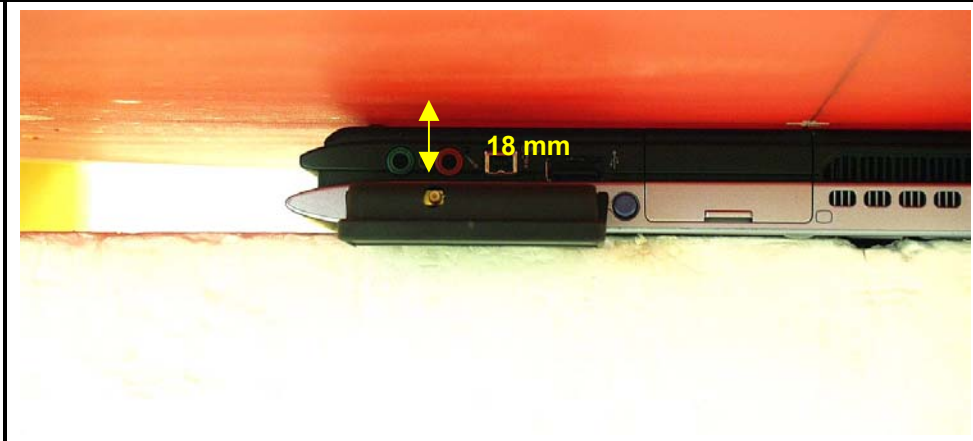


9 SAR MEASUREMENT RESULTS

9.1 CELL BAND

9.2 SONY



GPRS 2 slots

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
128	824.20	0.804	-0.010	0.806
192	837.00	0.730	-0.019	0.733
251	848.80	0.658	0.000	0.658

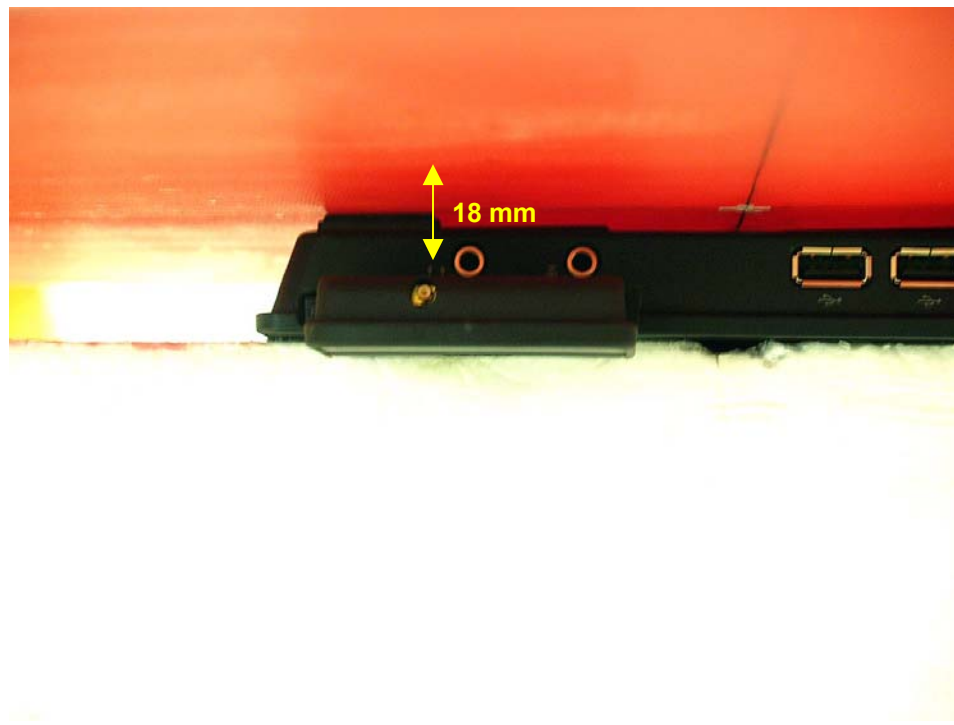
WCDMA 12.2k RMC + HSDPA

4132	826.40	0.348	-0.108	0.357
4182	836.40			
4233	846.60			

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

9.2.1 HP

**GPRS 2 slots**

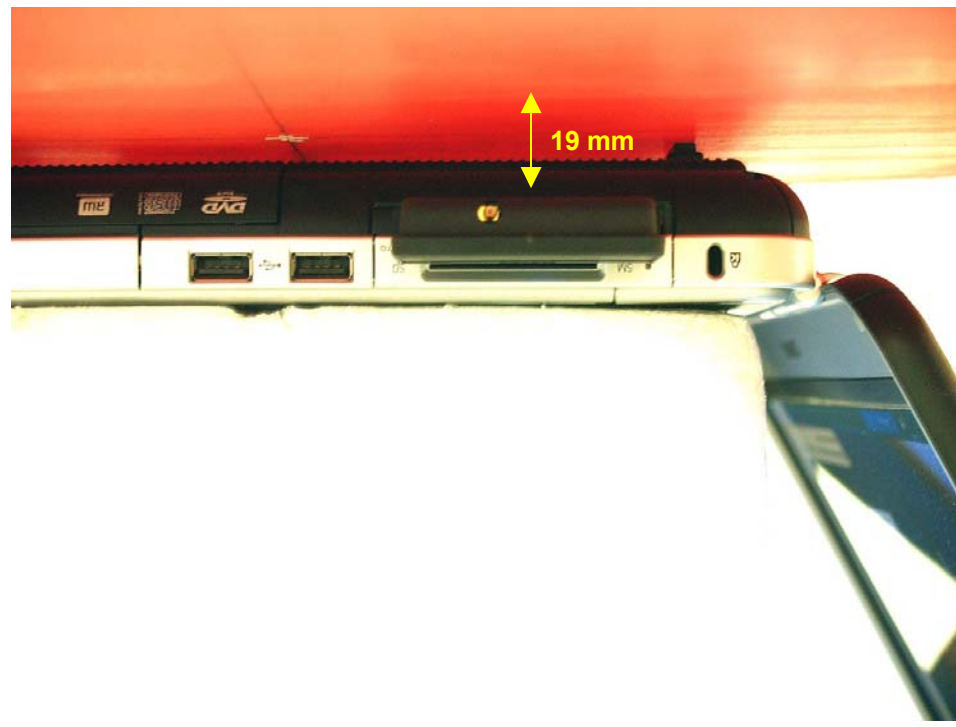
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
128	824.20	0.386	0.000	0.386
192	837.00			
251	848.80			

WCDMA + HSDPA

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
4132	826.40	0.201	0.000	0.201
4182	836.40			
4233	846.60			

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

9.2.2 COMPAQ**GPRS 2 slots**

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
128	824.20	0.393	-0.344	0.425
192	837.00			
251	848.80			

WCDMA+ HSDPA

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
4132	826.40	0.198	0.000	0.198
4182	836.40			
4233	846.60			

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

9.3 PCS BAND

9.3.1 SONY



GPRS 4 slots

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
512	1850.20	0.553	0.000	0.553
661	1880.00			
810	1909.80			

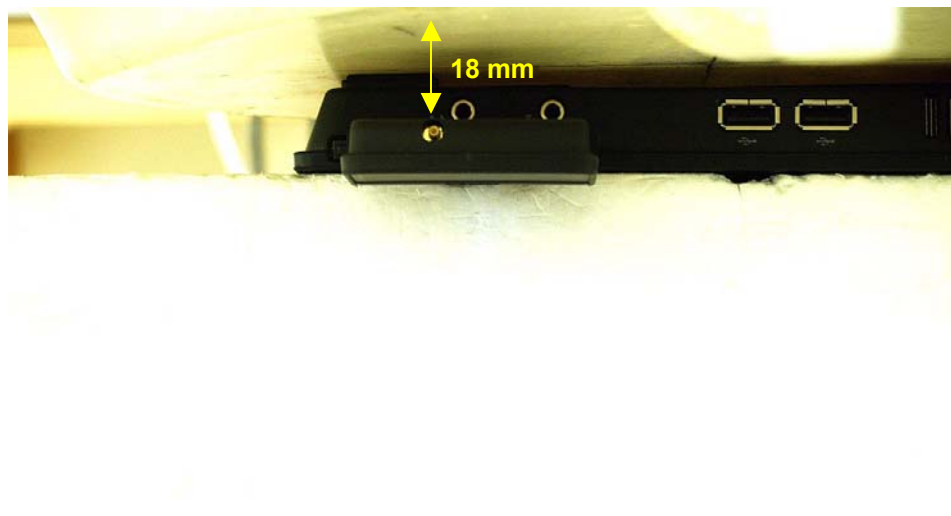
WCDMA 12.2K RMC

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
9262	1852.40	0.568	0.000	0.568
9400	1880.00			
9538	1907.60			

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

9.3.2 HP

**GPRS 4 slot**

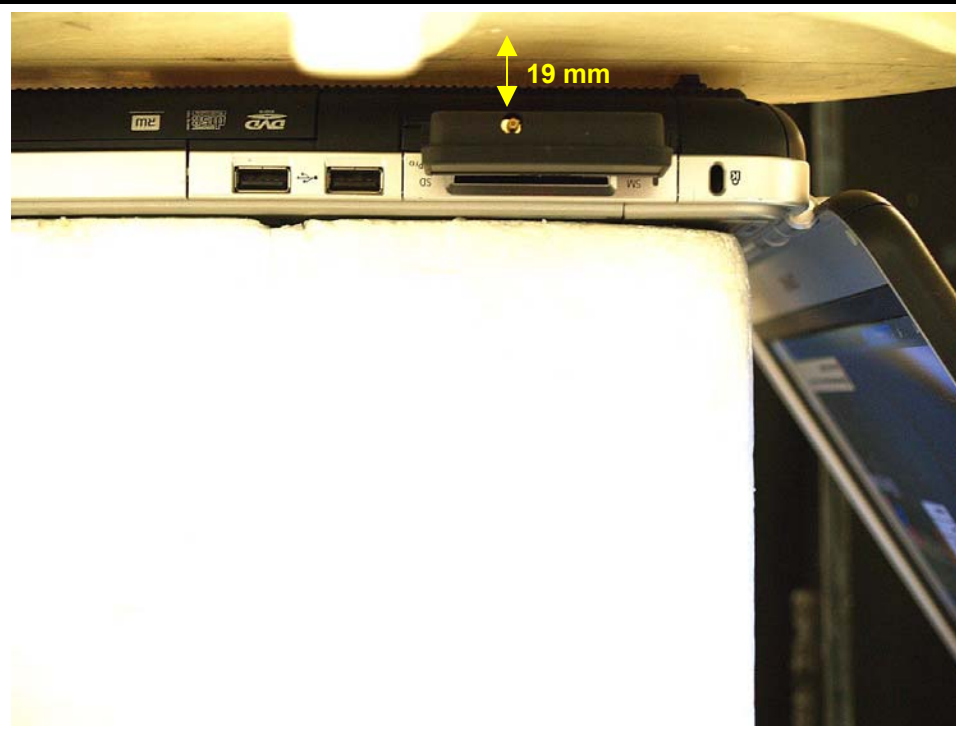
Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
512	1850.20	0.235	-0.002	0.235
661	1880.00			
810	1909.80			

WCDMA 12.2K RMC

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
9262	1852.40	0.265	0.000	0.265
9400	1880.00			
9538	1907.60			

Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

9.3.3 COMPAQ**GPRS 4 slots**

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
512	1850.20	0.696	-0.250	0.737
661	1880.00			
810	1909.80			

WCDMA 12.2K RMC

Channel	f (MHz)	Measured SAR 1g (mW/g)	Power Drift (dB)	Extrapolated ¹⁾ SAR 1g (mW/g)
9262	1852.40	0.702	-0.135	0.724
9400	1880.00			
9538	1907.60			

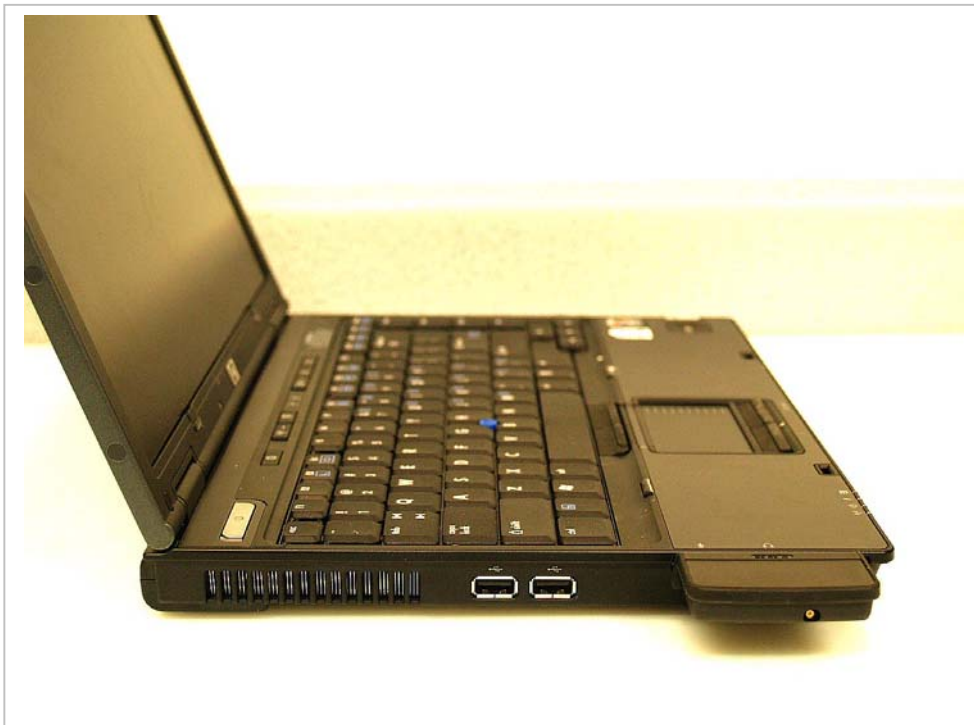
Notes:

- 1) The exact method of extrapolation is $\text{Measured SAR} \times 10^{(-\text{drift}/10)}$. The SAR reported at the end of the measurement process by the DASY4 system can be scaled up by the Power drift to determine the SAR at the beginning of the measurement process.
- 2) Please see attachments for the detailed measurement data and plots showing the maximum SAR location of the EUT.

Sony - PCG-V505D1p



HP - NC6400



Compaq - Presario R3000

