

TEST: FIELD STRENGTH OF RADIATED EMISSIONS

Grantee: SmartTire Systems, Inc.

FCC ID: NATPC433BP

Model: 200.0054

Setup:

The equipment under test (EUT) was configured and operated in accordance with the applicable provisions of ANSI C63.4-1992, Section 6, 12. Measurements were made in accordance with applicable paragraphs of Section 8.2.2 and 8.2.3, Section 12.1.1.1 Appendix D, Section 12.1.4 and Appendix H3 and H4.

The EUT was placed on a 1 by 1.5 meter table located 40 cm above a 2 meter diameter non-metallic turntable that sits 40 cm above the 15 X 30 meter ground plane at Spectrum's Open Area Test Site. The bi-conical or log-periodic antenna was mounted on a tower spaced at a three meters distance, and arranged for adjustment in height (1-4 meters) and vertical/horizontal polarization to maximize the emissions levels when combined with turntable rotation of the EUT. The dual ridged guide antenna was mounted on a tripod at one meter height and adjusted for vertical or horizontal antenna orientation. An HP 8562A spectrum analyzer with an HP 8447F, Option H64 amplifier and an HP 83006A pre-amplifier were used for the peak measuring instrumentation.

Discussion:

No modifications were required prior to the final radiated emissions measurements reported herein.

The EUT is a 433.92 MHz receiver used in the SmartTire Passenger Car Tire Monitoring system. The receiver would be installed in a passenger vehicle and used to receive signals and display status of passenger tire pressure sensors installed on the wheels. A transmitter and sensor would be installed within the tire on each of the four wheels with each transmitter reporting back to the Receiver once per minute for with pressure status and once every minute and a half with temperature status or approximately every thirty seconds while the vehicle is in motion at speeds in excess of ten miles per hour.

Measurements were made with the EUT receiver operating on it's nominal 433.92 (+/- .1)MHz. Preliminary measurements were made as described in Section 8.3.11 and 13.1.4.1 with the receiver operating as described. During preliminary measurements only four emissions in total were detected with the receive antenna and EUT in close proximity. With the aid of an amplifier and moving in to less than 50 cm EUT to antenna distance for frequencies above 1 GHz, a low level at the 3rd and 4th harmonics were observed just above the noise floor.

The EUT configuration is detailed in the photographs included with this report.

The final set of measurements as specified in Section 8.3.1.2 and 13.1.4.2 were made as specified in Section 13.1.1. The receiver was observed while positioned in three mutually orthogonal planes with the horizontal position "on its back", the worst case. The EUT 12 VDC power cord and the receivers attached wire antenna were manipulated to different positions endeavoring to maximize the measured levels. The EUT was 12 VDC powered from an Astron VS-35-M external power supply during all of the measurements. RBW and VBW of 100 kHz was used for measurements below 1 GHz. Above 1 GHz peak measurements were made with a RBW and VBW of 1 MHz. We also endeavored to maximize levels of the emissions with EUT rotation and adjustment of antenna height.

Measurements were made over the frequency range of 30 - 5000 MHz with only two emissions measurable at three meters and reported below. The fundamental and the second harmonic were the only emissions measurable at three meters during the final detailed radiated emissions measurements. An HP 8447F pre-amplifier was used during the measurements. The third and fourth harmonics were just measurable above the noise floor at <.5 meters spacing and 100 kHz RBW however, not measurable at three meters during the final measurements.

**FCC Part 15.109(b) Field Strength of Radiated Spurious Emissions
Final Data - Ref. SMARTIRE.R10**

Grantee: SmarTire Systems, Inc.
FCC ID: NATPC433BP

12/17/98

Radiated Emissions Measurements By Frequency

WKA/Memo

Freq MHz	Vert dBm	Horz dBm	Ant-F	dBuV/m	uV/m	dB +/- Limit	Limit uV/m @ 3 Meters
433.44	-89.33	-91.33	21.2	38.87	87.80	- 7.15	200
866.88	-104.67	-102.33	28.8	33.47	47.15	-12.55	200

No receiver antenna conducted emissions measurements were made as the EUT has a permanently attached wire antenna so we were unable to directly connect the spectrum analyzer to the receiver to recorded the antenna conducted spurious emissions.

Conclusion:

The SmarTire Systems, Inc., FCC ID: NATPC433BP, when operated and measured as discussed above, meets the receiver radiated spurious emissions requirements under Title 47, CFR Part 15.109(a). **This receiver is not subject to the transition provisions of Part 15.37.**

OPEN-FIELD TEST SITE

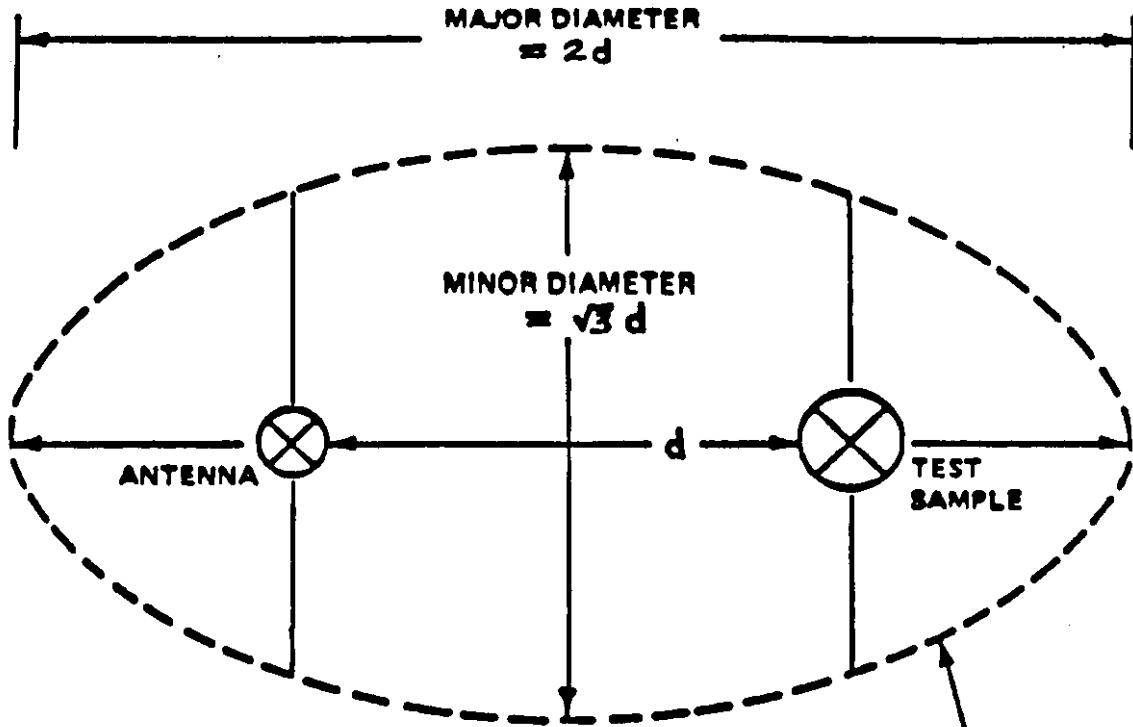


Figure 1

BOUNDARY OF AREA DEFINED BY AN ELLIPSE.
AREA TO BE FREE OF REFLECTING OBJECTS

ANTENNA/EQUIPMENT ORIENTATION

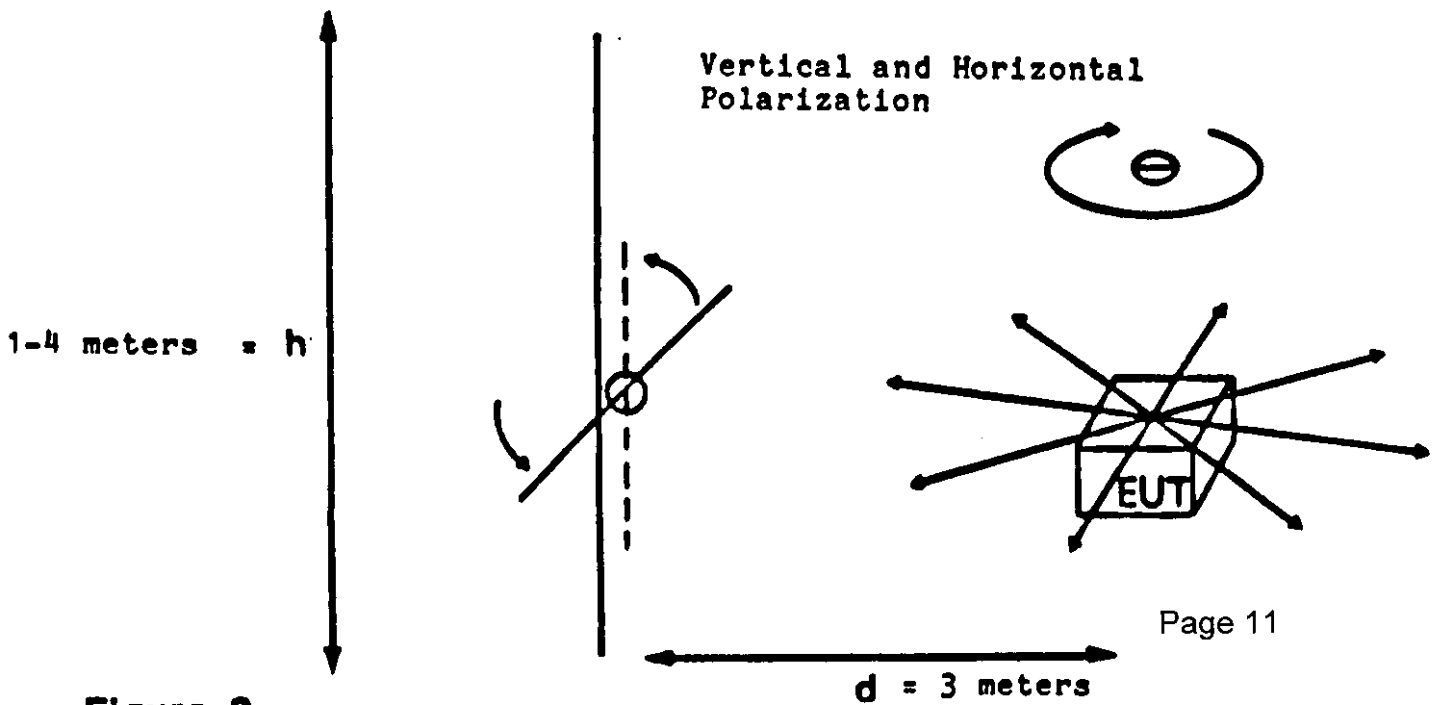


Figure 2

OPEN-FIELD TEST SITE

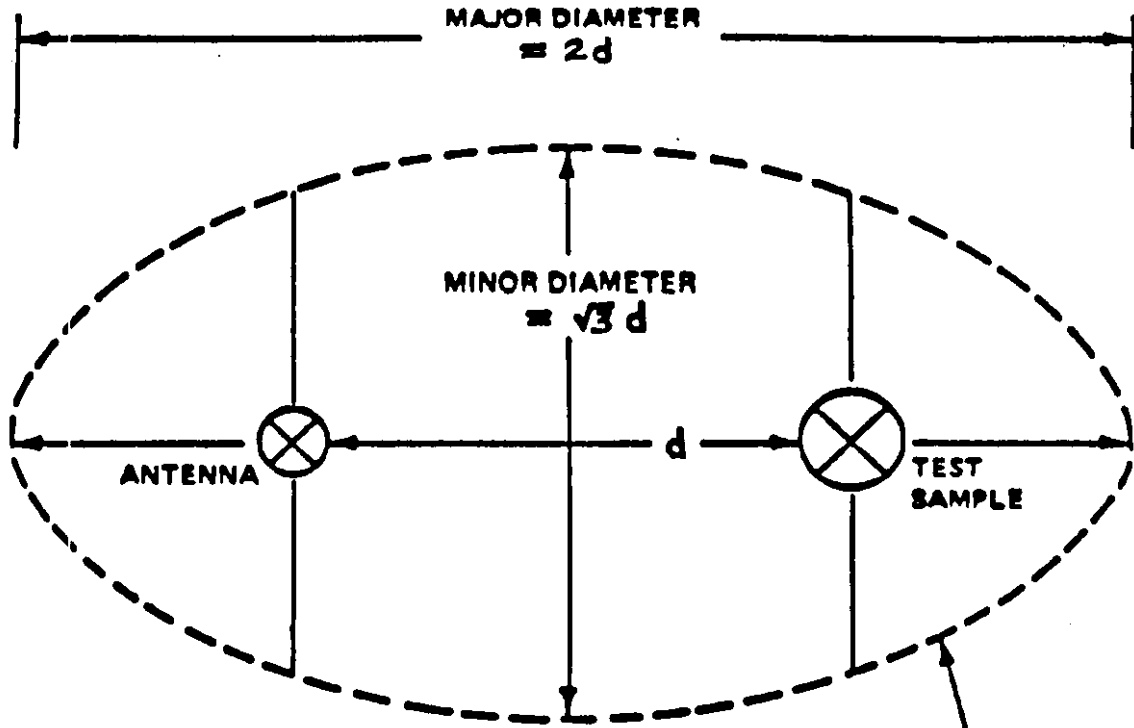


Figure 1

BOUNDARY OF AREA DEFINED BY AN ELLIPSE.
AREA TO BE FREE OF REFLECTING OBJECTS

ANTENNA/EQUIPMENT ORIENTATION

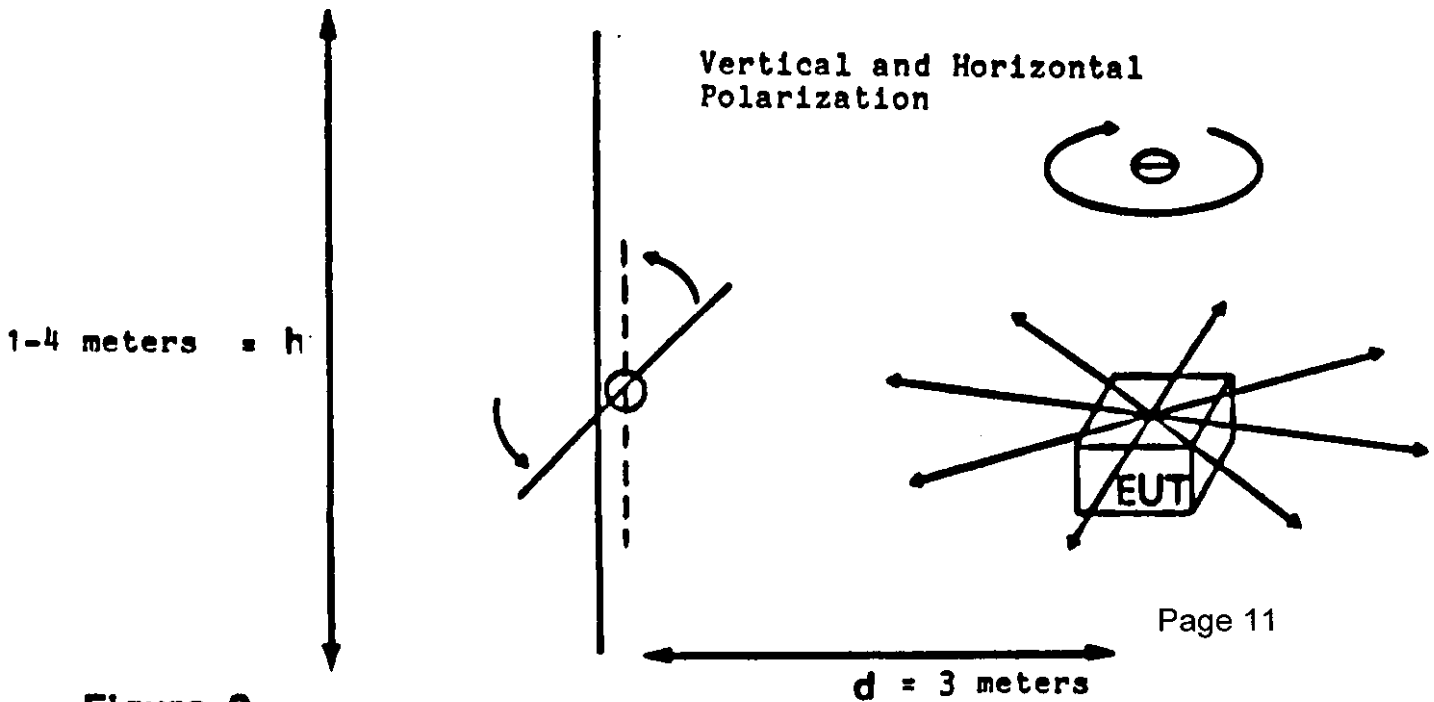


Figure 2


```
IF FREQ => 481
AND
IF FREQ => 482.5
AND
IF FREQ => 485
AND
IF FREQ => 488
AND
IF FREQ => 515
AND
IF FREQ => 540
AND
IF FREQ => 540
AND
IF FREQ => 560
AND
IF FREQ => 570
AND
IF FREQ => 580
AND
IF FREQ => 590
AND
IF FREQ => 610
AND
IF FREQ => 615
AND
IF FREQ => 620
AND
IF FREQ => 625
AND
IF FREQ => 630
AND
IF FREQ => 635
AND
IF FREQ => 640
AND
IF FREQ => 645
AND
IF FREQ => 647.5
AND
IF FREQ => 650
AND
IF FREQ => 652.5
AND
IF FREQ => 655
AND
IF FREQ => 660
AND
IF FREQ => 665
AND
IF FREQ => 670
AND
IF FREQ => 680
AND
IF FREQ => 690
AND
IF FREQ => 720
AND
IF FREQ => 760
AND
IF FREQ => 800
AND
IF FREQ => 802.5
AND
IF FREQ => 805
AND
IF FREQ => 807.5
AND
IF FREQ => 810
AND
IF FREQ => 815
AND
IF FREQ => 820
AND
IF FREQ => 840
AND
IF FREQ => 860
AND
IF FREQ => 870
AND
IF FREQ => 880
AND
IF FREQ => 890
AND
IF FREQ => 910
AND
IF FREQ => 920
AND
IF FREQ => 930
AND
IF FREQ => 940
AND
IF FREQ => 960
AND
IF FREQ => 970
AND
IF FREQ => 975
AND
IF FREQ => 980
AND
IF FREQ => 985
AND
IF FREQ => 990
AND
IF FREQ => 1000
AND
FREQ =< 482.5
AND
FREQ =< 485
AND
FREQ =< 488
AND
FREQ =< 515
AND
FREQ =< 540
AND
FREQ =< 560
AND
FREQ =< 570
AND
FREQ =< 580
AND
FREQ =< 590
AND
FREQ =< 610
AND
FREQ =< 615
AND
FREQ =< 620
AND
FREQ =< 625
AND
FREQ =< 630
AND
FREQ =< 635
AND
FREQ =< 640
AND
FREQ =< 645
AND
FREQ =< 647.5
AND
FREQ =< 650
AND
FREQ =< 652.5
AND
FREQ =< 655
AND
FREQ =< 660
AND
FREQ =< 665
AND
FREQ =< 670
AND
FREQ =< 680
AND
FREQ =< 690
AND
FREQ =< 720
AND
FREQ =< 760
AND
FREQ =< 800
AND
FREQ =< 802.5
AND
FREQ =< 805
AND
FREQ =< 807.5
AND
FREQ =< 810
AND
FREQ =< 815
AND
FREQ =< 820
AND
FREQ =< 840
AND
FREQ =< 860
AND
FREQ =< 870
AND
FREQ =< 880
AND
FREQ =< 890
AND
FREQ =< 910
AND
FREQ =< 920
AND
FREQ =< 930
AND
FREQ =< 940
AND
FREQ =< 960
AND
FREQ =< 970
AND
FREQ =< 975
AND
FREQ =< 980
AND
FREQ =< 985
AND
FREQ =< 990
AND
FREQ =< 1000
THEN ANTF = 22.7
AND
THEN ANTF = 22.8
AND
THEN ANTF = 22.9
AND
THEN ANTF = 23.1
AND
THEN ANTF = 23.3
AND
THEN ANTF = 23.6
AND
THEN ANTF = 23.7
AND
THEN ANTF = 23.9
AND
THEN ANTF = 24
AND
THEN ANTF = 24.2
AND
THEN ANTF = 24.4
AND
THEN ANTF = 24.5
AND
THEN ANTF = 24.6
AND
THEN ANTF = 24.8
AND
THEN ANTF = 24.9
AND
THEN ANTF = 25
AND
THEN ANTF = 25.1
AND
THEN ANTF = 25.3
AND
THEN ANTF = 25.4
AND
THEN ANTF = 25.6
AND
THEN ANTF = 25.7
AND
THEN ANTF = 25.8
AND
THEN ANTF = 26.1
AND
THEN ANTF = 26.3
AND
THEN ANTF = 26.6
AND
THEN ANTF = 26.7
AND
THEN ANTF = 26.9
AND
THEN ANTF = 26.8
AND
THEN ANTF = 27
AND
THEN ANTF = 27.3
AND
THEN ANTF = 27.5
AND
THEN ANTF = 27.6
AND
THEN ANTF = 27.7
AND
THEN ANTF = 27.8
AND
THEN ANTF = 27.9
AND
THEN ANTF = 28.2
AND
THEN ANTF = 28.4
AND
THEN ANTF = 28.8
AND
THEN ANTF = 29.3
AND
THEN ANTF = 29.4
AND
THEN ANTF = 29.6
AND
THEN ANTF = 29.7
AND
THEN ANTF = 29.9
AND
THEN ANTF = 30
AND
THEN ANTF = 30.2
AND
THEN ANTF = 30.6
AND
THEN ANTF = 30.8
AND
THEN ANTF = 31
AND
THEN ANTF = 31.1
AND
THEN ANTF = 31.3
AND
THEN ANTF = 31.4
```

Serial Number	Frequency	Gain and Antenna Factors	Antenna Factor
6225	MHZ	ELECTO-METRICS GAIN AND ANTENNA FACTORS MODEL RGA-60	ANTENNA FACTOR
		14 FOOT CABLE LOSS FSJI-50A	
10000	1000	.84	23.21
9500	1500	1.05	25.70
9000	2000	1.22	27.15
8500	2500	1.38	28.37
8000	3000	1.53	29.93
7500	3500	1.67	31.01
7000	4000	1.80	32.45
6500	4500	1.92	31.98
6000	5000	2.04	33.33
5500	5500	2.15	34.24
5000	6000	2.27	34.48
4500	6500	2.37	35.19
4000	7000	2.48	36.05
3500	7500	2.58	36.77
3000	8000	2.68	37.33
2500	8500	2.78	37.38
2000	9000	2.87	37.14
1500	9500	2.96	37.55
1000	10000	3.06	38.33

TEST EQUIPMENT LIST A SPECTRUM TECHNOLOGY, INC.

<u>Equipment</u>	<u>Manufacturer</u>	<u>Serial Number</u>	<u>Cal Date/Due Date</u>
Spectrum Analyzer	Hewlett-Packard 8562A	08562-60062	9/14/98 9/14/99
Amplifier	Hewlett-Packard 8447F	2727A02208	9/14/98 9/14/99
9 kHz-1300 MHz	OPT H64		
RF Signal Gen.	Fliuke 6071A	2915016	8/11/98 5/11/99
Service Monitor	IFR FM/AM 500A	4103	---
Oscilloscope	Kikusui C055060	6132295	---
Power Supply	Astron VS35	8601266	---
Voltmeter	Fliuke 8020A	N2420658	---
Multimeter	Fliuke 25	3710310	---
Wattmeter	Bird 43	56227	---
RF Termination	Bird 8135	10004	---
Dual Phase LISN	STI per MP-4	02	1/9/98 1/9/99
50 ohm/50 uH			
Dual Phase LISN	Compliance Design	8012-50R-24-BNC	1/9/98 1/9/99
50 ohm/50 uH			
Audio Generator	Hewlett-Packard 205-A/G	8689	---
Attenuators:	Texscan FP45-20		
	Texscan FP45-10		
	Weinschel 40-10-33	CZ682	
	Mini-Circuits CAT30	8419 01	
	Pomona 4108-10		
Thermometer	Fliuke 52	3965185	---
Test Line Simulator	Tektone TLS-2	none	---
Turn Table, RC	EMCO 1060-2M	8912-1415	---
Antenna Mast, RC	Compliance Design, Inc.	M100	---
Antennas:	EMCO Model: 3121C	1335	9/18/97 3/18/99
Dipole Set	EMCO Model: 3121C	1336	9/18/97 3/18/99
Dipole Set	EMCO 3104	3763	reference only
Bi-Conical	EMCO 3104C	9401-4635	6/20/97 1/20/99
Bi-Conical	EMCO 3146	1754	6/15/98 6/15/99
Log-Periodic	EMCO 6502	9107-2645	reference only
Active Loop			

Equipist Rev. 9/15/98