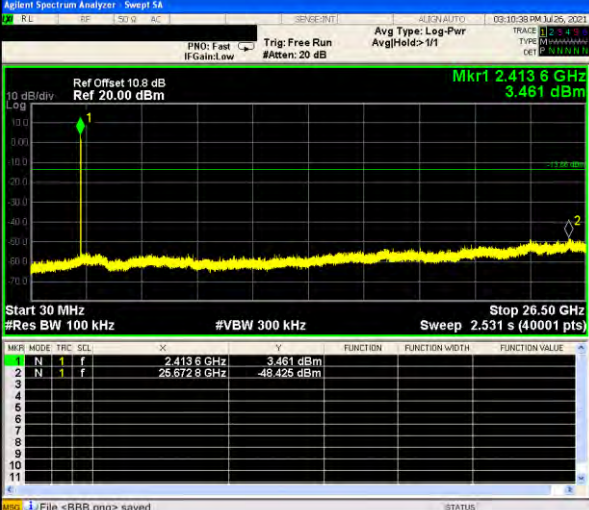
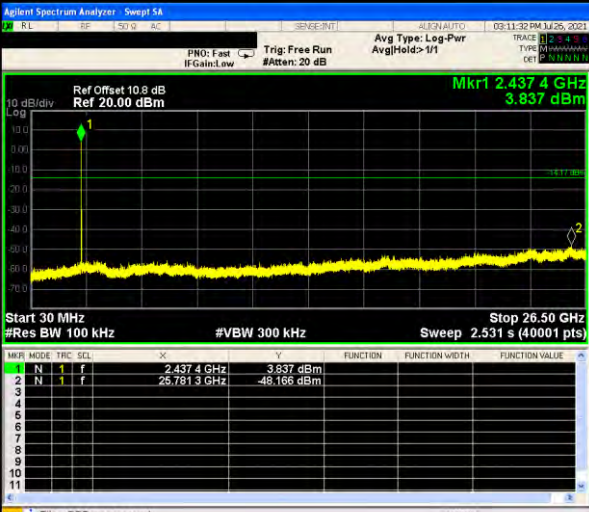
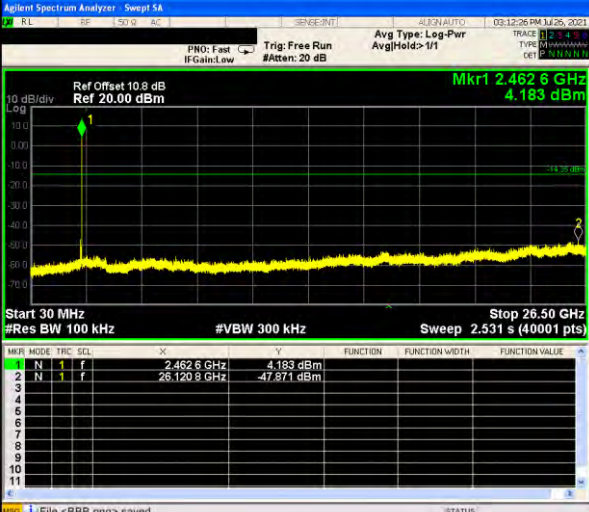


Out of Band Conducted Emissions

Mode 2: IEEE 802.11b Continuous TX mode_ANT-0

<p>2412 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz</p> <p>Freq Offset 0 Hz</p>
<p>2437 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz</p> <p>Freq Offset 0 Hz</p>
<p>2462 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz</p> <p>Freq Offset 0 Hz</p>

Mode 3: IEEE 802.11g Continuous TX mode_ANT-0

<p>2412 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz</p> <p>Freq Offset 0 Hz</p>
<p>2437 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz</p> <p>Freq Offset 0 Hz</p>
<p>2462 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz</p> <p>Freq Offset 0 Hz</p>

Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode _ANT-0

<p>2412 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>2437 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>2462 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>

Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode _ANT-0		
2422 MHz		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz</p> <p>Freq Offset 0 Hz</p>
2437 MHz		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz</p> <p>Freq Offset 0 Hz</p>
2452 MHz		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz</p> <p>Freq Offset 0 Hz</p>

Mode 2: IEEE 802.11b Continuous TX mode_ANT-1

<p>2412 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>2437 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>2462 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>

Mode 3: IEEE 802.11g Continuous TX mode_ANT-1




<p>2412 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>2437 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>2462 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>

Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode _ANT-1											
2412 MHz		<table border="1"> <tr><td>Frequency</td></tr> <tr><td>Auto Tune</td></tr> <tr><td>Center Freq 13.265000000 GHz</td></tr> <tr><td>Start Freq 30.000000 MHz</td></tr> <tr><td>Stop Freq 26.500000000 GHz</td></tr> <tr><td>CF Step 2.647000000 GHz</td></tr> <tr><td>Auto</td></tr> <tr><td>Man</td></tr> <tr><td>Freq Offset 0 Hz</td></tr> </table>	Frequency	Auto Tune	Center Freq 13.265000000 GHz	Start Freq 30.000000 MHz	Stop Freq 26.500000000 GHz	CF Step 2.647000000 GHz	Auto	Man	Freq Offset 0 Hz
Frequency											
Auto Tune											
Center Freq 13.265000000 GHz											
Start Freq 30.000000 MHz											
Stop Freq 26.500000000 GHz											
CF Step 2.647000000 GHz											
Auto											
Man											
Freq Offset 0 Hz											
2437 MHz		<table border="1"> <tr><td>Frequency</td></tr> <tr><td>Auto Tune</td></tr> <tr><td>Center Freq 13.265000000 GHz</td></tr> <tr><td>Start Freq 30.000000 MHz</td></tr> <tr><td>Stop Freq 26.500000000 GHz</td></tr> <tr><td>CF Step 2.647000000 GHz</td></tr> <tr><td>Auto</td></tr> <tr><td>Man</td></tr> <tr><td>Freq Offset 0 Hz</td></tr> </table>	Frequency	Auto Tune	Center Freq 13.265000000 GHz	Start Freq 30.000000 MHz	Stop Freq 26.500000000 GHz	CF Step 2.647000000 GHz	Auto	Man	Freq Offset 0 Hz
Frequency											
Auto Tune											
Center Freq 13.265000000 GHz											
Start Freq 30.000000 MHz											
Stop Freq 26.500000000 GHz											
CF Step 2.647000000 GHz											
Auto											
Man											
Freq Offset 0 Hz											
2462 MHz		<table border="1"> <tr><td>Frequency</td></tr> <tr><td>Auto Tune</td></tr> <tr><td>Center Freq 13.265000000 GHz</td></tr> <tr><td>Start Freq 30.000000 MHz</td></tr> <tr><td>Stop Freq 26.500000000 GHz</td></tr> <tr><td>CF Step 2.647000000 GHz</td></tr> <tr><td>Auto</td></tr> <tr><td>Man</td></tr> <tr><td>Freq Offset 0 Hz</td></tr> </table>	Frequency	Auto Tune	Center Freq 13.265000000 GHz	Start Freq 30.000000 MHz	Stop Freq 26.500000000 GHz	CF Step 2.647000000 GHz	Auto	Man	Freq Offset 0 Hz
Frequency											
Auto Tune											
Center Freq 13.265000000 GHz											
Start Freq 30.000000 MHz											
Stop Freq 26.500000000 GHz											
CF Step 2.647000000 GHz											
Auto											
Man											
Freq Offset 0 Hz											

Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode _ANT-1

<p>2422 MHz</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SEL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.428 2 GHz</td> <td>-4.540 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.654 9 GHz</td> <td>-48.238 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.428 2 GHz	-4.540 dBm				2	N	1	f	26.654 9 GHz	-48.238 dBm				<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz</p> <p>Freq Offset 0 Hz</p>
MKR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	2.428 2 GHz	-4.540 dBm																								
2	N	1	f	26.654 9 GHz	-48.238 dBm																								
<p>2437 MHz</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SEL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.441 4 GHz</td> <td>-3.358 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.749 6 GHz</td> <td>-47.604 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.441 4 GHz	-3.358 dBm				2	N	1	f	26.749 6 GHz	-47.604 dBm				<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz</p> <p>Freq Offset 0 Hz</p>
MKR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	2.441 4 GHz	-3.358 dBm																								
2	N	1	f	26.749 6 GHz	-47.604 dBm																								
<p>2452 MHz</p>	<table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SEL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.465 9 GHz</td> <td>-5.780 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.786 6 GHz</td> <td>-47.546 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.465 9 GHz	-5.780 dBm				2	N	1	f	26.786 6 GHz	-47.546 dBm				<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz</p> <p>Freq Offset 0 Hz</p>
MKR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	2.465 9 GHz	-5.780 dBm																								
2	N	1	f	26.786 6 GHz	-47.546 dBm																								

Mode 2: IEEE 802.11b Continuous TX mode_ANT-2
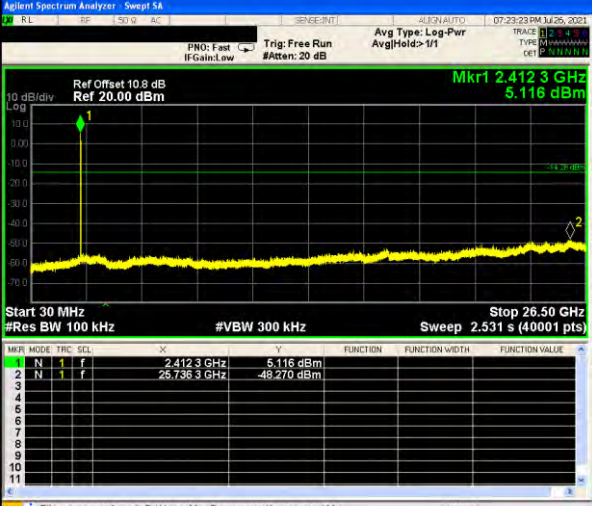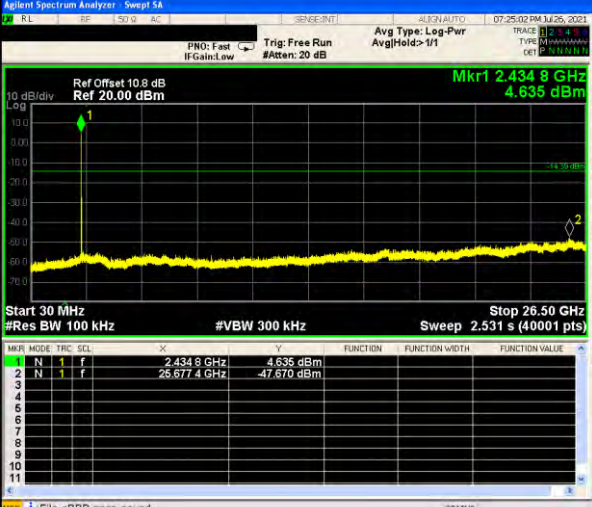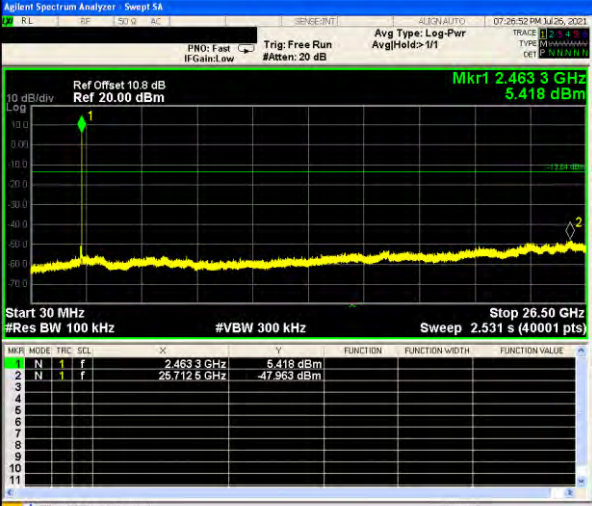
<p>2412 MHz</p>	 <table border="1" data-bbox="635 728 1228 891"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SEL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.412 3 GHz</td> <td>5.116 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.736 3 GHz</td> <td>-48.270 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.412 3 GHz	5.116 dBm				2	N	1	f	26.736 3 GHz	-48.270 dBm				<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz</p> <p>Freq Offset 0 Hz</p>
MKR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	2.412 3 GHz	5.116 dBm																								
2	N	1	f	26.736 3 GHz	-48.270 dBm																								
<p>2437 MHz</p>	 <table border="1" data-bbox="635 1256 1228 1420"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SEL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.434 8 GHz</td> <td>4.635 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.677 4 GHz</td> <td>-47.670 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.434 8 GHz	4.635 dBm				2	N	1	f	26.677 4 GHz	-47.670 dBm				<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz</p> <p>Freq Offset 0 Hz</p>
MKR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	2.434 8 GHz	4.635 dBm																								
2	N	1	f	26.677 4 GHz	-47.670 dBm																								
<p>2462 MHz</p>	 <table border="1" data-bbox="635 1794 1228 1946"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SEL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.463 3 GHz</td> <td>5.418 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.712 5 GHz</td> <td>-47.963 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.463 3 GHz	5.418 dBm				2	N	1	f	26.712 5 GHz	-47.963 dBm				<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz</p> <p>Freq Offset 0 Hz</p>
MKR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	2.463 3 GHz	5.418 dBm																								
2	N	1	f	26.712 5 GHz	-47.963 dBm																								

Mode 3: IEEE 802.11g Continuous TX mode_ANT-2

<p>2412 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>2437 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>2462 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>




Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode _ANT-2

<p>2412 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>2437 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>2462 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>

Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode _ANT-2

<p>2422 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>2437 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>2452 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>

Mode 2: IEEE 802.11b Continuous TX mode_ANT-3
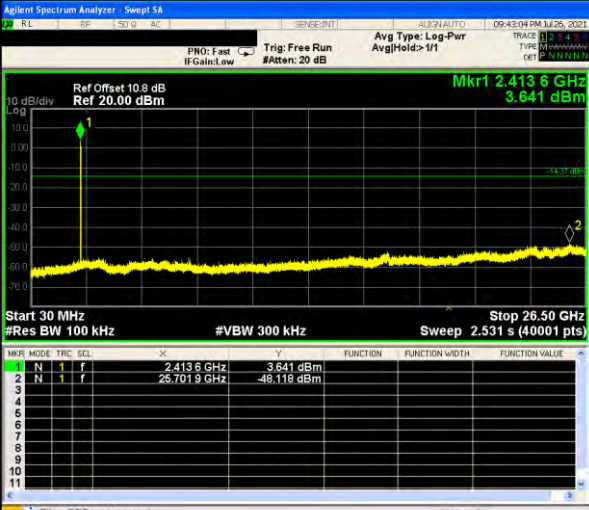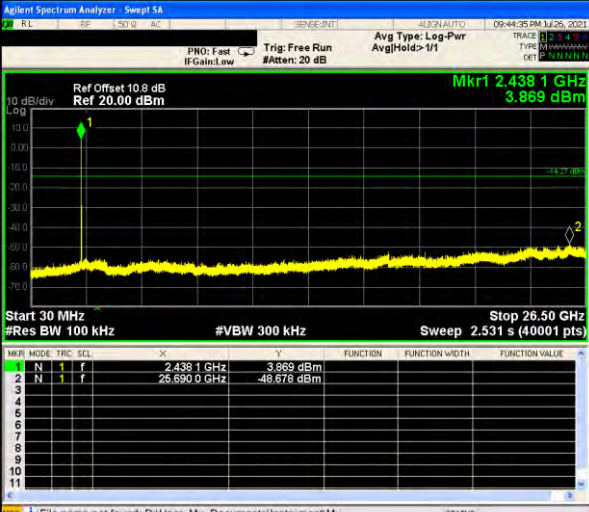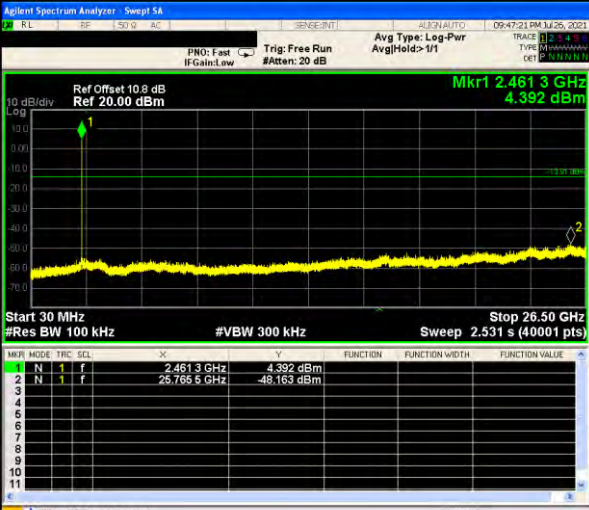
<p>2412 MHz</p>	 <table border="1" data-bbox="635 728 1225 891"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SEL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.413 6 GHz</td> <td>3.641 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.701 9 GHz</td> <td>-48.118 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.413 6 GHz	3.641 dBm				2	N	1	f	26.701 9 GHz	-48.118 dBm				<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
MKR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	2.413 6 GHz	3.641 dBm																								
2	N	1	f	26.701 9 GHz	-48.118 dBm																								
<p>2437 MHz</p>	 <table border="1" data-bbox="635 1256 1225 1420"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SEL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.438 1 GHz</td> <td>3.869 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.690 0 GHz</td> <td>-48.678 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.438 1 GHz	3.869 dBm				2	N	1	f	26.690 0 GHz	-48.678 dBm				<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
MKR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	2.438 1 GHz	3.869 dBm																								
2	N	1	f	26.690 0 GHz	-48.678 dBm																								
<p>2462 MHz</p>	 <table border="1" data-bbox="635 1783 1225 1946"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SEL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.461 3 GHz</td> <td>4.392 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.765 5 GHz</td> <td>-48.163 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.461 3 GHz	4.392 dBm				2	N	1	f	26.765 5 GHz	-48.163 dBm				<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
MKR	MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																					
1	N	1	f	2.461 3 GHz	4.392 dBm																								
2	N	1	f	26.765 5 GHz	-48.163 dBm																								

Mode 3: IEEE 802.11g Continuous TX mode_ANT-3

<p>2412 MHz</p>	<table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SEL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.411 0 GHz</td> <td></td> <td></td> <td>0.651 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.716 5 GHz</td> <td></td> <td></td> <td>-48.333 dBm</td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.411 0 GHz			0.651 dBm	2	N	1	f	26.716 5 GHz			-48.333 dBm	3								4								5								6								7								8								9								10								11								<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
MKR MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																											
1	N	1	f	2.411 0 GHz			0.651 dBm																																																																																											
2	N	1	f	26.716 5 GHz			-48.333 dBm																																																																																											
3																																																																																																		
4																																																																																																		
5																																																																																																		
6																																																																																																		
7																																																																																																		
8																																																																																																		
9																																																																																																		
10																																																																																																		
11																																																																																																		
<p>2437 MHz</p>	<table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SEL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.437 4 GHz</td> <td></td> <td></td> <td>0.572 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.731 7 GHz</td> <td></td> <td></td> <td>-47.694 dBm</td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.437 4 GHz			0.572 dBm	2	N	1	f	26.731 7 GHz			-47.694 dBm	3								4								5								6								7								8								9								10								11								<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
MKR MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																											
1	N	1	f	2.437 4 GHz			0.572 dBm																																																																																											
2	N	1	f	26.731 7 GHz			-47.694 dBm																																																																																											
3																																																																																																		
4																																																																																																		
5																																																																																																		
6																																																																																																		
7																																																																																																		
8																																																																																																		
9																																																																																																		
10																																																																																																		
11																																																																																																		
<p>2462 MHz</p>	<table border="1"> <thead> <tr> <th>MKR MODE</th> <th>TRC</th> <th>SEL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.469 2 GHz</td> <td></td> <td></td> <td>1.568 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>26.623 2 GHz</td> <td></td> <td></td> <td>-48.236 dBm</td> </tr> <tr> <td>3</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>7</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>8</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>9</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>10</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>11</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.469 2 GHz			1.568 dBm	2	N	1	f	26.623 2 GHz			-48.236 dBm	3								4								5								6								7								8								9								10								11								<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
MKR MODE	TRC	SEL	X	Y	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																																																											
1	N	1	f	2.469 2 GHz			1.568 dBm																																																																																											
2	N	1	f	26.623 2 GHz			-48.236 dBm																																																																																											
3																																																																																																		
4																																																																																																		
5																																																																																																		
6																																																																																																		
7																																																																																																		
8																																																																																																		
9																																																																																																		
10																																																																																																		
11																																																																																																		

Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-3

<p>2412 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>2437 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>2462 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.0000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode _ANT-3

<p>2422 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>2437 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>
<p>2452 MHz</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 13.265000000 GHz</p> <p>Start Freq 30.000000 MHz</p> <p>Stop Freq 26.500000000 GHz</p> <p>CF Step 2.647000000 GHz Auto Man</p> <p>Freq Offset 0 Hz</p>


Conducted Band Edge

Mode 2: IEEE 802.11b Continuous TX mode_ANT-0

2412 MHz

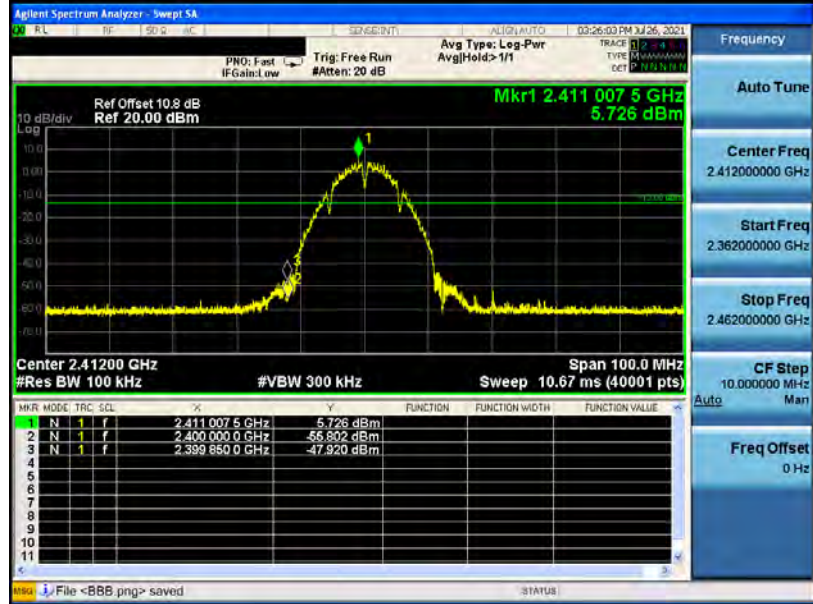


2462 MHz

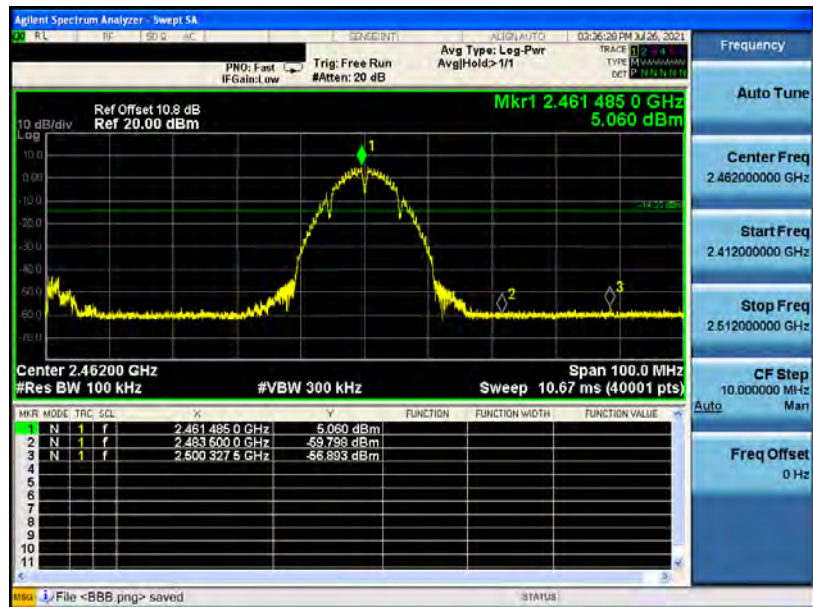


Mode 3: IEEE 802.11g Continuous TX mode_ANT-0

2412 MHz

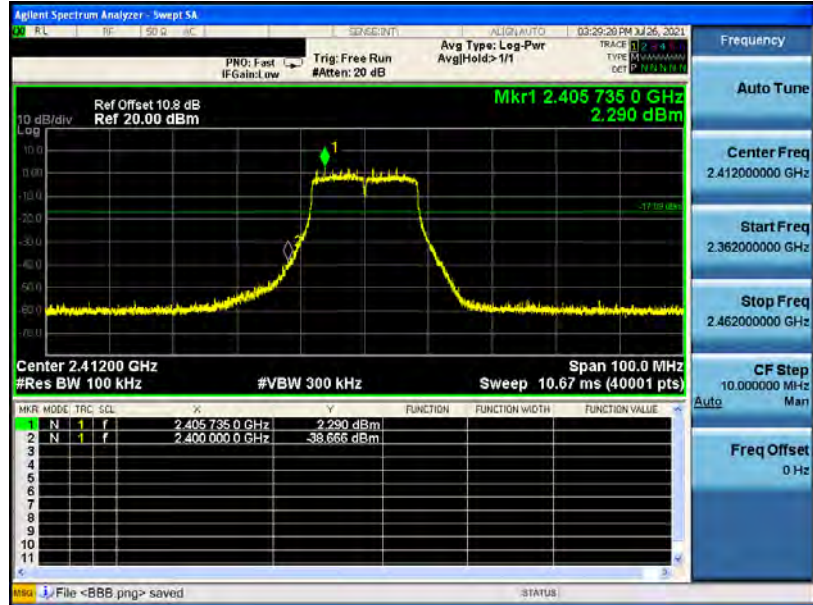


2462 MHz

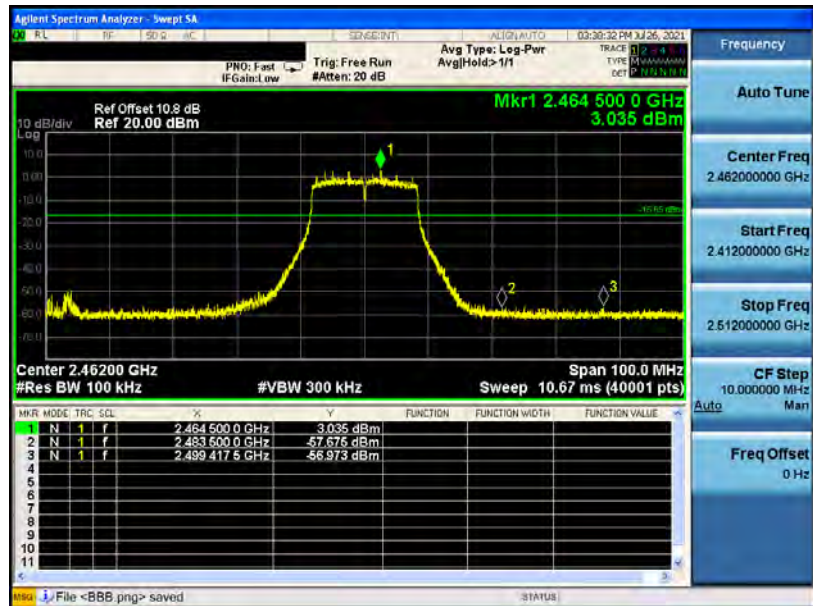


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-0

2412 MHz

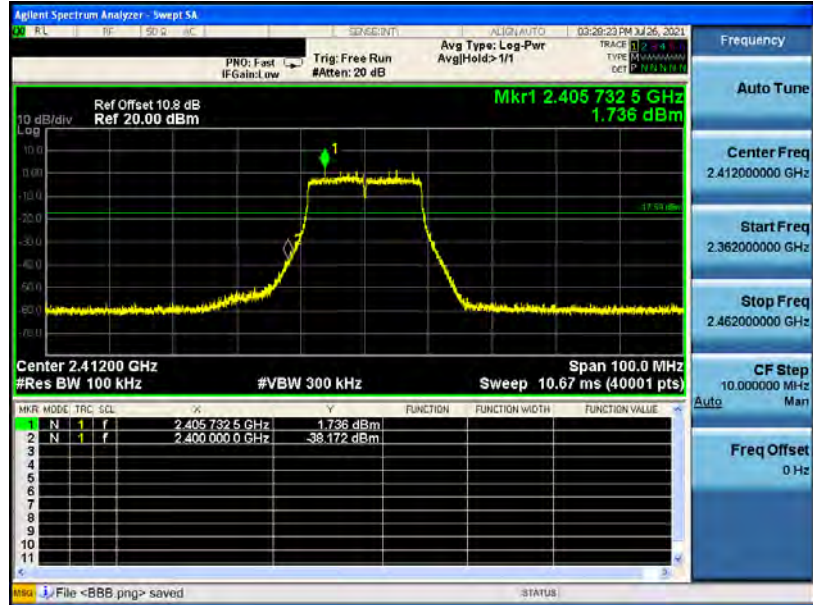


2462 MHz

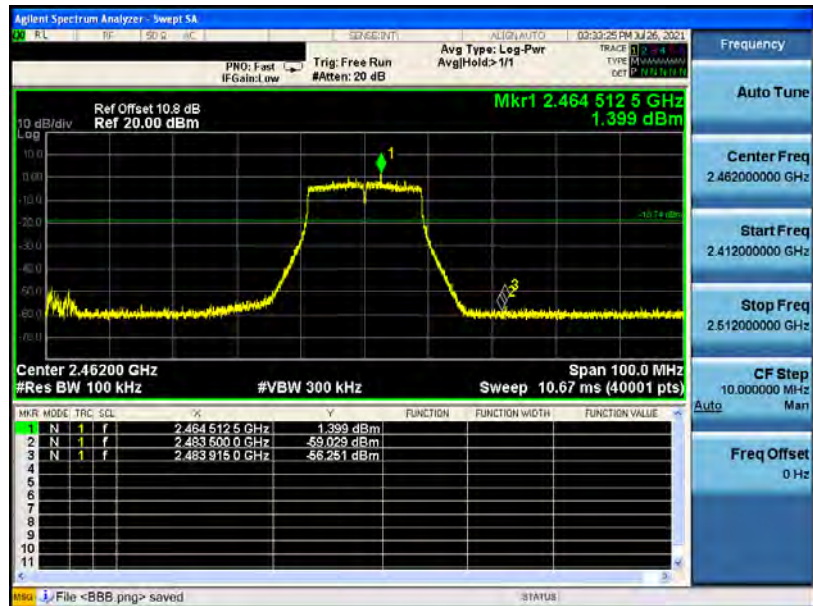


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-0

2422 MHz

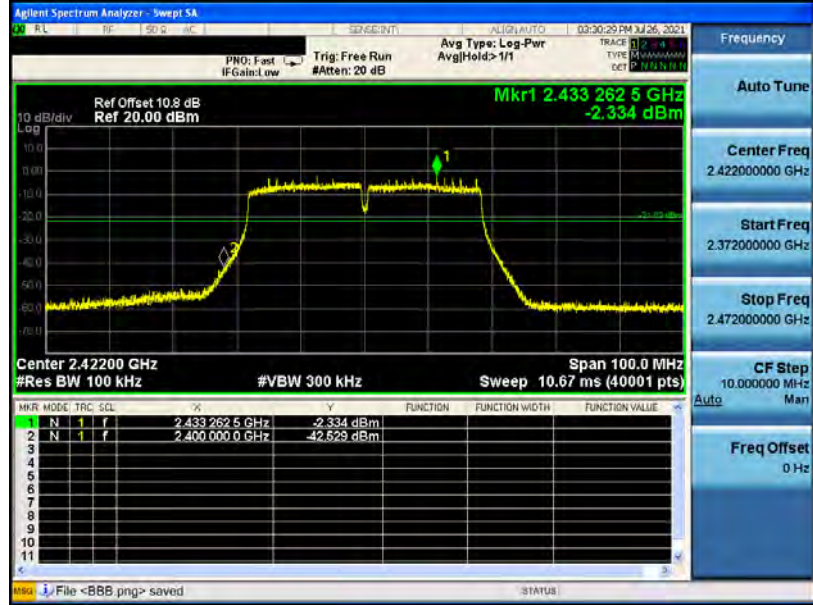


2452 MHz

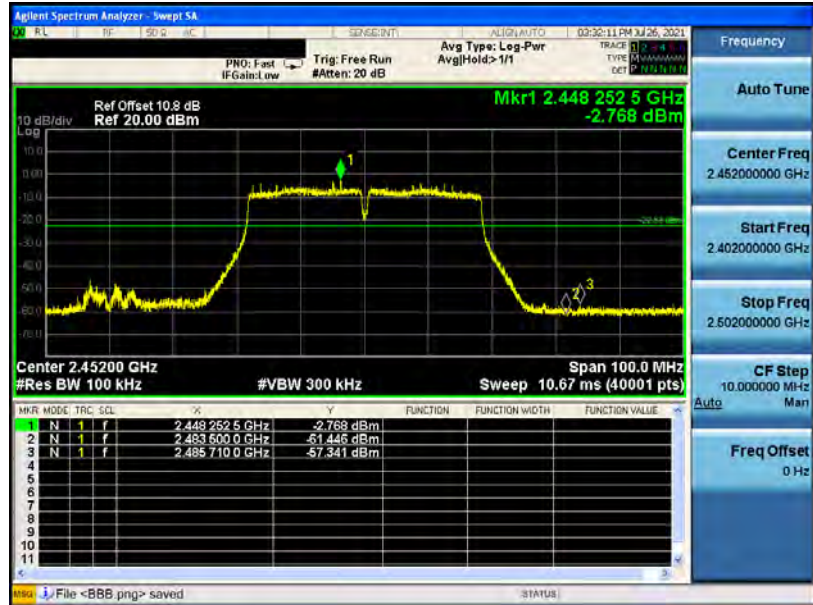


Mode 2: IEEE 802.11b Continuous TX mode_ANT-1

2412 MHz

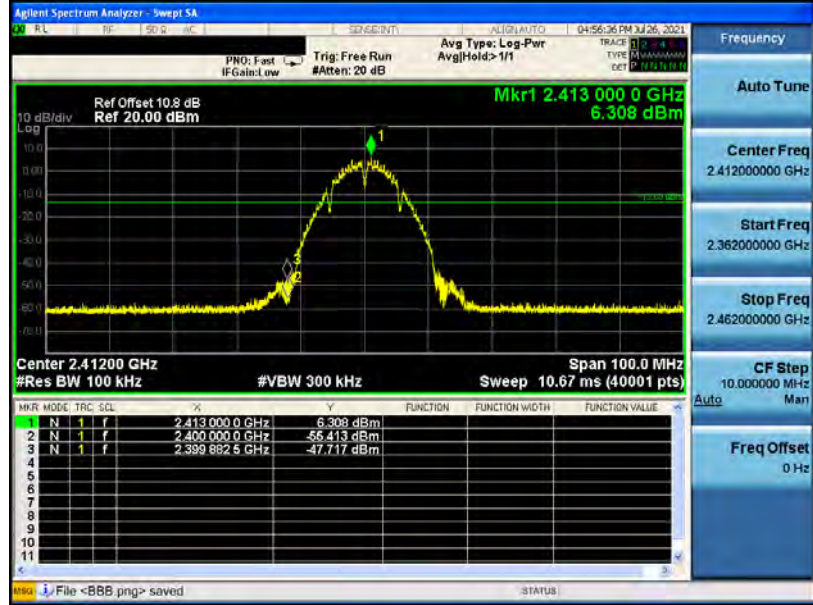


2462 MHz

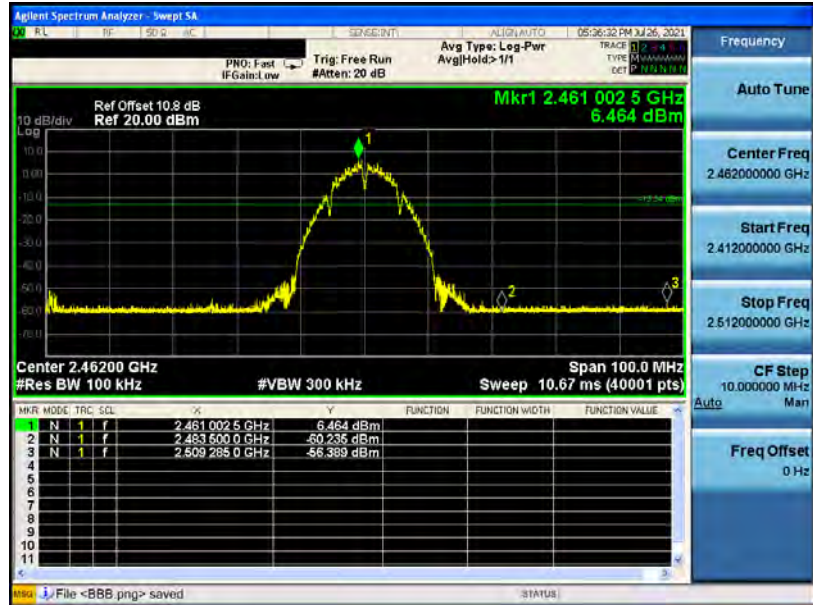


Mode 3: IEEE 802.11g Continuous TX mode_ANT-1

2412 MHz

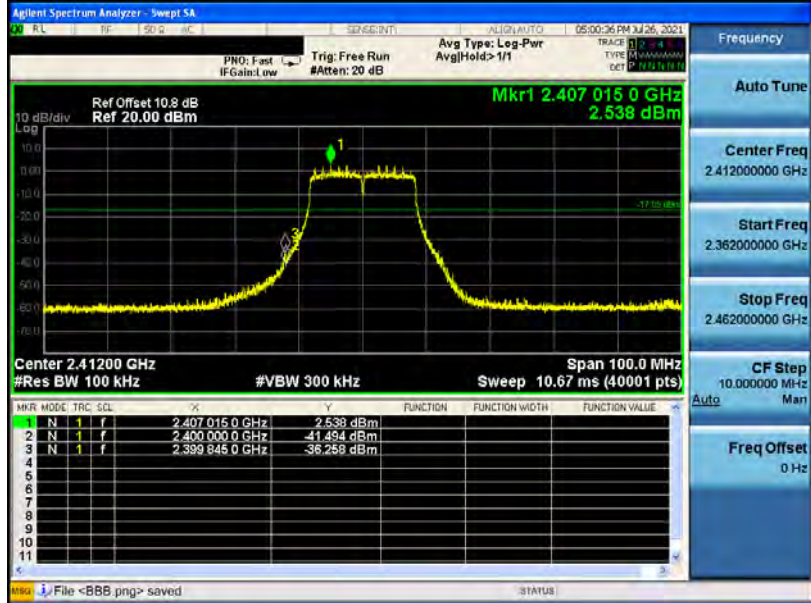


2462 MHz

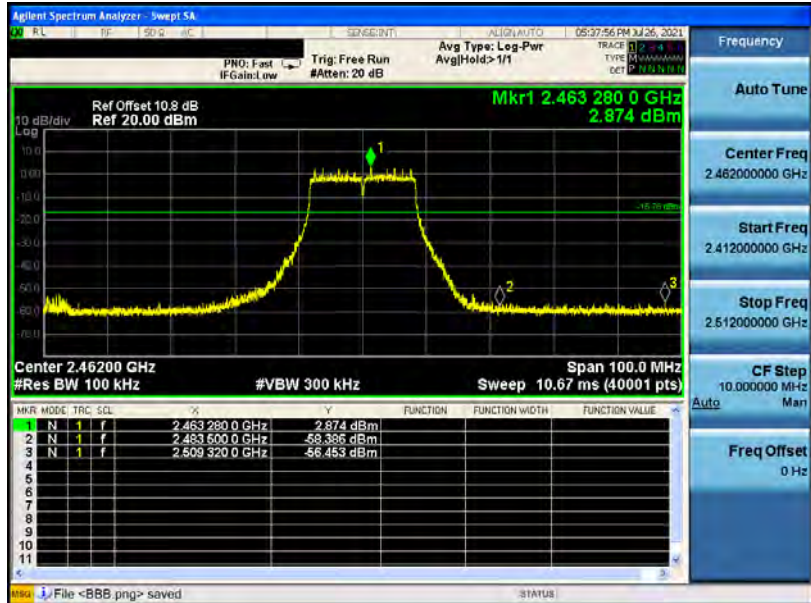


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-1

2412 MHz

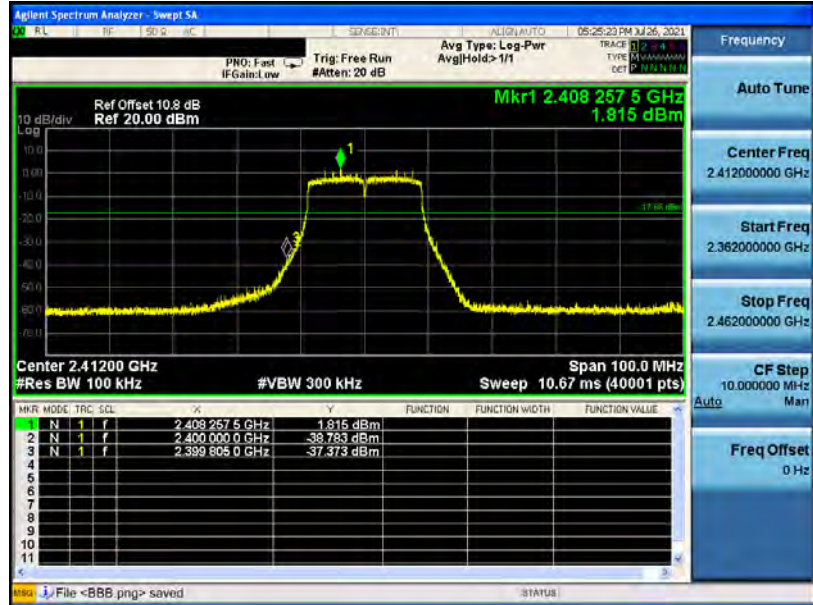


2462 MHz

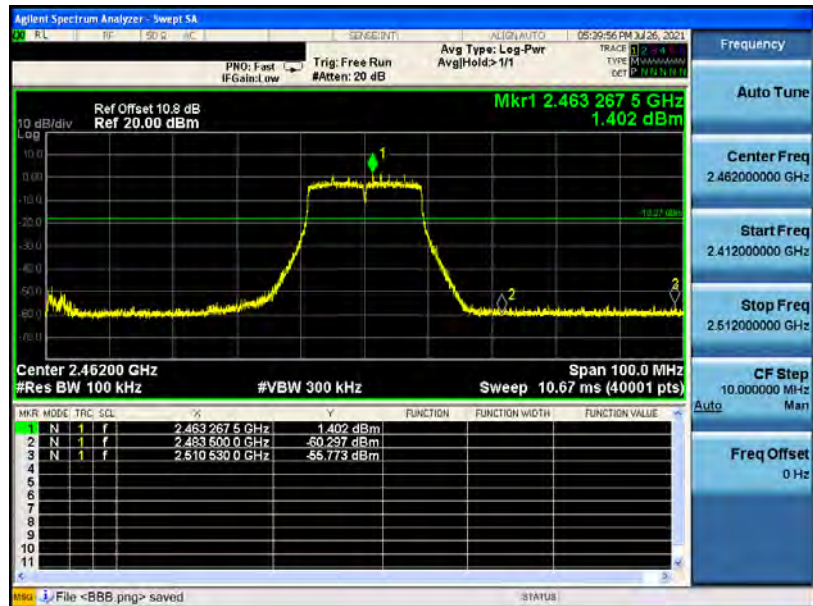


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-1

2422 MHz

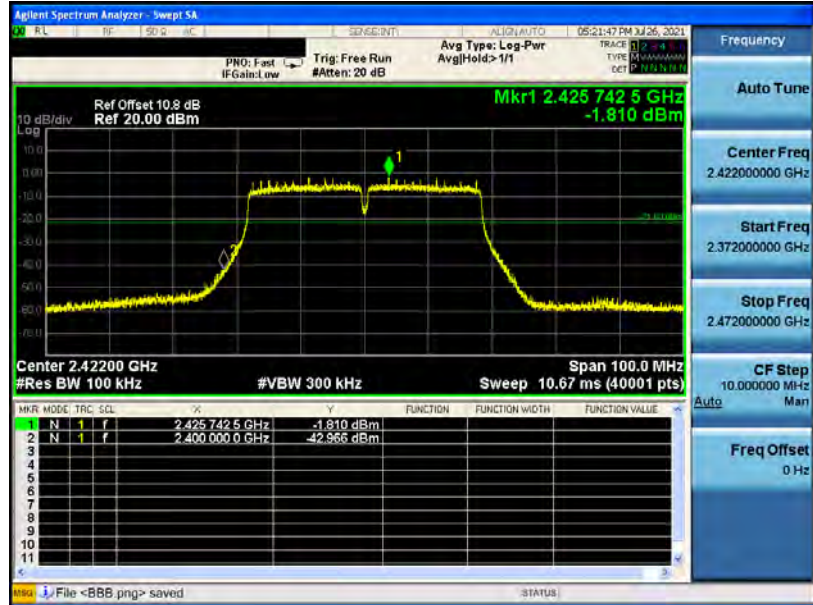


2452 MHz

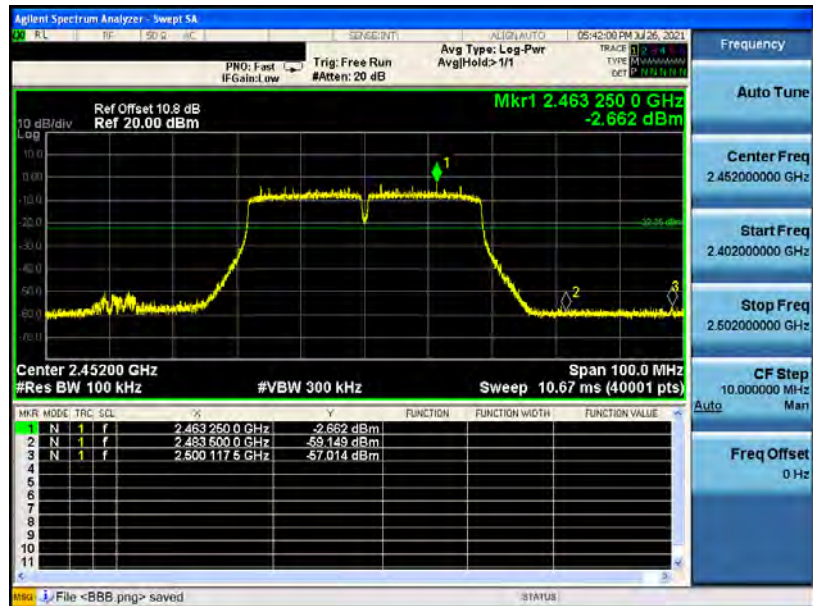


Mode 2: IEEE 802.11b Continuous TX mode_ANT-2

2412 MHz

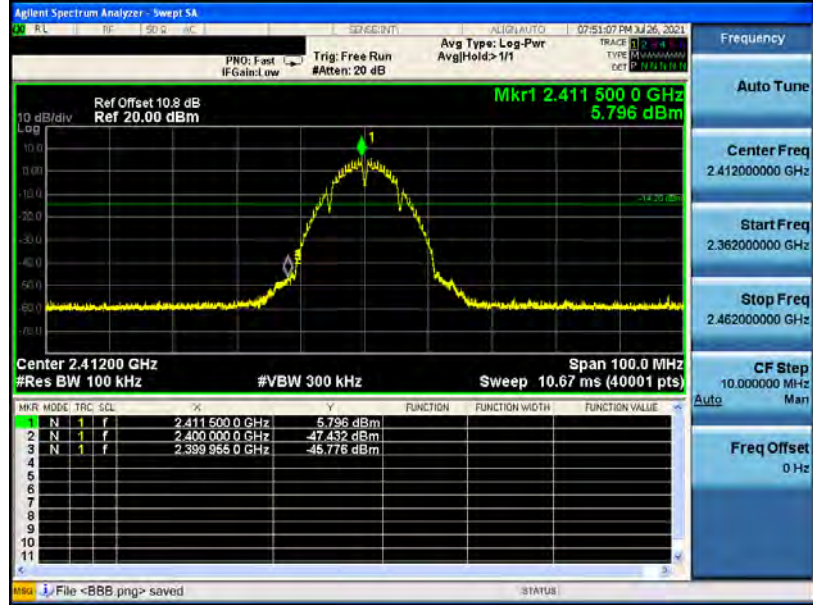


2462 MHz

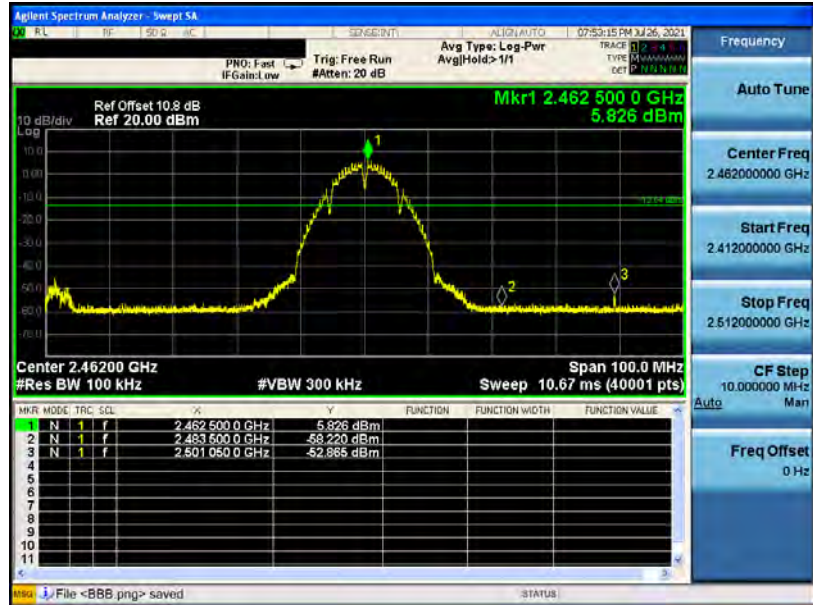


Mode 3: IEEE 802.11g Continuous TX mode_ANT-2

2412 MHz

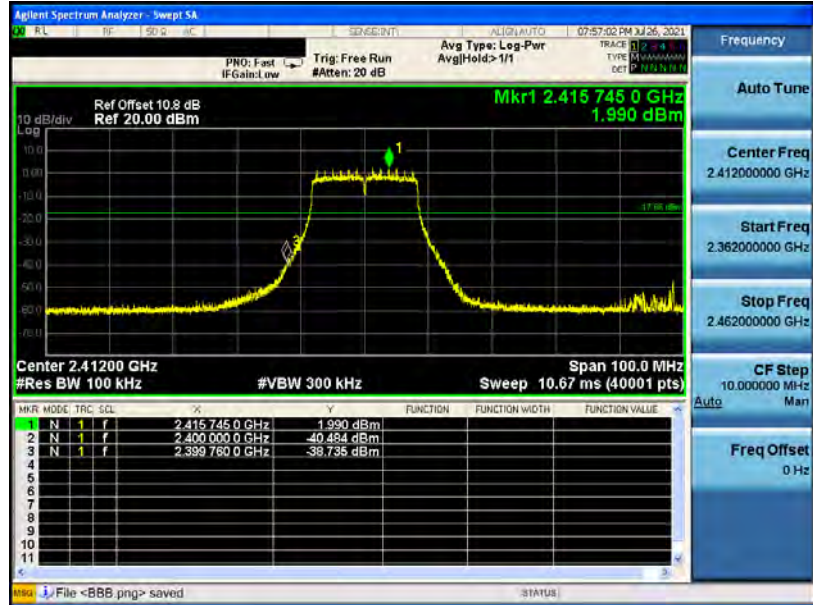


2462 MHz

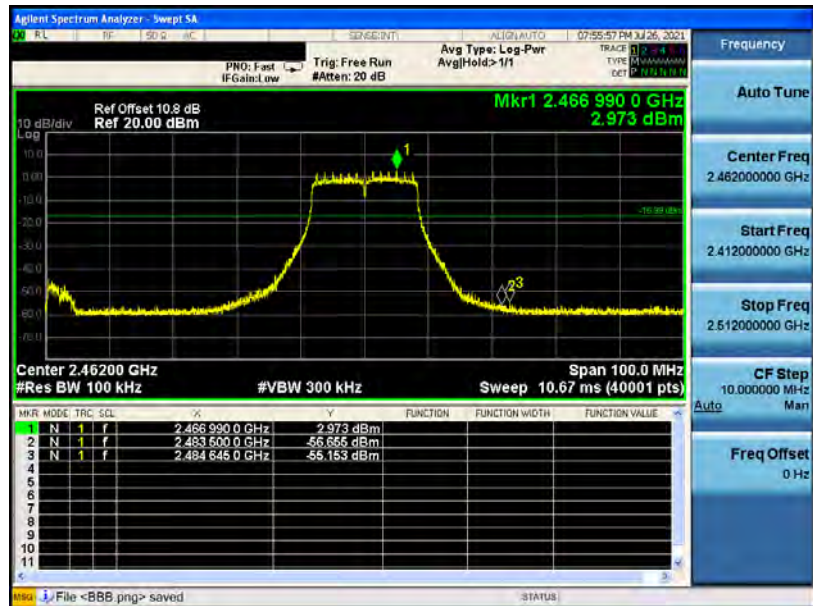


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-2

2412 MHz

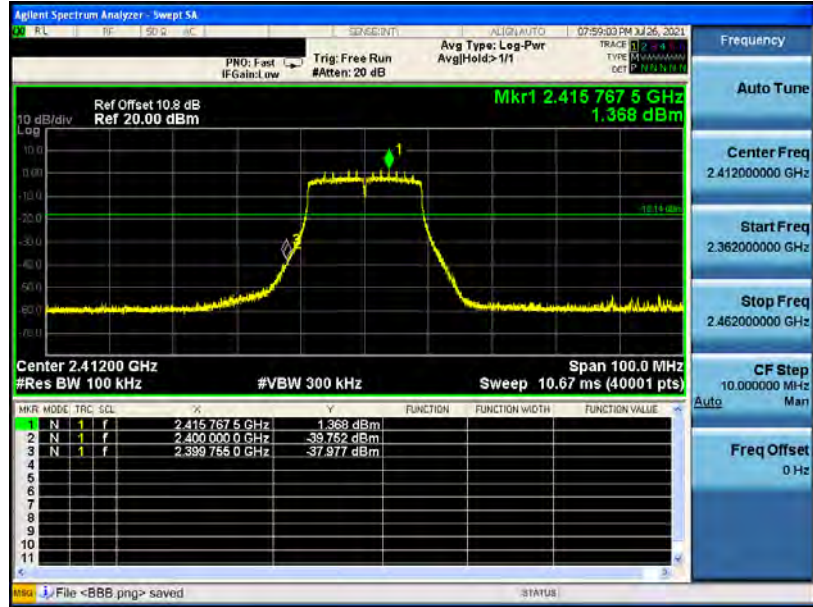


2462 MHz

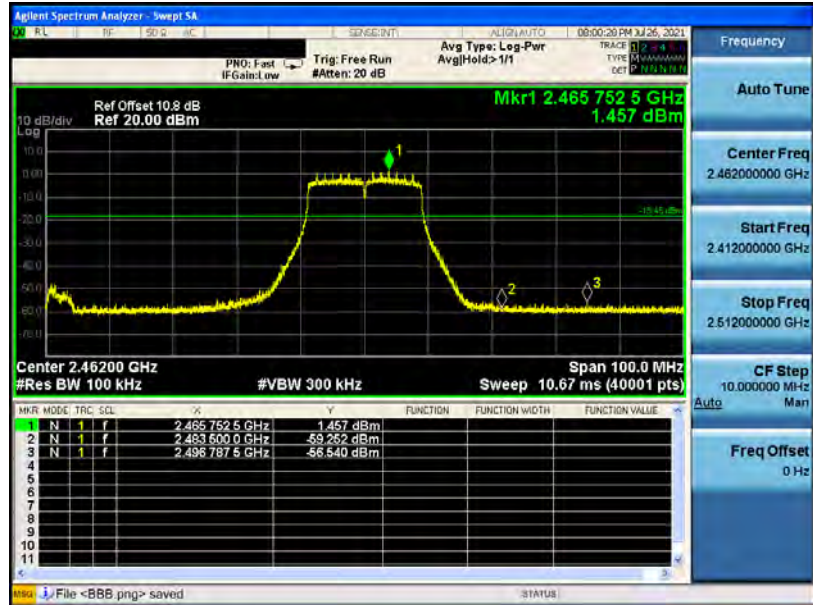


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-2

2422 MHz

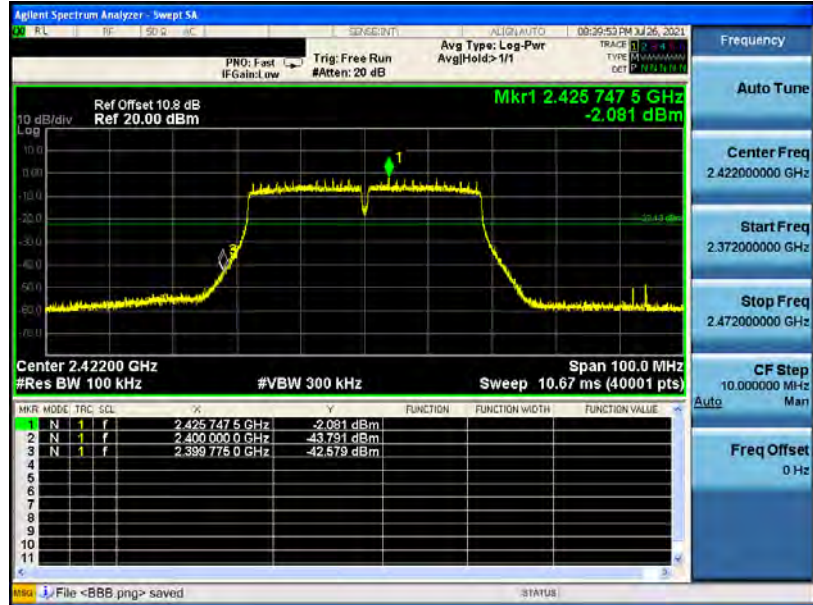


2452 MHz

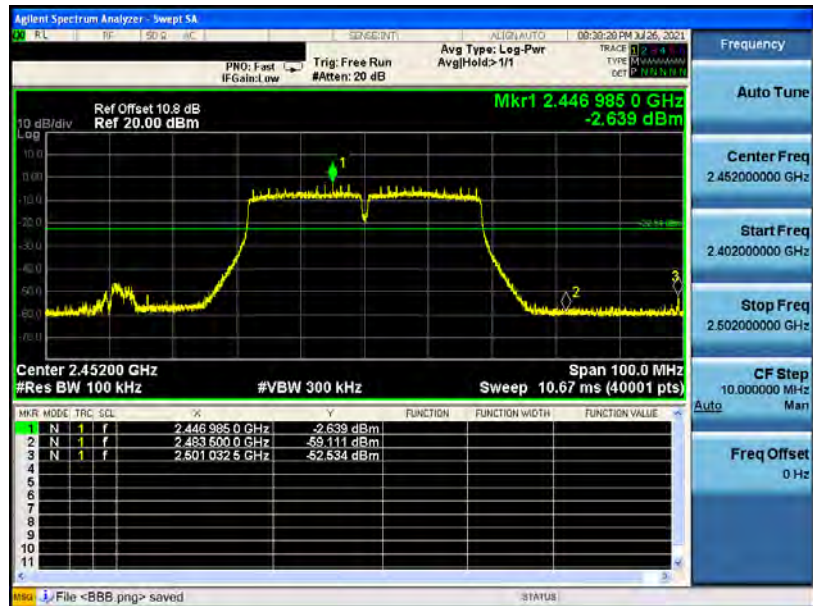


Mode 2: IEEE 802.11b Continuous TX mode_ANT-3

2412 MHz

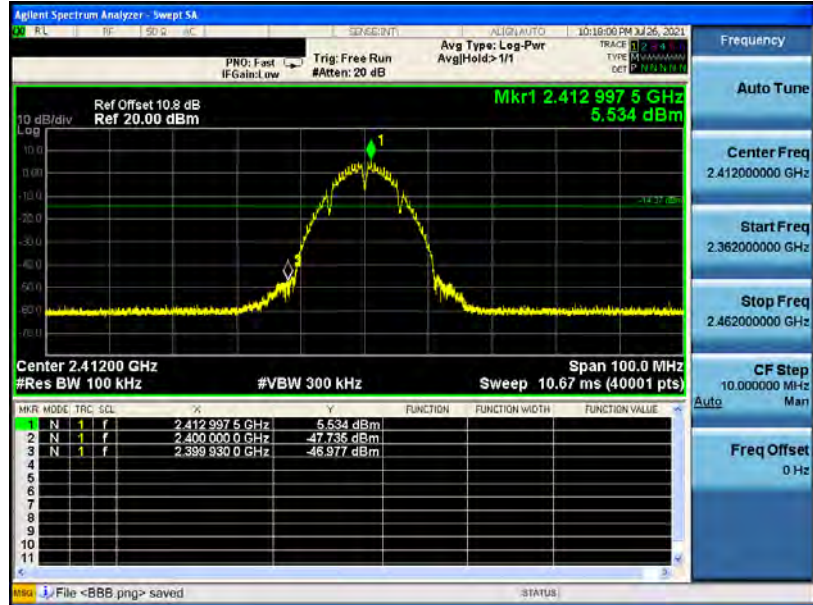


2462 MHz

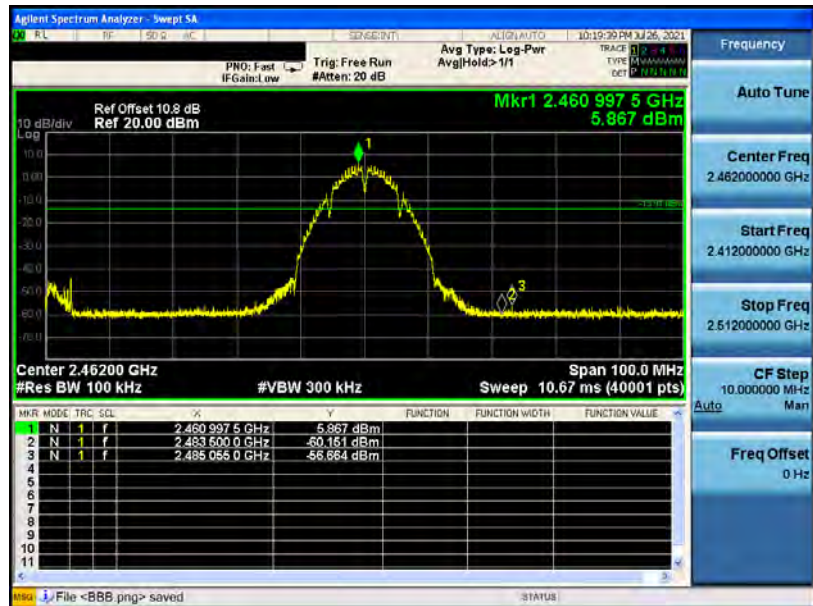


Mode 3: IEEE 802.11g Continuous TX mode_ANT-3

2412 MHz

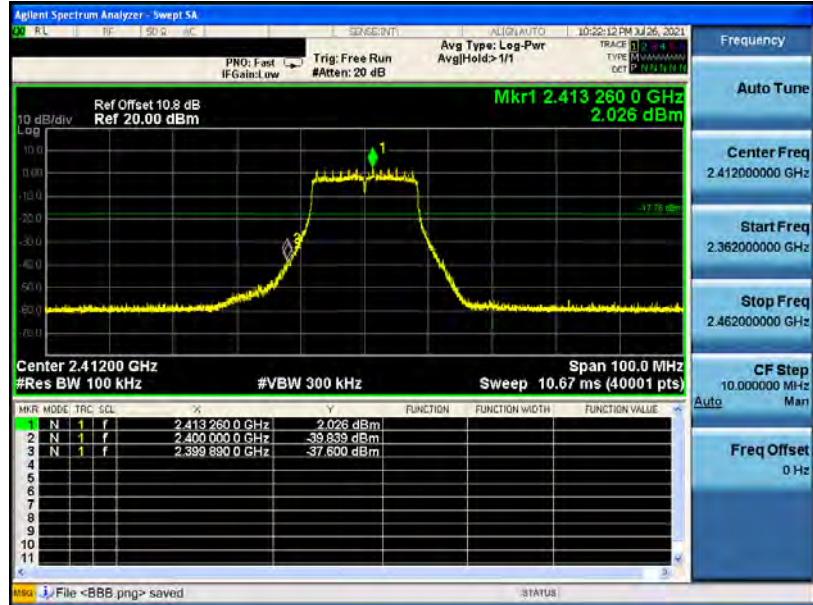


2462 MHz

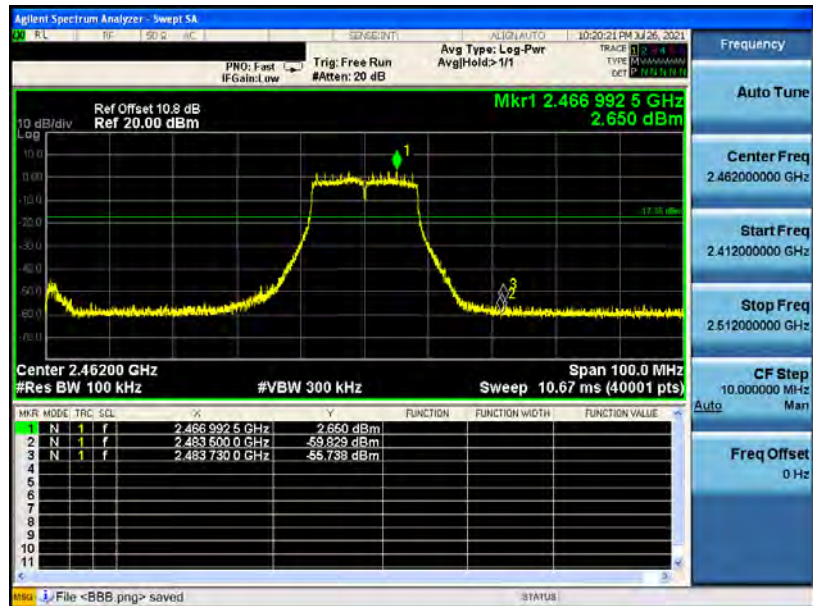


Mode 4: IEEE 802.11n 2.4 GHz 20 MHz Continuous TX mode_ANT-3

2412 MHz

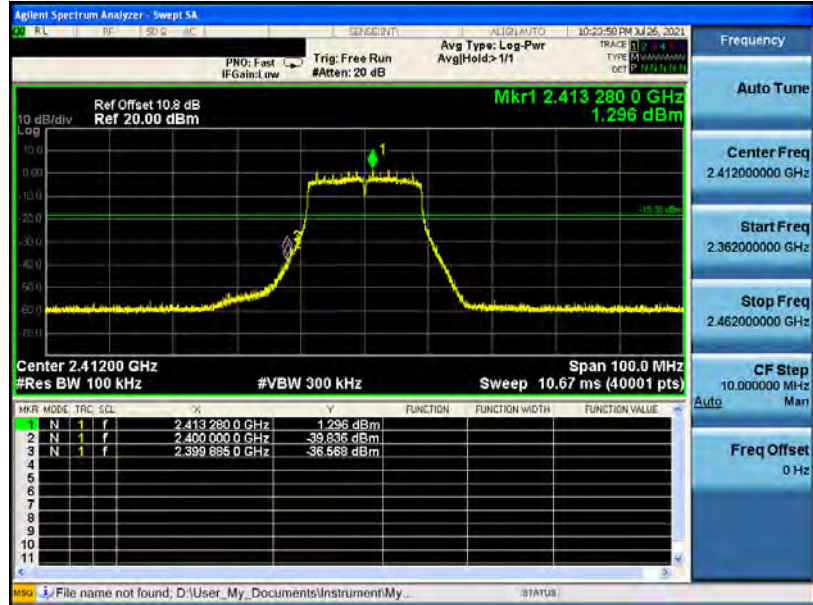


2462 MHz

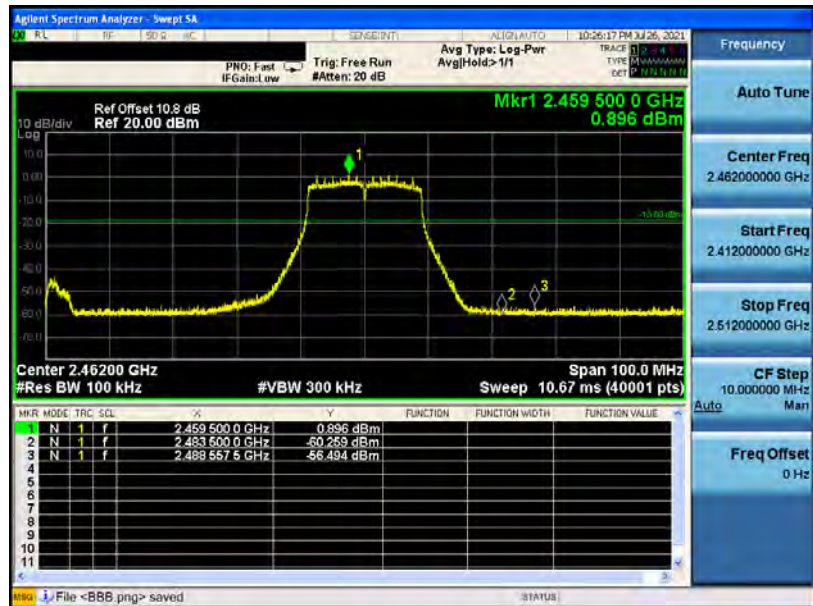


Mode 5: IEEE 802.11n 2.4 GHz 40 MHz Continuous TX mode_ANT-3

2422 MHz

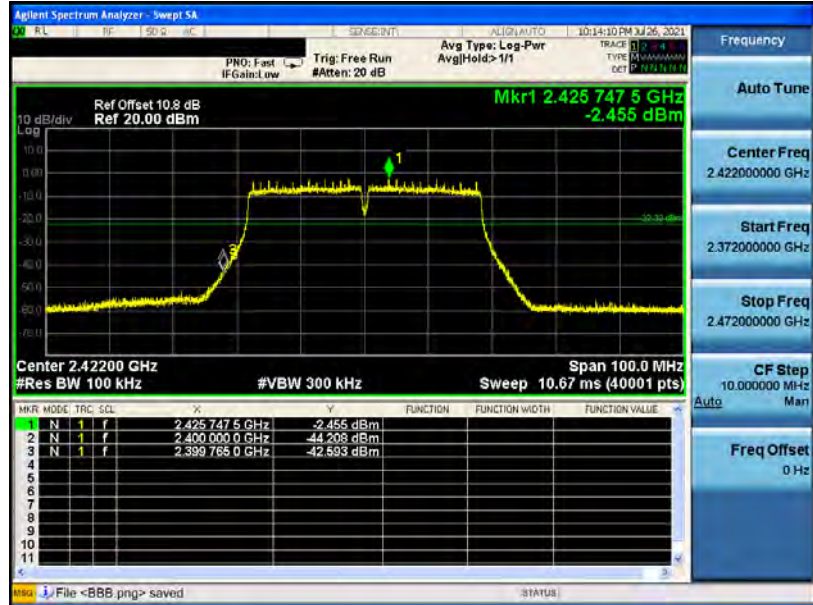


2452 MHz

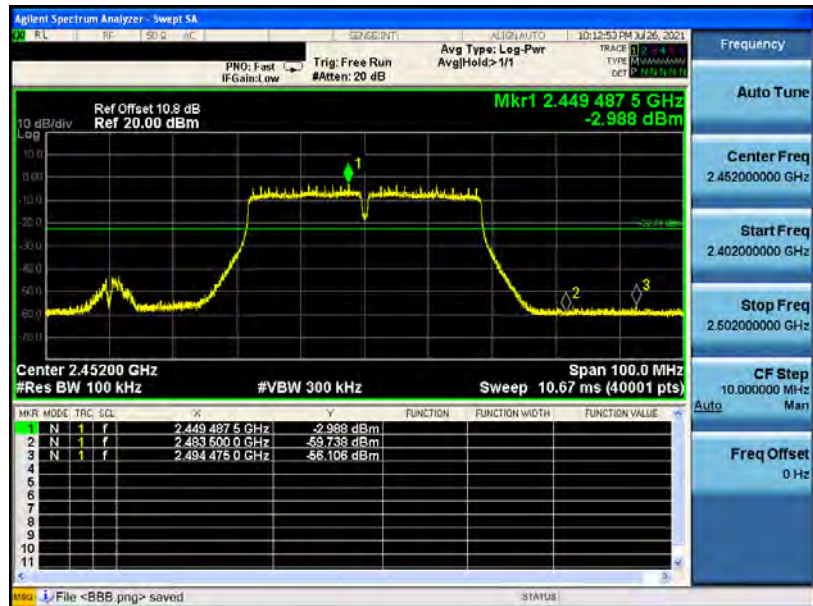

Annex C. Radiated Emission Measurement

Below 1 GHz

Standard:	FCC Part 15.247	Test Distance:	3m
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

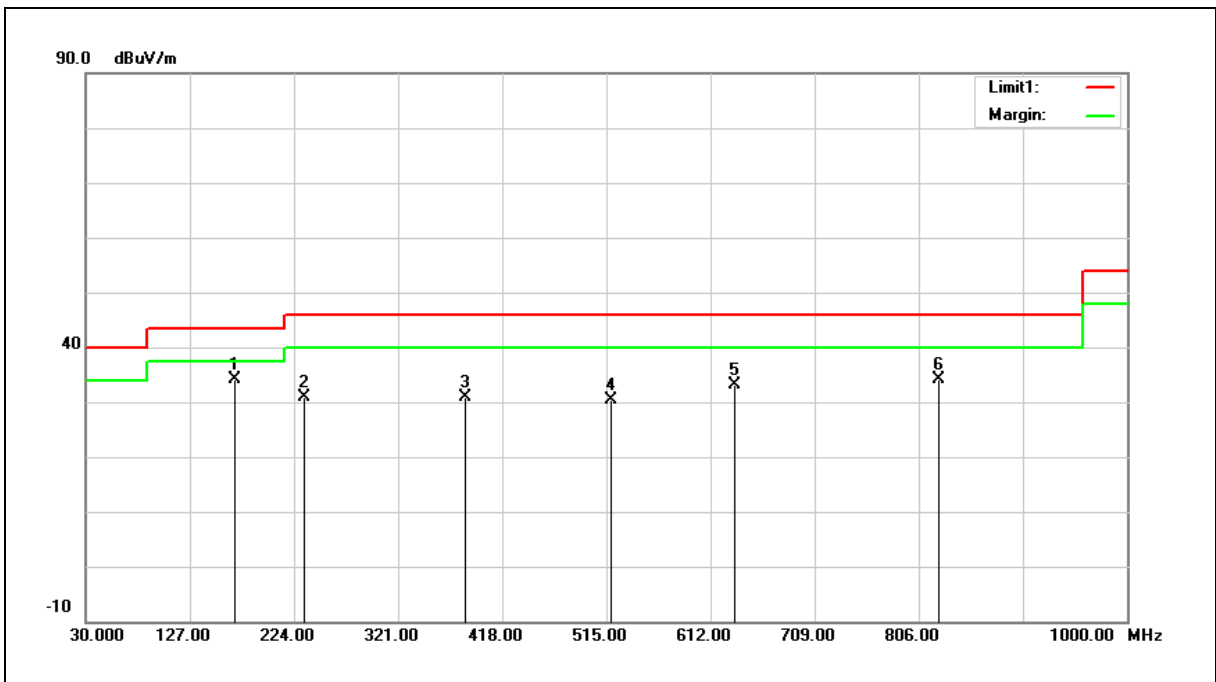

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	168.7100	41.31	-7.11	34.20	43.50	-9.30	QP
2	233.7000	38.97	-8.01	30.96	46.00	-15.04	QP
3	384.0500	35.06	-4.09	30.97	46.00	-15.03	QP
4	518.8800	32.14	-1.85	30.29	46.00	-15.71	QP
5	634.3100	32.78	0.28	33.06	46.00	-12.94	QP
6	824.4300	30.84	3.17	34.01	46.00	-11.99	QP


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: $34.20 = -7.11 + 41.31$.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3m
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

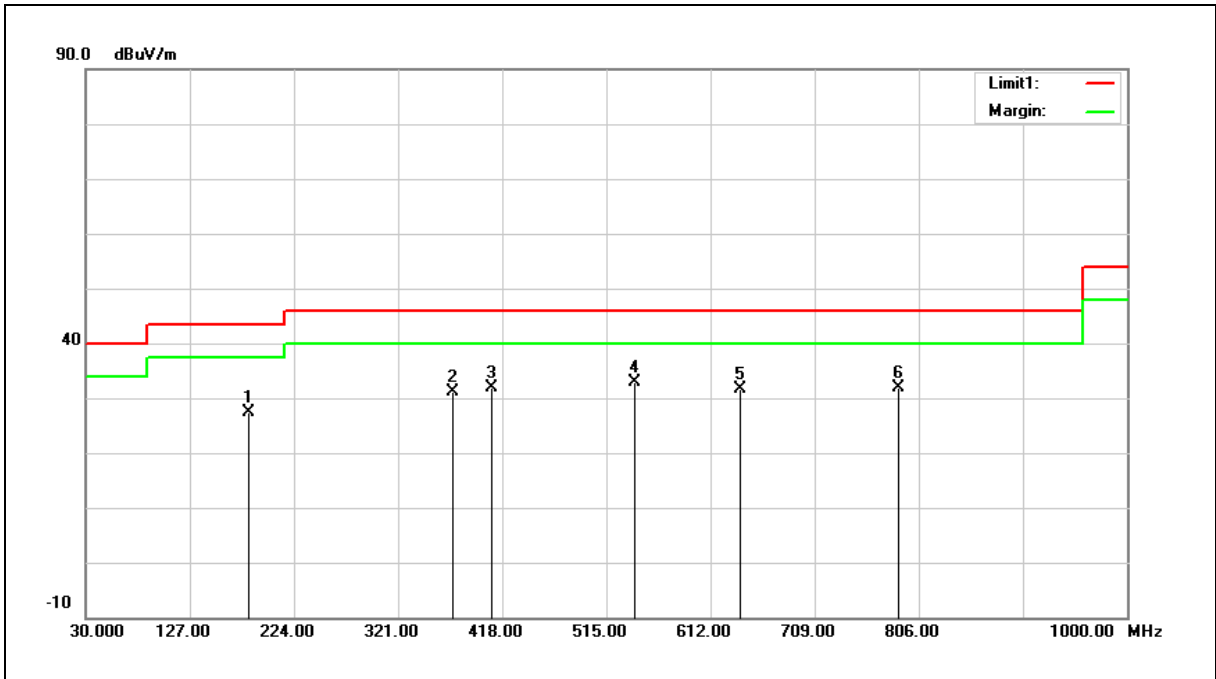

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	181.3200	35.60	-8.17	27.43	43.50	-16.07	QP
2	371.4400	35.57	-4.33	31.24	46.00	-14.76	QP
3	408.3000	35.53	-3.65	31.88	46.00	-14.12	QP
4	541.1900	34.19	-1.41	32.78	46.00	-13.22	QP
5	639.1600	31.31	0.31	31.62	46.00	-14.38	QP
6	787.5700	29.23	2.62	31.85	46.00	-14.15	QP

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 27.43 = -8.17 + 35.60.


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Harmonic

Above 1 GHz

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

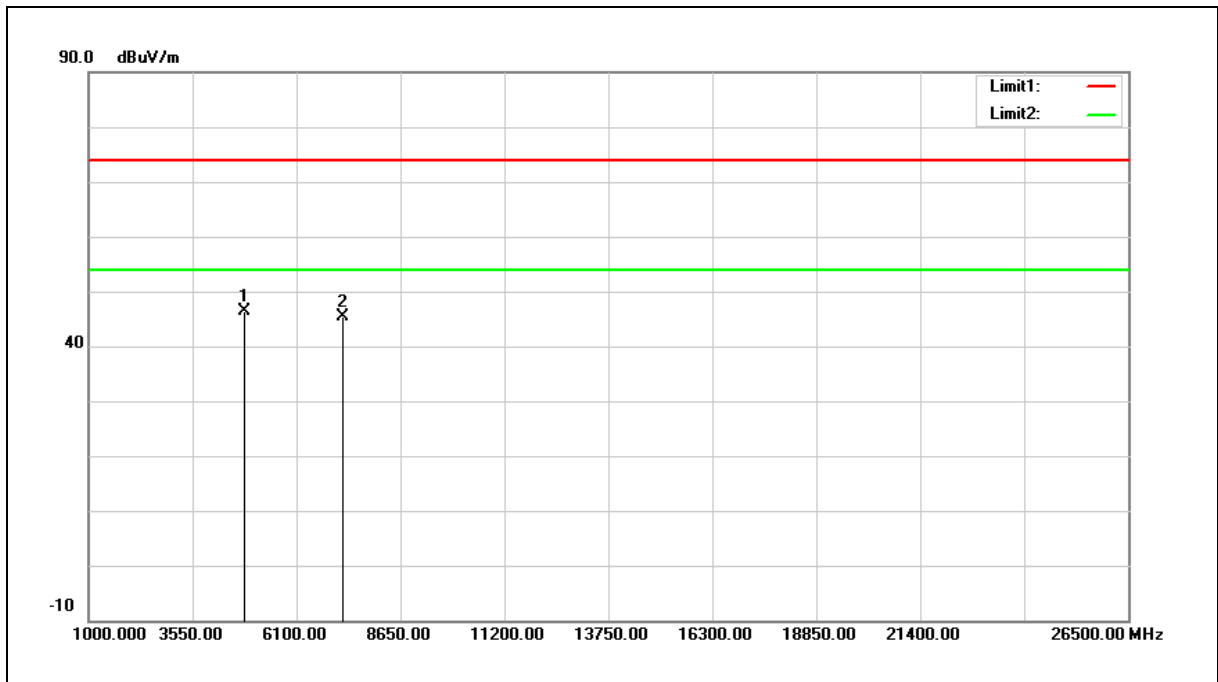

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	43.68	2.72	46.40	74.00	-27.60	peak
2	7236.000	37.09	8.30	45.39	74.00	-28.61	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: 46.40 = 2.72 + 43.68.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

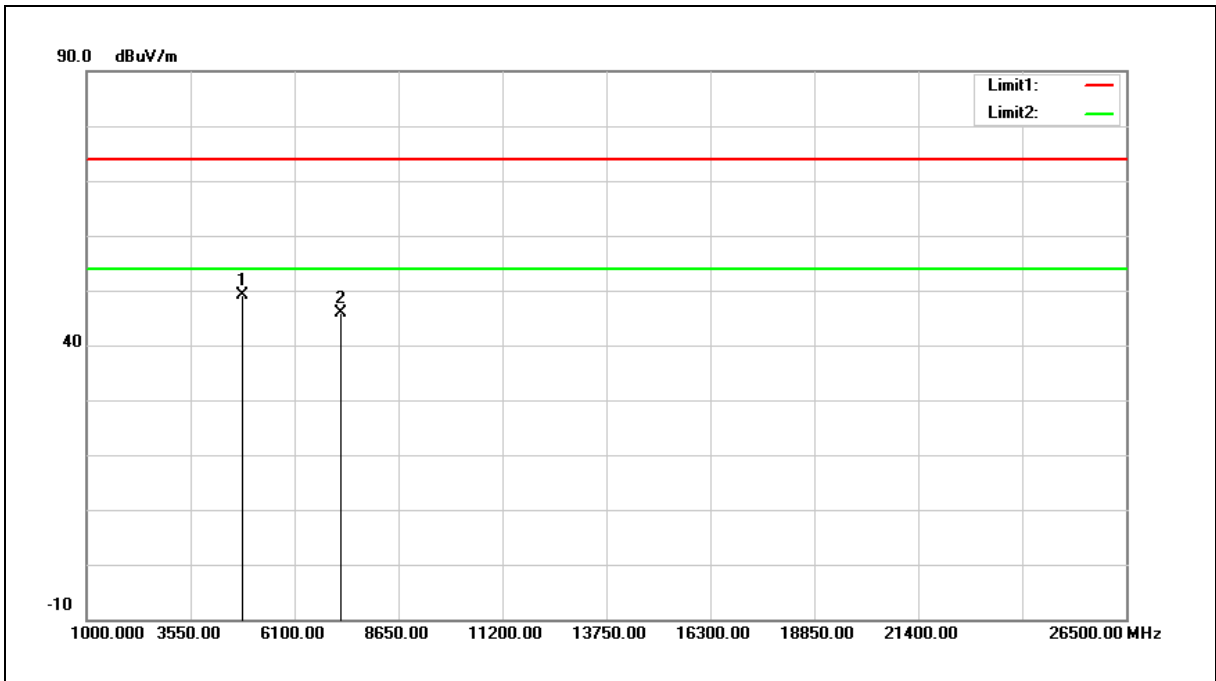

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	49.10	2.72	51.82	74.00	-22.18	peak
2	7236.000	37.48	8.30	45.78	74.00	-28.22	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

Example: $51.82 = 2.72 + 49.10$.

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.


Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

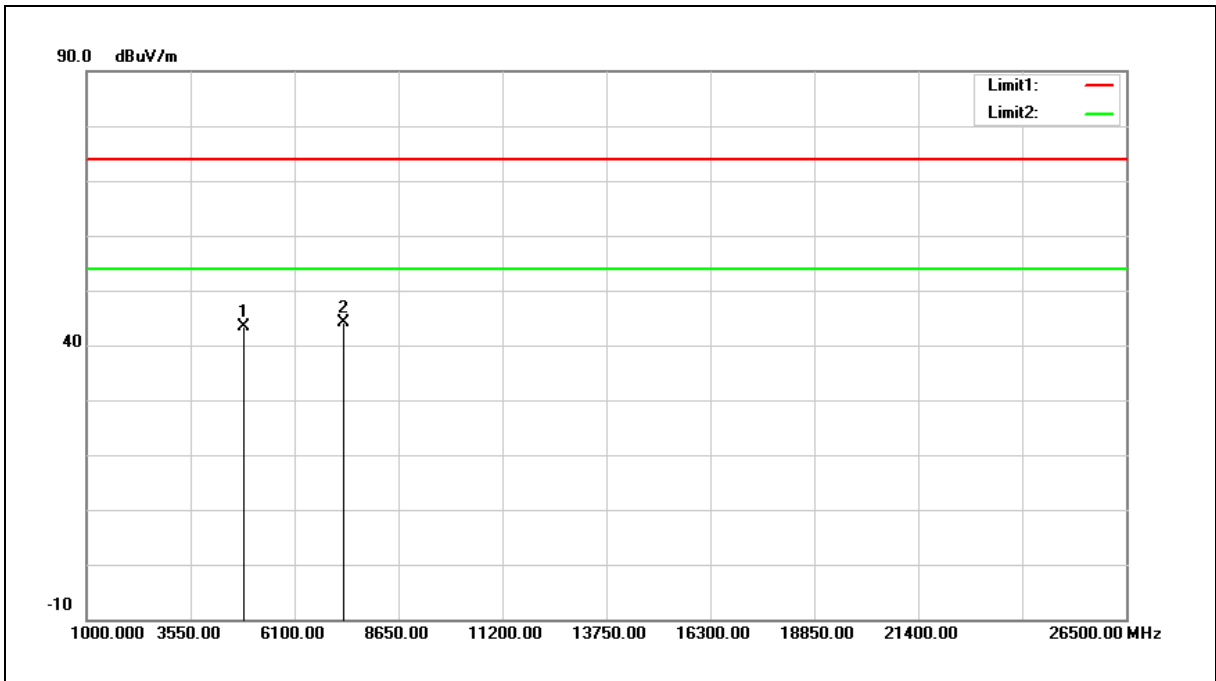

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	40.64	2.84	43.48	74.00	-30.52	peak
2	7311.000	35.66	8.53	44.19	74.00	-29.81	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.


Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

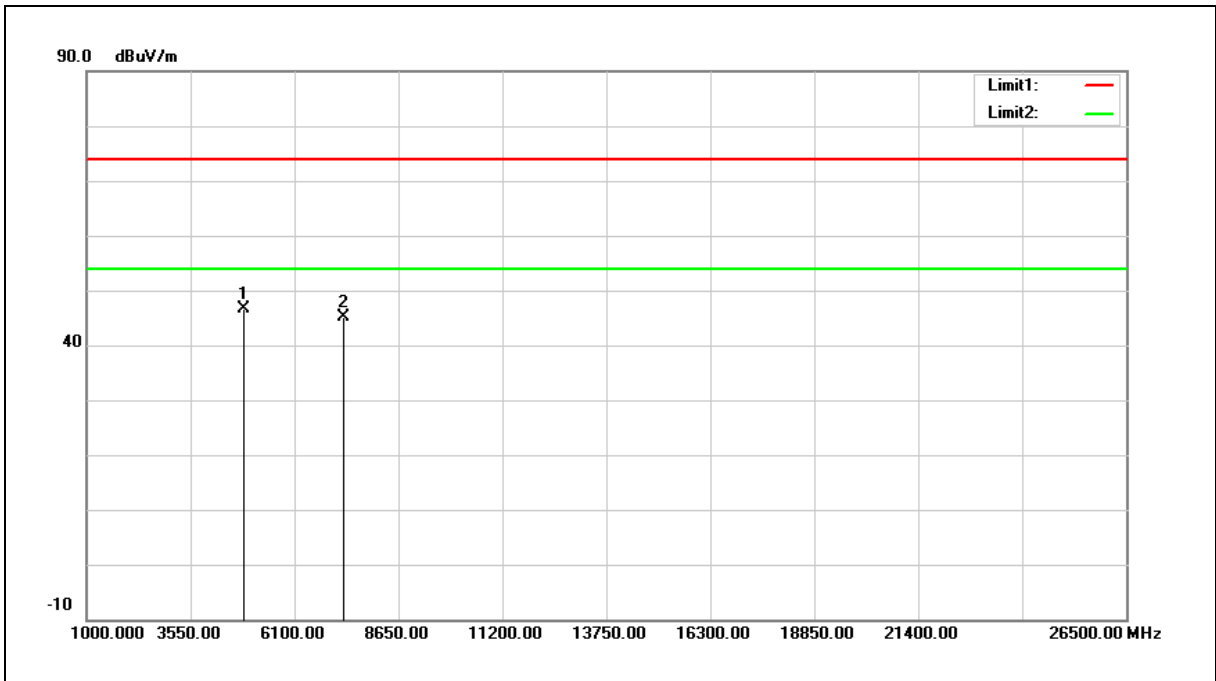

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	43.77	2.84	46.61	74.00	-27.39	peak
2	7311.000	36.58	8.53	45.11	74.00	-28.89	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.


Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

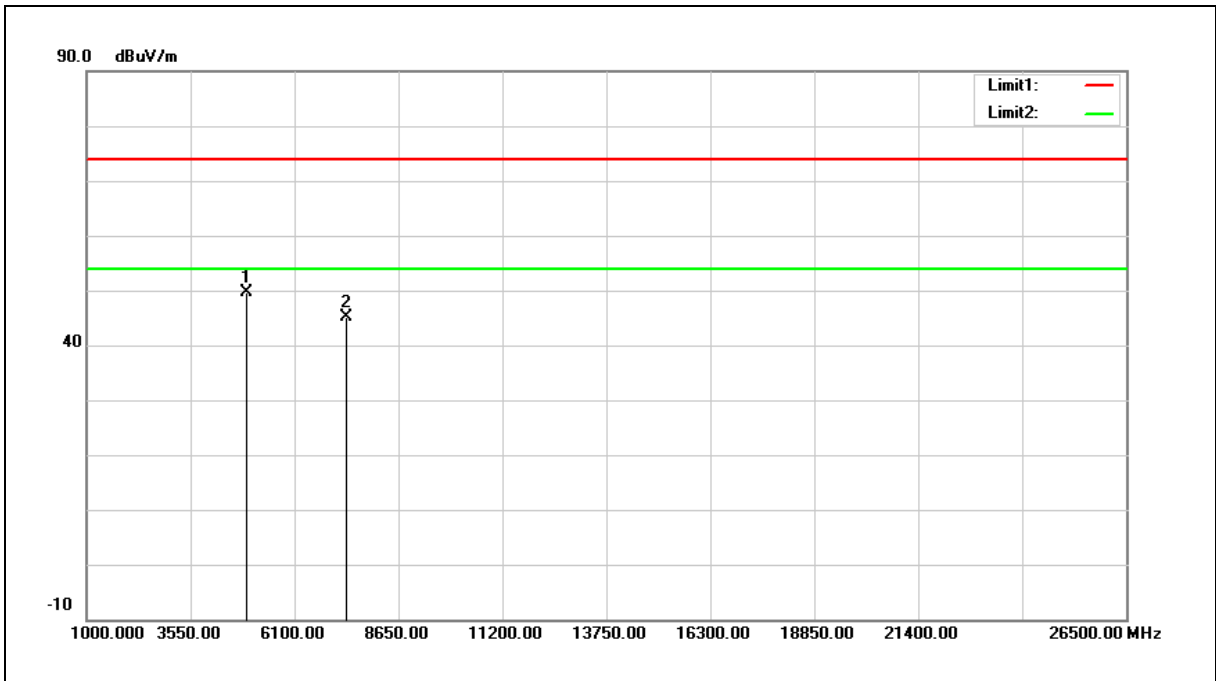

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	46.69	2.96	49.65	74.00	-24.35	peak
2	7386.000	36.32	8.77	45.09	74.00	-28.91	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

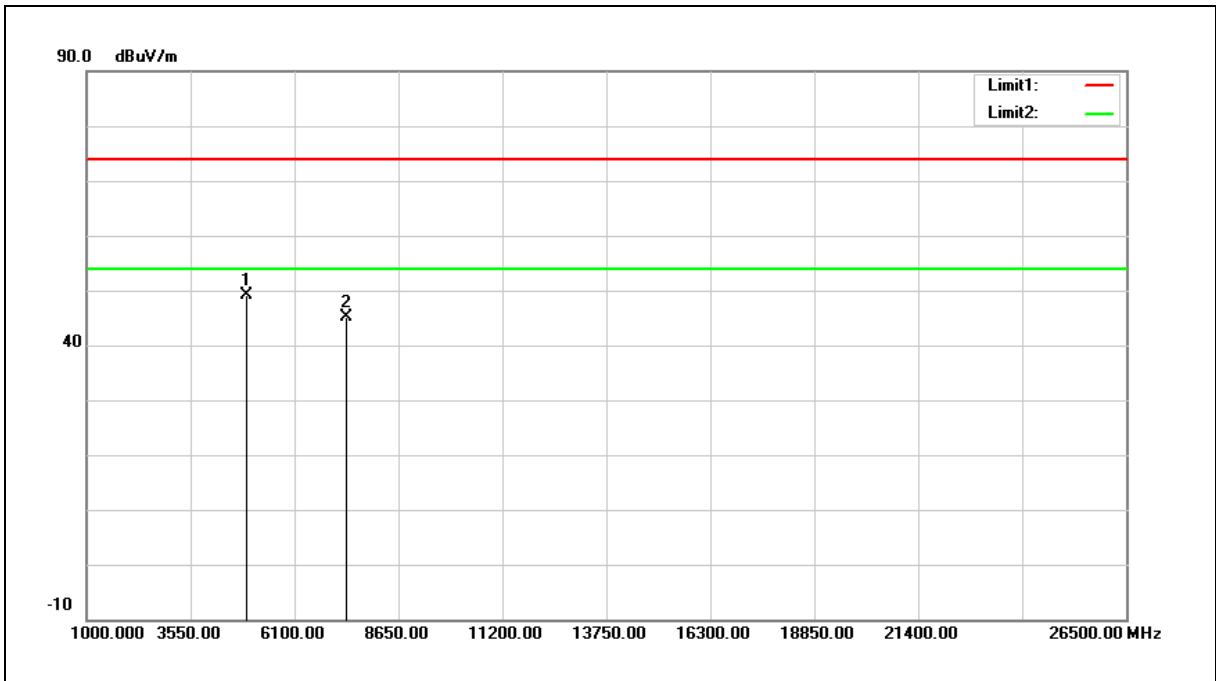


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	46.14	2.96	49.10	74.00	-24.90	peak
2	7386.000	36.32	8.77	45.09	74.00	-28.91	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.


Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

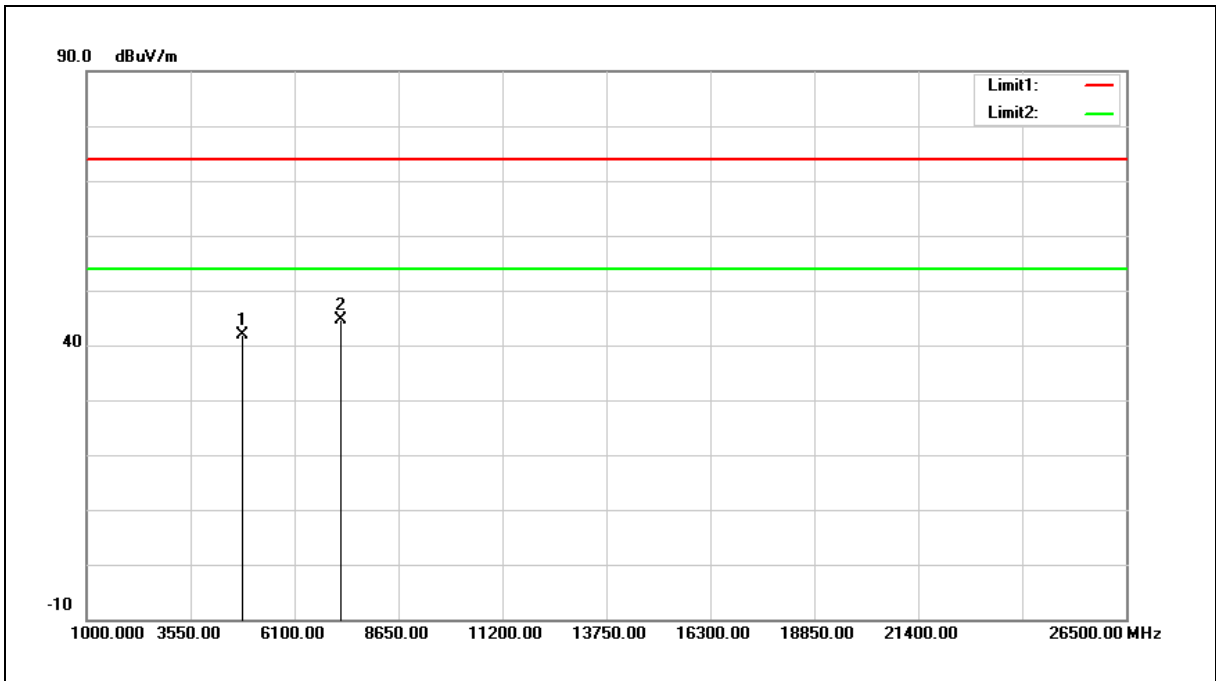

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	39.11	2.72	41.83	74.00	-32.17	peak
2	7236.000	36.28	8.30	44.58	74.00	-29.42	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.


Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

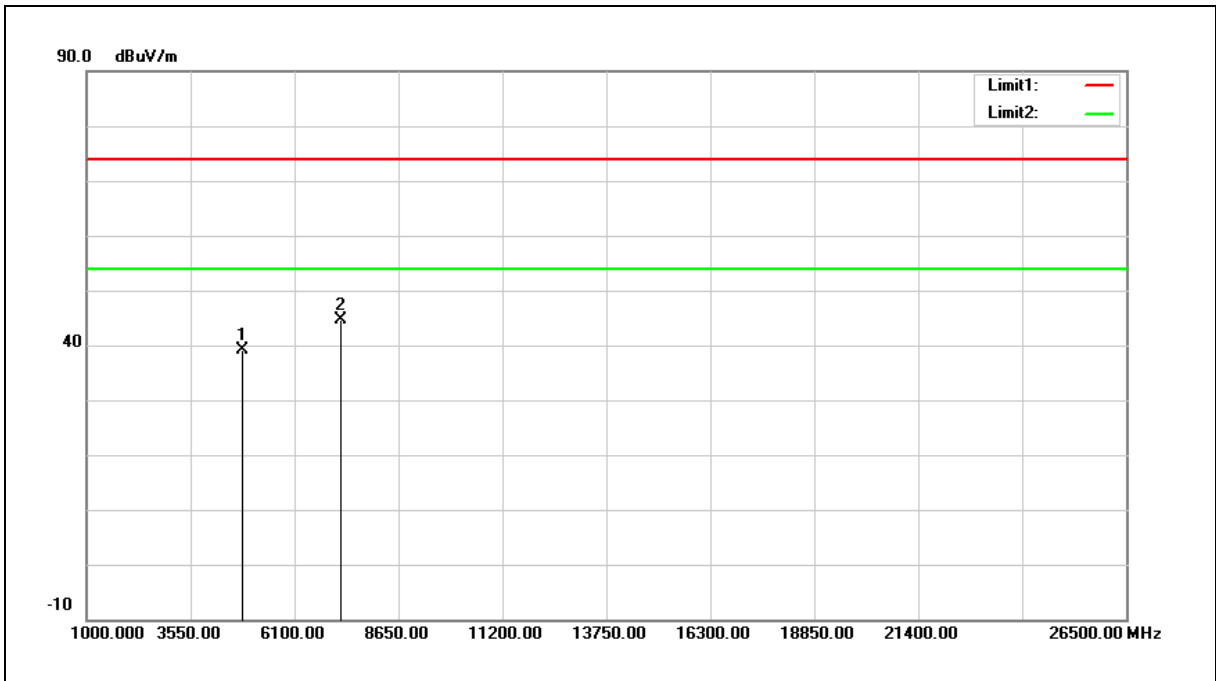

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	36.47	2.72	39.19	74.00	-34.81	peak
2	7236.000	36.42	8.30	44.72	74.00	-29.28	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

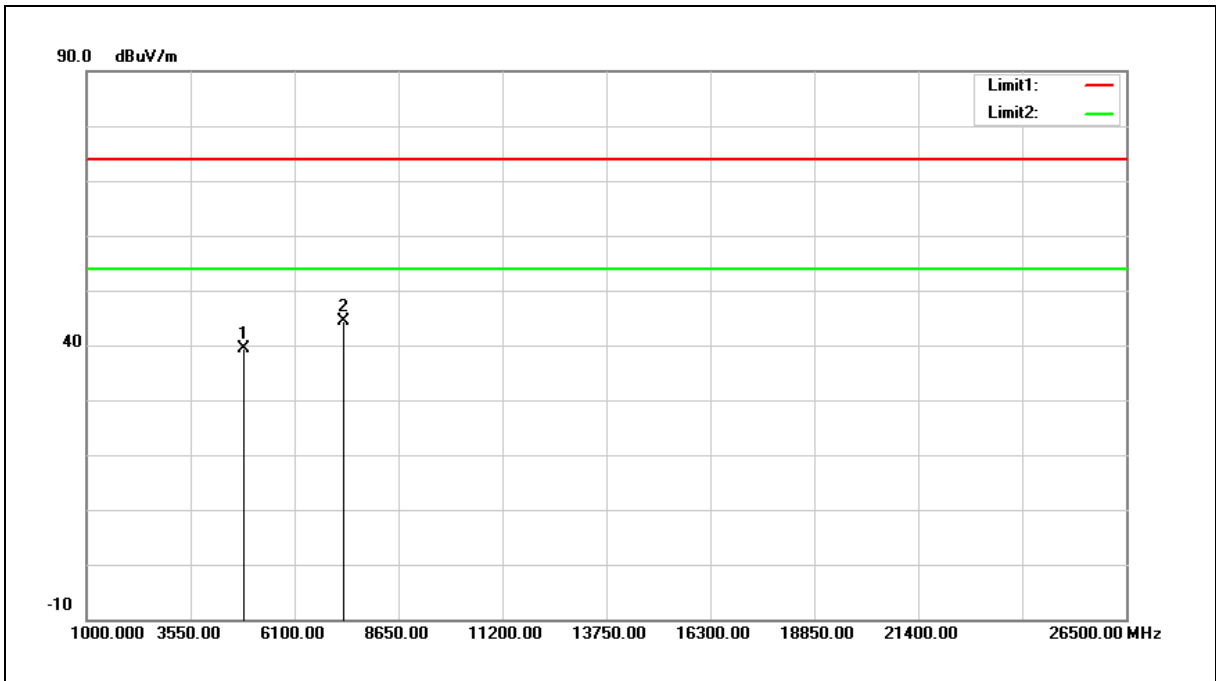


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	36.49	2.84	39.33	74.00	-34.67	peak
2	7311.000	35.74	8.53	44.27	74.00	-29.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

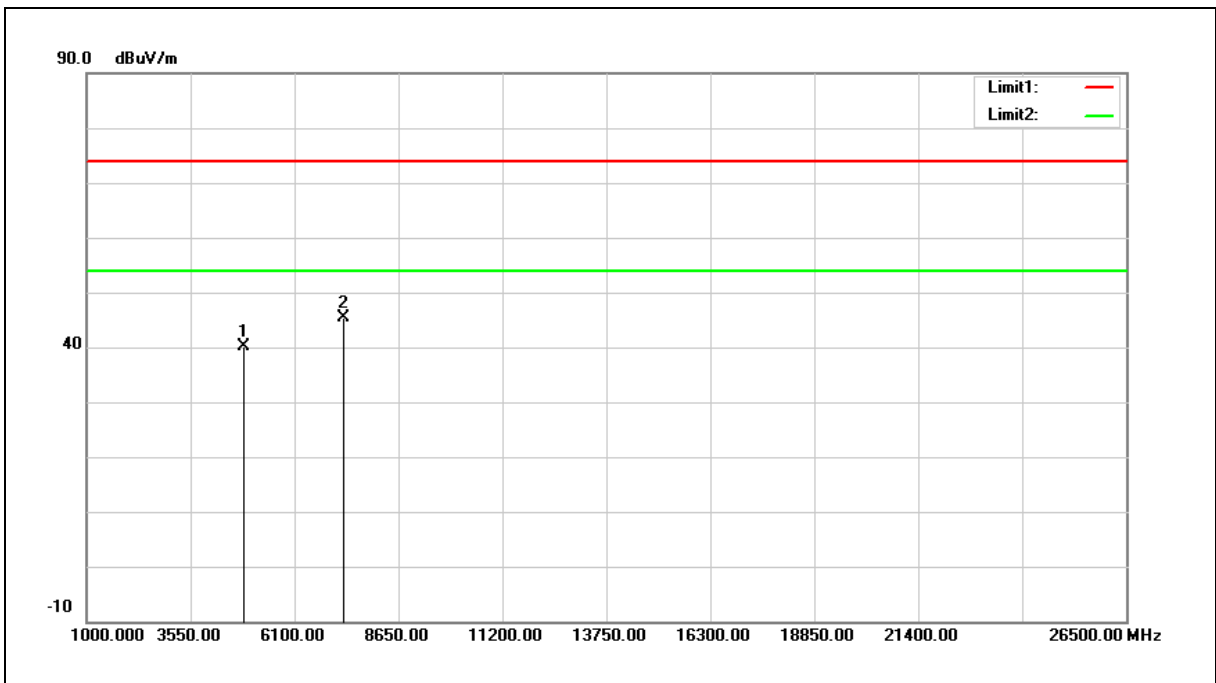


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.18	2.84	40.02	74.00	-33.98	peak
2	7311.000	36.76	8.53	45.29	74.00	-28.71	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

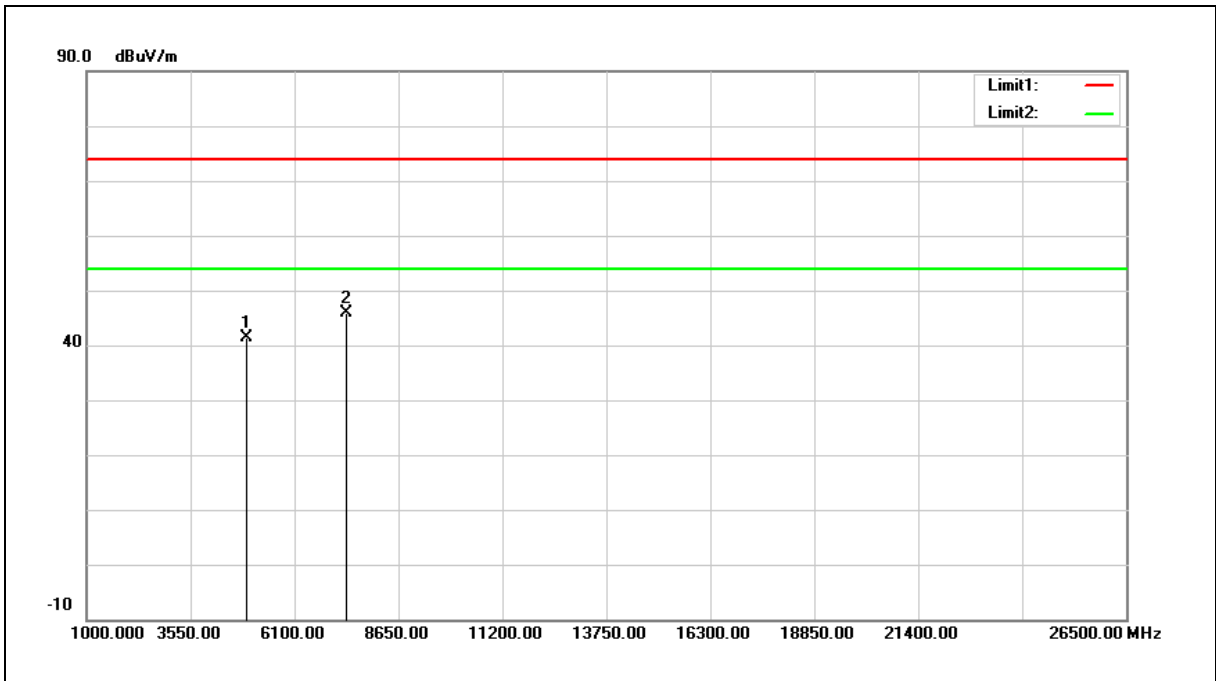


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	38.46	2.96	41.42	74.00	-32.58	peak
2	7386.000	37.10	8.77	45.87	74.00	-28.13	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.


Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

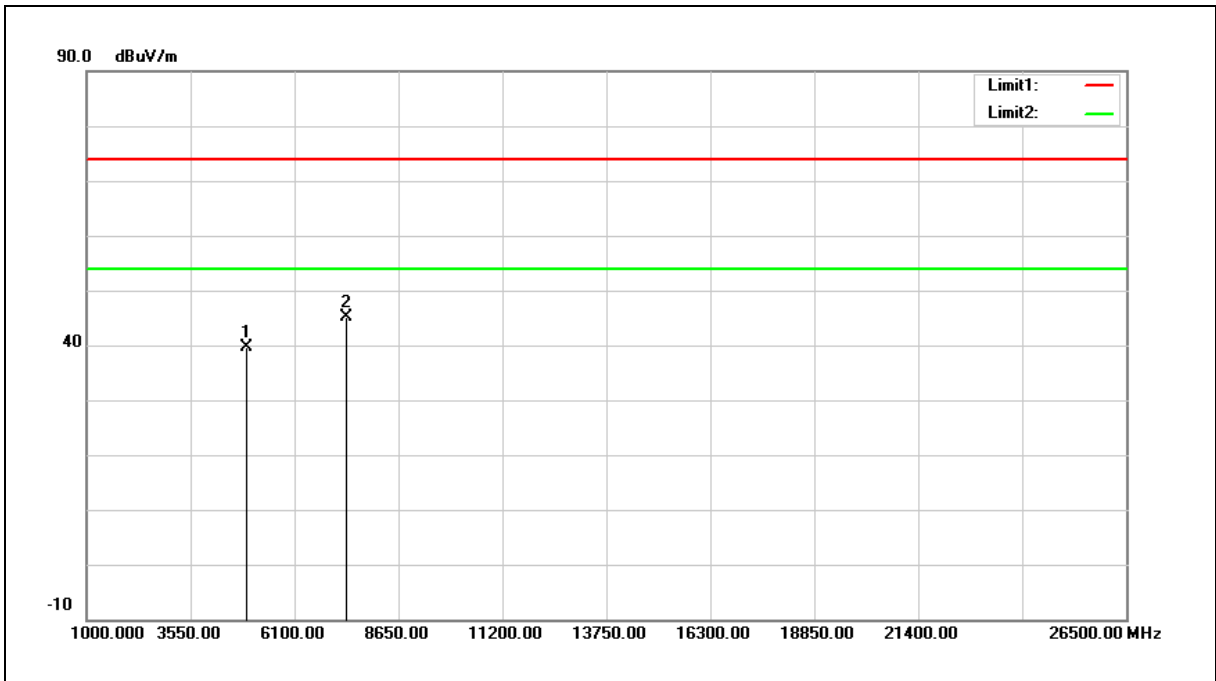

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	36.77	2.96	39.73	74.00	-34.27	peak
2	7386.000	36.34	8.77	45.11	74.00	-28.89	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

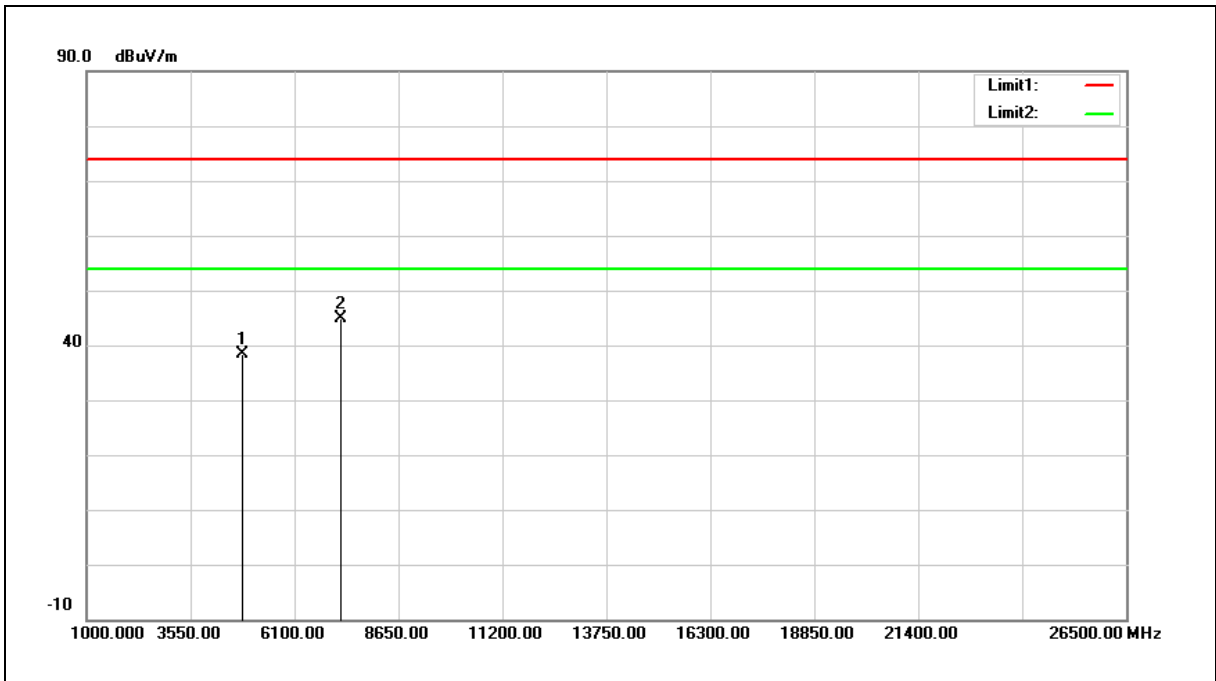


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	35.61	2.72	38.33	74.00	-35.67	peak
2	7236.000	36.58	8.30	44.88	74.00	-29.12	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.


Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2412 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

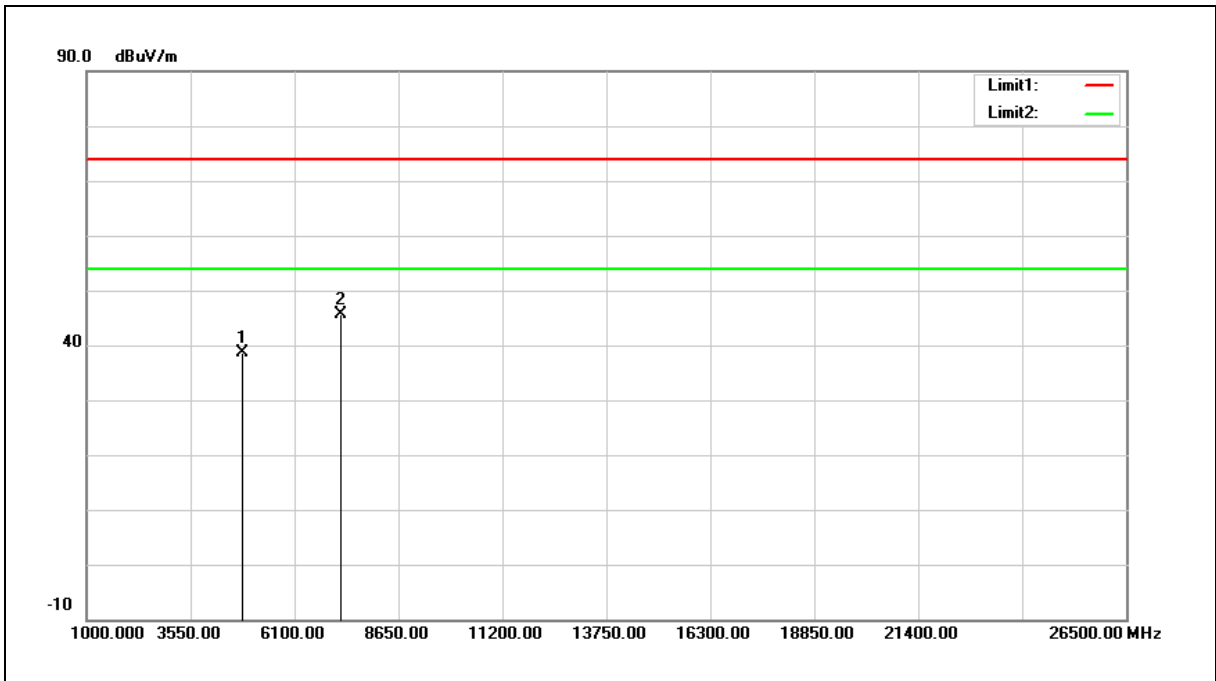

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	35.91	2.72	38.63	74.00	-35.37	peak
2	7236.000	37.37	8.30	45.67	74.00	-28.33	peak

- Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).
 2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3. When the peak results are less than average limit, so not need to evaluate the average.


Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

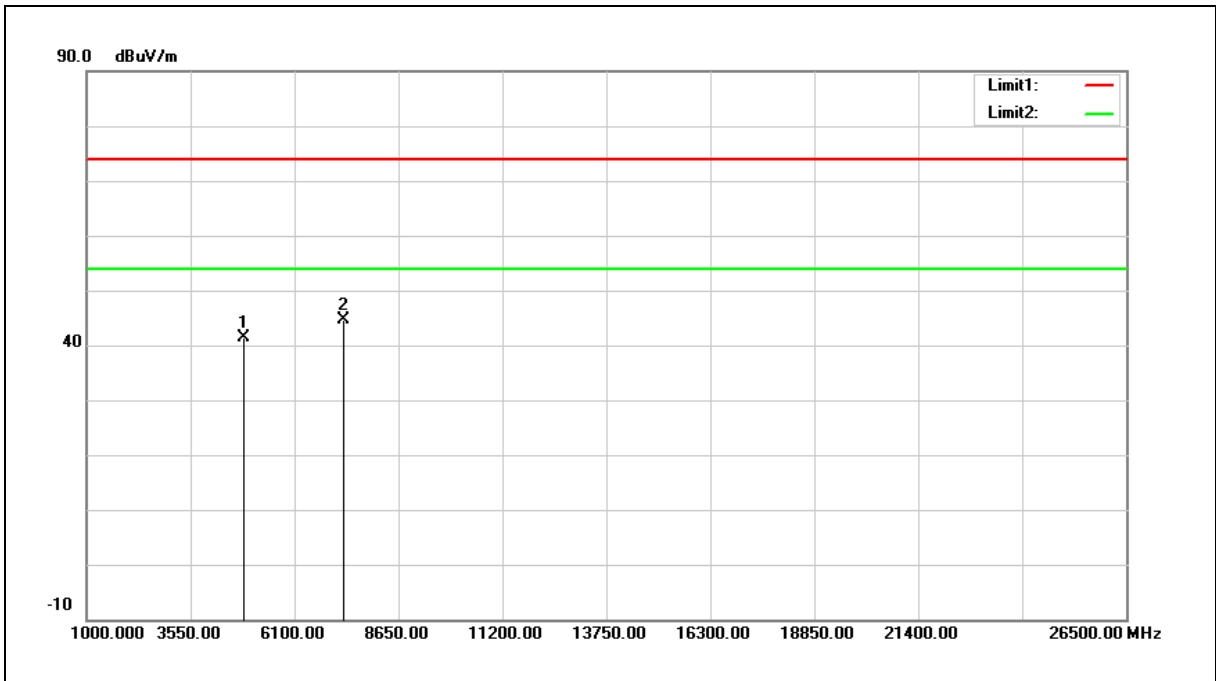

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	38.44	2.84	41.28	74.00	-32.72	peak
2	7311.000	36.22	8.53	44.75	74.00	-29.25	peak

- Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).
 2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3. When the peak results are less than average limit, so not need to evaluate the average.


Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

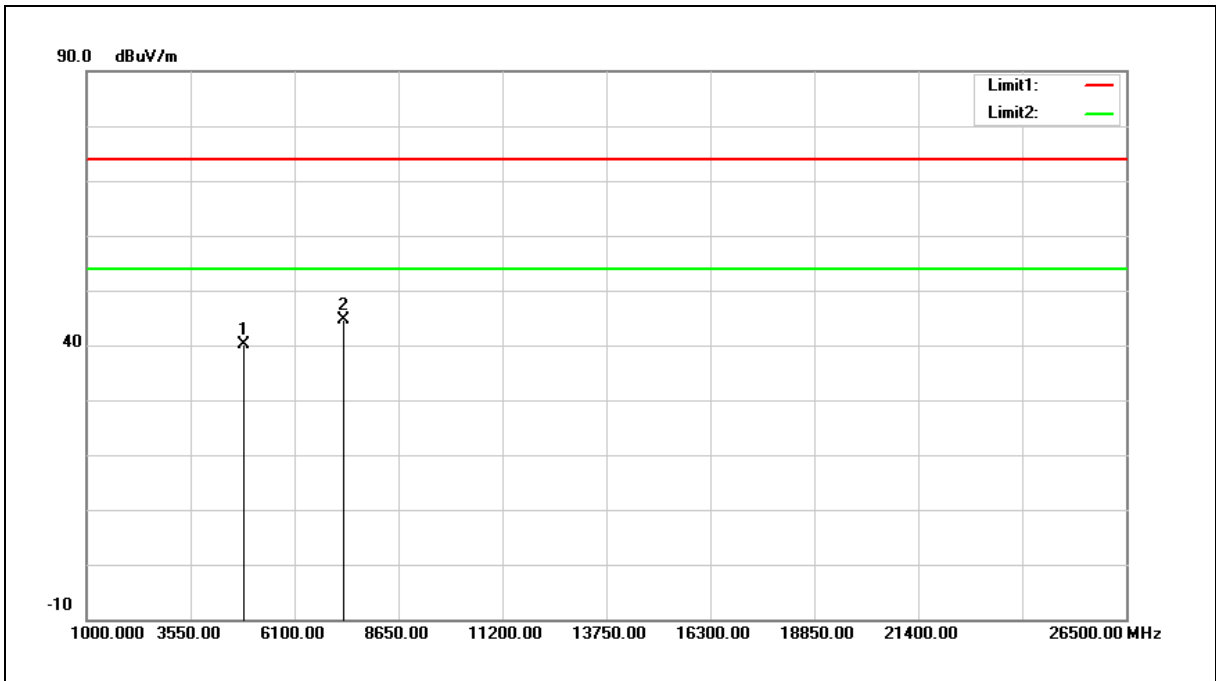

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.38	2.84	40.22	74.00	-33.78	peak
2	7311.000	36.08	8.53	44.61	74.00	-29.39	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.


Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

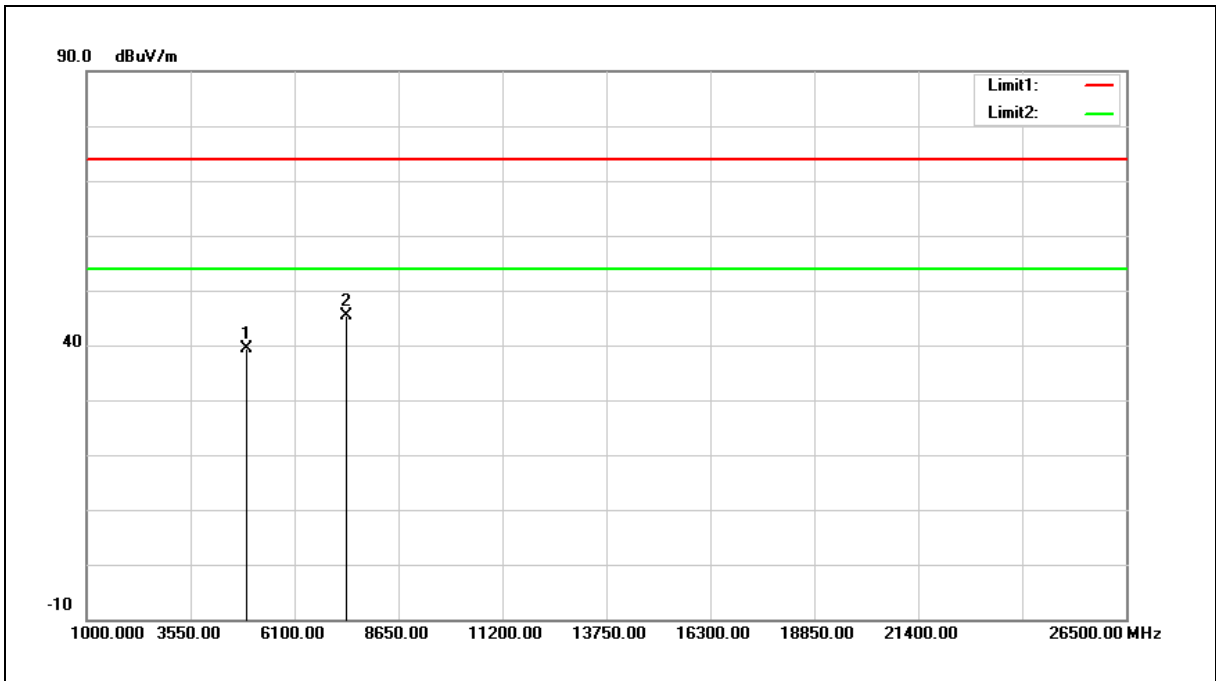

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	36.53	2.96	39.49	74.00	-34.51	peak
2	7386.000	36.70	8.77	45.47	74.00	-28.53	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.


Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

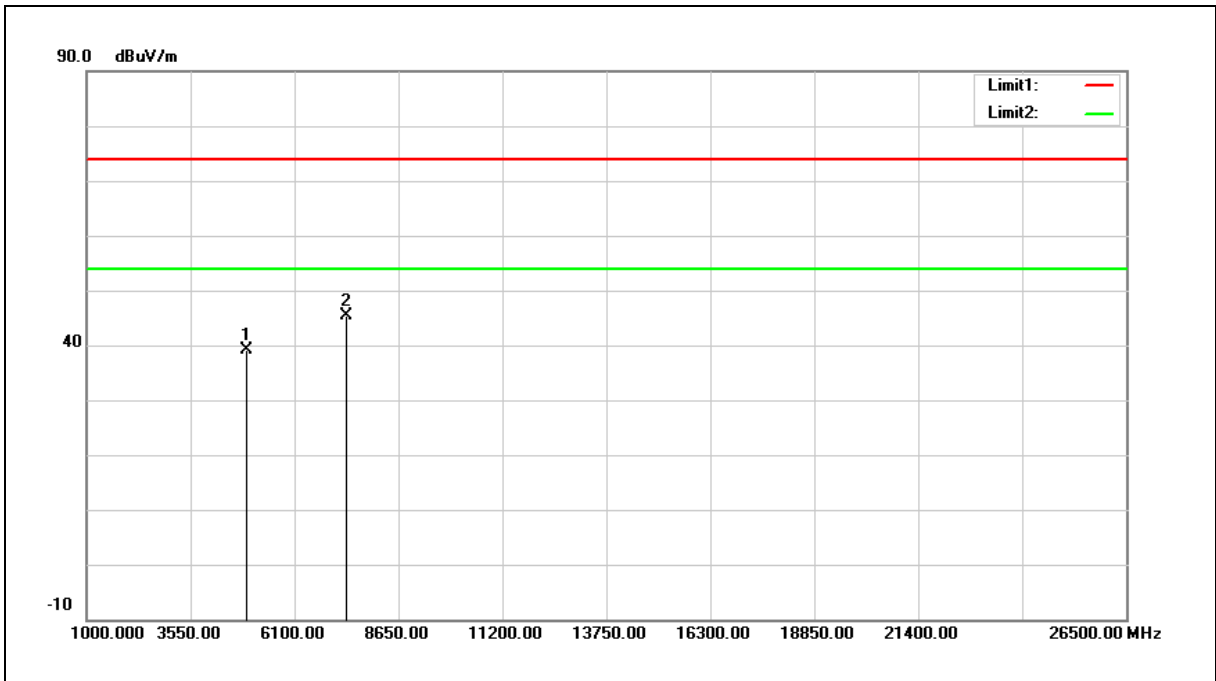

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	36.14	2.96	39.10	74.00	-34.90	peak
2	7386.000	36.53	8.77	45.30	74.00	-28.70	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.


Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2422 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

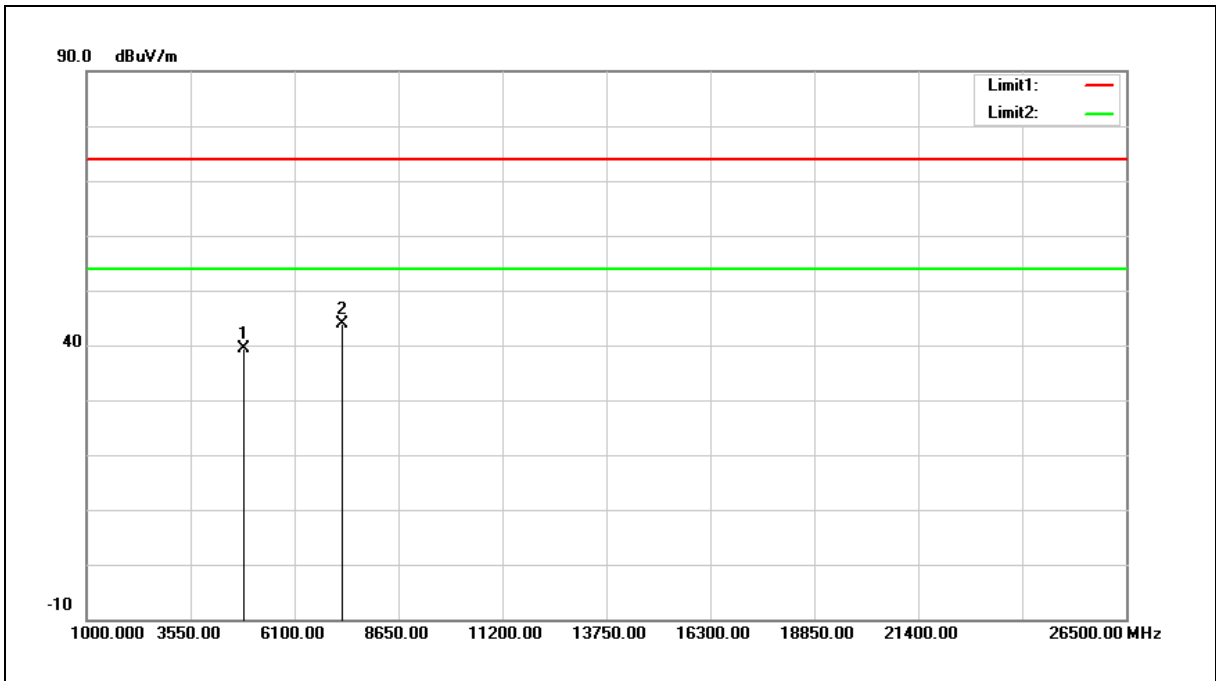

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	36.48	2.78	39.26	74.00	-34.74	peak
2	7266.000	35.42	8.39	43.81	74.00	-30.19	peak

- Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).
 2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3. When the peak results are less than average limit, so not need to evaluate the average.


Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2422 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

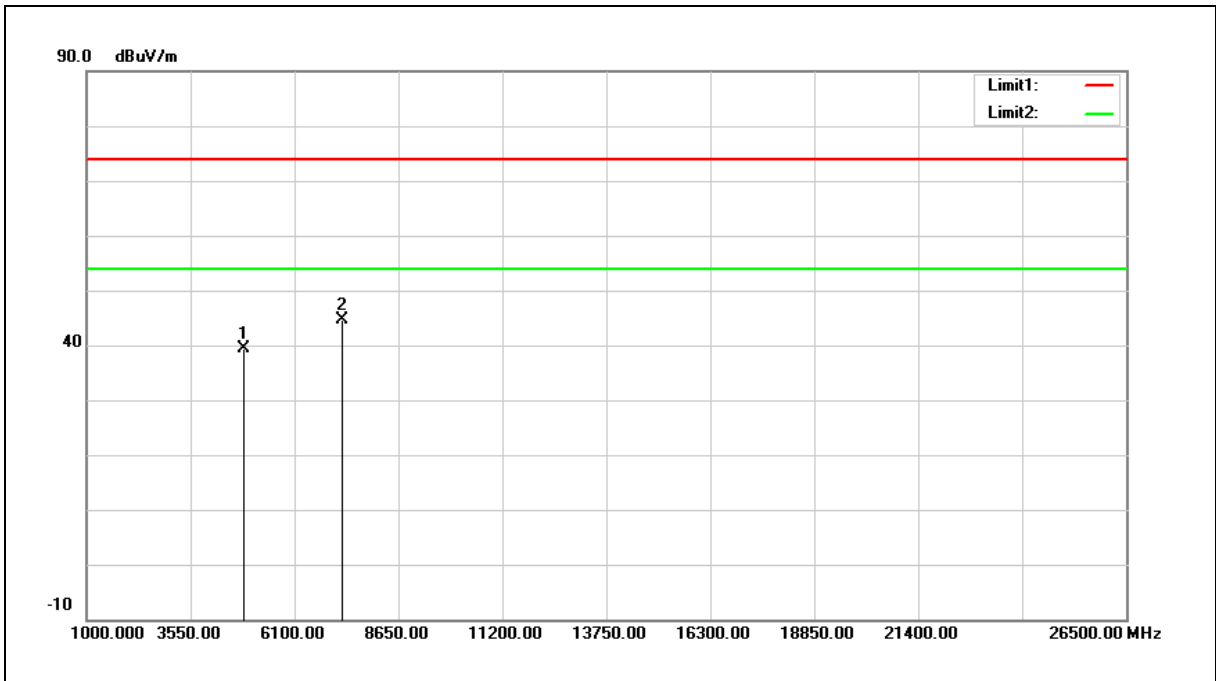

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4844.000	36.49	2.78	39.27	74.00	-34.73	peak
2	7266.000	36.26	8.39	44.65	74.00	-29.35	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.


Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

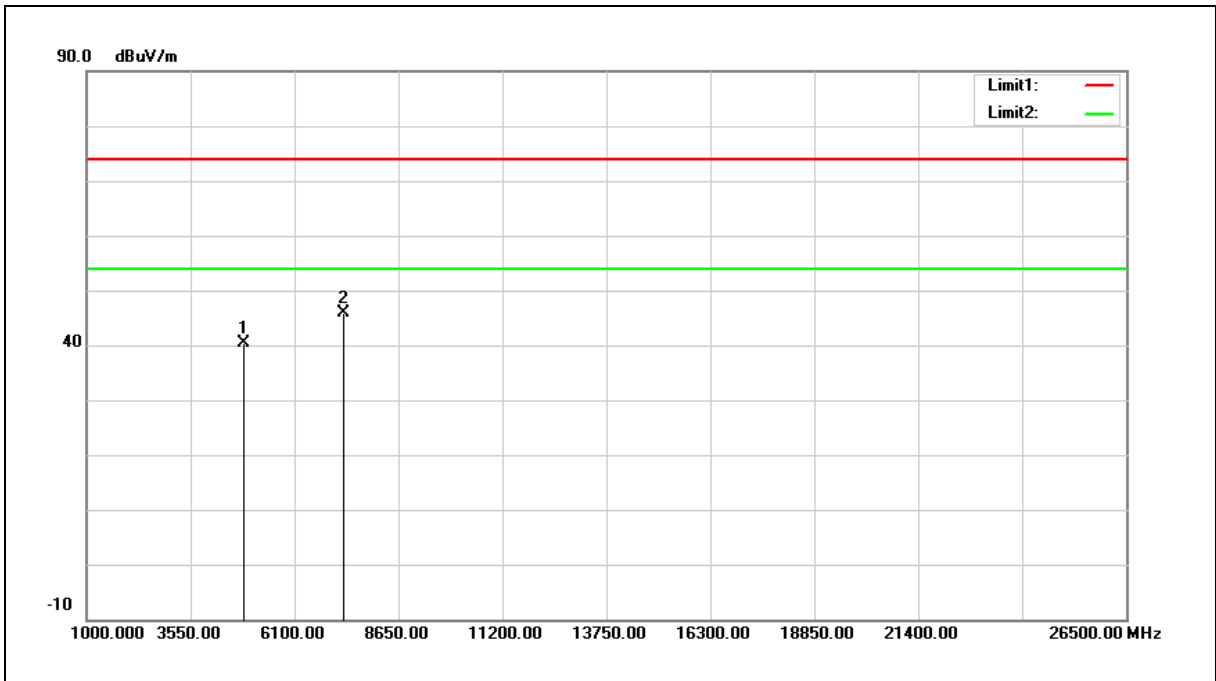

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.45	2.84	40.29	74.00	-33.71	peak
2	7311.000	37.45	8.53	45.98	74.00	-28.02	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.


Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2437 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

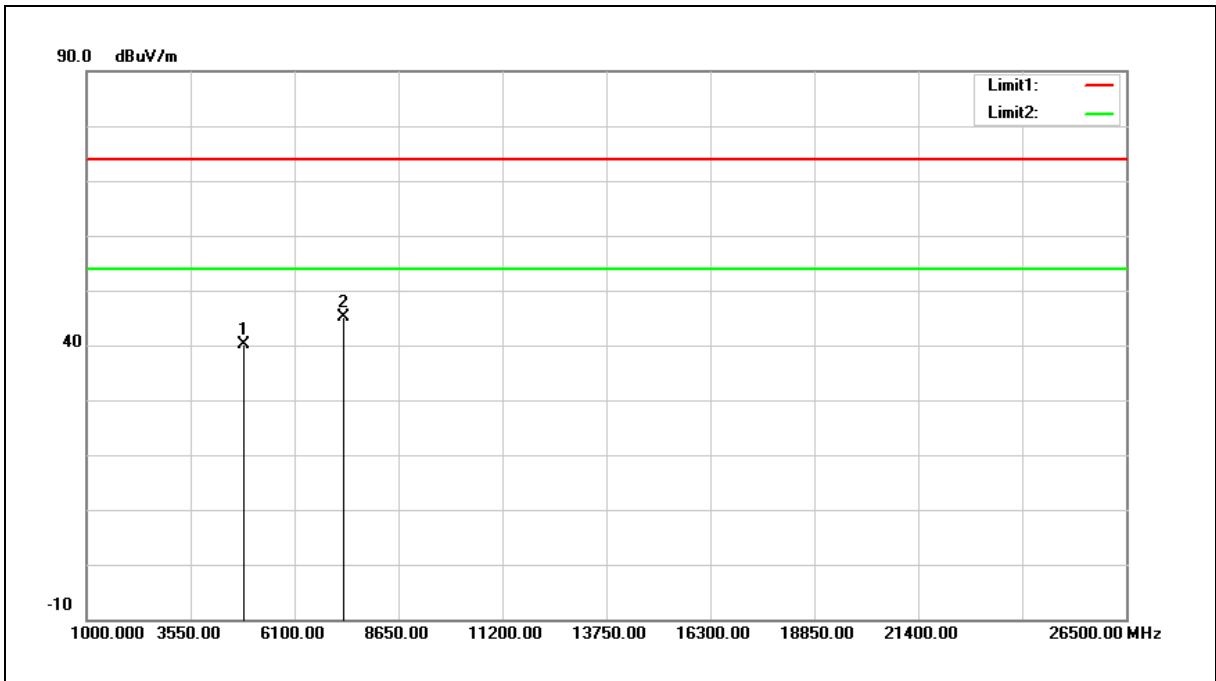

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	37.20	2.84	40.04	74.00	-33.96	peak
2	7311.000	36.67	8.53	45.20	74.00	-28.80	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.


Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

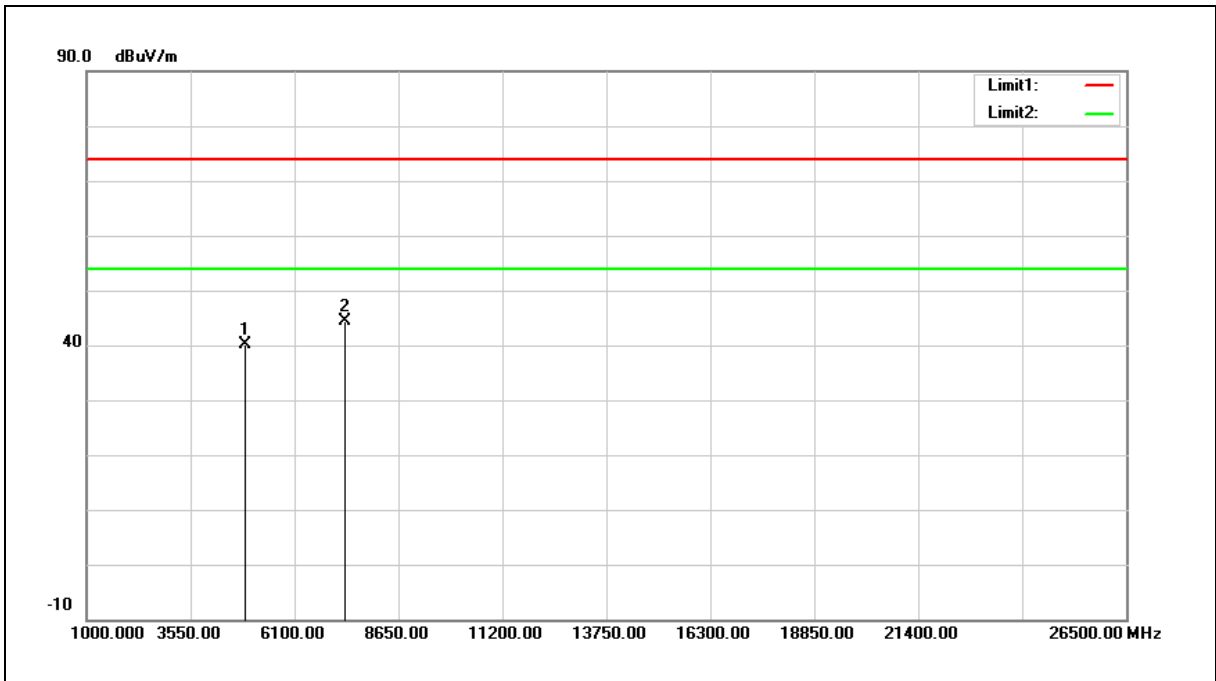

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	37.18	2.91	40.09	74.00	-33.91	peak
2	7356.000	35.76	8.68	44.44	74.00	-29.56	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.


Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Harmonic		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

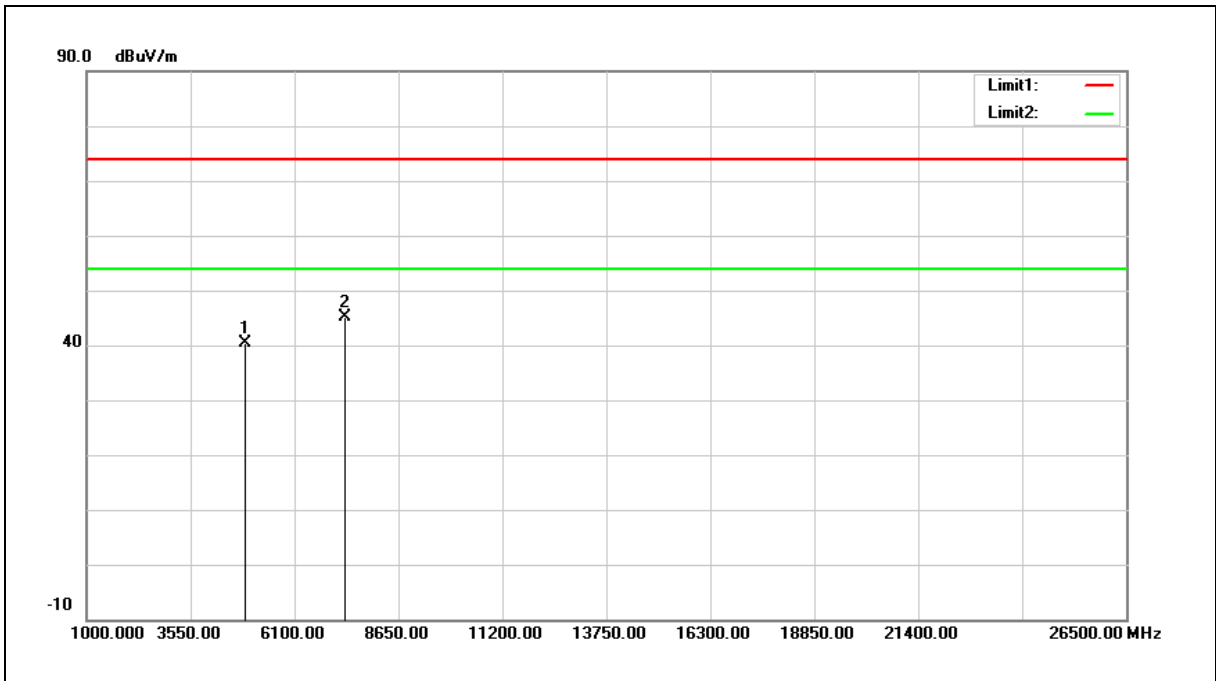

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4904.000	37.42	2.91	40.33	74.00	-33.67	peak
2	7356.000	36.41	8.68	45.09	74.00	-28.91	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.


Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting (Bluetooth + WLAN 2.4 GHz + 5 GHz)		
Ant.Polar.:	Horizontal		

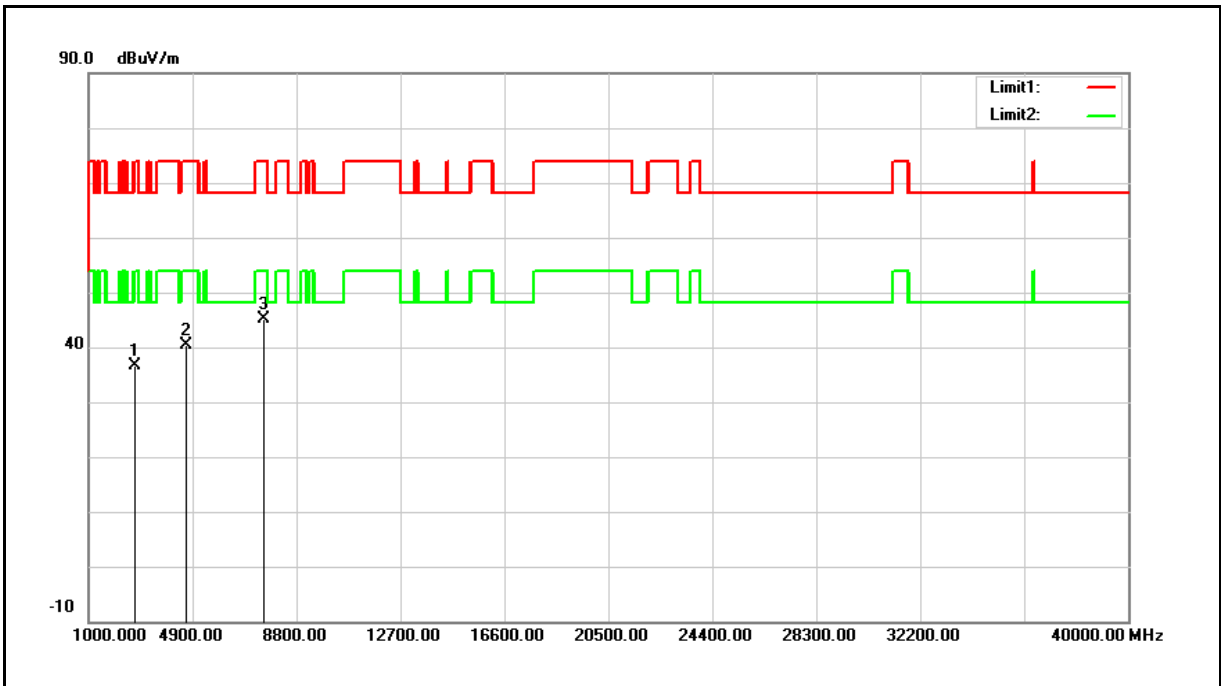

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2751.000	38.81	-2.09	36.72	74.00	-37.28	peak
2	4638.000	38.01	2.27	40.28	74.00	-33.72	peak
3	7579.000	35.90	9.24	45.14	74.00	-28.86	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting (Bluetooth + WLAN 2.4 GHz + 5 GHz)		
Ant.Polar.:	Vertical		

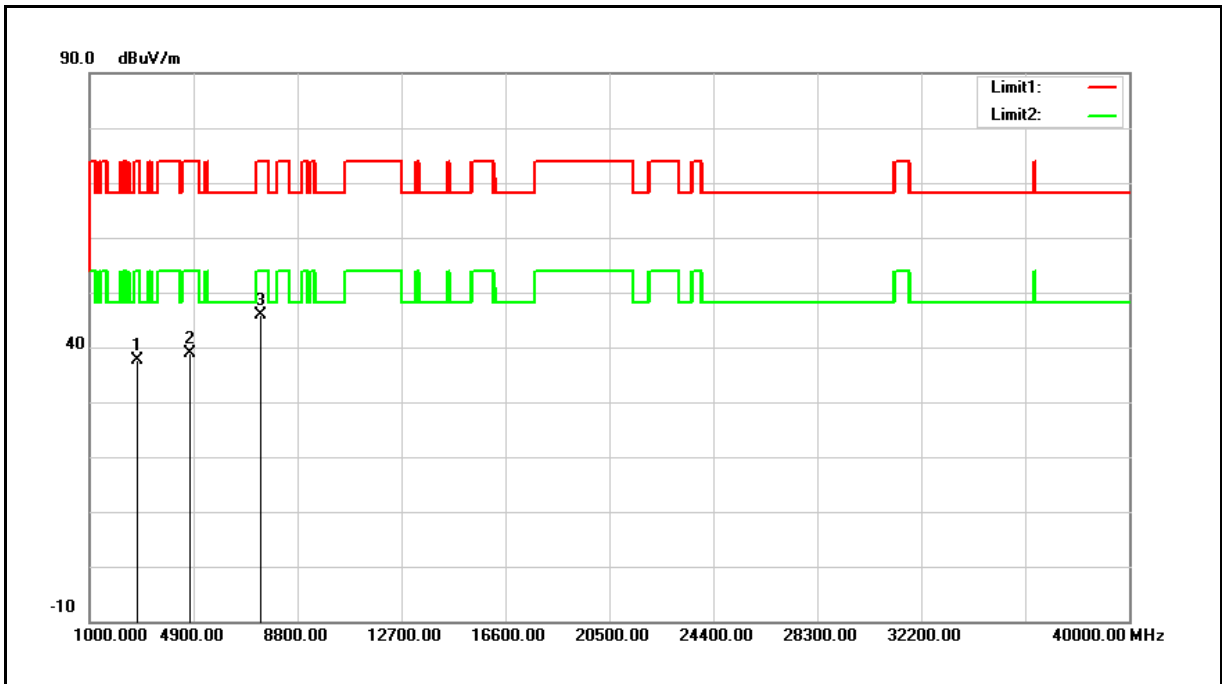


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2785.000	39.53	-1.99	37.54	74.00	-36.46	peak
2	4774.000	36.41	2.59	39.00	74.00	-35.00	peak
3	7375.000	37.12	8.73	45.85	74.00	-28.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.


Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting (Zigbee + WLAN 2.4 GHz + 5 GHz)		
Ant.Polar.:	Horizontal		

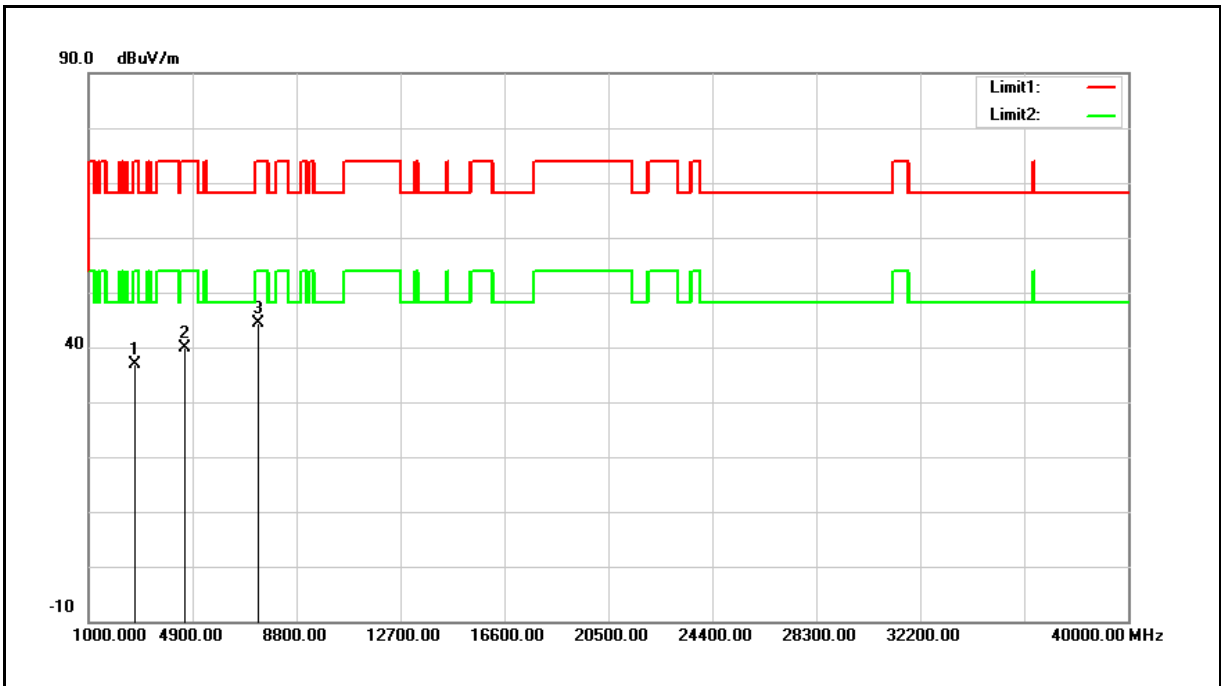

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2734.000	38.91	-2.13	36.78	74.00	-37.22	peak
2	4553.000	37.85	2.07	39.92	74.00	-34.08	peak
3	7341.000	35.68	8.63	44.31	74.00	-29.69	peak

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	LP0002	Test Distance:	3 m
Test item:	Harmonic		
Mode:	Simultaneous Transmitting (Zigbee + WLAN 2.4 GHz + 5 GHz)		
Ant.Polar.:	Vertical		

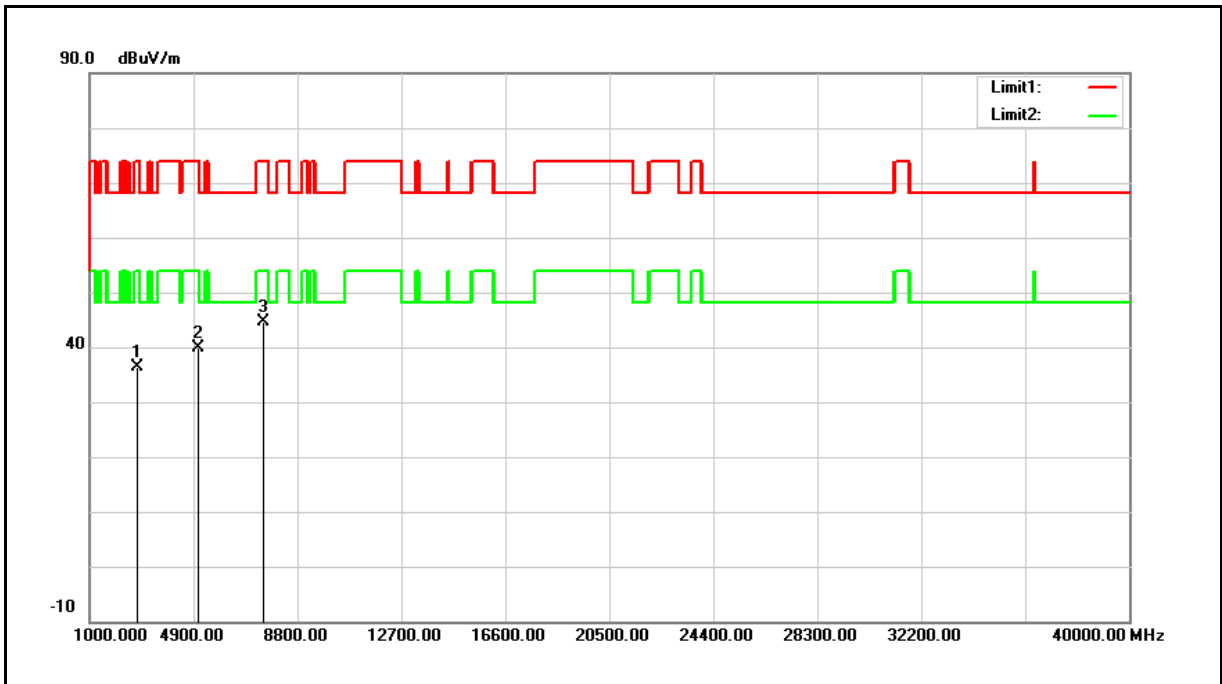

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2802.000	38.25	-1.95	36.30	74.00	-37.70	peak
2	5063.000	36.63	3.23	39.86	74.00	-34.14	peak
3	7545.000	35.55	9.19	44.74	74.00	-29.26	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).


2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Band Edge

Peak

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

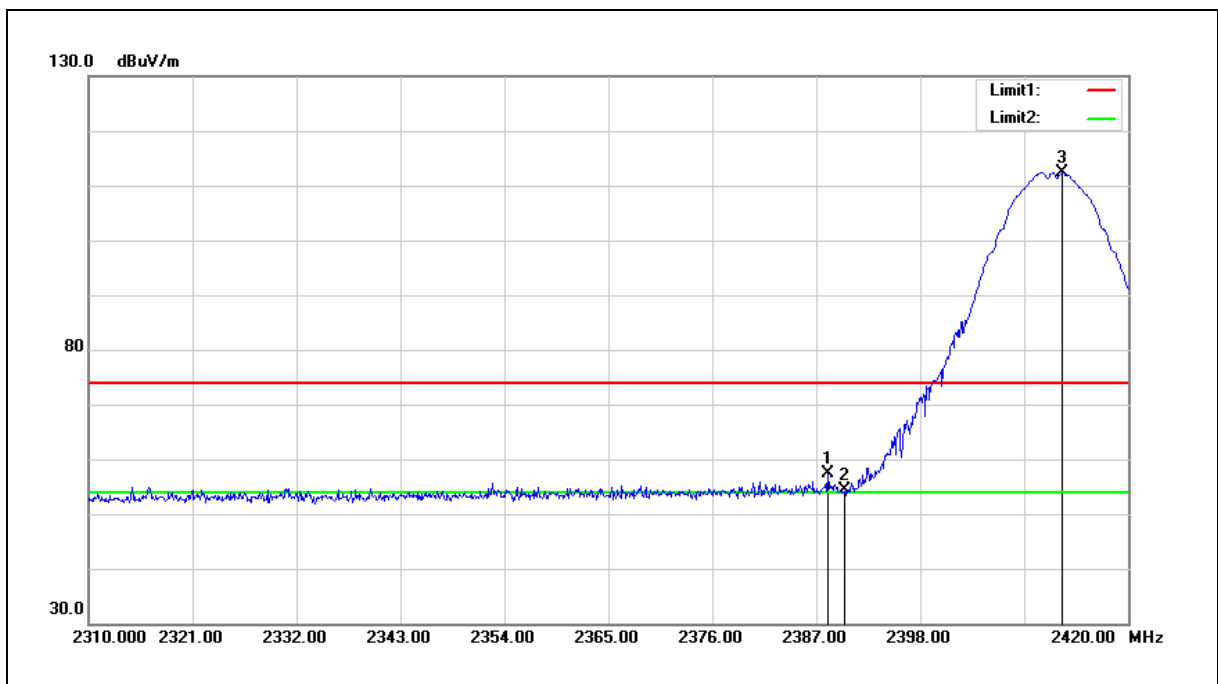


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.210	60.49	-3.19	57.30	74.00	-16.70	peak
2	2390.000	57.58	-3.19	54.39	74.00	-19.61	peak
3	2413.070	115.46	-3.10	112.36	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

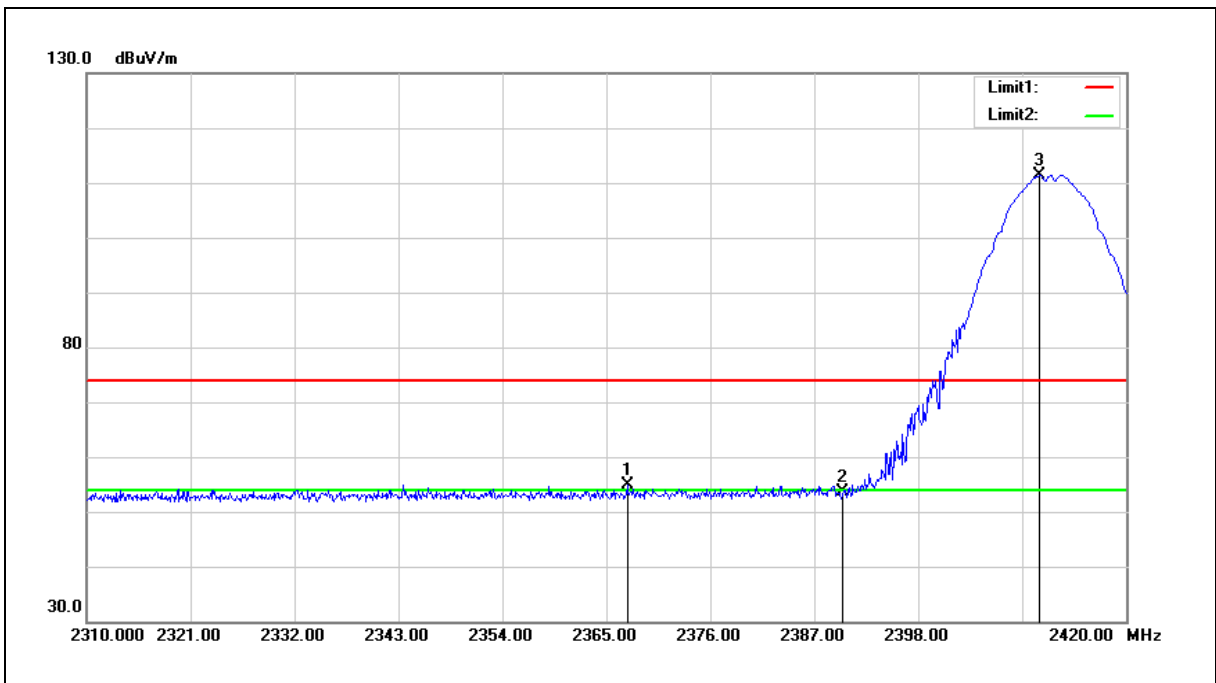


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2367.200	58.25	-3.27	54.98	74.00	-19.02	peak
2	2390.000	56.74	-3.19	53.55	74.00	-20.45	peak
3	2410.870	114.48	-3.12	111.36	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

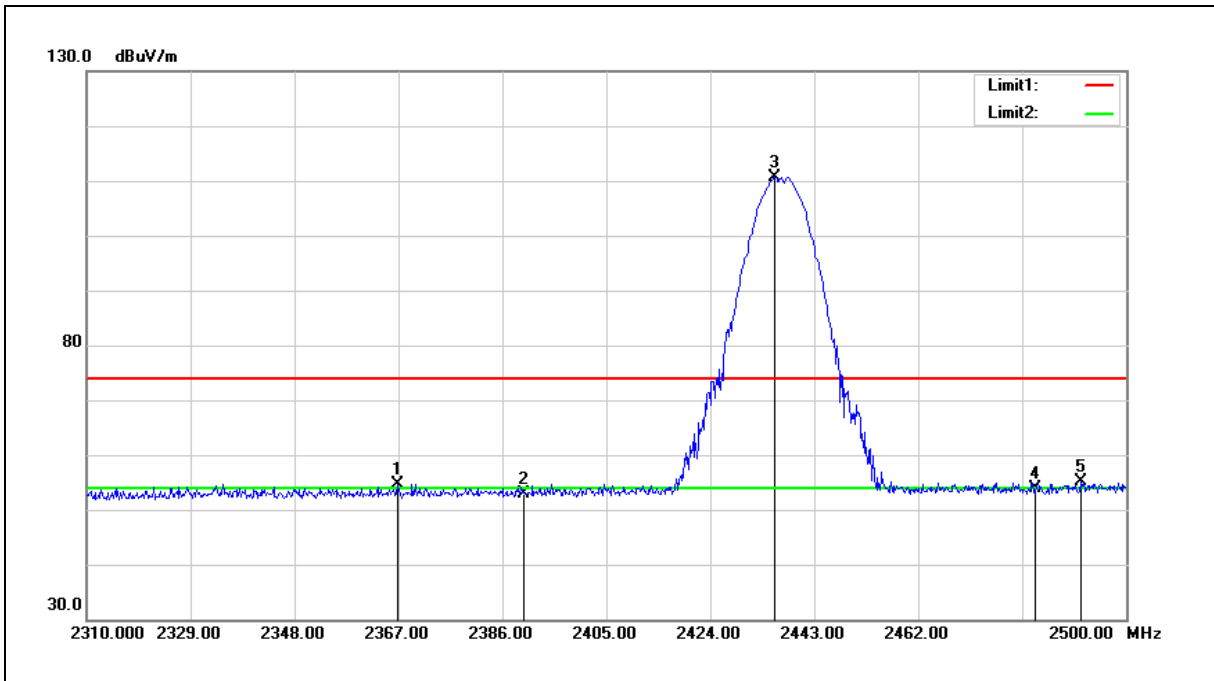


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2366.810	57.90	-3.27	54.63	74.00	-19.37	peak
2	2390.000	55.99	-3.19	52.80	74.00	-21.20	peak
3	2435.780	113.61	-3.03	110.58	--	--	peak
4	2483.500	56.78	-2.86	53.92	74.00	-20.08	peak
5	2491.640	57.97	-2.83	55.14	74.00	-18.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

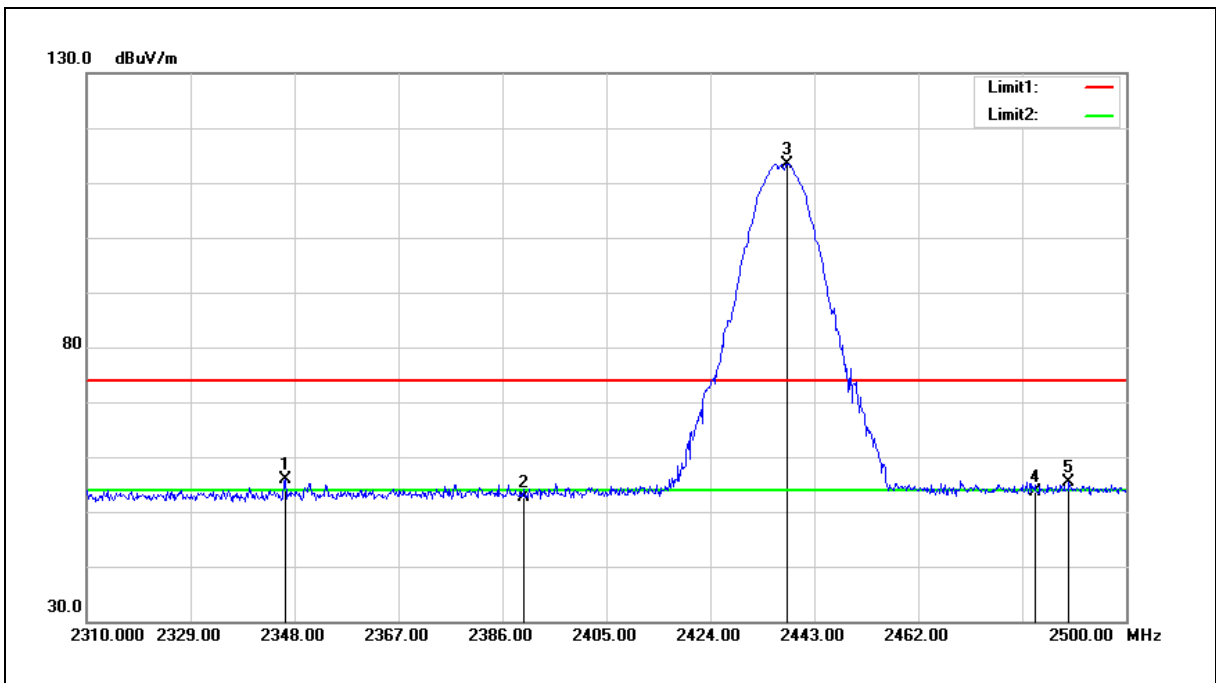


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2346.290	59.09	-3.33	55.76	74.00	-18.24	peak
2	2390.000	55.92	-3.19	52.73	74.00	-21.27	peak
3	2438.060	116.51	-3.02	113.49	--	--	peak
4	2483.500	56.50	-2.86	53.64	74.00	-20.36	peak
5	2489.550	58.10	-2.84	55.26	74.00	-18.74	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

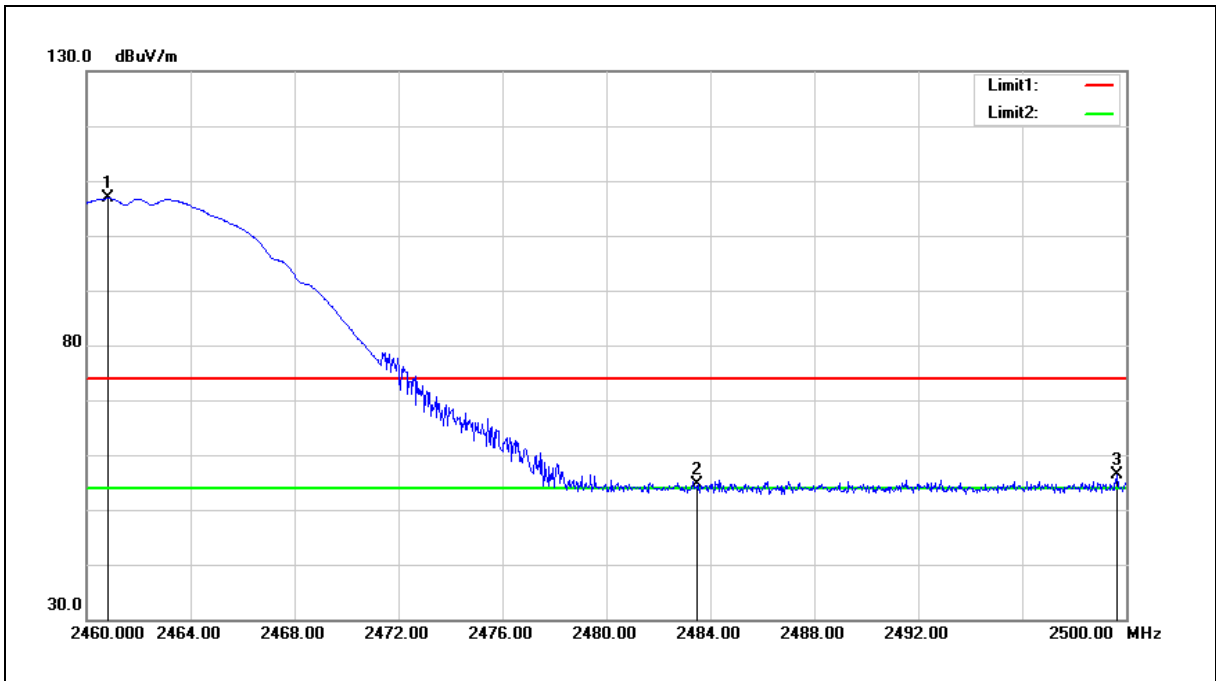


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.800	109.77	-2.94	106.83	--	--	peak
2	2483.500	57.45	-2.86	54.59	74.00	-19.41	peak
3	2499.640	59.17	-2.80	56.37	74.00	-17.63	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

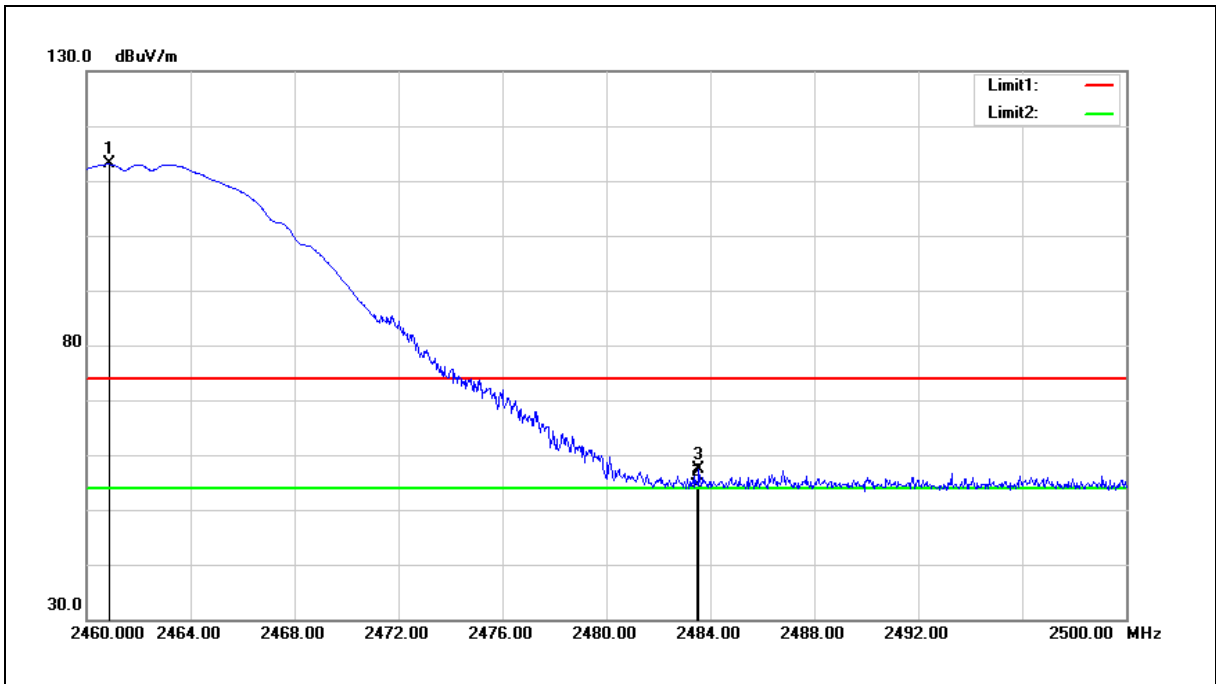


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.880	116.00	-2.94	113.06	--	--	peak
2	2483.500	57.31	-2.86	54.45	74.00	-19.55	peak
3	2483.560	60.30	-2.86	57.44	74.00	-16.56	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

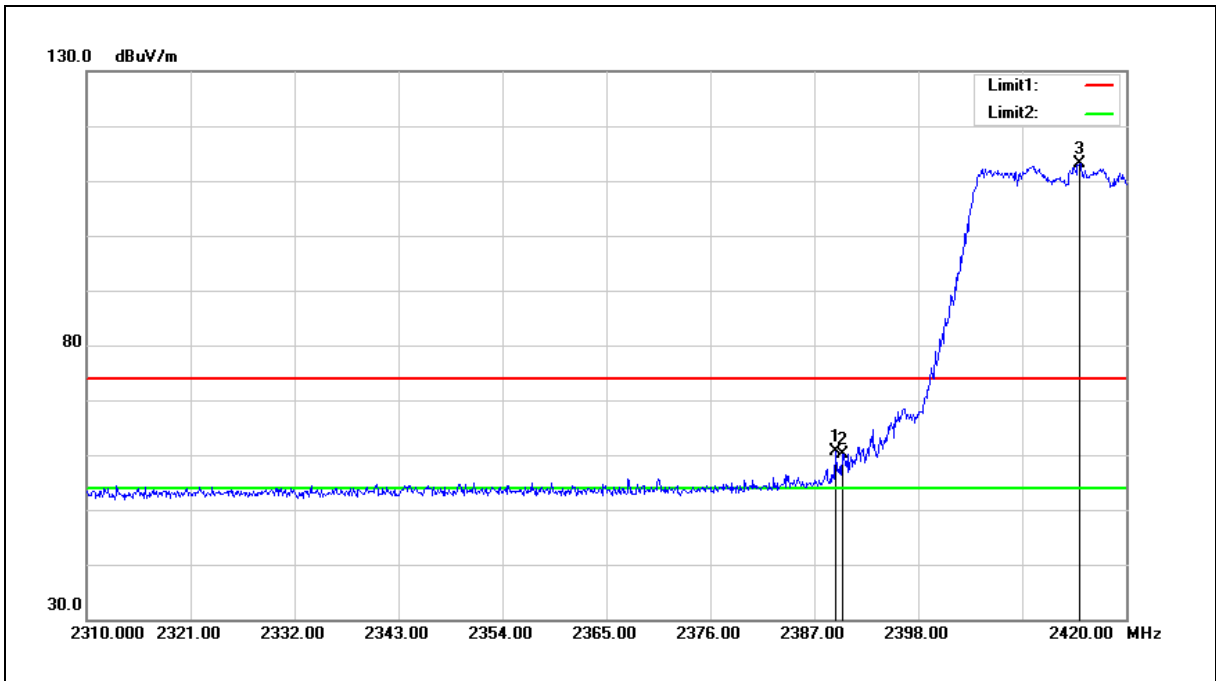


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.310	63.81	-3.19	60.62	74.00	-13.38	peak
2	2390.000	63.21	-3.19	60.02	74.00	-13.98	peak
3	2415.050	116.22	-3.10	113.12	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

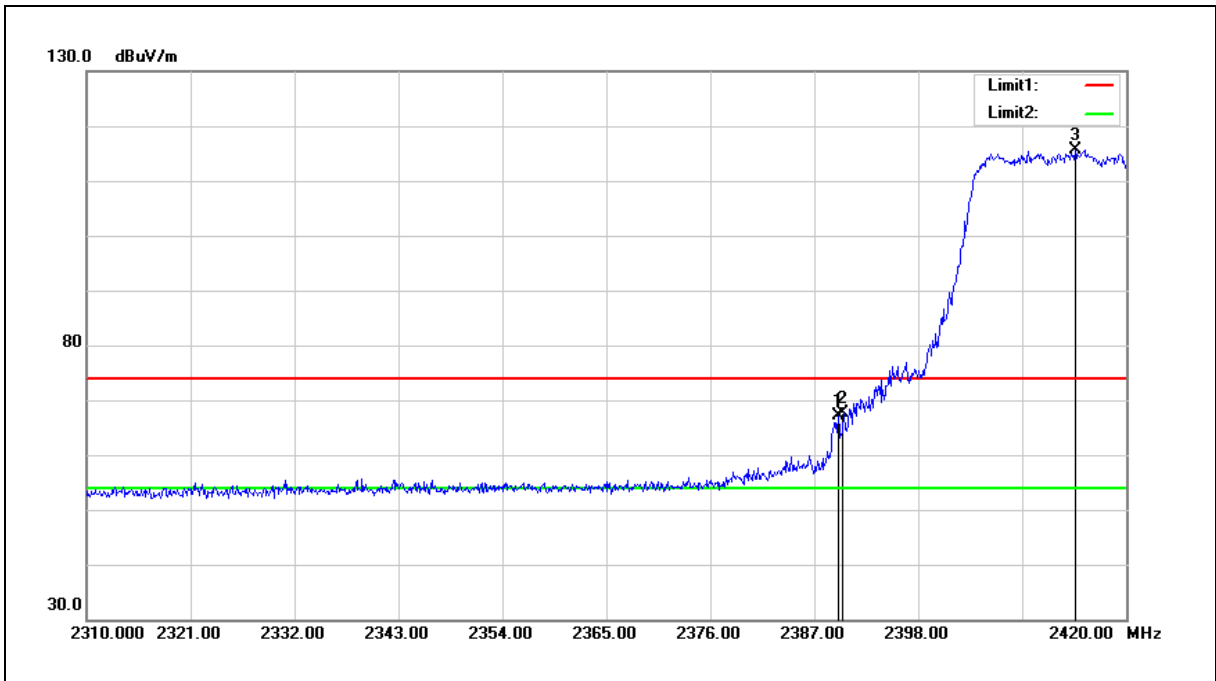


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.530	70.40	-3.19	67.21	74.00	-6.79	peak
2	2390.000	70.72	-3.19	67.53	74.00	-6.47	peak
3	2414.610	118.80	-3.10	115.70	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

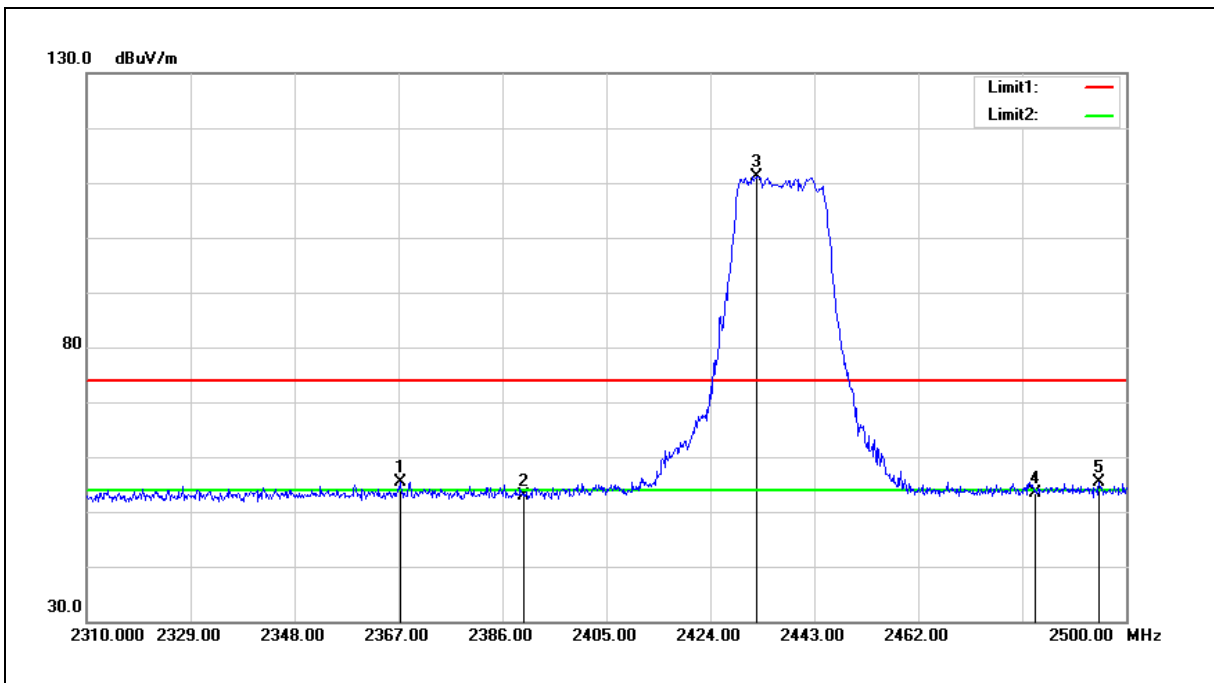


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2367.380	58.58	-3.27	55.31	74.00	-18.69	peak
2	2390.000	56.18	-3.19	52.99	74.00	-21.01	peak
3	2432.360	114.29	-3.04	111.25	--	--	peak
4	2483.500	56.13	-2.86	53.27	74.00	-20.73	peak
5	2495.060	58.08	-2.81	55.27	74.00	-18.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

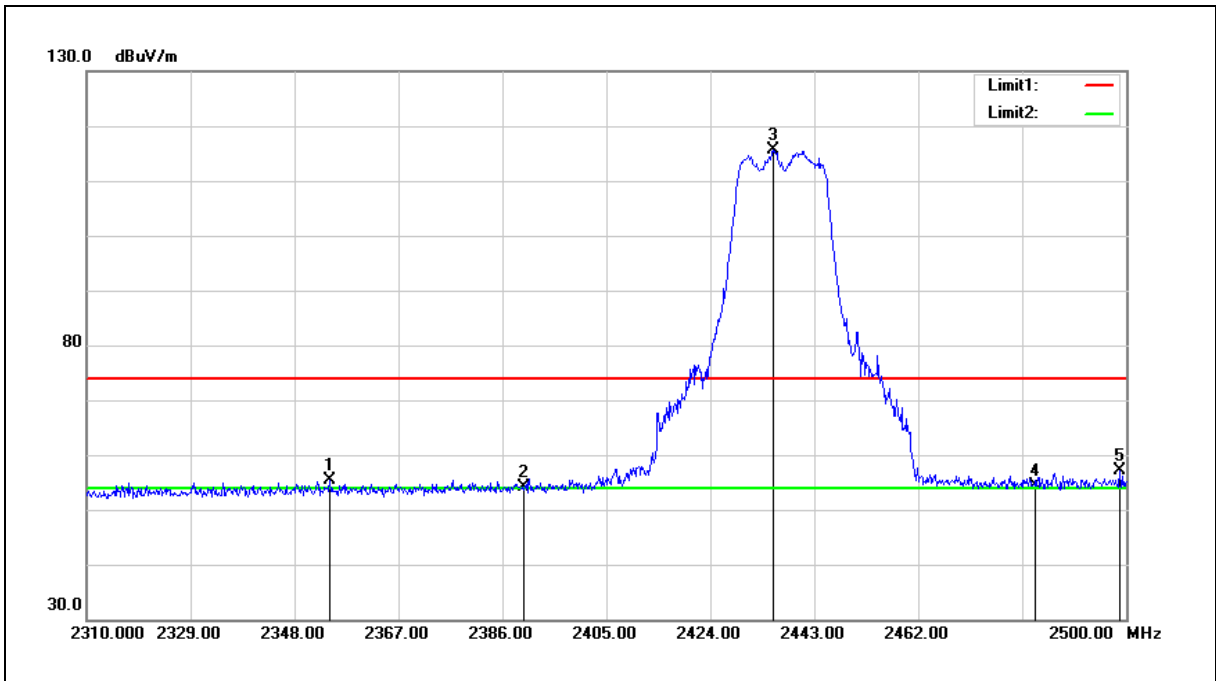


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2354.460	58.70	-3.31	55.39	74.00	-18.61	peak
2	2390.000	57.33	-3.19	54.14	74.00	-19.86	peak
3	2435.400	118.68	-3.03	115.65	--	--	peak
4	2483.500	57.17	-2.86	54.31	74.00	-19.69	peak
5	2498.860	59.85	-2.80	57.05	74.00	-16.95	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

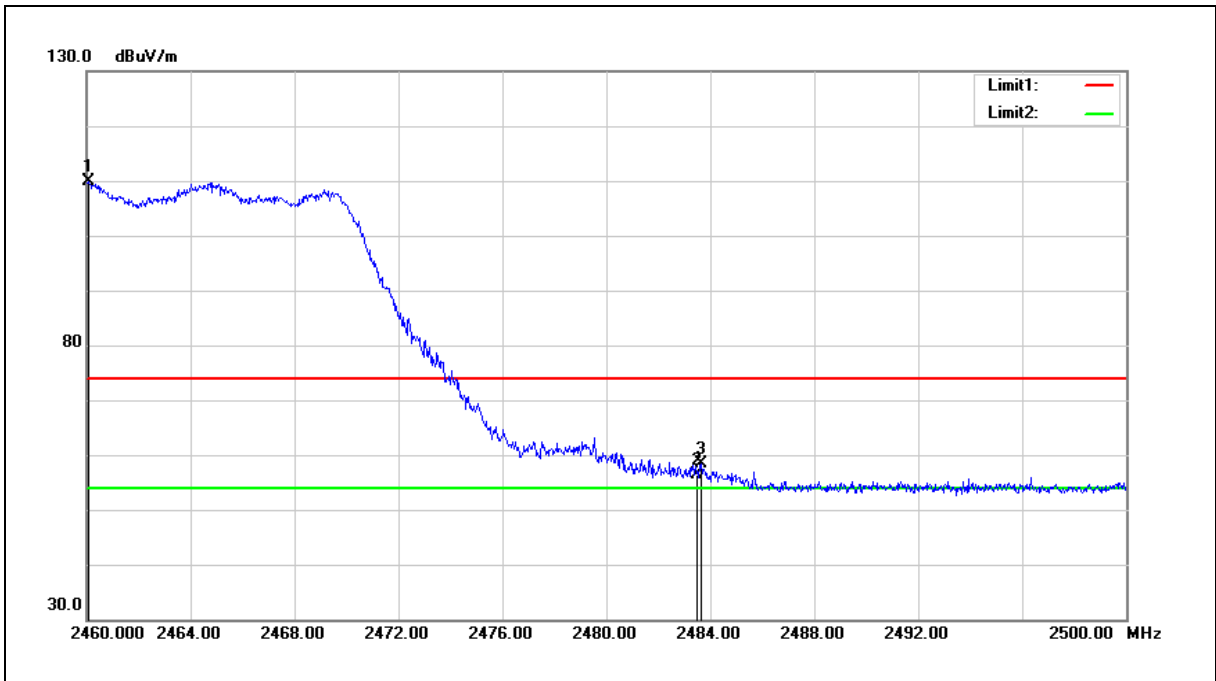


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.080	112.70	-2.94	109.76	--	--	peak
2	2483.500	59.31	-2.86	56.45	74.00	-17.55	peak
3	2483.640	61.13	-2.86	58.27	74.00	-15.73	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

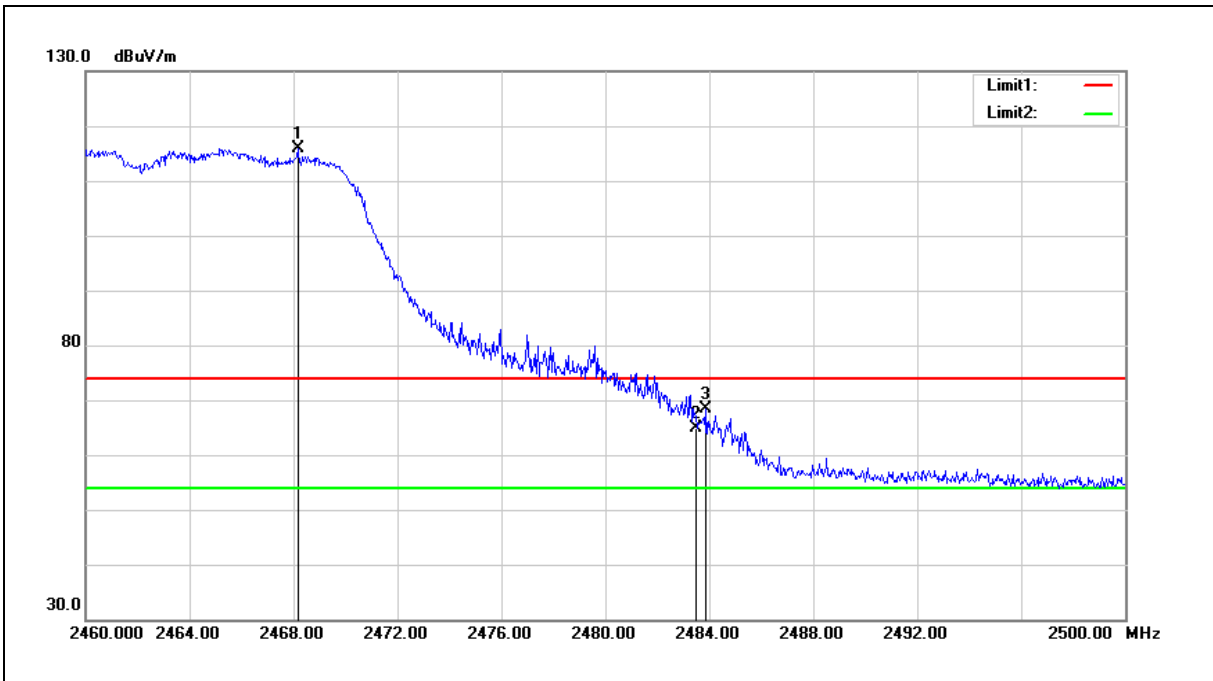


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2468.160	118.78	-2.91	115.87	--	--	peak
2	2483.500	67.64	-2.86	64.78	74.00	-9.22	peak
3	2483.880	71.26	-2.86	68.40	74.00	-5.60	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

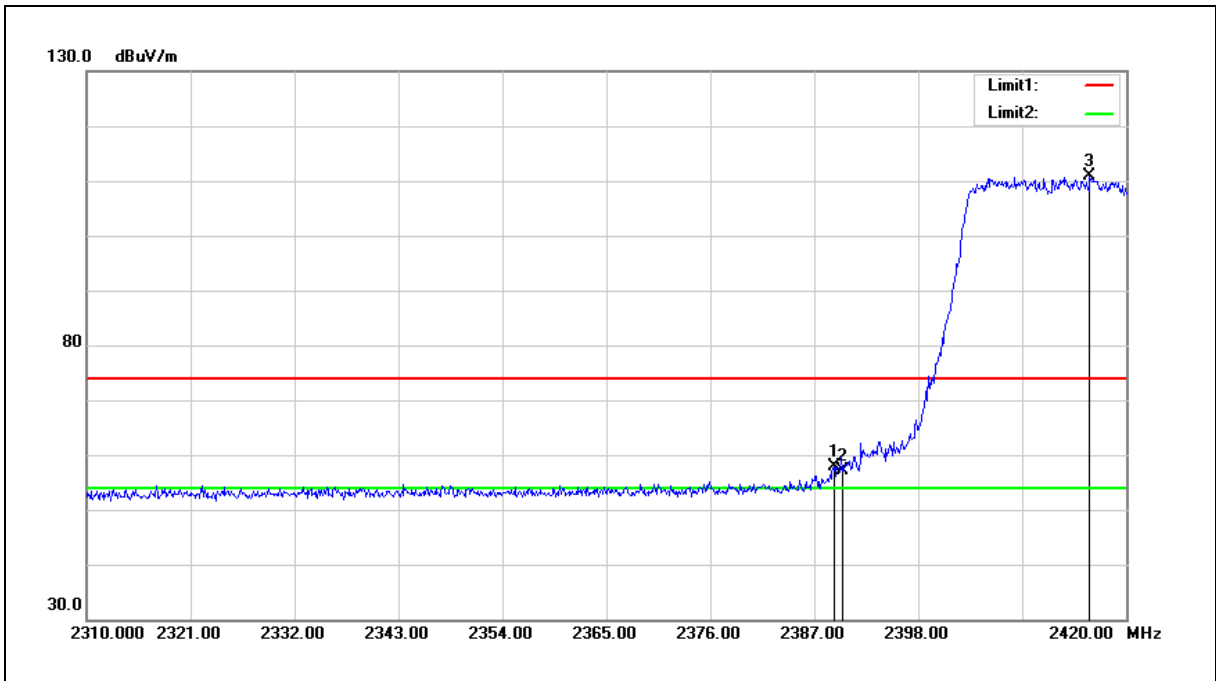


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.090	61.14	-3.19	57.95	74.00	-16.05	peak
2	2390.000	60.29	-3.19	57.10	74.00	-16.90	peak
3	2416.150	114.05	-3.09	110.96	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

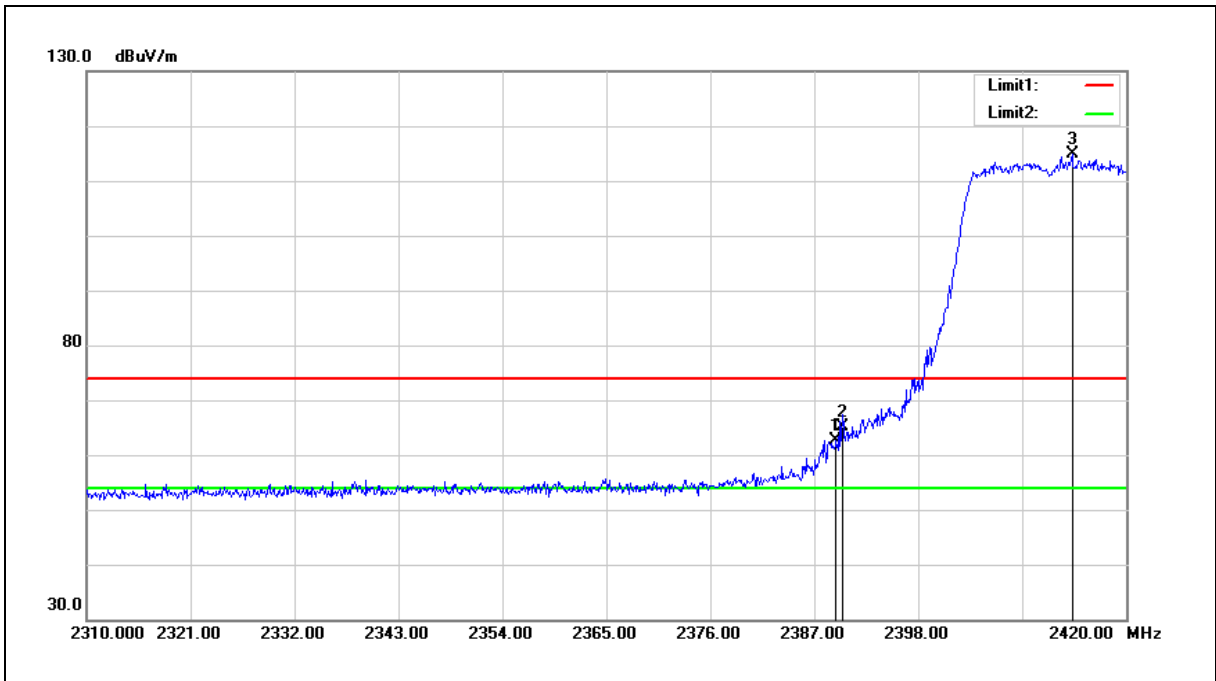


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.310	65.91	-3.19	62.72	74.00	-11.28	peak
2	2390.000	68.27	-3.19	65.08	74.00	-8.92	peak
3	2414.280	118.00	-3.10	114.90	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

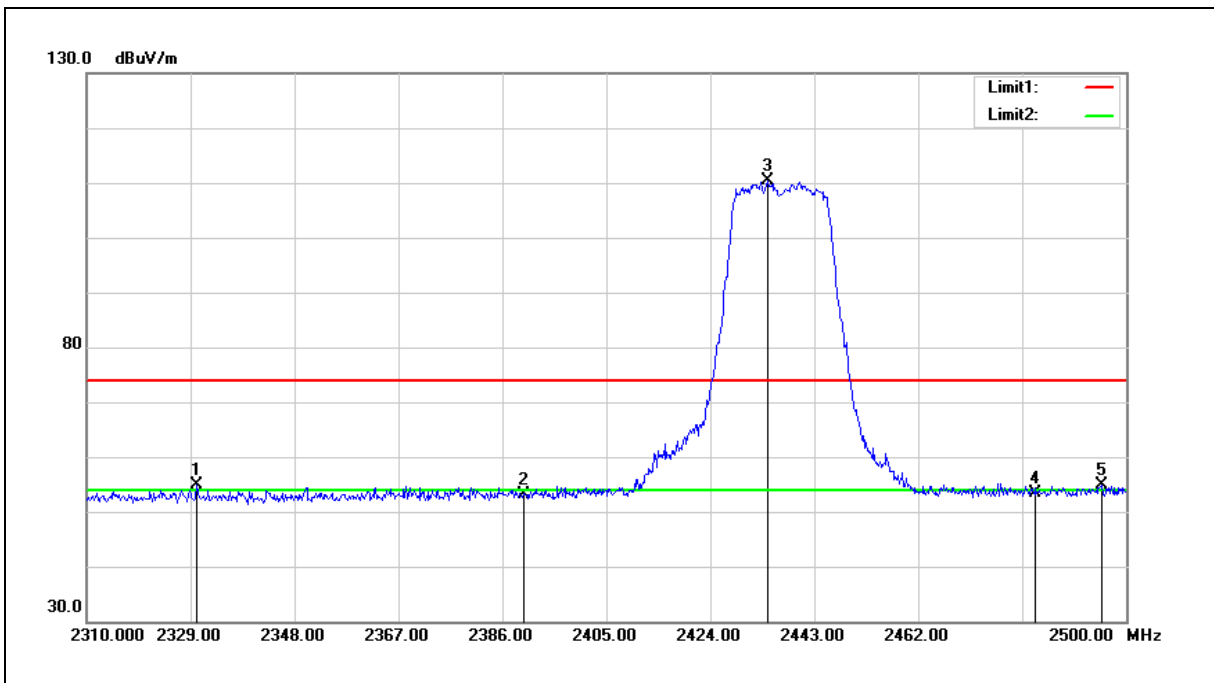


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2330.140	58.24	-3.40	54.84	74.00	-19.16	peak
2	2390.000	56.41	-3.19	53.22	74.00	-20.78	peak
3	2434.450	113.50	-3.03	110.47	--	--	peak
4	2483.500	56.31	-2.86	53.45	74.00	-20.55	peak
5	2495.630	57.66	-2.81	54.85	74.00	-19.15	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

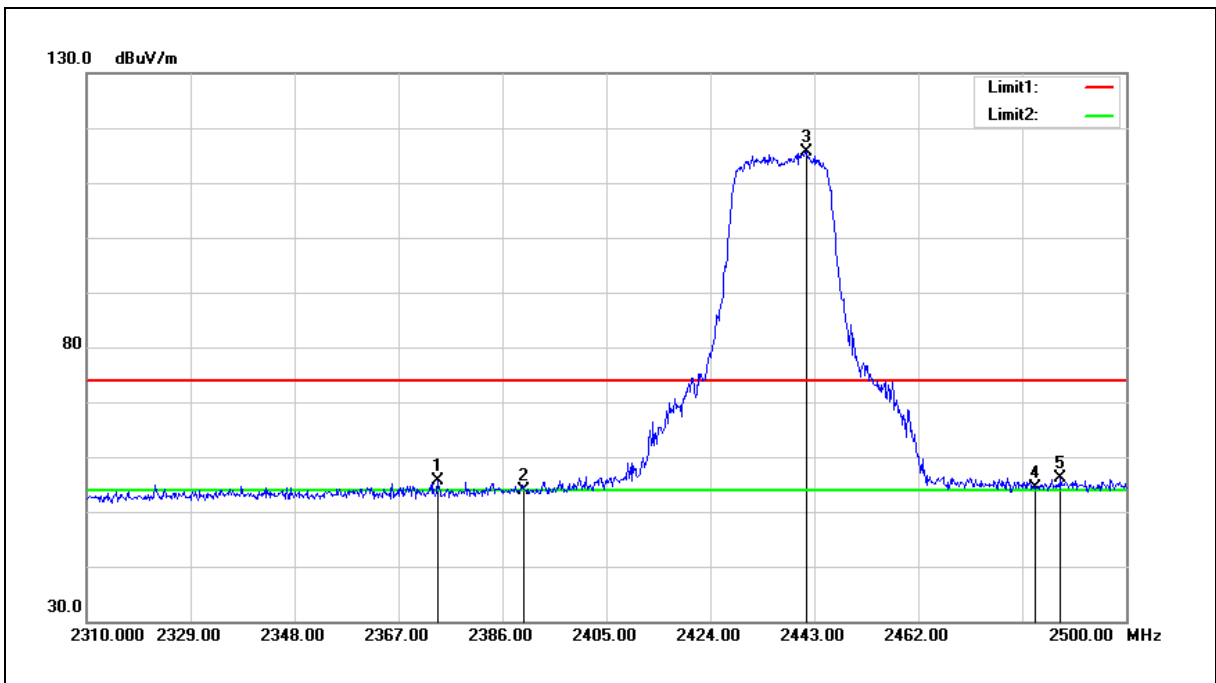


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2374.220	58.75	-3.24	55.51	74.00	-18.49	peak
2	2390.000	56.95	-3.19	53.76	74.00	-20.24	peak
3	2441.480	118.64	-3.00	115.64	--	--	peak
4	2483.500	57.16	-2.86	54.30	74.00	-19.70	peak
5	2488.030	58.87	-2.84	56.03	74.00	-17.97	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

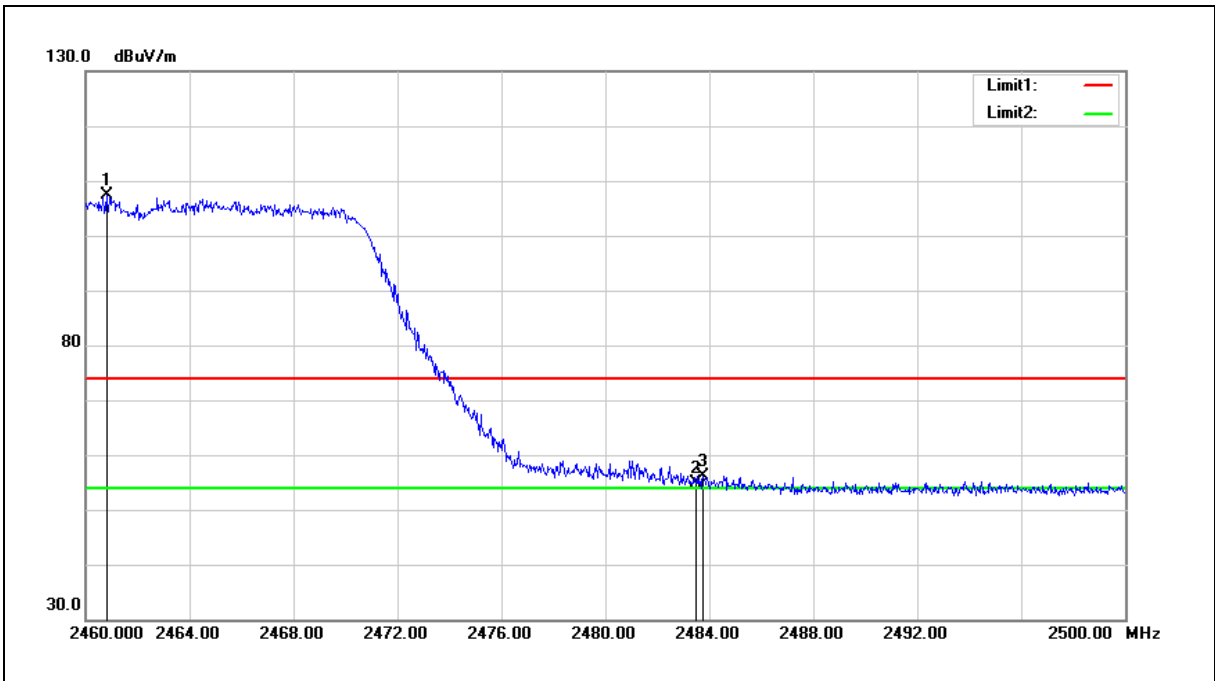


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2460.800	110.30	-2.94	107.36	--	--	peak
2	2483.500	57.70	-2.86	54.84	74.00	-19.16	peak
3	2483.760	59.00	-2.86	56.14	74.00	-17.86	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

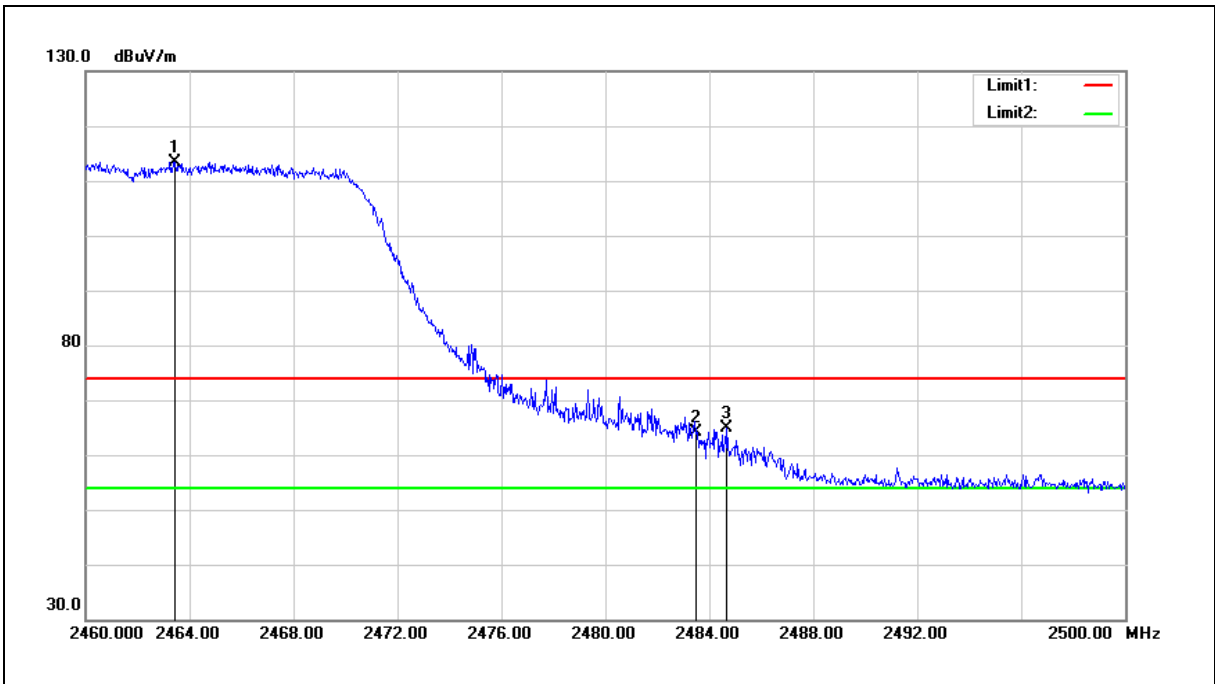


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.440	116.36	-2.93	113.43	--	--	peak
2	2483.500	66.87	-2.86	64.01	74.00	-9.99	peak
3	2484.680	67.69	-2.85	64.84	74.00	-9.16	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

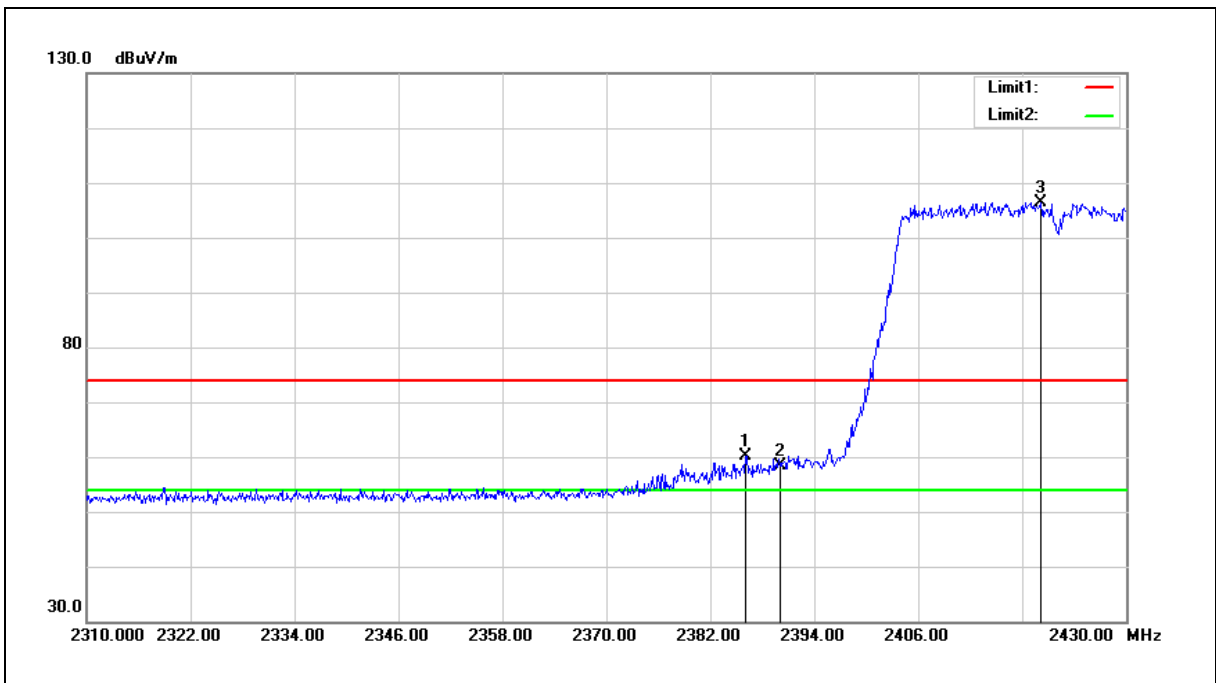


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.080	63.32	-3.20	60.12	74.00	-13.88	peak
2	2390.000	61.56	-3.19	58.37	74.00	-15.63	peak
3	2420.160	109.56	-3.08	106.48	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

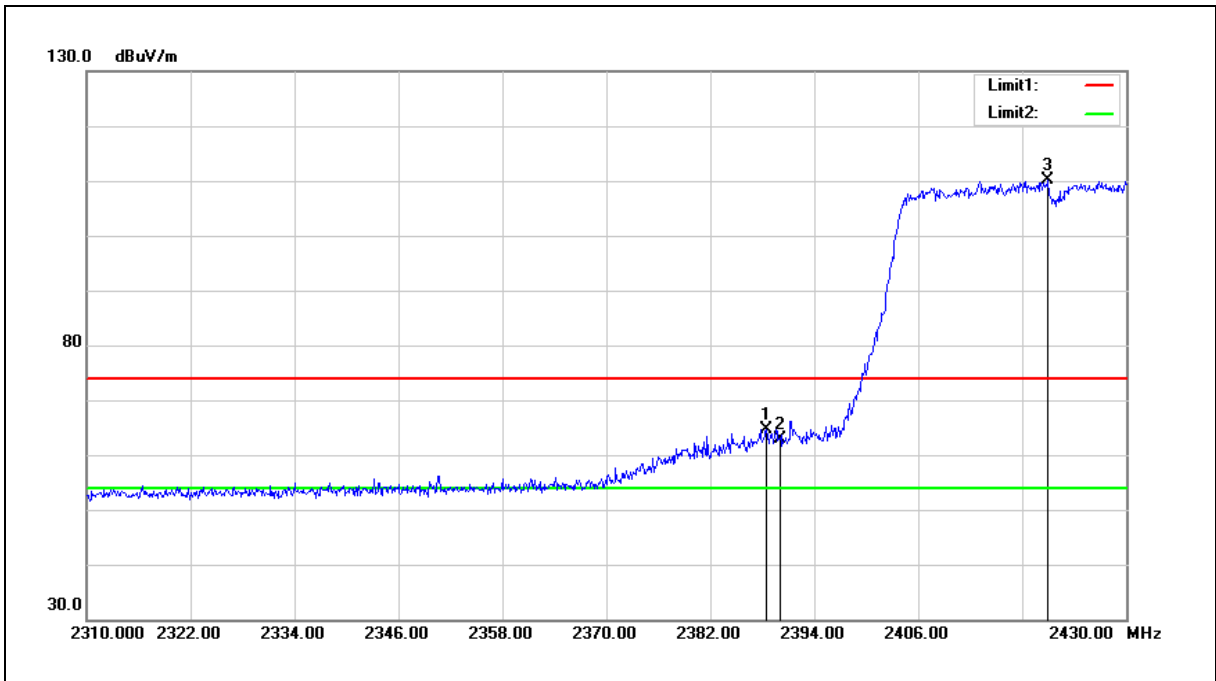


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.480	67.78	-3.19	64.59	74.00	-9.41	peak
2	2390.000	66.19	-3.19	63.00	74.00	-11.00	peak
3	2421.000	113.28	-3.08	110.20	--	--	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

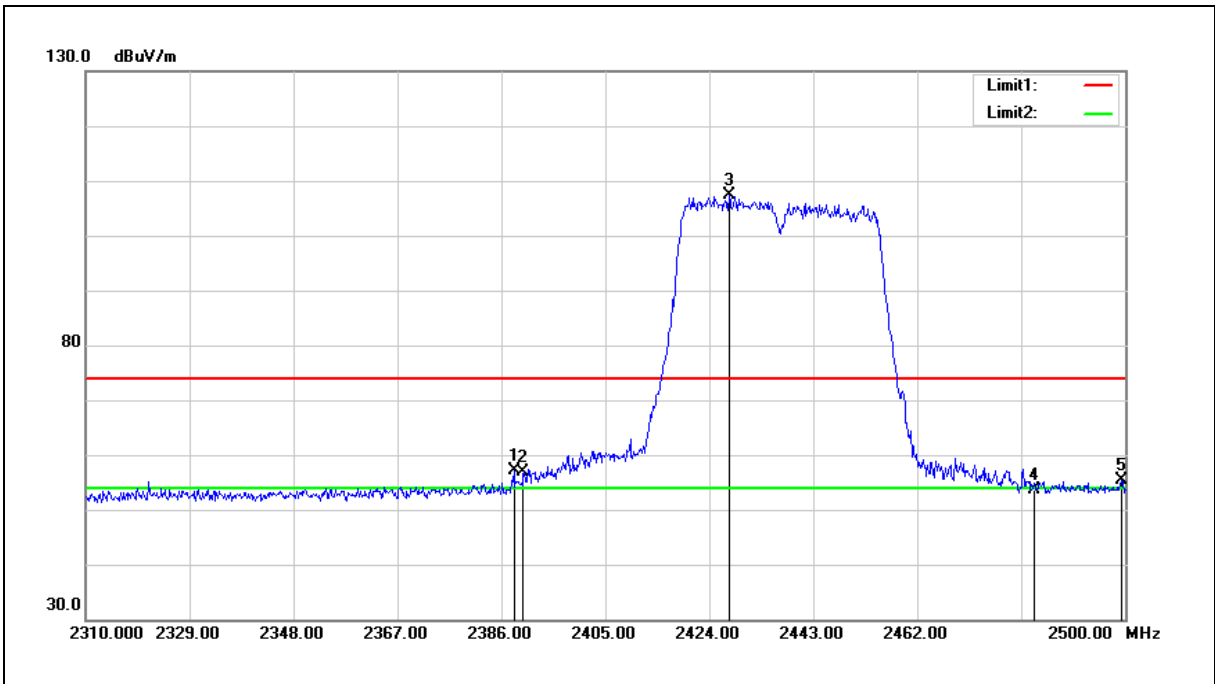


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.280	60.43	-3.19	57.24	74.00	-16.76	peak
2	2390.000	60.15	-3.19	56.96	74.00	-17.04	peak
3	2427.610	110.48	-3.05	107.43	--	--	peak
4	2483.500	56.39	-2.86	53.53	74.00	-20.47	peak
5	2499.240	58.23	-2.80	55.43	74.00	-18.57	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

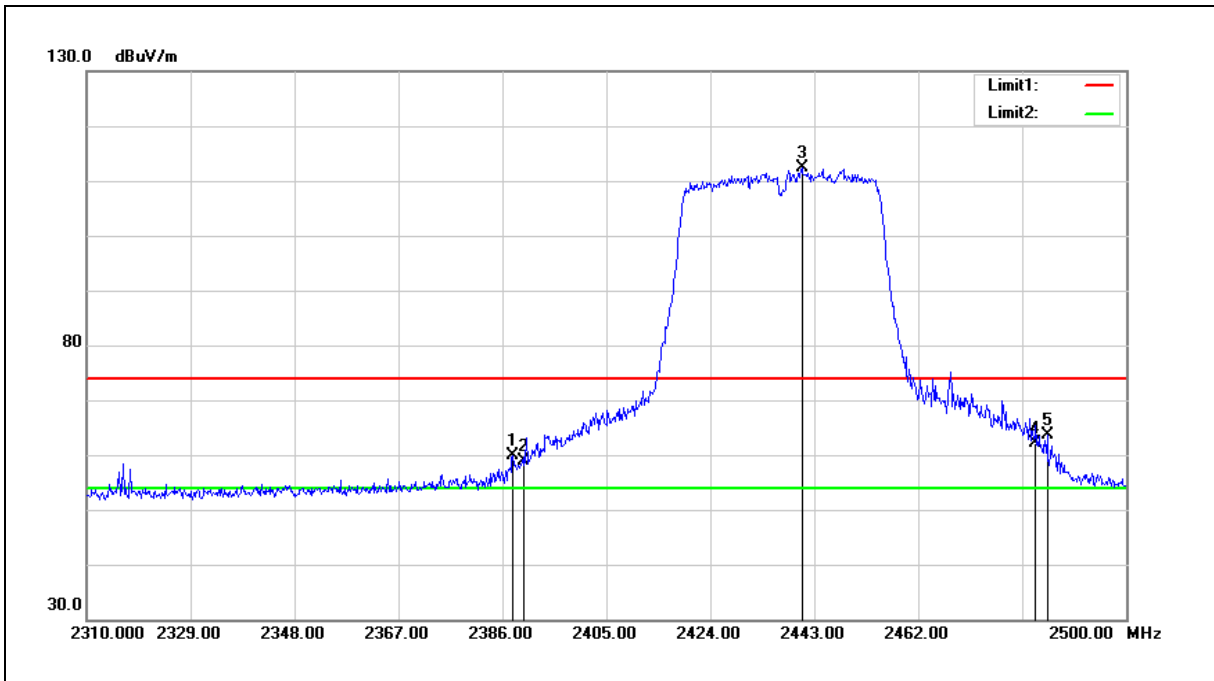


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.900	62.97	-3.19	59.78	74.00	-14.22	peak
2	2390.000	62.02	-3.19	58.83	74.00	-15.17	peak
3	2440.720	115.43	-3.01	112.42	--	--	peak
4	2483.500	64.95	-2.86	62.09	74.00	-11.91	peak
5	2485.560	66.45	-2.85	63.60	74.00	-10.40	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

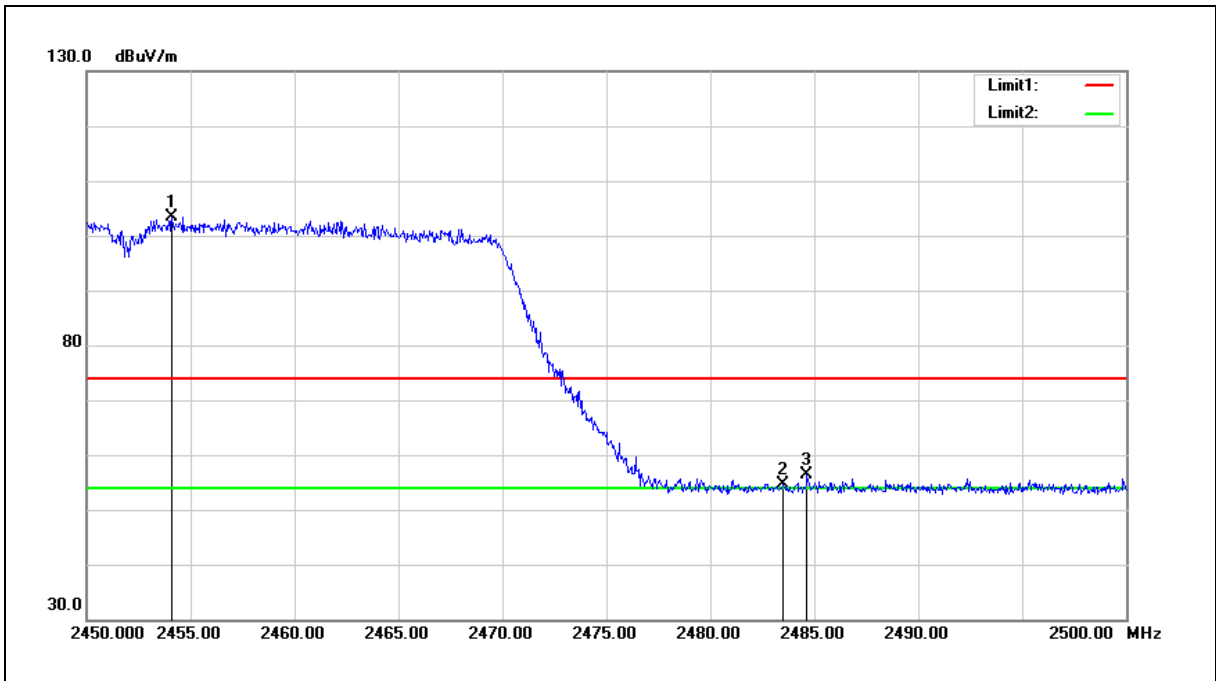


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2454.100	106.26	-2.96	103.30	--	--	peak
2	2483.500	57.56	-2.86	54.70	74.00	-19.30	peak
3	2484.650	59.26	-2.85	56.41	74.00	-17.59	peak

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

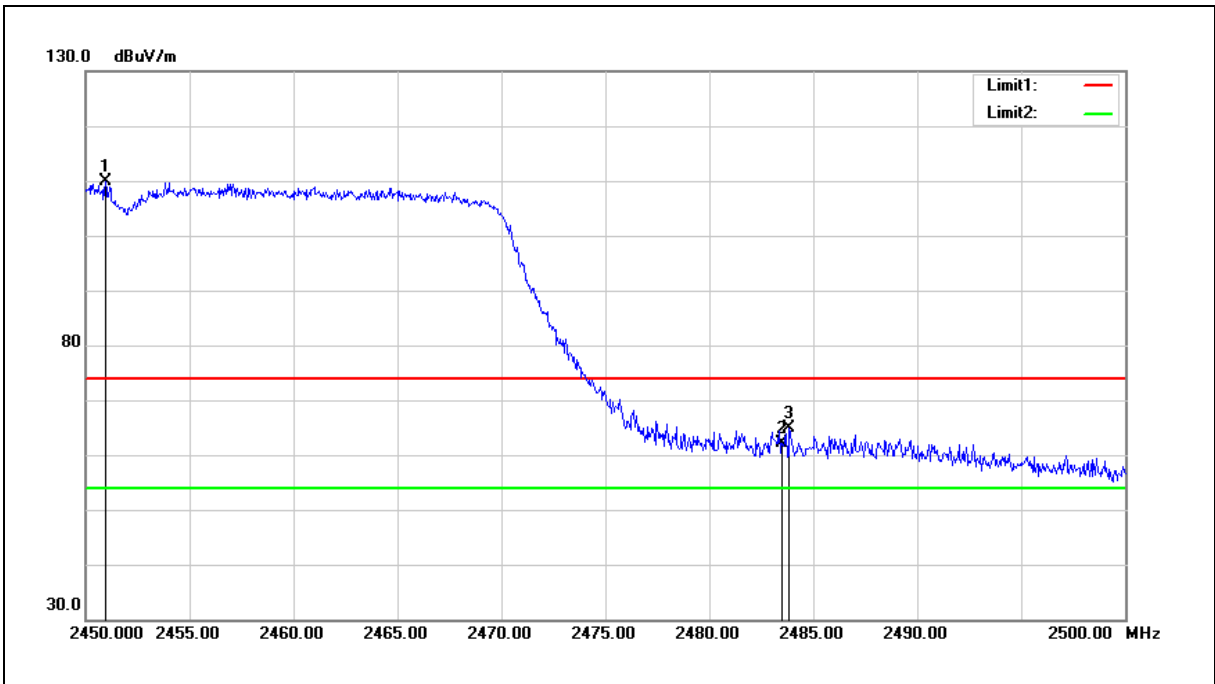

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2450.950	112.79	-2.98	109.81	--	--	peak
2	2483.500	64.95	-2.86	62.09	74.00	-11.91	peak
3	2483.850	67.72	-2.86	64.86	74.00	-9.14	peak


Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

AVG

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

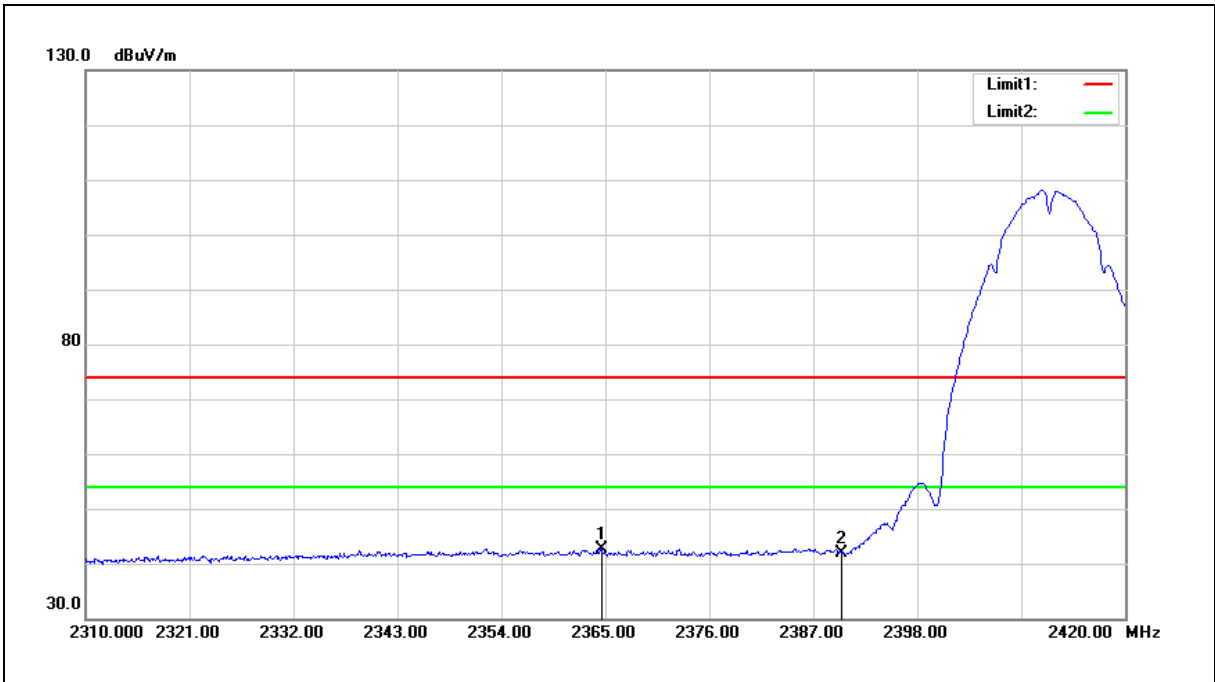


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2364.560	46.03	-3.28	42.75	54.00	-11.25	AVG
2	2390.000	44.98	-3.19	41.79	54.00	-12.21	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

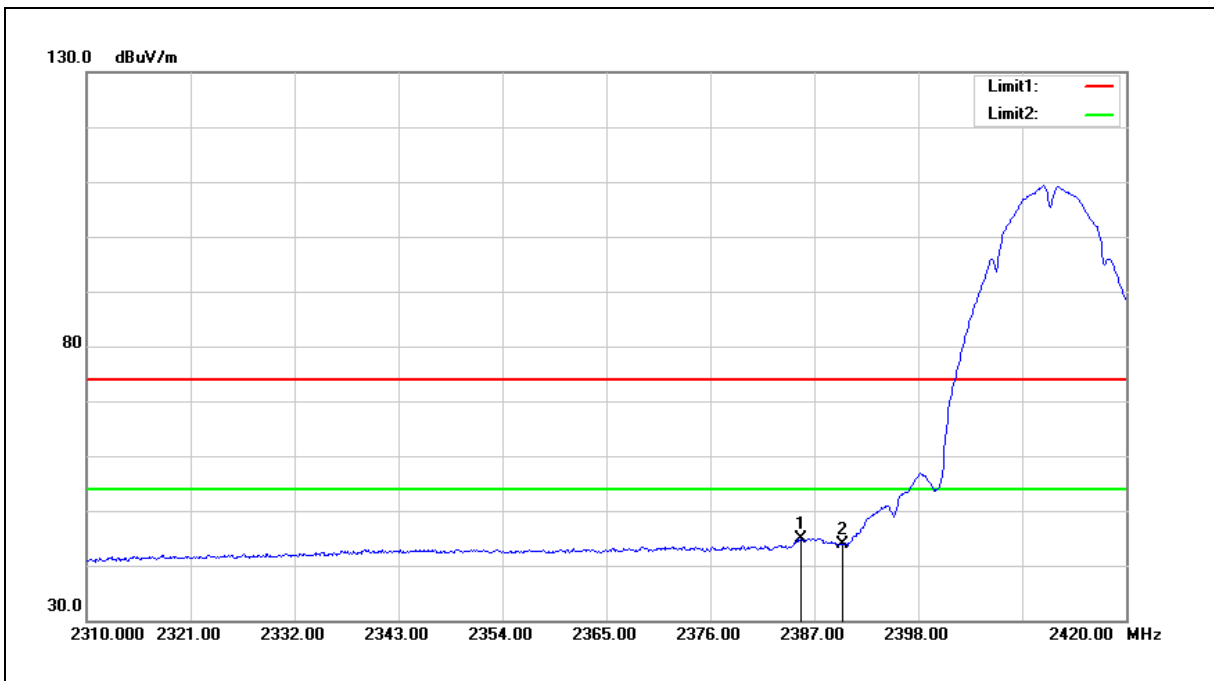


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.570	48.19	-3.20	44.99	54.00	-9.01	AVG
2	2390.000	46.95	-3.19	43.76	54.00	-10.24	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

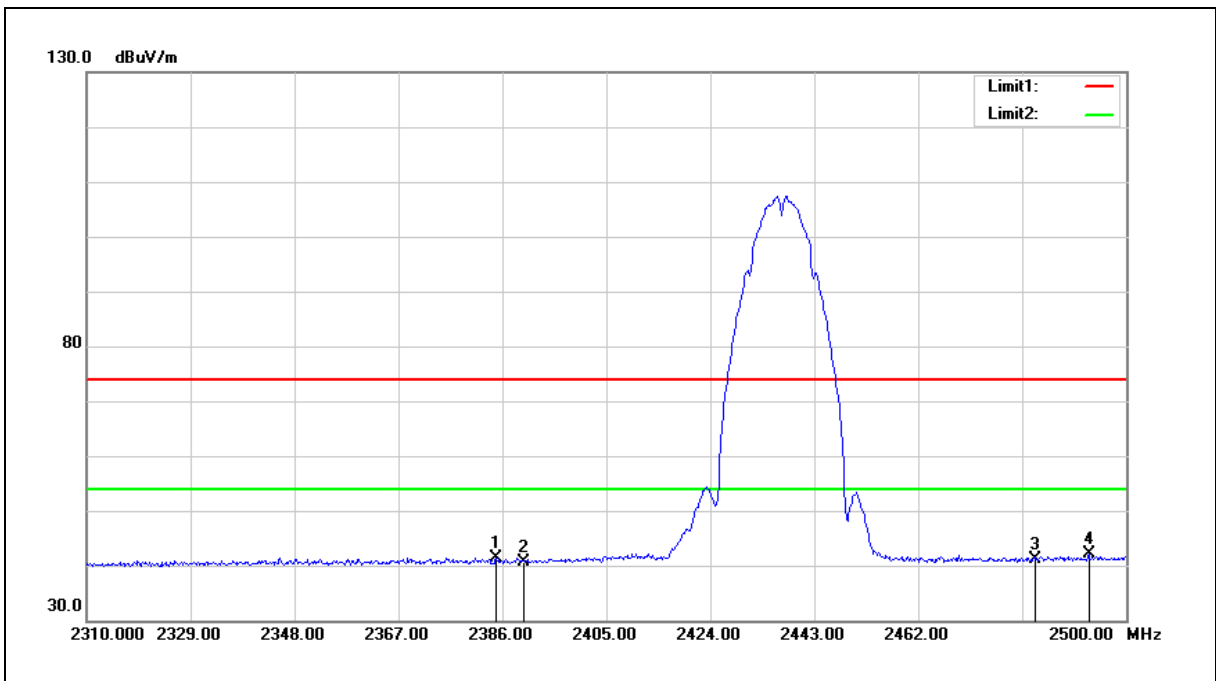


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2384.860	44.66	-3.21	41.45	54.00	-12.55	AVG
2	2390.000	43.81	-3.19	40.62	54.00	-13.38	AVG
3	2483.500	44.07	-2.86	41.21	54.00	-12.79	AVG
4	2493.160	44.89	-2.83	42.06	54.00	-11.94	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

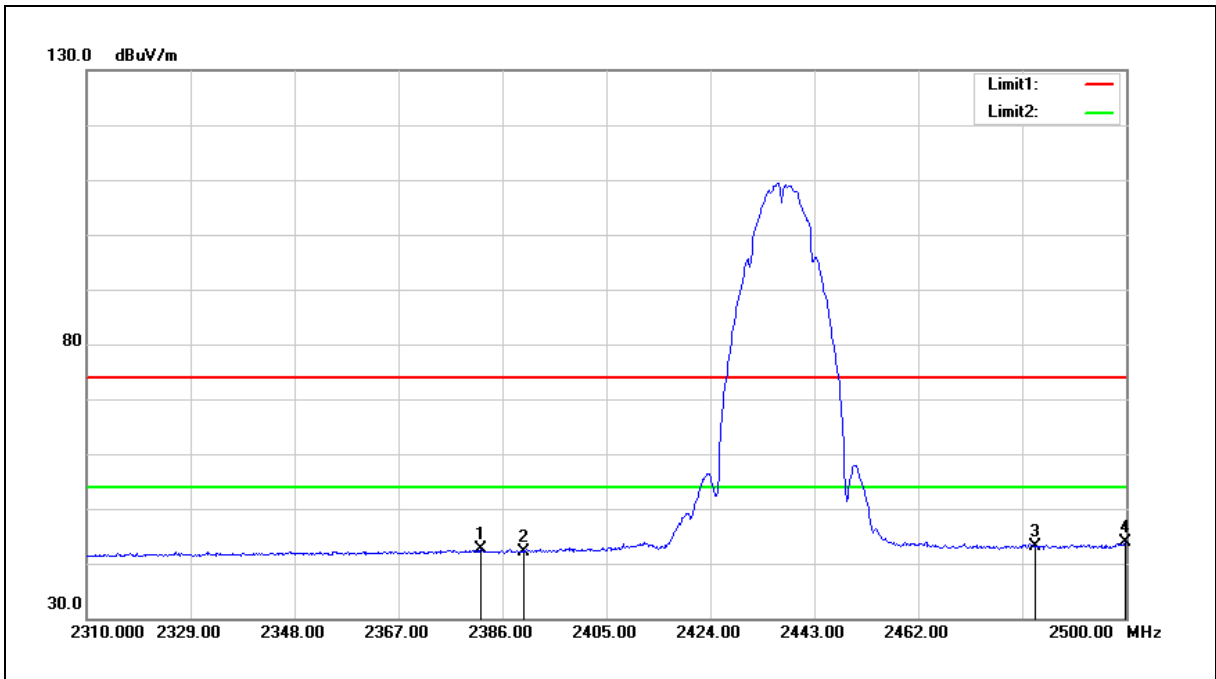


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2382.010	45.91	-3.22	42.69	54.00	-11.31	AVG
2	2390.000	45.43	-3.19	42.24	54.00	-11.76	AVG
3	2483.500	46.04	-2.86	43.18	54.00	-10.82	AVG
4	2499.810	46.63	-2.80	43.83	54.00	-10.17	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Horizontal		

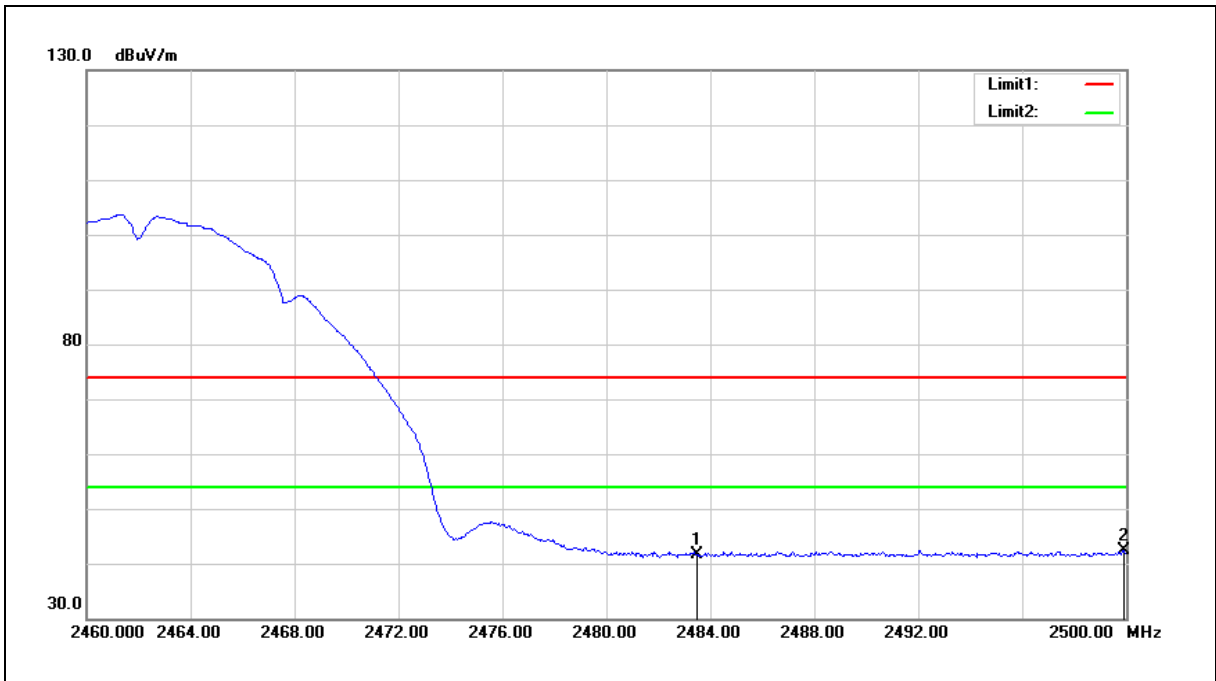


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	44.42	-2.86	41.56	54.00	-12.44	AVG
2	2499.920	45.29	-2.80	42.49	54.00	-11.51	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 2		
Ant.Polar.:	Vertical		

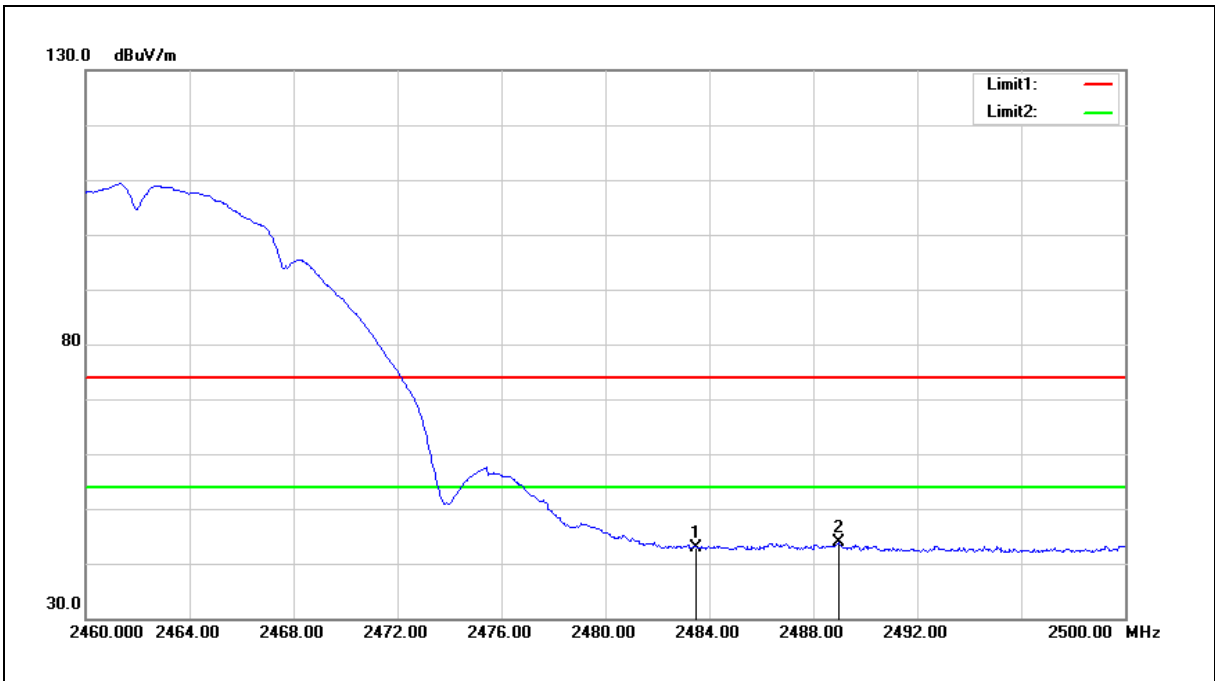


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	45.72	-2.86	42.86	54.00	-11.14	AVG
2	2488.960	46.62	-2.84	43.78	54.00	-10.22	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

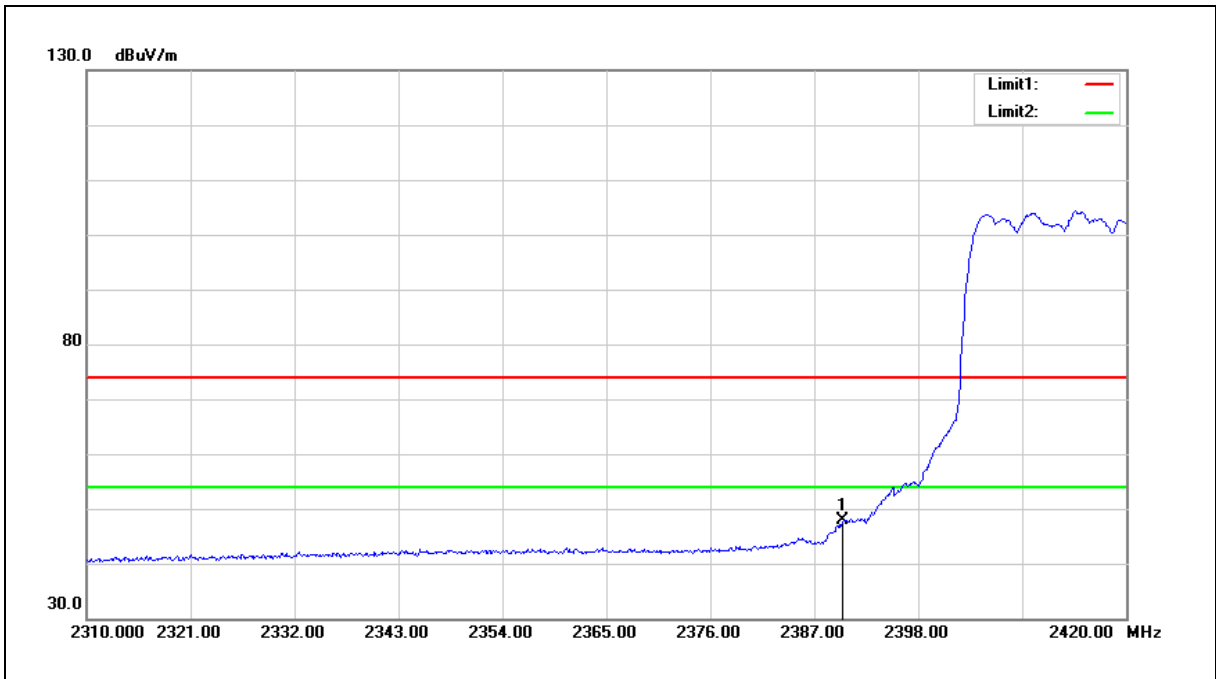


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	51.08	-3.19	47.89	54.00	-6.11	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

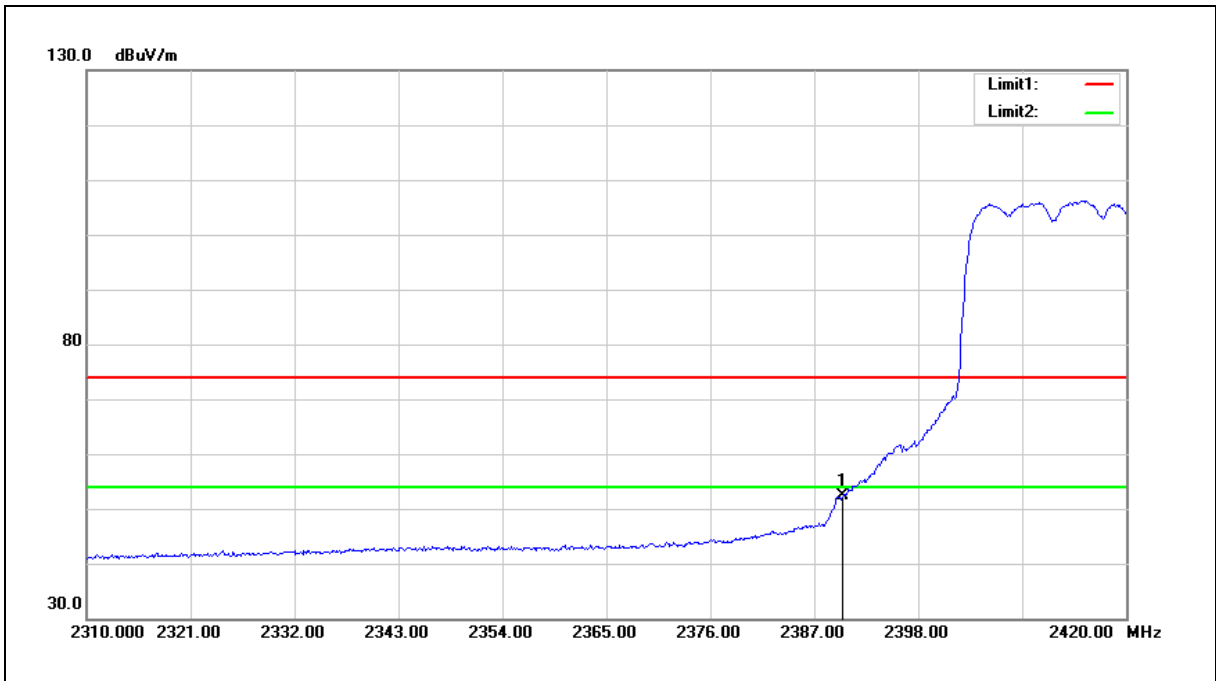


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	55.47	-3.19	52.28	54.00	-1.72	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

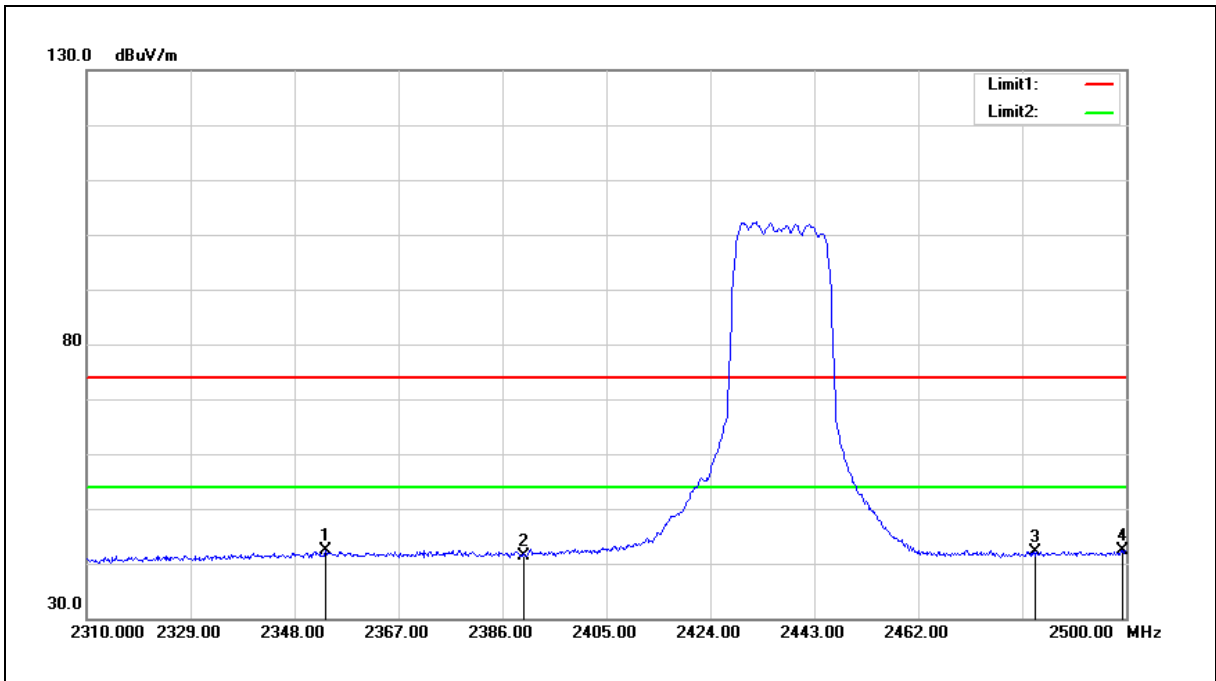


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2353.700	45.66	-3.31	42.35	54.00	-11.65	AVG
2	2390.000	44.61	-3.19	41.42	54.00	-12.58	AVG
3	2483.500	44.93	-2.86	42.07	54.00	-11.93	AVG
4	2499.240	45.22	-2.80	42.42	54.00	-11.58	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

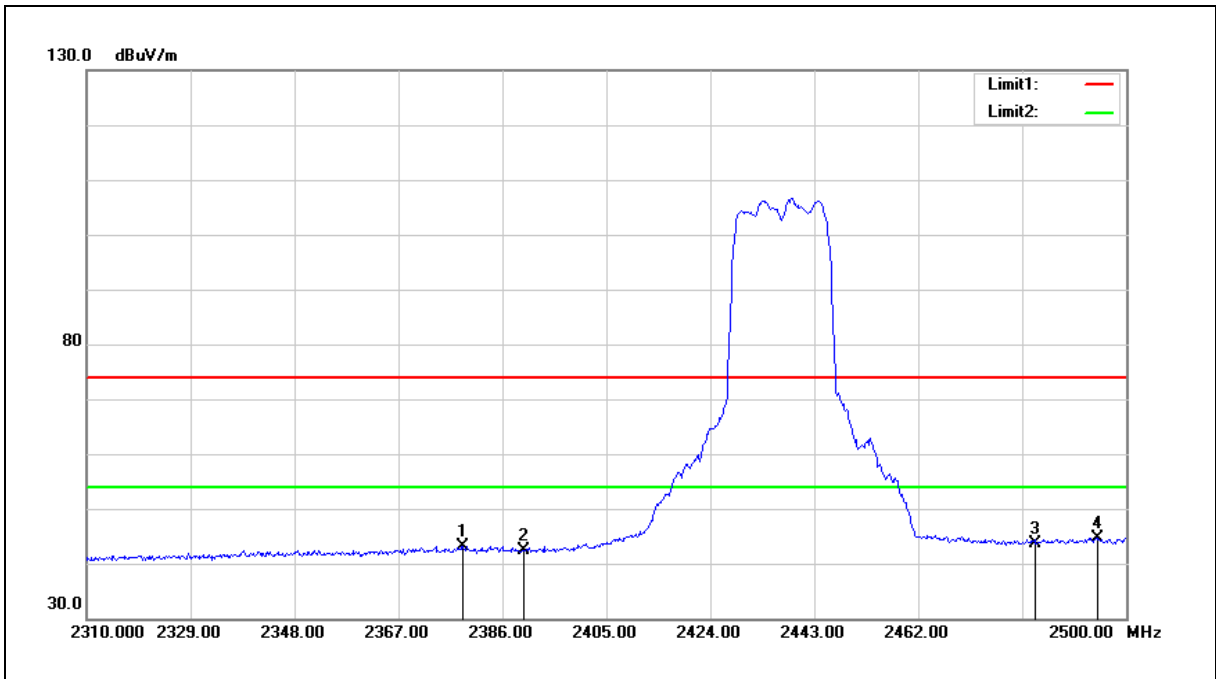


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2378.780	46.45	-3.23	43.22	54.00	-10.78	AVG
2	2390.000	45.55	-3.19	42.36	54.00	-11.64	AVG
3	2483.500	46.41	-2.86	43.55	54.00	-10.45	AVG
4	2494.680	47.53	-2.81	44.72	54.00	-9.28	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Horizontal		

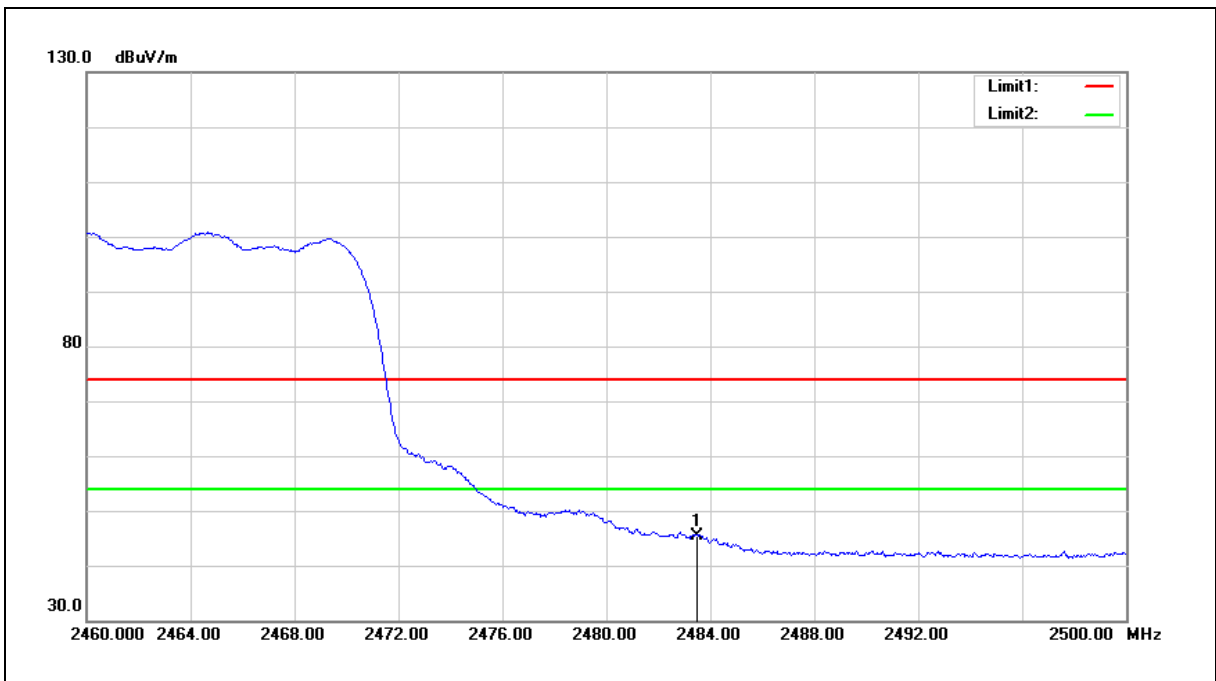


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	48.30	-2.86	45.44	54.00	-8.56	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 3		
Ant.Polar.:	Vertical		

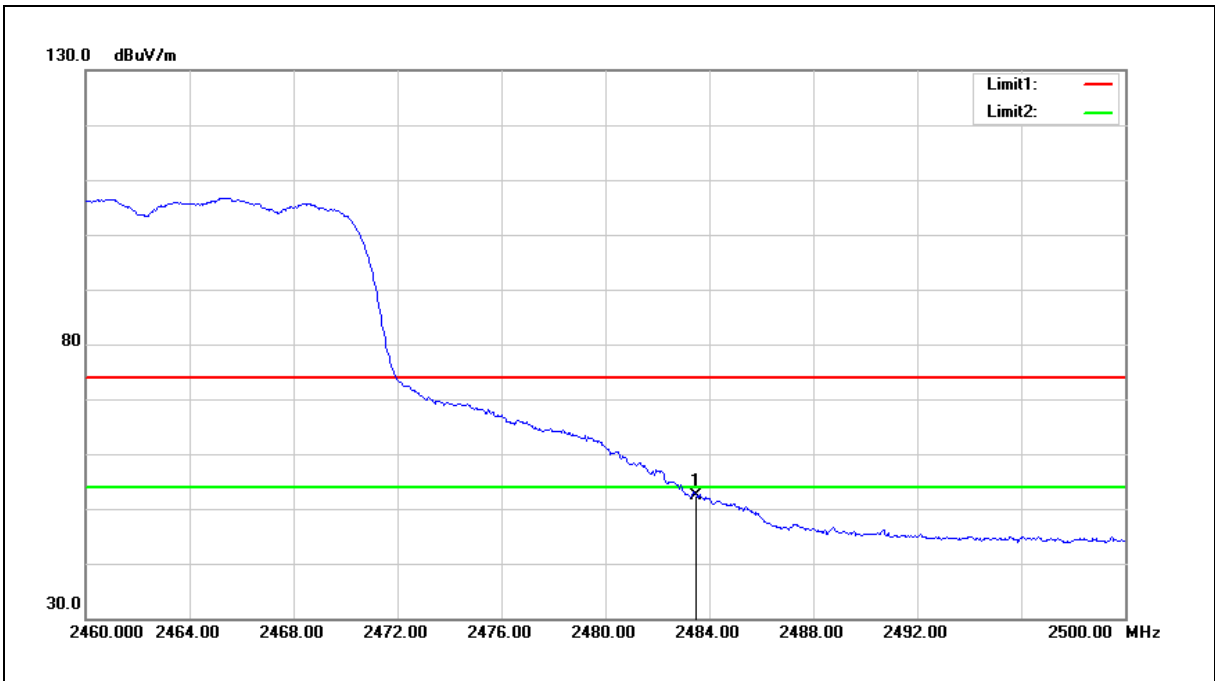


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.26	-2.86	52.40	54.00	-1.60	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

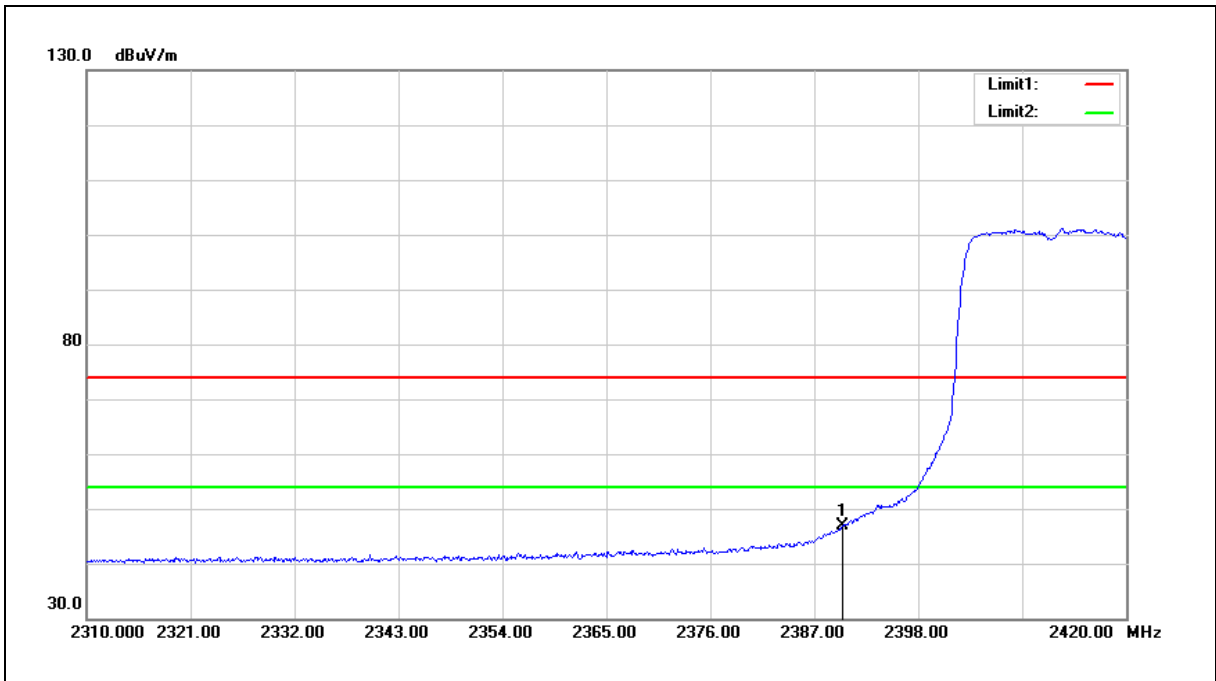


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	50.14	-3.19	46.95	54.00	-7.05	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2412 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

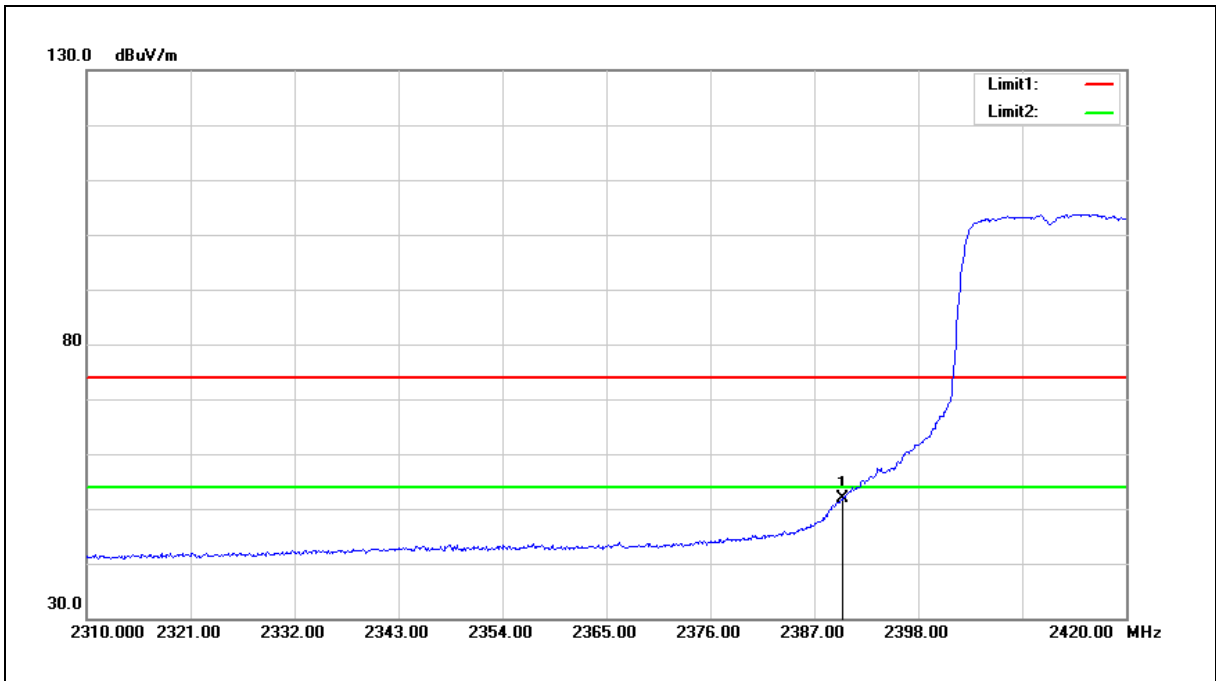


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	55.17	-3.19	51.98	54.00	-2.02	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

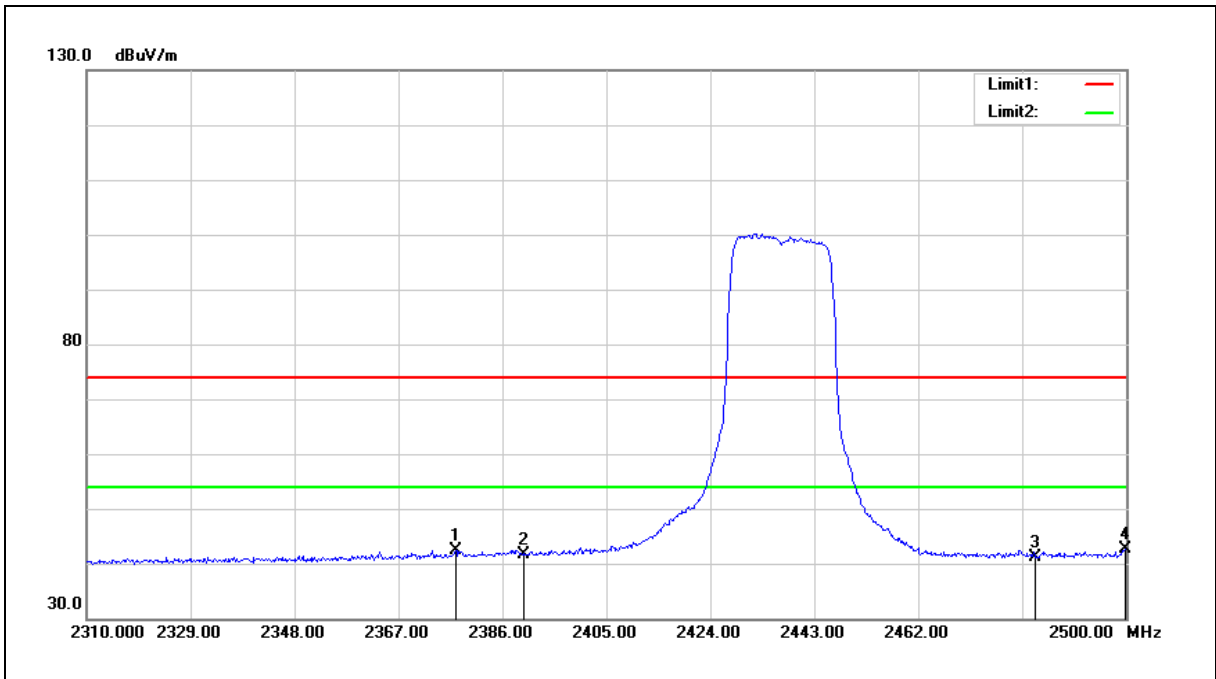


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2377.450	45.71	-3.23	42.48	54.00	-11.52	AVG
2	2390.000	44.84	-3.19	41.65	54.00	-12.35	AVG
3	2483.500	44.07	-2.86	41.21	54.00	-12.79	AVG
4	2499.810	45.47	-2.80	42.67	54.00	-11.33	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

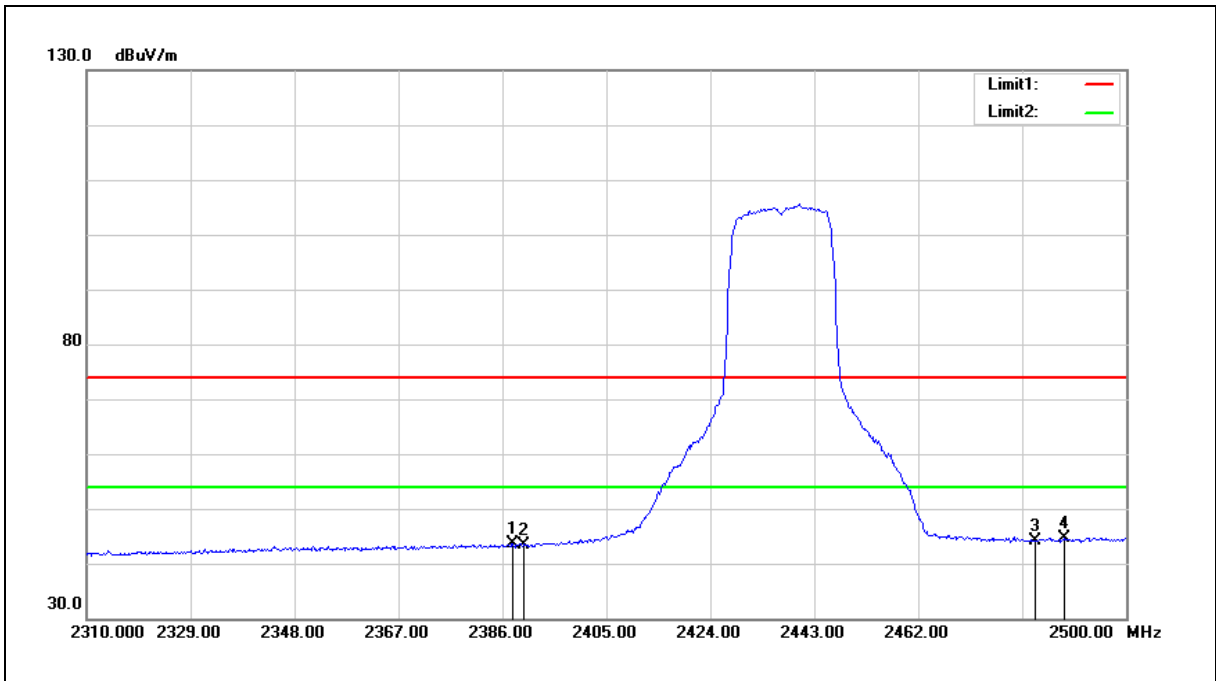


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2387.900	46.84	-3.19	43.65	54.00	-10.35	AVG
2	2390.000	46.64	-3.19	43.45	54.00	-10.55	AVG
3	2483.500	47.09	-2.86	44.23	54.00	-9.77	AVG
4	2488.790	47.57	-2.84	44.73	54.00	-9.27	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Horizontal		

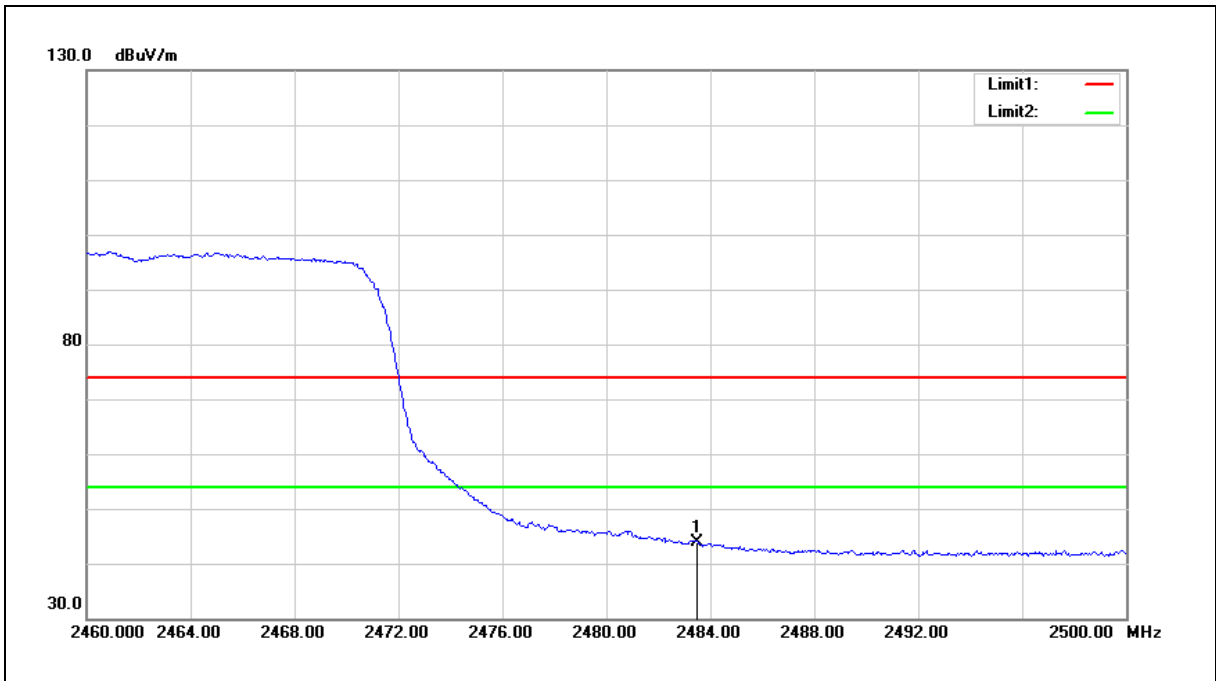


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	46.71	-2.86	43.85	54.00	-10.15	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.


Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2462 MHz		
Mode:	Mode 4		
Ant.Polar.:	Vertical		

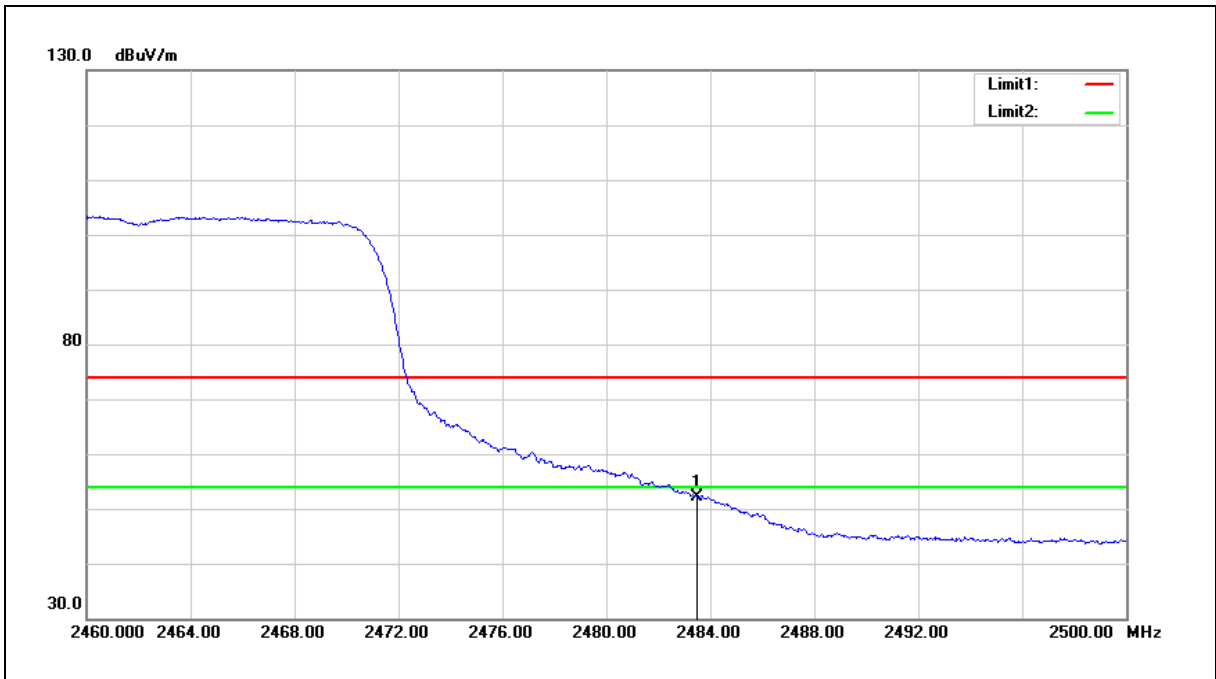

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	54.98	-2.86	52.12	54.00	-1.88	AVG

- Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).
- 2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
- 3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

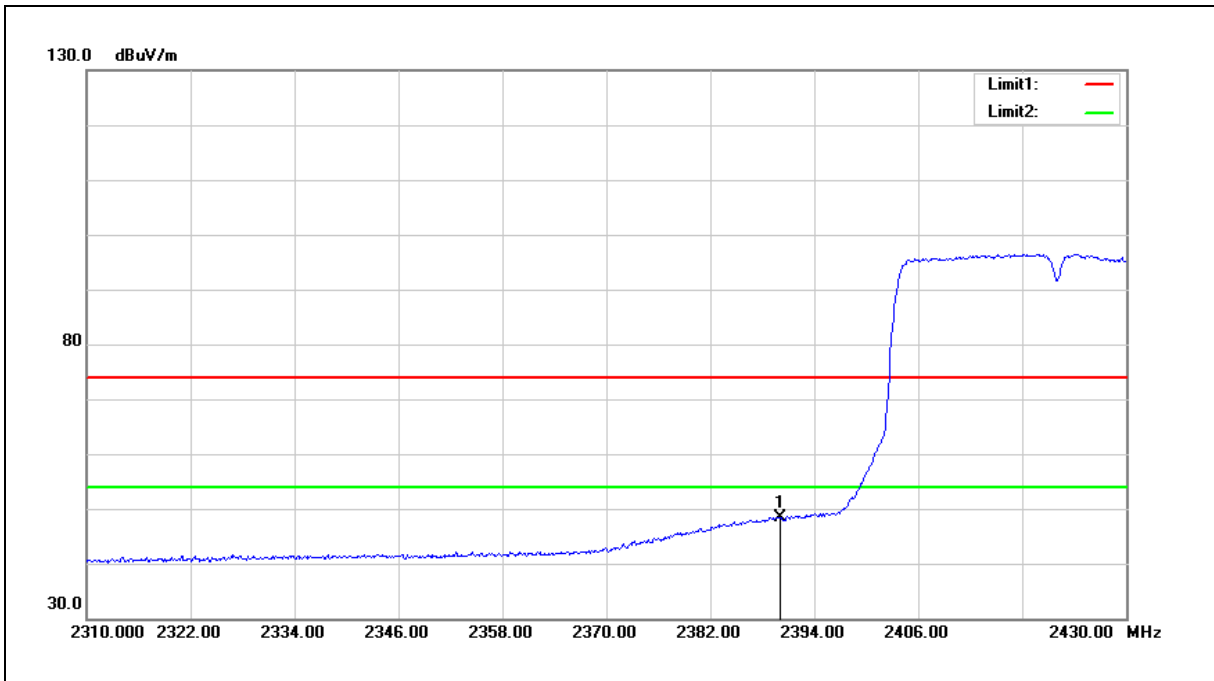


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	51.66	-3.19	48.47	54.00	-5.53	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2422 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

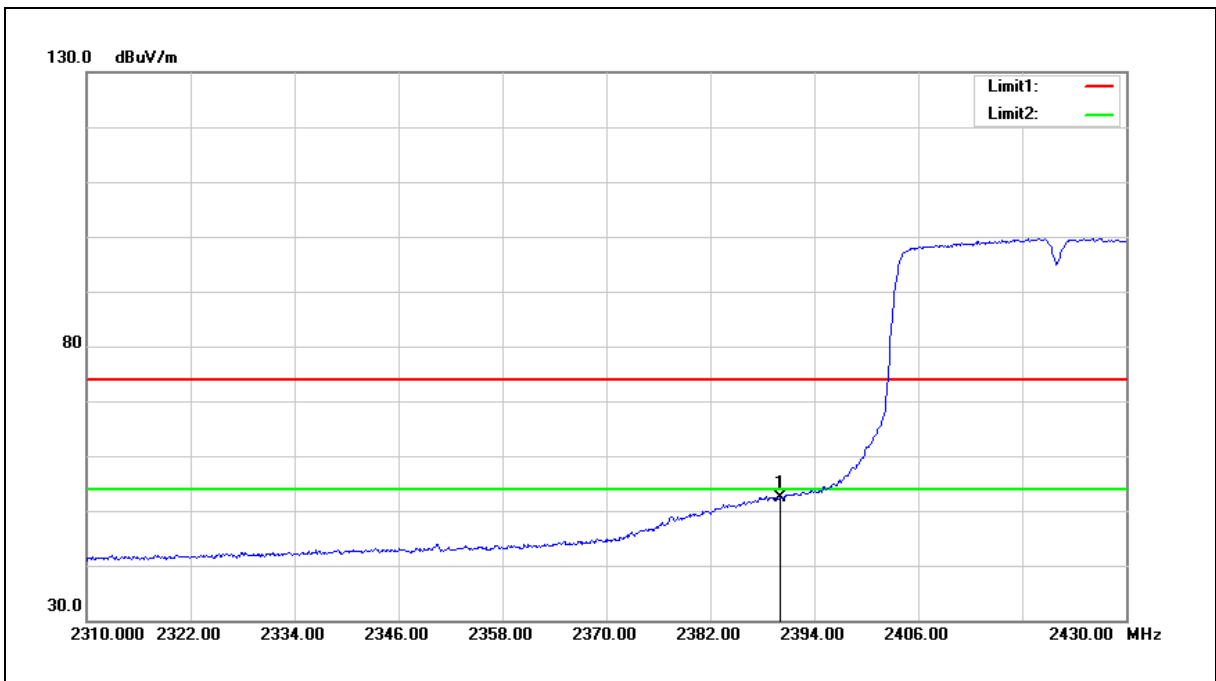


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	55.47	-3.19	52.28	54.00	-1.72	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

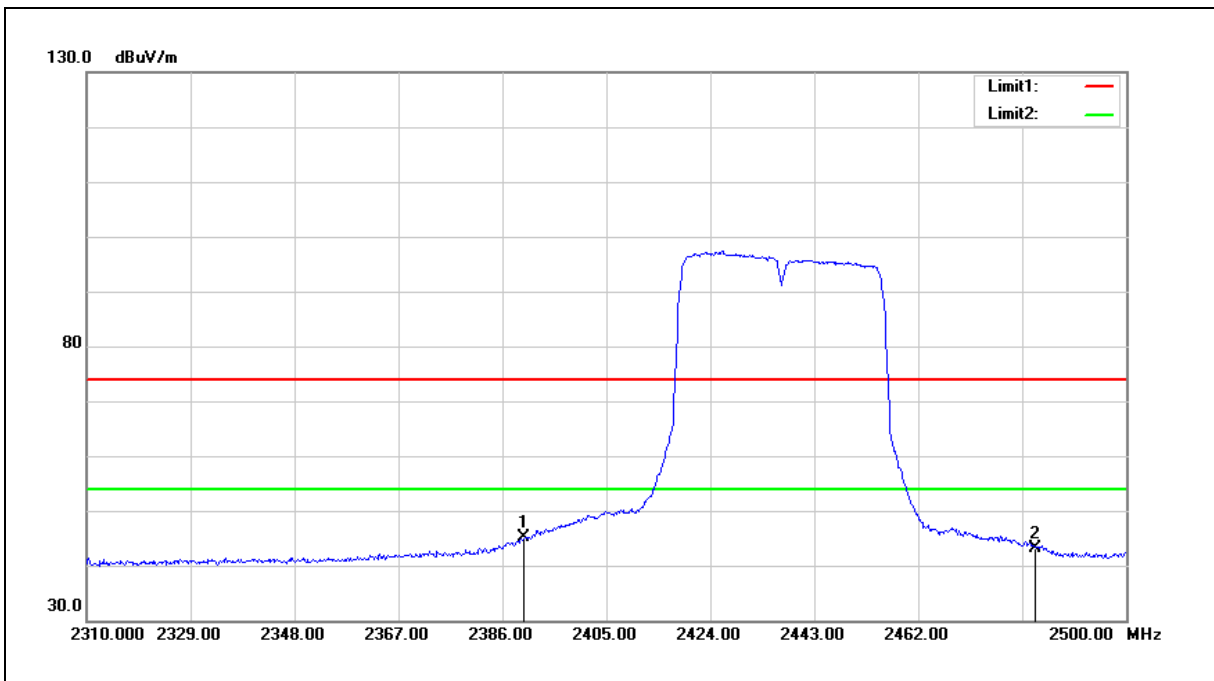


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	48.22	-3.19	45.03	54.00	-8.97	AVG
2	2483.500	46.11	-2.86	43.25	54.00	-10.75	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2437 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

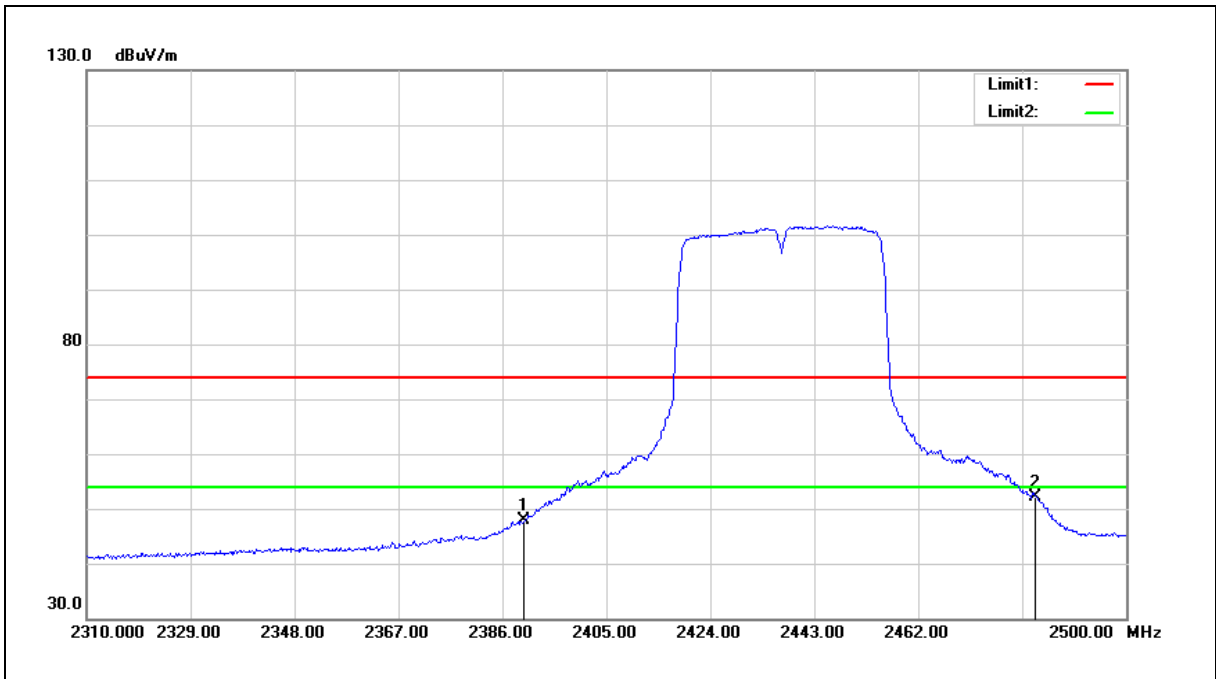


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	50.95	-3.19	47.76	54.00	-6.24	AVG
2	2483.500	54.88	-2.86	52.02	54.00	-1.98	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Horizontal		

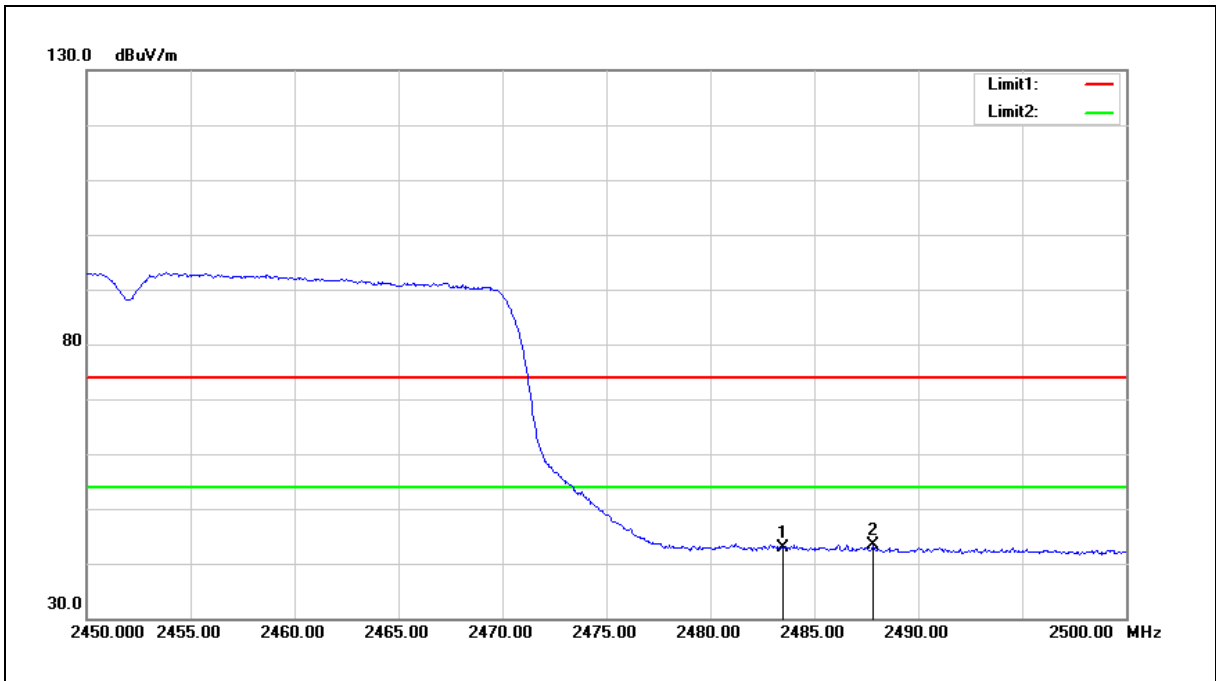


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	45.67	-2.86	42.81	54.00	-11.19	AVG
2	2487.850	46.33	-2.84	43.49	54.00	-10.51	AVG

Note:1.Result (dBuV/m) = Correct Factor (dB/m) + Reading(dBuV).

2.Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).

3.When the peak results are less than average limit, so not need to evaluate the average.

Standard:	FCC Part 15.247	Test Distance:	3 m
Test item:	Band edge		
Frequency:	2452 MHz		
Mode:	Mode 5		
Ant.Polar.:	Vertical		

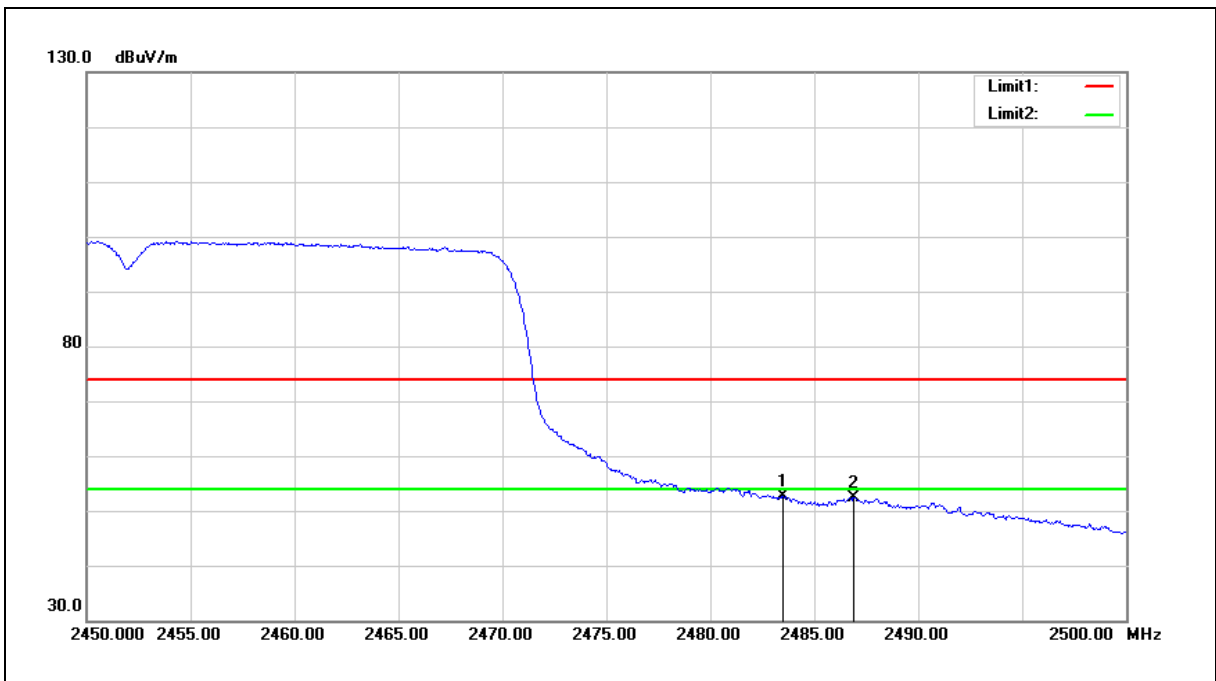

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	55.41	-2.86	52.55	54.00	-1.45	AVG
2	2486.900	55.30	-2.85	52.45	54.00	-1.55	AVG

- Note: 1. Result (dBuV/m) = Correct Factor (dB/m) + Reading (dBuV).
 2. Correction factor (dB/m) = Antenna Factor (dB/m) + Cable loss (dB) – Pre-Amplifier gain (dB).
 3. When the peak results are less than average limit, so not need to evaluate the average.

---END---