



Appendix E. FCC 3G SAR Measurement Procedures


Conducted Output Power:

The EUT was tested according to the requirements of the FCC 3G procedures and the TS 34.121. The EUT's WCDMA and HSPA function is Release 6 version supporting HSDPA Category 10, and HSUPA Category 6. A detailed analysis of the output power for all WCDMA, HSPDA, and HSPA (HSUPA & HSDPA) modes is provided in the tables below. According to the FCC 3G procedures, handsets with both HSDPA and HSUPA should be tested according to Release 6 HSPA test procedures, and the function. Device was tested according to procedure KDB941225 - section Release 6 HSPA Data Devices as documented/evaluated in the following table. Power values for HSPA are configurations in WCDMA.

WCDMA SAR Test mode - Conducted Power				
Mode	Setup	PCS band (1700)		
		CH1312	CH1413	CH1513
		1712.4 (MHz)	1732.6 (MHz)	1752.6 (MHz)
WCDMA	RMC 12.2Kbps	23.23	23.55	23.33
HSDPA	Subtest 1	22.84	23.08	23.17
	Subtest 2	22.86	23.05	23.04
	Subtest 3	22.38	22.68	22.62
	Subtest 4	21.98	22.69	22.33
HSUPA	Subtest 1	22.13	22.52	22.68
	Subtest 2	21.24	21.44	21.51
	Subtest 3	21.74	21.61	21.82
	Subtest 4	21.48	21.81	21.91
	Subtest 5	22.83	22.34	22.81

WCDMA Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting
 - i. Data rates: Varied from RMC 12.2Kbps
 - ii. RMC Test Loop = Loop Mode 1
 - iii. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

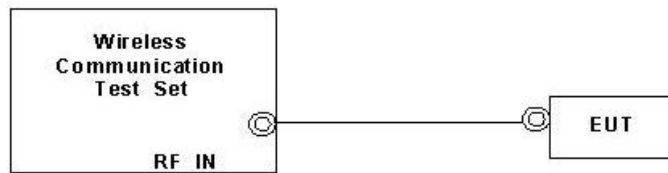

Setup Configuration

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set DeltaACK, DeltaNACK and DeltaCQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d=12/15, \beta_{HS}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSPA (HSUPA & HSPDA) Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d=12/15, \beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

Note: For details settings in the Agilent 8960 test equipment, please refer to the user guide “ HSUPA Measurement Guide with 8960 V7.5.0 Release 7 (2007-06) Ver.: v.02.18”



Call Setup Screen			
Call Control	Active Cell Operating Mode		Call Parms
Channel (UARFCN) Info	UE Information		Cell Power
	INSI: INEI: Power Class:		-86.00
Cell Parameters	UE Expected Open Loop Transmit Power		dBm/3.84 MHz
	Initial PRACH TX Power: -11.70 dBm Initial DPCCH TX Power: -0.56 dBm		Channel Type
Generator Info	Uplink Parameters		12.2k + HSPA
	Value		Paging Service
Uplink Parameters	PRACH Preambles	64	RB Test Mode
	PRACH Ramping Cycles (NMAX)	2	
UE Rep Params	Available Subchannels (Bit Mask)	000000000001	HSPA Parameters
	Uplink DPCH Scrambling Code	0	
Close Menu	Uplink DPCH Bc/Bd Control	Manual	34,121 Preset Call Configs
	Manual Uplink DPCH Bc	11	
2 of 4	Manual Uplink DPCH Bd	15	Channel (UARFCN) Parms
	Maximum Uplink Transmit Power Level	21 dBm	
Active Cell		Sys Type: UTRA FDD	
Idle			
IntRef		Offset	
			1 of 3

Example for HSPA Subtest 1, and other subtests following table, C11.1.3
(Gain Factors ($\beta_c = 11$ and $\beta_d = 15$))

Call Setup Screen			
Call Control	Active Cell Operating Mode		Serving Grant
Additional Screens	UE Information		AG Mode
	INSI: INEI: Power Class:		Single Shot
Cell Parameters	UE Expected Open Loop Transmit Power		Single Shot AG
	Initial PRACH TX Power: -11.70 dBm Initial DPCCH TX Power: -0.56 dBm		20: (119/15)^2
Generator Info	Call Processing Status		Send Single Shot Absolute Grant
	Current Service Type: None MM Status: GMM State: Current DPCH:		Send Relative Grant Up
Uplink Parameters	HSUPA In: Index 15: (67/15)^2 UE Rep E-DCH: Index 16: (75/15)^2 Last Received: Index 17: (84/15)^2 Throughput: Index 18: (95/15)^2 ACKs Transmitted: Index 19: (106/15)^2 ACKs Received: Index 20: (119/15)^2		Send Relative Grant Down
	Information: OSCH Cat: ---- Ratio: ---- % kbps Transmitted: ----		Return
Trig Output Setup	Active Cell		Sys Type: UTRA FDD
	Idle		
Sys Frame Clock	IntRef		Offset
2 of 4			1 of 2

Example: AG – Index = 20 for HSPA subtest 1



Call Setup Screen																																																																																																						
Screen Ctrl	Recorded E-TFCI Information	E-TFCI Record																																																																																																				
Channel (UARFCN) Info	E-TFCI Recording State	E-TFCI Rec Count																																																																																																				
	Idle	15																																																																																																				
HSPA Information	Recorded E-TFCI Values	Start Recording E-TFCI Values																																																																																																				
E-TFCI Recording Information	<table border="1"> <tr><td>1:</td><td>75</td><td>11:</td><td>75</td><td>21:</td><td>----</td><td>31:</td><td>----</td><td>41:</td><td>----</td></tr> <tr><td>2:</td><td>75</td><td>12:</td><td>75</td><td>22:</td><td>----</td><td>32:</td><td>----</td><td>42:</td><td>----</td></tr> <tr><td>3:</td><td>75</td><td>13:</td><td>75</td><td>23:</td><td>----</td><td>33:</td><td>----</td><td>43:</td><td>----</td></tr> <tr><td>4:</td><td>75</td><td>14:</td><td>75</td><td>24:</td><td>----</td><td>34:</td><td>----</td><td>44:</td><td>----</td></tr> <tr><td>5:</td><td>75</td><td>15:</td><td>75</td><td>25:</td><td>----</td><td>35:</td><td>----</td><td>45:</td><td>----</td></tr> <tr><td>6:</td><td>75</td><td>16:</td><td>----</td><td>26:</td><td>----</td><td>36:</td><td>----</td><td>46:</td><td>----</td></tr> <tr><td>7:</td><td>75</td><td>17:</td><td>----</td><td>27:</td><td>----</td><td>37:</td><td>----</td><td>47:</td><td>----</td></tr> <tr><td>8:</td><td>75</td><td>18:</td><td>----</td><td>28:</td><td>----</td><td>38:</td><td>----</td><td>48:</td><td>----</td></tr> <tr><td>9:</td><td>75</td><td>19:</td><td>----</td><td>29:</td><td>----</td><td>39:</td><td>----</td><td>49:</td><td>----</td></tr> <tr><td>10:</td><td>75</td><td>20:</td><td>----</td><td>30:</td><td>----</td><td>40:</td><td>----</td><td>50:</td><td>----</td></tr> </table>	1:	75	11:	75	21:	----	31:	----	41:	----	2:	75	12:	75	22:	----	32:	----	42:	----	3:	75	13:	75	23:	----	33:	----	43:	----	4:	75	14:	75	24:	----	34:	----	44:	----	5:	75	15:	75	25:	----	35:	----	45:	----	6:	75	16:	----	26:	----	36:	----	46:	----	7:	75	17:	----	27:	----	37:	----	47:	----	8:	75	18:	----	28:	----	38:	----	48:	----	9:	75	19:	----	29:	----	39:	----	49:	----	10:	75	20:	----	30:	----	40:	----	50:	----	
1:	75	11:	75	21:	----	31:	----	41:	----																																																																																													
2:	75	12:	75	22:	----	32:	----	42:	----																																																																																													
3:	75	13:	75	23:	----	33:	----	43:	----																																																																																													
4:	75	14:	75	24:	----	34:	----	44:	----																																																																																													
5:	75	15:	75	25:	----	35:	----	45:	----																																																																																													
6:	75	16:	----	26:	----	36:	----	46:	----																																																																																													
7:	75	17:	----	27:	----	37:	----	47:	----																																																																																													
8:	75	18:	----	28:	----	38:	----	48:	----																																																																																													
9:	75	19:	----	29:	----	39:	----	49:	----																																																																																													
10:	75	20:	----	30:	----	40:	----	50:	----																																																																																													
Clear UE Info	15/15	Send Step Up TPC Bit Pattern																																																																																																				
Return		Send Step Down TPC Bit Pattern																																																																																																				
	<table border="1"> <tr> <td><input type="checkbox"/> Background</td> <td>Active Cell</td> <td>Sys Type: UTRA FDD</td> </tr> <tr> <td></td> <td>Connected</td> <td></td> </tr> <tr> <td></td> <td>IntRef</td> <td>Offset</td> </tr> </table>	<input type="checkbox"/> Background	Active Cell	Sys Type: UTRA FDD		Connected			IntRef	Offset	Return																																																																																											
<input type="checkbox"/> Background	Active Cell	Sys Type: UTRA FDD																																																																																																				
	Connected																																																																																																					
	IntRef	Offset																																																																																																				

Example: Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1



Reference:

- [1] 941225 D01 SAR test for 3G devices v02, SAR Measurement Procedures for 3G Devices CDMA 2000/Ev-Do/WCDMA/HSDPA/HSPA Oct. 2007 Laboratory Division Office of Engineering and Technology Federal Communications Commission
- [2.] TS 34.121 Universal Mobile Telecommunications System (UMTS); Terminal Conformance Specification, Radio Transmission and Reception (FDD)
- [3.] HSUPA Measurement Guide with 8960 V7.5.0 Release 7 (2007-06) Ver.: v.02.18